



EMC Test Report

Product Name: Multifunctional LED controller for chain stores





Model Number: BV-M3200

Applicant: Blueview Elec-optic Tech Co., Ltd.

KeySense Testing & Certification International Co., Ltd.

1-3F, Lab Building, No.29 District, ZhongKai Hi-Tech Industrial Development Park,
Huizhou, Guangdong, China



Test Report of EMC			
Product name	Multifunctional LED controller for chain stores		
Model number	BV-M3200		
Applicant	Name	Blueview Elec-optic Tech Co., Ltd.	
	Address	No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Shuangliu District, Chengdu City, Sichuan Province, P.R.China	
Manufacturer	Name	Blueview Elec-optic Tech Co., Ltd.	
	Address	No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Shuangliu District, Chengdu City, Sichuan Province, P.R.China	
Factory	Name	Blueview Elec-optic Tech Co., Ltd.	
	Address	No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Shuangliu District, Chengdu City, Sichuan Province, P.R.China	
Trade Name			
Receipt date	Feb 24, 2022	Quantity	1
Standard	EN IEC 55015:2019+A11:2020 EN IEC 61000-3-2:2019 EN 61547:2009 EN 61000-3-3:2013+A1:2019		
Test site	1F, Lab Building, No.29 District, ZhongKai Hi-Tech Industrial Development Park, Huizhou, Guangdong, China.		
Test period	Feb 25, 2022- Mar 10, 2022	Issue Date	Mar 23, 2022
Test result	The equipment under test was found to be compliance with the requirements of the standards applied.		
Tested by: Bing. He	Sign: 	Date: 2022.3.23	
Reviewed by: Lake. Wang	Sign: 	Date: 2022.3.23	
Approved by: Jack. Li (Supervisor)	Sign: 	Date: 2022.3.23	

Contents

Description	Page
1 SUMMARY OF STANDARDS AND RESULTS	7
1.1 Description of Standards and Results	7
2 GENERAL INFORMATION	8
2.1 Description of Device(EUT)	8
2.2 EUT operating mode(s)	9
2.3 Tested Supporting System Details	9
2.4 Block Diagram of connection between EUT and simulators	10
2.5 Test Facility	10
2.6 Measurement Uncertainty(95% confidence levels, k=2)	11
2.7 Test Equipments	12
3 CONDUCTED EMISSION AT THE MAINS TERMINALS TEST	14
3.1 Block Diagram of Test Setup	14
3.2 Test Standard	14
3.3 Limits of mains terminal disturbance voltage.....	14
3.4 Operating Condition of EUT	15
3.5 Test Procedure	15
3.6 Test Data	16
4 RADIATED ELECTROMAGNETIC DISTURBANCE TEST	18
4.1 Block Diagram of Test Setup	18
4.2 Test Standard	18

4.3	Limits for radiated disturbance.....	18
4.4	Operating Condition of EUT	19
4.5	Test Procedure	19
4.6	Test Data.....	20
5	RADIATED EMISSION TEST	23
5.1	Block Diagram of Test Setup	23
5.2	Test Standard	23
5.3	Limits for radiated disturbance.....	23
5.4	Operating Condition of EUT	24
5.5	Test Procedure	24
5.6	Test Data.....	25
6	HARMONIC CURRENT EMISSION TEST.....	27
6.1	Block Diagram of Test Setup	27
6.2	Test Standard	27
6.3	Limits of Harmonic Current.....	28
6.4	Operating Condition of EUT	29
6.5	Test Procedure	29
6.6	Test Data.....	30
7	VOLTAGE FLUCTUATIONS & FLICKER TEST	33
7.1	Block Diagram of Test Setup	33
7.2	Test Standard	33
7.3	Limits of Voltage Fluctuation and Flick.....	33
7.4	Operating Condition of EUT	34

7.5	Test Procedure	34
7.6	Test Data	35
8	IMMUNITY TEST RESULT	36
9	ELECTROSTATIC DISCHARGE TEST	37
9.1	Block Diagram of Test Setup	37
9.2	Test Standard	37
9.3	Severity Levels and Performance Criterion	37
9.4	Operating Condition of EUT	38
9.5	Test Procedure	38
9.6	Test Data	39
10	RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST	40
10.1	Block Diagram of Test Setup	40
10.2	Test Standard	40
10.3	Operating Condition of EUT	41
10.4	Test Procedure	41
10.5	Test Data	42
11	ELECTRICAL FAST TRANSIENT/BURST TEST	43
11.1	. Block Diagram of Test Setup	43
11.2	Test Standard	43
11.3	Severity Levels and Performance Criterion	43
11.4	Operating Condition of EUT	44
11.5	Test Procedure	44
11.6	Test Data	45

12	SURGE TEST	46
12.1	Block Diagram of Test Setup	46
12.2	Test Standard.....	46
12.3	Severity Levels and Performance Criterion	46
12.4	Operating Condition of EUT	46
12.5	Test Procedure	47
12.6	Test Data	48
13	RADIO-FREQUENCY CONTINUOUS CONDUCTED DISTURBANCE TEST	49
13.1	Block Diagram of Test Setup	49
13.2	Test Standard.....	49
13.3	Severity Levels and Performance Criterion	49
13.4	Operating Condition of EUT	49
13.5	Test Procedure	50
13.6	Test Data	51
14	VOLTAGE DIPS AND INTERRUPTIONS TEST	52
14.1	Block Diagram of Test Setup	52
14.2	Test Standard.....	52
14.3	Severity Levels and Performance Criterion	52
14.4	Operating Condition of EUT	52
14.5	Test Procedure	52
14.6	Test Data	53
15	TEST SETUP PHOTO	54
16	PHOTOS OF THE EUT.....	59

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION(EN IEC 55015:2019+A11:2020)				
Description of Test Item	Standard	Results	Remark	
Conducted disturbance at mains terminals	EN IEC 55015:2019+A11:2020	PASS	Minimum passing margin is -5.18dB at 0.7351MHz	
Radiated Electromagnetic Disturbance (9kHz to 30MHz)	EN IEC 55015:2019+A11:2020	PASS	Minimum passing margin is -22.46dB at 7.4401MHz	
Radiated Disturbance	EN IEC 55015:2019+A11:2020	PASS	Minimum passing margin is -15.20dB at 716.6820MHz	
Harmonic current emission	EN IEC 61000-3-2:2019	PASS	Meet the Class C requirement	
Voltage fluctuations &flicker	EN 61000-3-3:2013+A1:2019	PASS	Meet the Clause 5 requirement	
IMMUNITY(EN 61547:2009)				
Description of Test Item	Basic Standard	Results	Performance Criteria	Observation Criteria
Electrostatic discharge	EN 61000-4-2:2009	PASS	B	A
Radio-frequency Continuous radiated disturbance	EN IEC 61000-4-3:2020	PASS	A	A
Electrical fast transient	EN 61000-4-4:2012	PASS	B	A
Surge	EN 61000-4-5:2014/A1:2017	PASS	B	A
Radio-frequency Continuous conducted disturbance	EN 61000-4-6:2014/A1:2015	PASS	A	A
Voltage dips, 100% reduction	EN IEC 61000-4-11:2020	PASS	B	A
Voltage dips, 30% reduction		PASS	C	A
N/A is an abbreviation for Not Applicable.				
Final Judgment : Pass				

2 GENERAL INFORMATION

2.1 Description of Device(EUT)

Description: Multifunctional LED controller for chain stores

Model Number: BV-M3200

Input: AC 180-235V

Output: AC 235V Max power:3.2KW

Test Voltage: AC 230V/50Hz& AC 180V/60Hz

Remark:

In Emission test, a pre-test shall be made over a range of 230 V and 180 V , using a frequency of 50 Hz or 60 Hz, the rated voltage in order to check the level of disturbance varies considerably with the supply voltage, compliance test at 230V/50 Hz as worse case was found.

2.2 EUT operating mode(s)

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

Operating mode 1	Lighting
------------------	----------

2.3 Tested Supporting System Details

No.	Description	KST No.	Manufacturer	Model	Serial Number
1	Lamp	/	/	/	/

☒ Cable Description

N o.	From		To		Type of Cable		
	Device	I/O Port	Device	I/O Port	Length (m)	Shielded or Unshielded	Ferrite Core [Y/N]
1	EUT	DC port	load	/	1.0	U	N

* Shielded or Unshielded : Unshielded=U, Shielded=S

2.4 Block Diagram of connection between EUT and simulators



2.5 Test Facility

Site Description: 1-3F, Lab Building, No.29 District, ZhongKai Hi-Tech Industrial Development Park, Huizhou, Guangdong, China

Name of Firm: KeySense Testing & Certification International Co., Ltd.

EMC Lab: Certificated by CNAS, CHINA

Registration No.:L9678

Date of registration: Feb 07, 2017

2.6 Measurement Uncertainty(95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in shielding room	2.5dB(150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	4.14dB(30M~1GHz,Polarize:V)
	4.25dB(30M~1GHz,Polarize:H)

2.7 Test Equipments

2.7.1 For Conducted Emission at the Mains Terminals Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal .Interval
Receiver	R&S	ESR3	102054	2021.12.06	1 year
LISN	AFJ	LS16	16011618383	2021.09.01	1 year

2.7.2 For Radiated Electromagnetic Disturbance test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal .Interval
Receiver	R&S	ESR3	102054	2021.12.06	1 year
Loop antenna	SCHWARZBECK	HXYZ 9170	HFCD9171-296	2019.01.16	3 year

2.7.3 For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	R&S	ESR7	101661	2021.12.06	1 year
Trilog-boardband antenna	SCHWARZBECK	VULB 9163D	9163-961	2019.05.18	3 years

2.7.4 For Harmonics Current Emission Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Harmonic & Flicker analyzer	California Instruments	100-CTS-230	1626A00278	2021.09.07	1 year
Programmable power supply	California Instruments	5001iX-CTS-400	1629A02598	2021.09.01	1 year

2.7.5 For Voltage Fluctuations & Flicker Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Harmonic & Flicker analyzer	California Instruments	100-CTS-230	1626A00278	2021.09.07	1 year
Programmable power supply	California Instruments	5001iX-CTS-400	1629A02598	2021.09.01	1 year

2.7.6 For Electrostatic discharge Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Electrostatic discharge generator	Noiseken	ESS-L1611	ESS1643151	2021.08.28	1 year

2.7.7 For Radio-frequency Continuous radiated disturbance Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Signal generator	R&S	SMC100A	105651	2021.12.06	1 year
Power amplifier	PRANA	MT400	1507-1746	2021.12.06	1 year
Trilog-boardband antenna	SCHWARZBECK	STLP 9128E	9128ES-136	2019.09.02	3years

2.7.8 For Electrical fast transient Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EFT generator	Noiseken	FNS-AX3-A16C	FNS1621762	2021.09.01	1 year

2.7.9 For Surge Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Surge generator	Noiseken	LSS-6230A	LSS1634248	2021.09.01	1 year

2.7.10 For Radio-frequency Continuous conducted disturbance Test


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Signal generator	R&S	SMC100A	105651	2021.12.06	1 year
Power amplifier	PRANA	DR220	1602-1819	2021.12.06	1 year
CND	TESEQ	M016	43434	2021.09.01	1 year

2.7.11 For Voltage dips and interruptions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Dips simulator	Noiseken	VDS-2002	VDS1510396	2021.09.01	1 year

3 CONDUCTED EMISSION AT THE MAINS TERMINALS TEST

3.1 Block Diagram of Test Setup

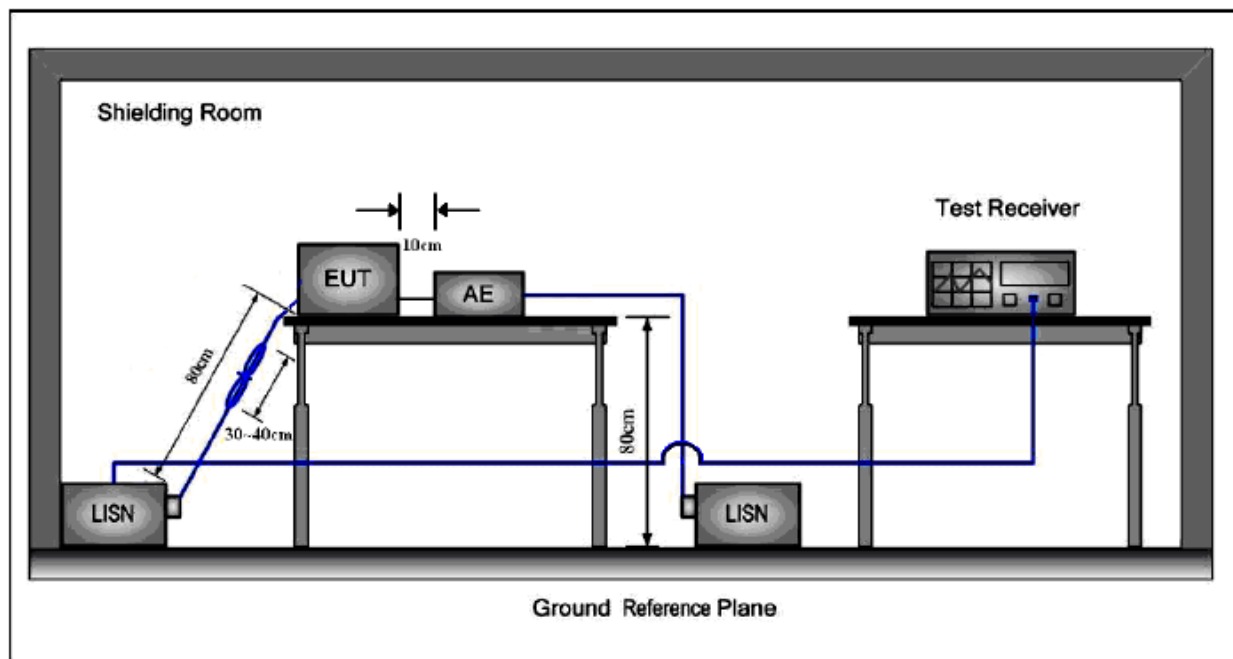

3.2 Test Standard

EN IEC 55015:2019+A11:2020

3.3 Limits of mains terminal disturbance voltage

Frequency range [MHz]	Limits [dB μ V]	
	Quasi-peak	Average
0.009 to 0.05	110	-
0.05 to 0.15	90 - 80	-
0,15 to 0,50	66 - 56 *	56 - 46 *
0,50 to 5	56.00	46.00
5 to 30	60.00	50.00

3.4 Operating Condition of EUT

Test date	Ambient temperature	Relative humidity	Atmospheric pressure
Feb 25, 2022	20°C	60%	101.2kPa

3.5 Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The side of power line was checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN 55015 on conducted Disturbance test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.6 Test Data

EUT:	Multifunctional LED controller for chain stores	Model Name:	BV-M3200
Test Mode:	Lighting	Test Date:	2022.2.25
Phase:	Live	Test Voltage:	AC 230V /50Hz
Operator:	Bing	Note:	

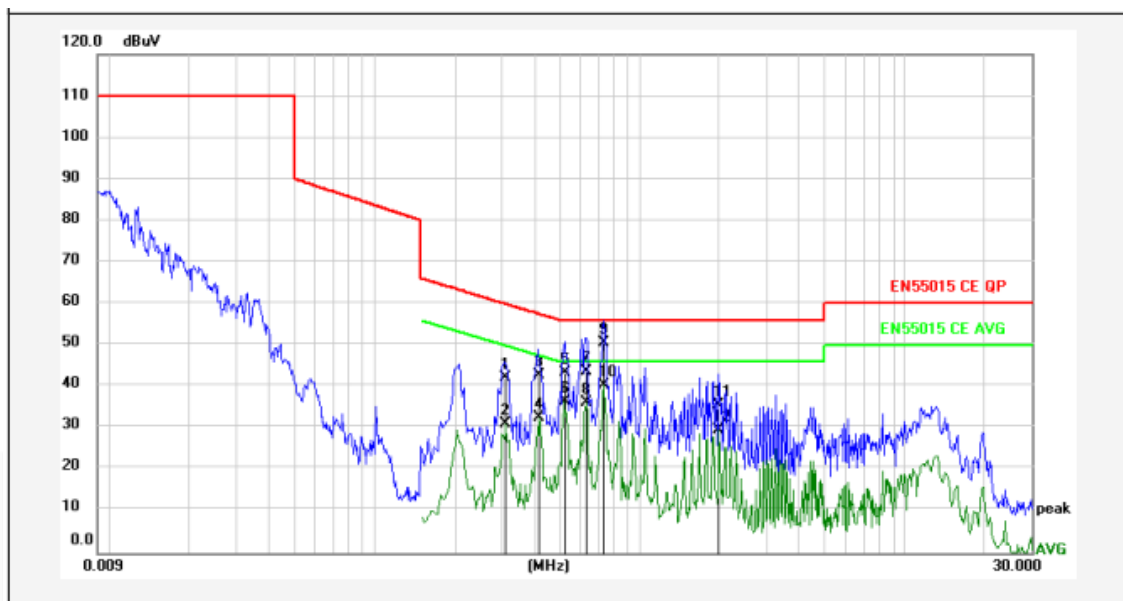


No.	Frequency (MHz)	Reading (dBuV)	Lisn/Isn (dB)	Cab_L (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3121	32.26	9.6	0.24	42.10	59.91	-17.81	QP	
2	0.3121	21.14	9.6	0.24	30.98	49.91	-18.93	AVG	
3	0.4201	32.87	9.58	0.24	42.69	57.45	-14.76	QP	
4	0.4201	22.74	9.58	0.24	32.56	47.45	-14.89	AVG	
5	0.5191	33.62	9.57	0.24	43.43	56.00	-12.57	QP	
6	0.5191	26.67	9.57	0.24	36.48	46.00	-9.52	AVG	
7	0.6271	33.77	9.55	0.24	43.56	56.00	-12.44	QP	
8	0.6271	26.28	9.55	0.24	36.07	46.00	-9.93	AVG	
9	0.7351	40.72	9.54	0.23	50.49	56.00	-5.51	QP	
10	0.7351	30.48	9.54	0.23	40.25	46.00	-5.75	AVG	
11	1.9951	25.77	9.7	0.2	35.67	56.00	-20.33	QP	
12	1.9951	19.54	9.7	0.2	29.44	46.00	-16.56	AVG	

Remarks: 1. Result=Reading+Lisn+Cab_L

2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

EUT:	Multifunctional LED controller for chain stores	Model Name:	BV-M3200
Test Mode:	Lighting	Test Date:	2022.2.25
Phase:	Neutral	Test Voltage:	AC 230V /50Hz
Operator:	Bing	Note:	

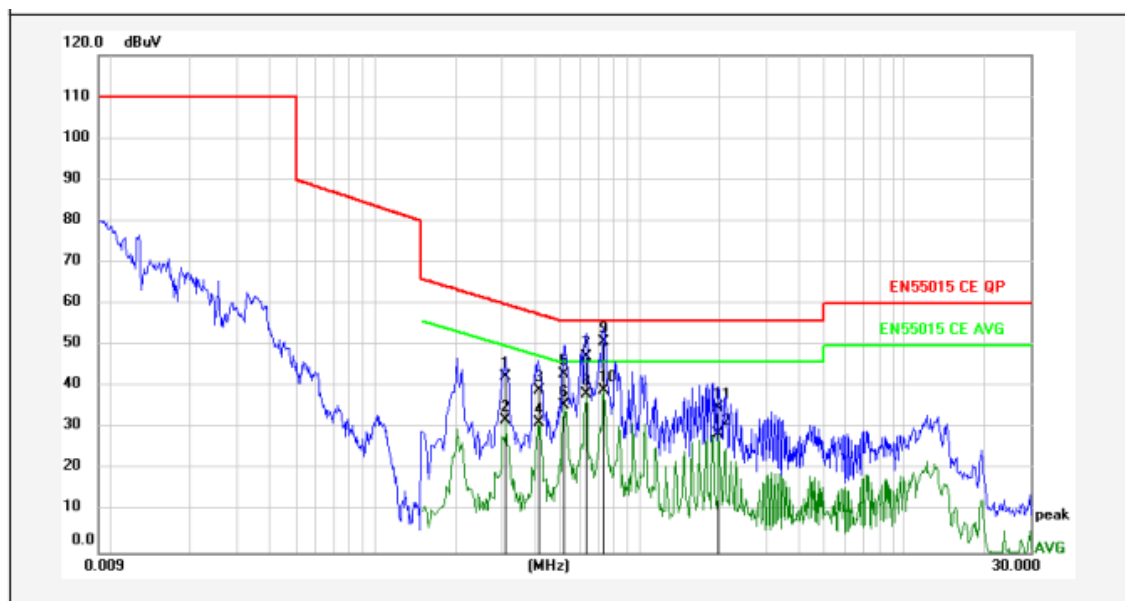


No.	Frequency (MHz)	Reading (dBuV)	Lisn/Isn (dB)	Cab_L (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3121	32.47	9.6	0.24	42.31	59.91	-17.60	QP	
2	0.3121	22.00	9.6	0.24	31.84	49.91	-18.07	AVG	
3	0.4201	29.30	9.58	0.24	39.12	57.45	-18.33	QP	
4	0.4201	21.39	9.58	0.24	31.21	47.45	-16.24	AVG	
5	0.5191	33.14	9.57	0.24	42.95	56.00	-13.05	QP	
6	0.5191	25.86	9.57	0.24	35.67	46.00	-10.33	AVG	
7	0.6271	37.54	9.55	0.24	47.33	56.00	-8.67	QP	
8	0.6271	28.34	9.55	0.24	38.13	46.00	-7.87	AVG	
9	0.7351	41.05	9.54	0.23	50.82	56.00	-5.18	QP	
10	0.7351	29.50	9.54	0.23	39.27	46.00	-6.73	AVG	
11	1.9951	25.11	9.7	0.2	35.01	56.00	-20.99	QP	
12	1.9951	18.78	9.7	0.2	28.68	46.00	-17.32	AVG	

Remarks: 1. Result=Reading+Lisn+Cab_L
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4 RADIATED ELECTROMAGNETIC DISTURBANCE TEST

4.1 Block Diagram of Test Setup

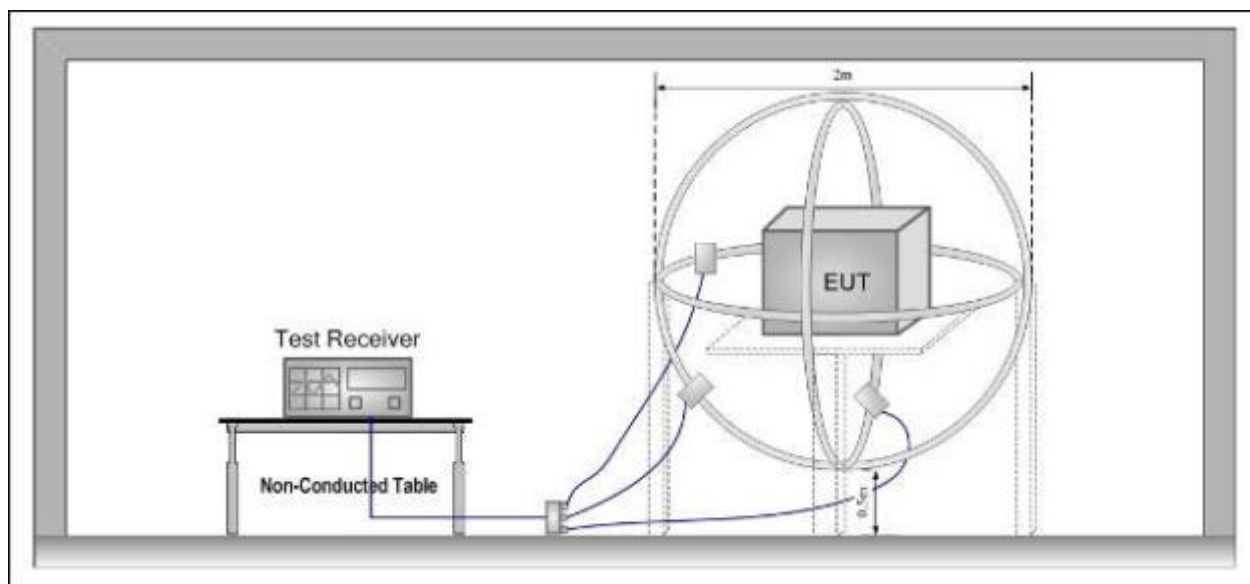

4.2 Test Standard

EN IEC 55015:2019+A11:2020

4.3 Limits for radiated disturbance

Frequency MHz	Limits for loop diameter 2m dB(μ A) Quasi Peak Level
0.009 to 0.070	88
0.070 to 0.150	88 to 58
0.150 to 3.0	58 to 22
3.0 to 30.0	22

NOTE 1 At the transition frequency, the lower limit applies

NOTE 2 Decreasing linearly with the logarithm of the frequency. For electrodeless Lightings and luminaires, the limit in the frequency range of 2.2 MHz to 3.0 MHz is 58 dB (μ A) for 2 m, 51 dB (μ A) for 3 m and 45 dB (μ A) for 4 m loop diameter.

4.4 Operating Condition of EUT


Test date	Ambient temperature	Relative humidity	Atmospheric pressure
Feb 25, 2022	20° C	60%	101.2kPa

4.5 Test Procedure

1. The magnetic component was measured by means of a loop antenna. The Charging equipment was placed in the centre of the antenna. The position of the mains lead was optimized for maximum current induction.
2. The induced current in the loop antenna was measured by means of a current probe (1 V/A) and the CISPR measuring receiver. During the measurements the EUT remains in a fixed position. By means of a coaxial switch, The currents in the three large loop antennas, originating from the three mutually orthogonal magnetic field components, were measured in sequence. Each value was fulfil the requirements given.
3. There were no special instructions for the supply wiring.
4. The distance between the outer perimeter of the LAS(Loop Antenna System) and nearby objects, such as floor and walls, was at least 0.5 m.
5. To avoid unwanted capacitive coupling between the EUT and the LAS, the maximum dimensions of the EUT allowed a distance of at least 0.20 m between the EUT and the standardized 2 m large loop antennas of the LAS.


4.6 Test Data

EUT:	Multifunctional LED controller for chain stores	Model Name:	BV-M3200
Test Mode:	Lighting	Test Date:	2022.2.25
Polarization:	X	Test Voltage:	AC 230V/50Hz
Operator:	Bing	Note:	

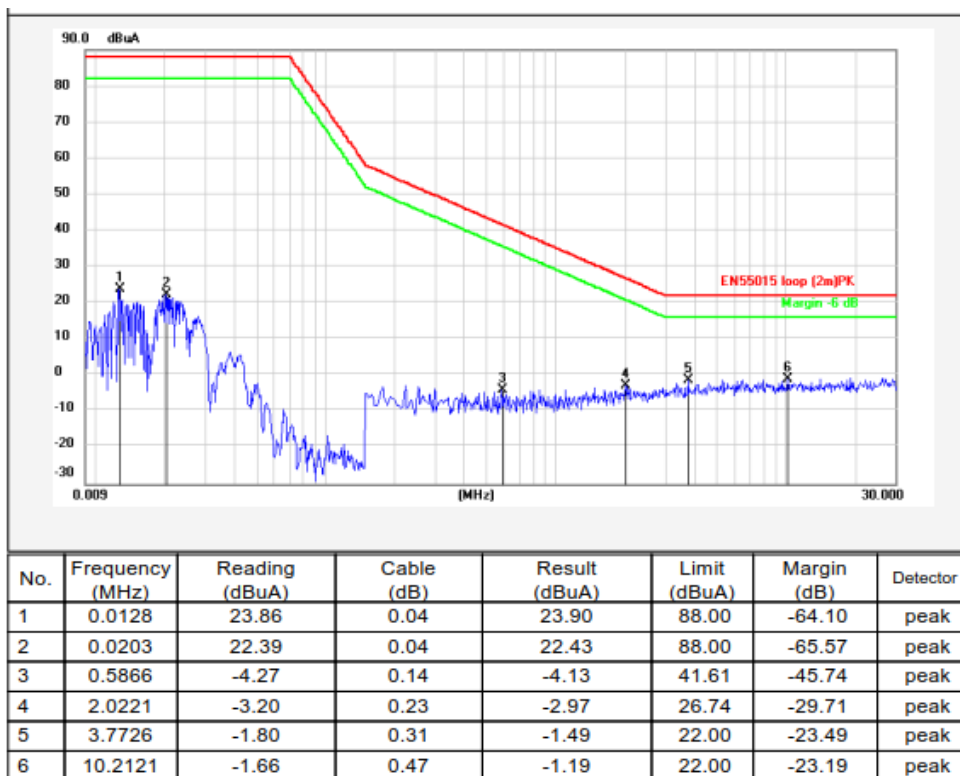


Remarks: 1. Result=Reading+Cab_L

EUT:	Multifunctional LED controller for chain stores	Model Name:	BV-M3200
Test Mode:	Lighting	Test Date:	2022.2.25
Polarization:	Y	Test Voltage:	AC 230V/50Hz
Operator:	Bing	Note:	

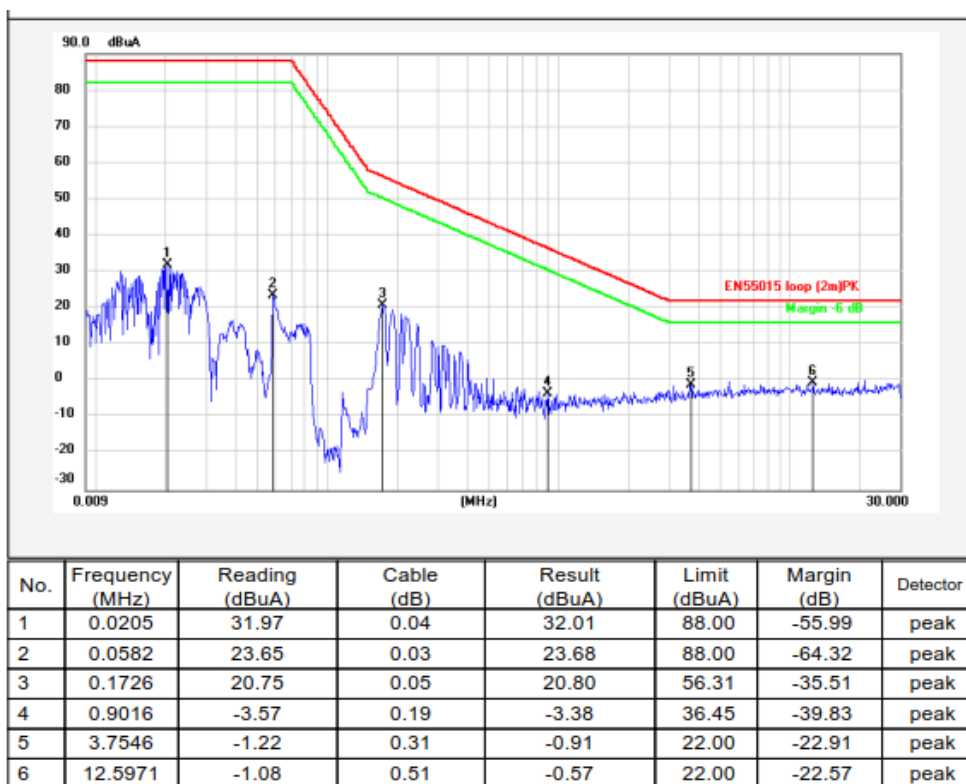

Remarks: 1. Result=Reading+Cab_L

EUT:	Multifunctional LED controller for chain stores	Model Name:	BV-M3200
Test Mode:	Lighting	Test Date:	2022.2.25
Polarization:	Z	Test Voltage:	AC 230V/50Hz
Operator:	Bing	Note:	

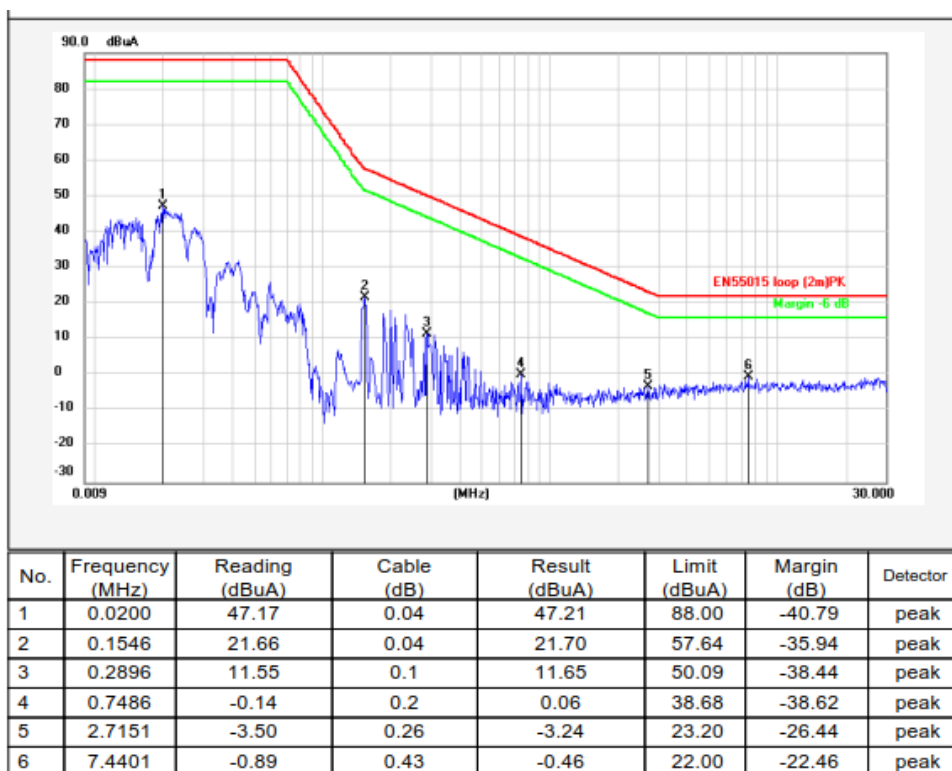


Remarks: 1. Result=Reading+Cab_L

5 RADIATED EMISSION TEST

5.1 Block Diagram of Test Setup

30~1000MHz:

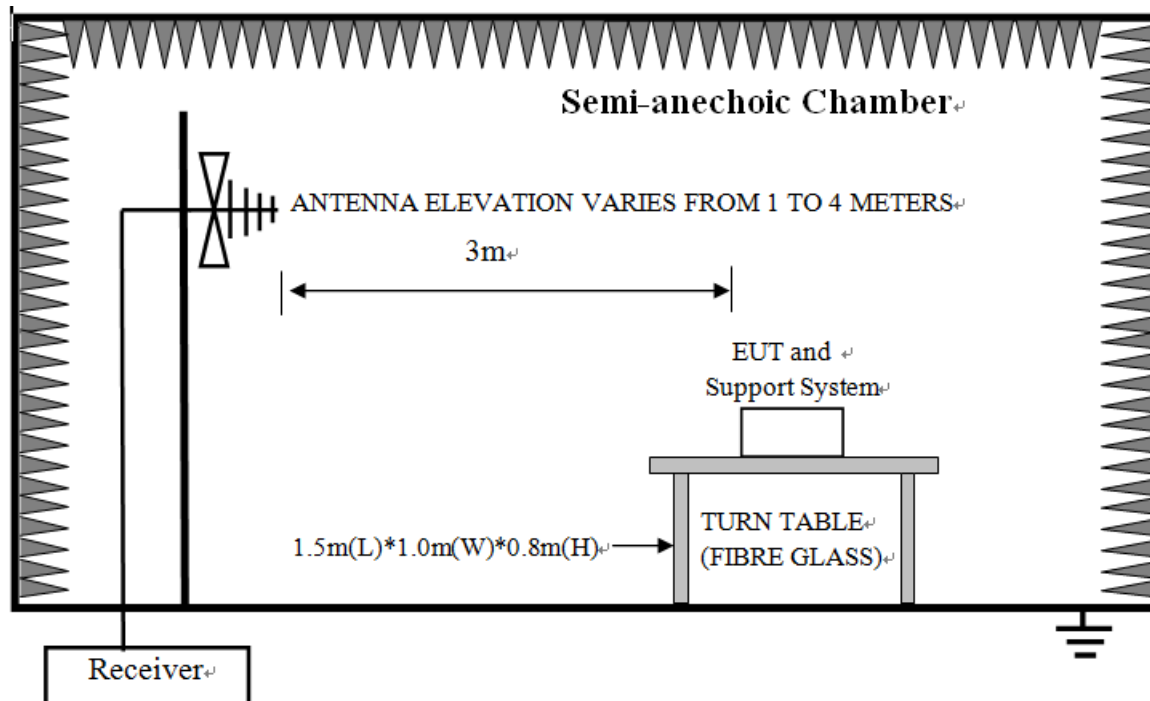

5.2 Test Standard

EN IEC 55015:2019+A11:2020

5.3 Limits for radiated disturbance

Frequency MHz	Distance	Limits dB(μV)/m
30 ~ 230	3m	40(Quasi Peak)
230 ~ 1000	3m	47(Quasi Peak)

5.4 Operating Condition of EUT

Test date	Ambient temperature	Relative humidity	Atmospheric pressure
Feb 28, 2022	20°C	60%	101.5kPa

5.5 Test Procedure


The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth setting on the test receiver was 120 kHz.

5.6 Test Data


EUT:	Multifunctional LED controller for chain stores	Model Name:	BV-M3200
Test Mode:	Lighting	Test Date:	2022.2.28
Polarization:	Horizontal	Test Voltage:	AC 230V /50Hz
Operator:	Bing	Note:	

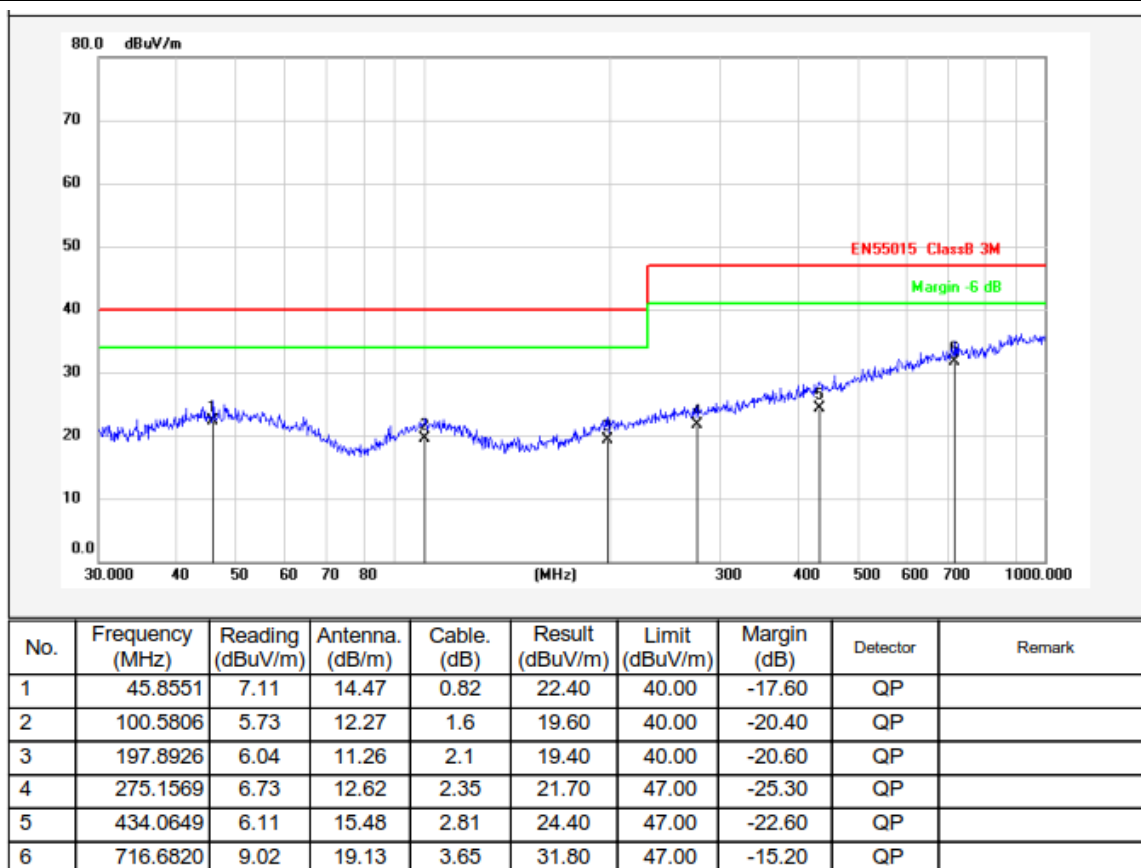

Remarks:1. Result=Reading+Antenna+Cable

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

EUT:	Multifunctional LED controller for chain stores	Model Name:	BV-M3200
Test Mode:	Lighting	Test Date:	2022.2.28
Polarization:	Vertical	Test Voltage:	AC 230V /50Hz
Operator:	Bing	Note:	

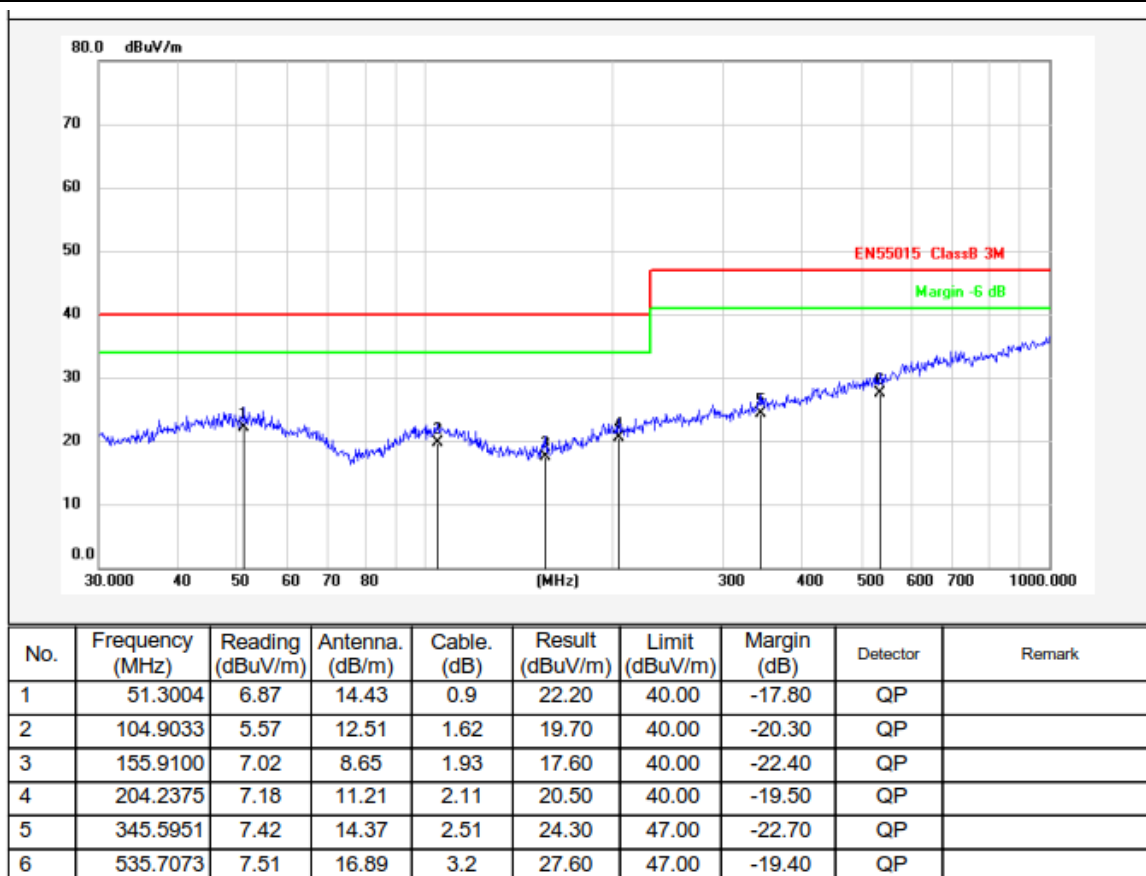


Remarks: 1. Result=Reading+Antenna+Cable

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

6 HARMONIC CURRENT EMISSION TEST

6.1 Block Diagram of Test Setup

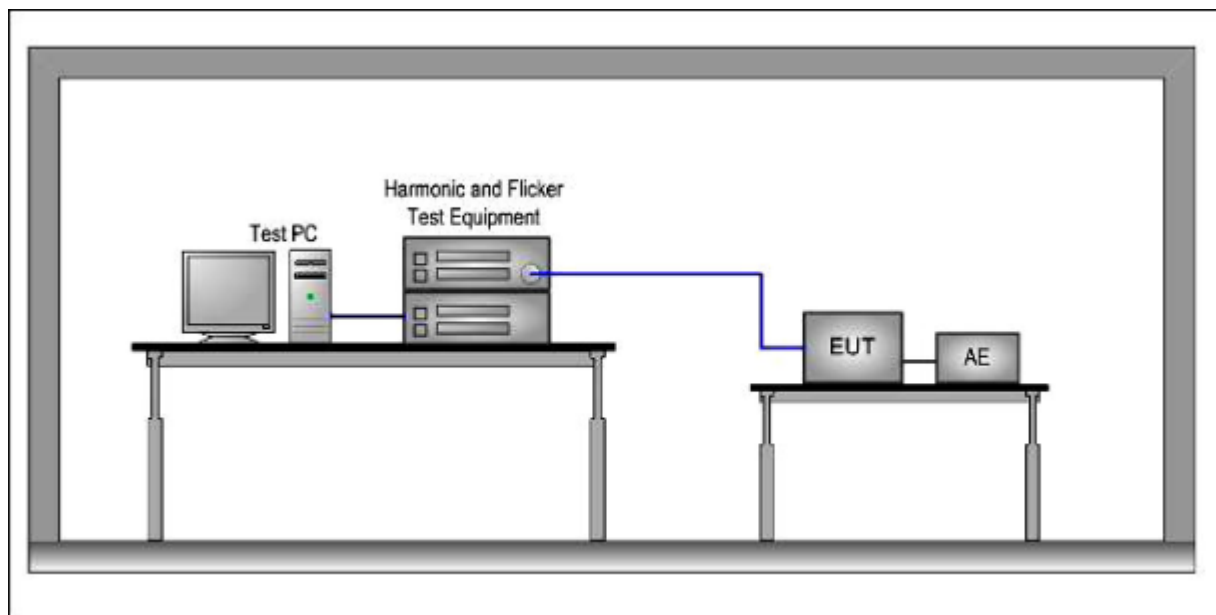

6.2 Test Standard

EN IEC 61000-3-2:2019, Class C

6.3 Limits of Harmonic Current

Limits for Class C equipment	
Harmonic order n	Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency %
2	2
3	$30 \cdot \lambda^*$
5	10
7	7
9	5
$11 \leq n \leq 39$ (odd harmonics only)	3
* λ is the circuit power factor	

6.4 Operating Condition of EUT

Test date	Ambient temperature	Relative humidity	Atmospheric pressure
Mar 01, 2022	24°C	54%	101.3kPa

The details of test modes are as follows :

No.	Test Mode
1.	Lighting

6.5 Test Procedure


The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.

The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the necessary for the EUT to be exercised.

6.6 Test Data


Test Result: Pass Source qualification: Normal

Current & voltage waveforms

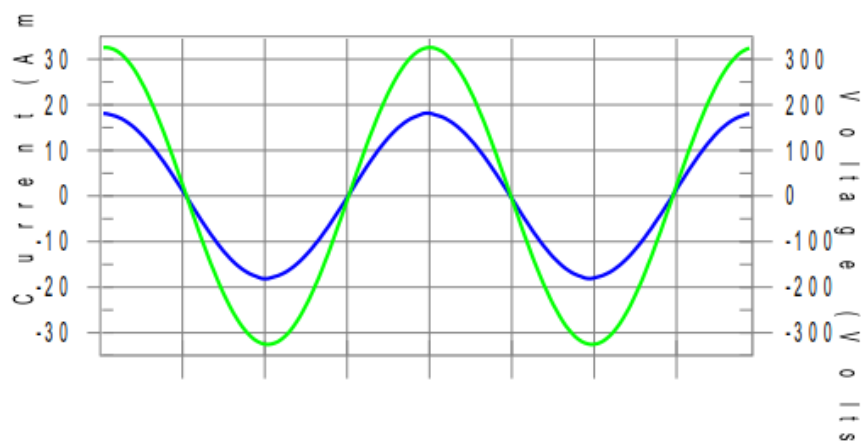

Harmonics and Class C limit line

European Limits

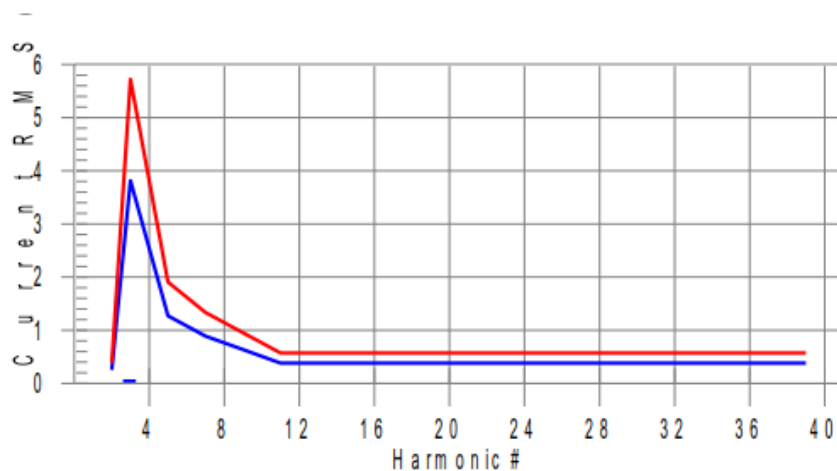

Test result: Pass Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit



Test Result: Pass Source qualification: Normal
THC(A): 0.063 I-THD(%): 0.5 POHC(A): 0.006 POHC Limit(A): 1.206

Highest parameter values during test:

V_RMS (Volts):	230.42	Frequency(Hz):	50.00
I_Peak (Amps):	18.183	I_RMS (Amps):	12.714
I_Fund (Amps):	12.713	Crest Factor:	1.430
Power (Watts):	2928.4	Power Factor:	1.000

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	0.254	N/A	0.002	0.381	N/A	Pass
3	0.060	3.814	N/A	0.065	5.721	N/A	Pass
4	0.001	0.000	N/A	0.001	0.000	N/A	Pass
5	0.006	1.271	N/A	0.011	1.907	N/A	Pass
6	0.002	0.000	N/A	0.002	0.000	N/A	Pass
7	0.008	0.890	N/A	0.015	1.335	N/A	Pass
8	0.001	0.000	N/A	0.001	0.000	N/A	Pass
9	0.005	0.636	N/A	0.009	0.954	N/A	Pass
10	0.000	0.000	N/A	0.001	0.000	N/A	Pass
11	0.007	0.381	N/A	0.011	0.572	N/A	Pass
12	0.002	0.000	N/A	0.002	0.000	N/A	Pass
13	0.004	0.381	N/A	0.007	0.572	N/A	Pass
14	0.001	0.000	N/A	0.001	0.000	N/A	Pass
15	0.005	0.381	N/A	0.008	0.572	N/A	Pass
16	0.000	0.000	N/A	0.001	0.000	N/A	Pass
17	0.004	0.381	N/A	0.005	0.572	N/A	Pass
18	0.000	0.000	N/A	0.001	0.000	N/A	Pass
19	0.004	0.381	N/A	0.005	0.572	N/A	Pass
20	0.000	0.000	N/A	0.001	0.000	N/A	Pass
21	0.004	0.381	N/A	0.004	0.572	N/A	Pass
22	0.000	0.000	N/A	0.000	0.000	N/A	Pass
23	0.003	0.381	N/A	0.003	0.572	N/A	Pass
24	0.000	0.000	N/A	0.001	0.000	N/A	Pass
25	0.002	0.381	N/A	0.003	0.572	N/A	Pass
26	0.000	0.000	N/A	0.001	0.000	N/A	Pass
27	0.002	0.381	N/A	0.002	0.572	N/A	Pass
28	0.000	0.000	N/A	0.000	0.000	N/A	Pass
29	0.001	0.381	N/A	0.002	0.572	N/A	Pass
30	0.000	0.000	N/A	0.000	0.000	N/A	Pass
31	0.001	0.381	N/A	0.002	0.572	N/A	Pass
32	0.000	0.000	N/A	0.000	0.000	N/A	Pass
33	0.001	0.381	N/A	0.001	0.572	N/A	Pass
34	0.000	0.000	N/A	0.000	0.000	N/A	Pass
35	0.001	0.381	N/A	0.001	0.572	N/A	Pass
36	0.000	0.000	N/A	0.000	0.000	N/A	Pass
37	0.001	0.381	N/A	0.001	0.572	N/A	Pass
38	0.000	0.000	N/A	0.000	0.000	N/A	Pass
39	0.000	0.381	N/A	0.001	0.572	N/A	Pass
40	0.000	0.000	N/A	0.000	0.000	N/A	Pass



Test Result: Pass Source qualification: Normal


Highest parameter values during test:

Voltage (Vrms):	230.42	Frequency(Hz):	50.00
I_Peak (Amps):	18.183	I_RMS (Amps):	12.714
I_Fund (Amps):	12.713	Crest Factor:	1.430
Power (Watts):	2928.4	Power Factor:	1.000

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.053	0.461	11.42	OK
3	0.434	2.073	20.93	OK
4	0.037	0.461	8.05	OK
5	0.050	0.921	5.41	OK
6	0.042	0.461	9.06	OK
7	0.076	0.691	10.94	OK
8	0.014	0.461	3.11	OK
9	0.037	0.461	7.94	OK
10	0.013	0.461	2.89	OK
11	0.037	0.230	15.90	OK
12	0.034	0.230	14.55	OK
13	0.021	0.230	9.28	OK
14	0.016	0.230	6.98	OK
15	0.018	0.230	7.61	OK
16	0.010	0.230	4.45	OK
17	0.013	0.230	5.57	OK
18	0.009	0.230	3.98	OK
19	0.005	0.230	2.29	OK
20	0.012	0.230	5.25	OK
21	0.008	0.230	3.64	OK
22	0.006	0.230	2.62	OK
23	0.009	0.230	3.89	OK
24	0.007	0.230	2.97	OK
25	0.011	0.230	4.82	OK
26	0.009	0.230	3.72	OK
27	0.011	0.230	4.91	OK
28	0.003	0.230	1.49	OK
29	0.007	0.230	3.11	OK
30	0.003	0.230	1.24	OK
31	0.004	0.230	1.89	OK
32	0.002	0.230	1.08	OK
33	0.005	0.230	2.01	OK
34	0.002	0.230	0.86	OK
35	0.005	0.230	2.31	OK
36	0.002	0.230	0.84	OK
37	0.003	0.230	1.34	OK
38	0.002	0.230	0.89	OK
39	0.003	0.230	1.31	OK
40	0.006	0.230	2.50	OK

7 VOLTAGE FLUCTUATIONS & FLICKER TEST

7.1 Block Diagram of Test Setup

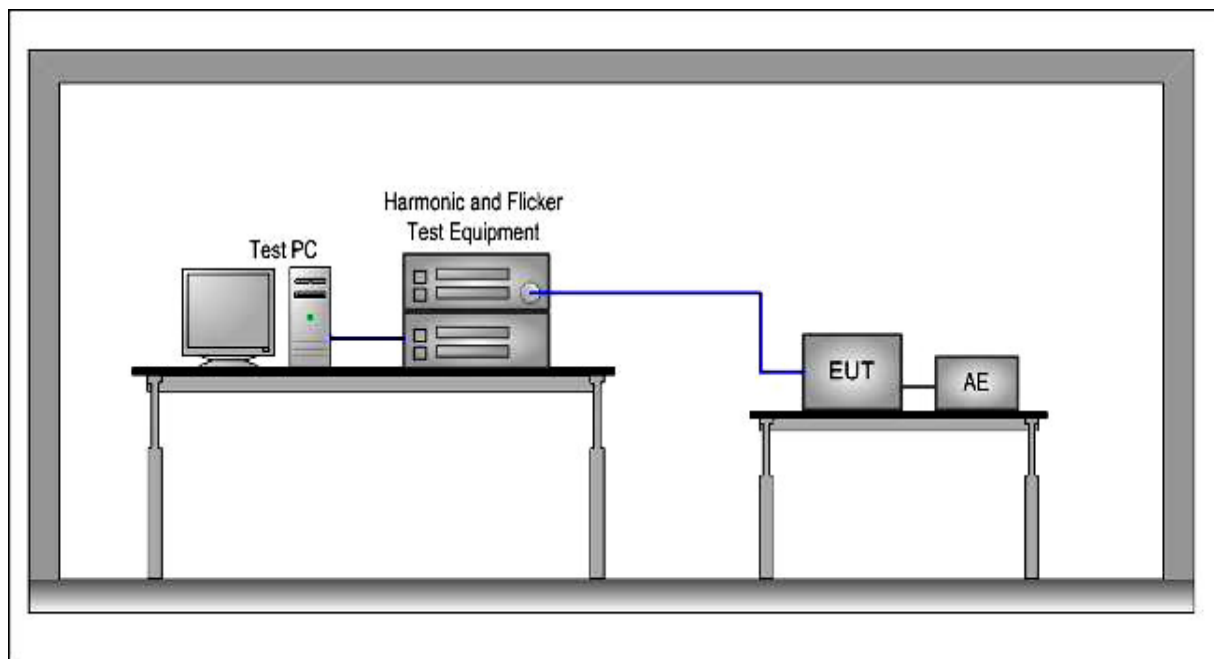

7.2 Test Standard

EN 61000-3-3:2013+A1:2019

7.3 Limits of Voltage Fluctuation and Flick

Test Item	Limit	Note
Pst	1.0	Pst means Short-term flicker indicator
Plt	0.65	Plt means long-term flicker indicator
Tmax	500ms	Tmax means maximum time that d(t) exceeds 3.3%
dmax(%)	4%	dmax means maximum relative voltage change.
dc(%)	3.3%	dc means relative steady-state voltage change.

7.4 Operating Condition of EUT

Test date	Ambient temperature	Relative humidity	Atmospheric pressure
Mar 01, 2022	24°C	54%	101.3kPa

The details of test modes are as follows :

No.	Test Mode
1.	Lighting

7.5 Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal conditions. During the flick measurement, the measure time shall include that part of whole operation changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.


7.6 Test Data

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

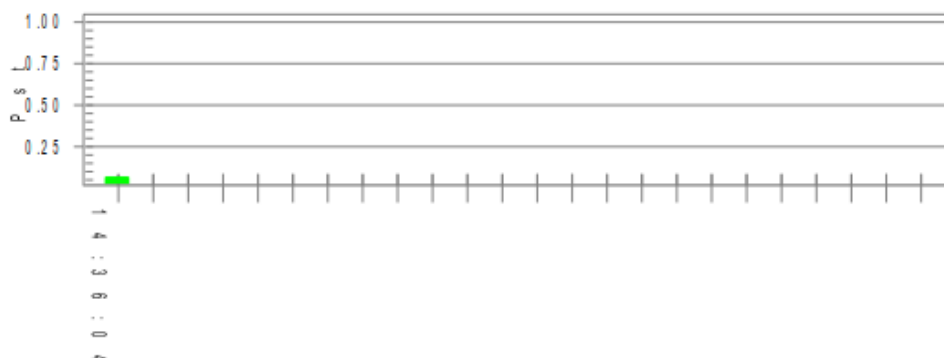

Plt and limit line

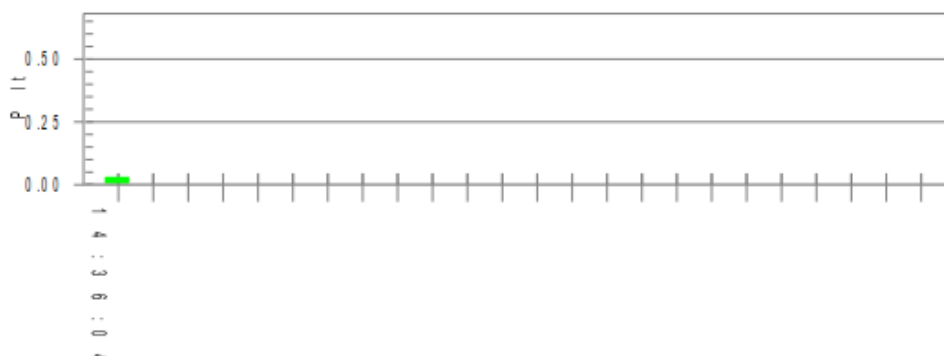

Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.42

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.00

Highest Pst (10 min. period): 0.064

Highest Plt (2 hr. period): 0.028

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass

8 IMMUNITY TEST RESULT

Description of Performance Criteria:

Performance criteria A

During and after the test the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criteria B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.


Performance criteria C

During and after testing, a temporary loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a backup, shall not be lost.

9 ELECTROSTATIC DISCHARGE TEST

9.1 Block Diagram of Test Setup

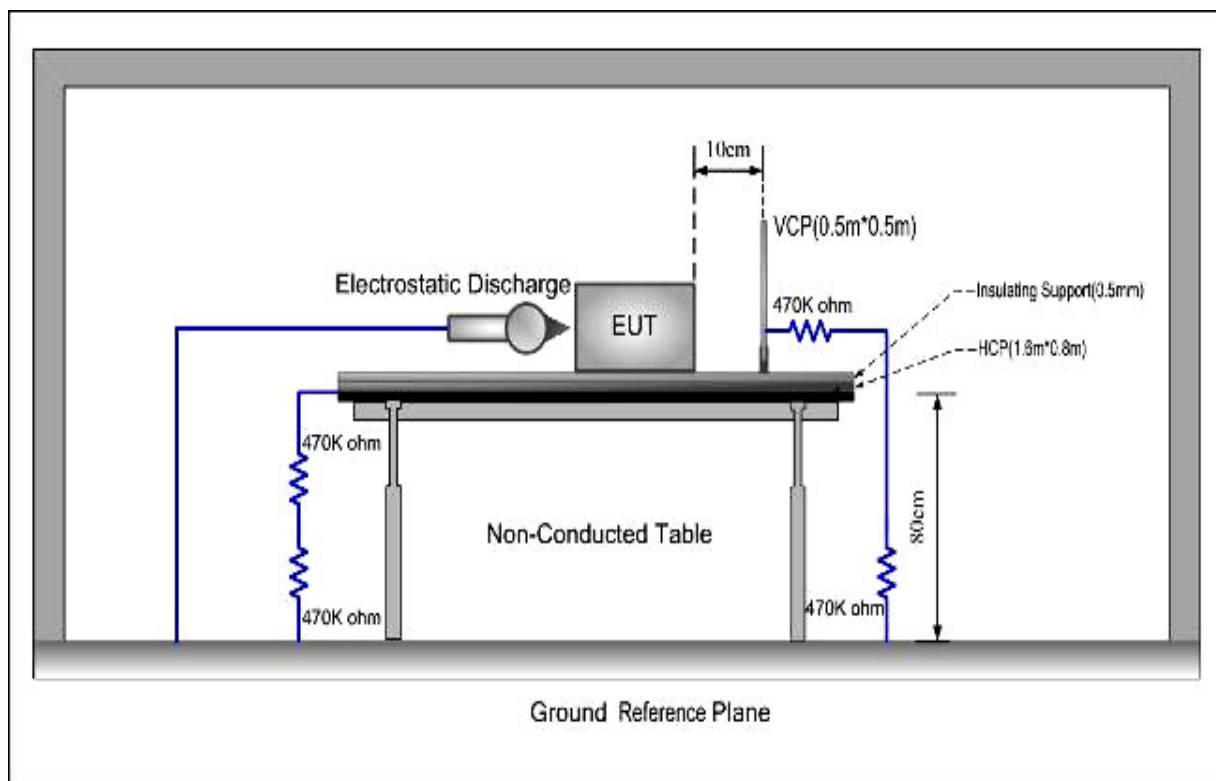

9.2 Test Standard

EN 61547:2009 (EN 61000-4-2)

(Severity Level 1&2&3 for Air Discharge at 2kV 4kV 8kV;

Severity Level 1&2 for Contact Discharge at 2kV 4kV)

9.3 Severity Levels and Performance Criterion

Severity Levels	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)	Performance criterion
1.	2	2	B
2.	4	4	
3.	6	8	
4.	8	15	
x	Special	Special	

9.4 Operating Condition of EUT

The details of test modes are as follows :

No.	Test Mode
1.	Lighting

9.5 Test Procedure

9.5.1 Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed.

9.5.2 Contact Discharge:

All the procedure was same as Section 8.5.1. except that the generator was re-triggered for a new single discharge and repeated 50 times for each pre-selected test point. The tip of the discharge electrode was touch the EUT before the discharge switch was operated.

9.5.3 Indirect discharge for horizontal coupling plane

At least 20 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

9.5.4 Indirect discharge for vertical coupling plane

At least 20 single discharge were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.


9.6 Test Data

Electrostatic Discharge Test Results

EUT	:	Multifunctional LED controller for chain stores	Temperature	:	22℃	
M/N	:	BV-M3200	Humidity	:	55%	
Test Voltage	:	AC 230V/50Hz	Test Date	:	2022.3.1	
Test Engineer	:	Bing	Pressure	:	101.3kPa	
Required Performance	:	B	Actual Performance	:	A	
Air Discharge: ±2kV ±4kV ±8kV		#	For Air Discharge each Point Positive >25 times and negative >25 times discharge			
Contact Discharge: ±2kV ±4kV		#	For Contact Discharge each point positive >25 times and negative >25 times discharge			
For the time interval between successive single discharges an initial value of one second. After discharge to the ungrounded part of EUT, it needs the bleeder resistor to remove the charge prior to next ESD pulse						
Discharge Voltage (kV)		Type of discharge	Dischargeable Points	Performance		Result (Pass/Fail)
				Required	Observation	
±2		Contact	Center of VCP	B	A	Pass
±4		Contact	Center of HCP	B	A	Pass
±4		Contact	1	B	A	Pass
±8		Air	2	B	A	Pass
1	Metal Shell		8	/		
2	Gap		9	/		
3	/		10	/		
4	/		11	/		
5	/		12	/		
6	/		13	/		
7	/		14	/		
Performance:						
The EUT was no change compared with initial operation during the test.						

10 Radio Frequency Electromagnetic Field Immunity Test

10.1 Block Diagram of Test Setup

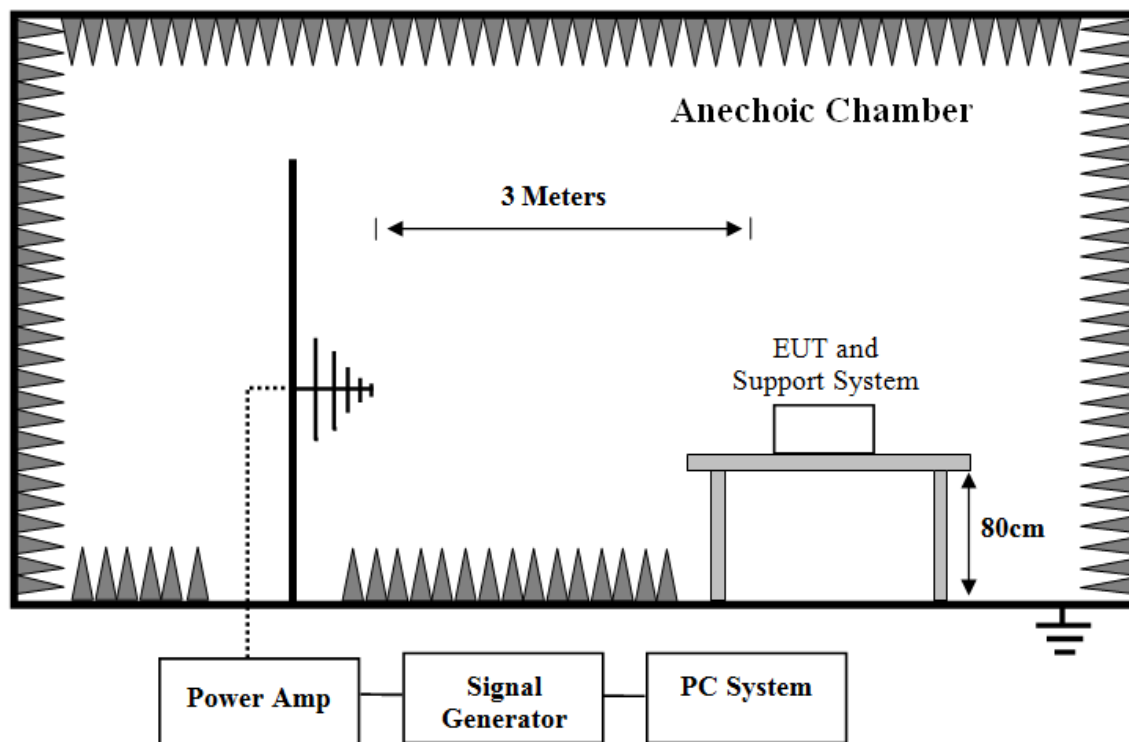

10.2 Test Standard

EN 61547:2009 (EN 61000-4-3),
Frequency Range: 80-1000MHz
Severity Level 2 at 3V/m

Radio Frequency Electromagnetic Field Immunity Test levels

Level	Test field strength V/m
1	1
2	3
3	10
4	30
X	Special
Note: X is an open test level and the associated field strength may be any value. This level may be given in the product standard.	

10.3 Operating Condition of EUT

The details of test modes are as follows :

No.	Test Mode
1.	Lighting

10.4 Test Procedure

The field sensor is placed on the EUT table (0.8 meter above the ground) which is 3 meters away from the transmitting antenna. Through the signal generator, power amplifier and transmitting antenna to produce a uniformity field strength (3V/m measured by field sensor) around the EUT table from frequency range specified and records the signal generator 's output level at the same time for whole measured frequency range. Then, put EUT and its simulators on the EUT turn table and keep them 3 meters away from the transmitting antenna which is mounted on an antenna tower and fixes at 1 meter height above the ground. Using the recorded signal generator' s output level to measure the EUT from frequency range specified and both horizontal & vertical polarization of antenna must be set and measured. Each of the four sides of EUT must be faced this transmitting antenna and measures individually.

All the scanning conditions are as follows :

Test Level	
Frequency	80-1000MHz
Test level	3V/m (Severity Level 2)
Antenna polarization	Horizontal & Vertical
Modulation	80%, 1kHz Amplitude Modulation
Steps increment	1%

10.5 Test Data


Radio-frequency Continuous radiated disturbance Test Results

Field Strength (V/m)	Test Frequency (MHz)	Test mode (worst case)	Polarization of antenna	Required Performance	Actual Performance	Result
3	80-1000MHz,	Lighting	H	A	A	PASS
			V	A	A	



11 ELECTRICAL FAST TRANSIENT/BURST TEST

11.1 . Block Diagram of Test Setup

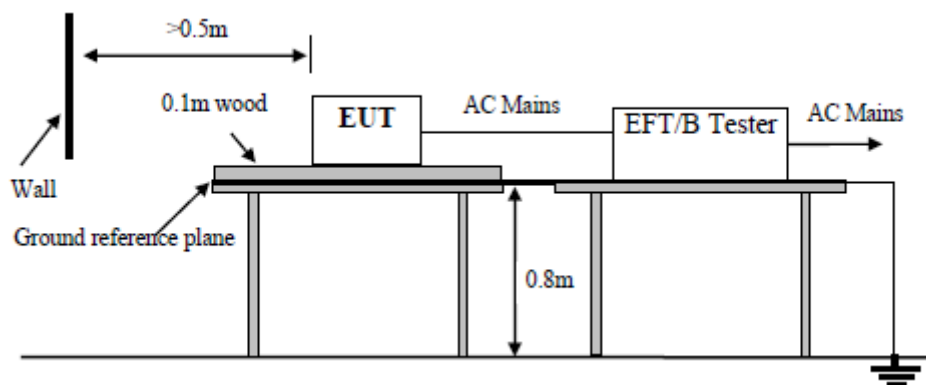

11.2 Test Standard

EN 61547:2009 (EN 61000-4-4)

11.3 Severity Levels and Performance Criterion

Open Circuit Output Test Voltage ±10%			
Severity Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines	Performance criterion
1.	0.5KV	0.25KV	B
2.	1KV	0.5KV	
3.	2KV	1KV	
4.	4KV	2KV	
X	Special	Special	
The use of 5 kHz repetition frequency is traditional, however, 100 kHz is closer to reality. Product committees should determine which frequencies are relevant for specific products or product types. With some products, there may be no clear distinction between power ports and signal ports, in which case it is up to product committees to make this determination for test purposes. a "X" can be any level, above, below or in between the others. The level shall be specified in the dedicated equipment specification.			

11.4 Operating Condition of EUT

The details of test modes are as follows :

No.	Test Mode
1.	Lighting

11.5 Test Procedure

The EUT and its simulators were placed on a ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. The length of signal and power cable between EUT and EFT generator was 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.

11.6 Test Data


Electrical fast transient Test Results

Coupling Ports		Coupling Voltage	Inject Method	Result
AC Power Ports	L-N	± 1 kV	Direct	Pass
	L-N-PE	/	/	/
Remark: There was no change compared with initial operation during the test.				



12 SURGE TEST

12.1 Block Diagram of Test Setup

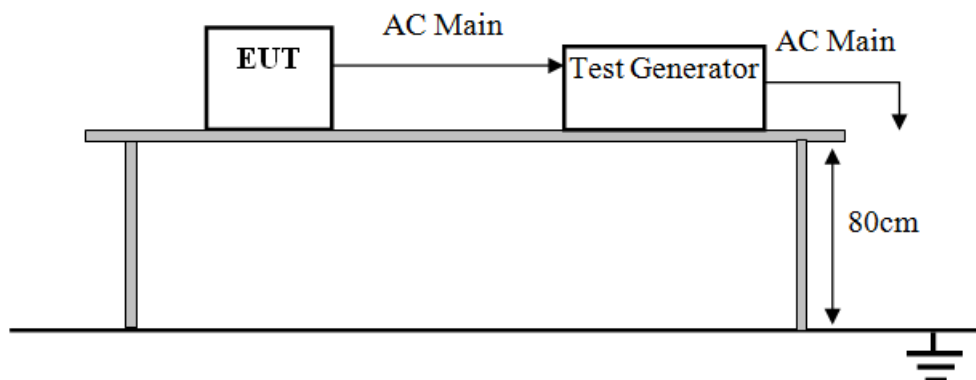

12.2 Test Standard

EN 61547:2009 (EN 61000-4-5)

12.3 Severity Levels and Performance Criterion

Severity Level	Open-Circuit Test Voltage kV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

12.4 Operating Condition of EUT

The details of test modes are as follows :

No.	Test Mode
1.	Lighting

12.5 Test Procedure

2 Ω effective output impedance of the generator was used for L-N test. 12 Ω effective output impedance of the generator was used for L-PE, N-PE test.

5 positive and 5 negative (polarity) tests were applied successively synchronized to the voltage phase, 90°, 270° to L-N respectively. The repetition rate was 1 per minute during test.

(1). For input and AC power ports:


The EUT was connected to the power mains by using a coupling device which coupled the surge interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration was 1 minute.

(2). For signal lines and control lines ports:

None.

(3). For DC input and DC output power ports:

None.

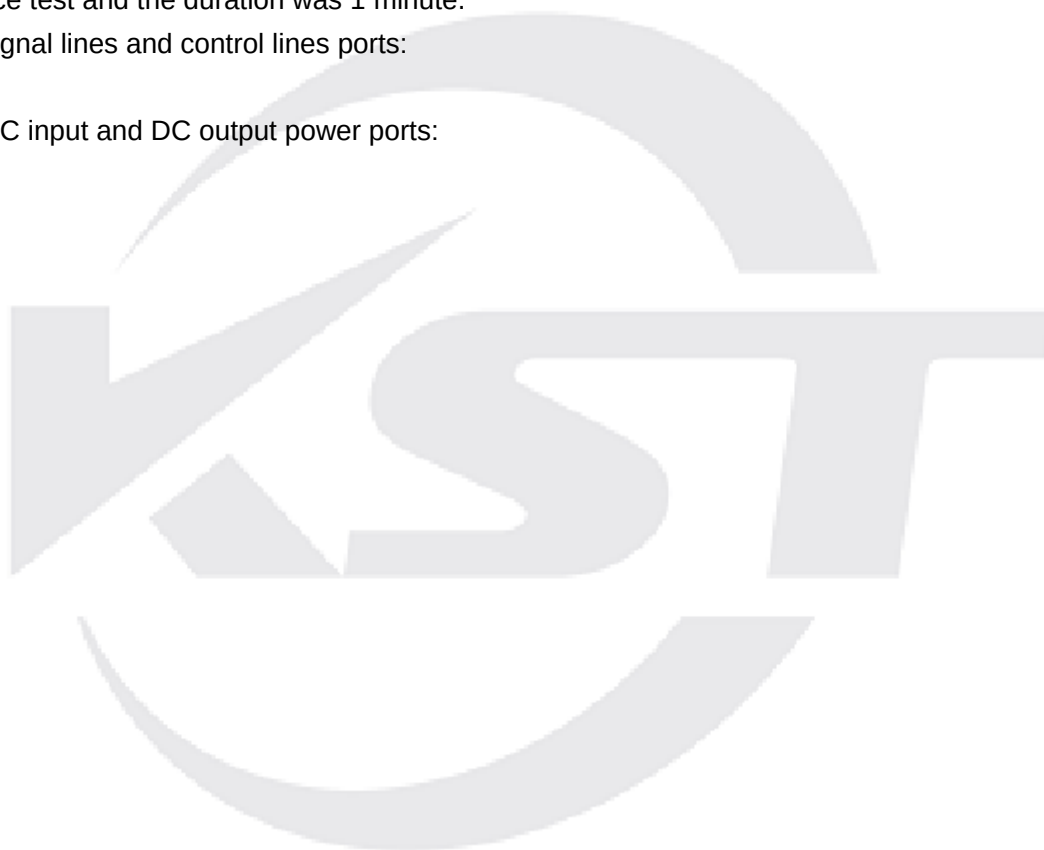


12.6 Test Data

Surge Immunity Test Results

Coupling Ports		Coupling Voltage	Coupling Phase / Result			
			0°	90°	180°	270°
AC power ports	L-N	+/-1kV Direct	/	Pass	/	Pass
	L-PE	+/-2kV Direct	/	/	/	/
	N-PE	+/-2kV Direct	/	/	/	/
Remark: There was no change compared with initial operation during the test.						

13 RADIO-FREQUENCY CONTINUOUS CONDUCTED DISTURBANCE TEST

13.1 Block Diagram of Test Setup

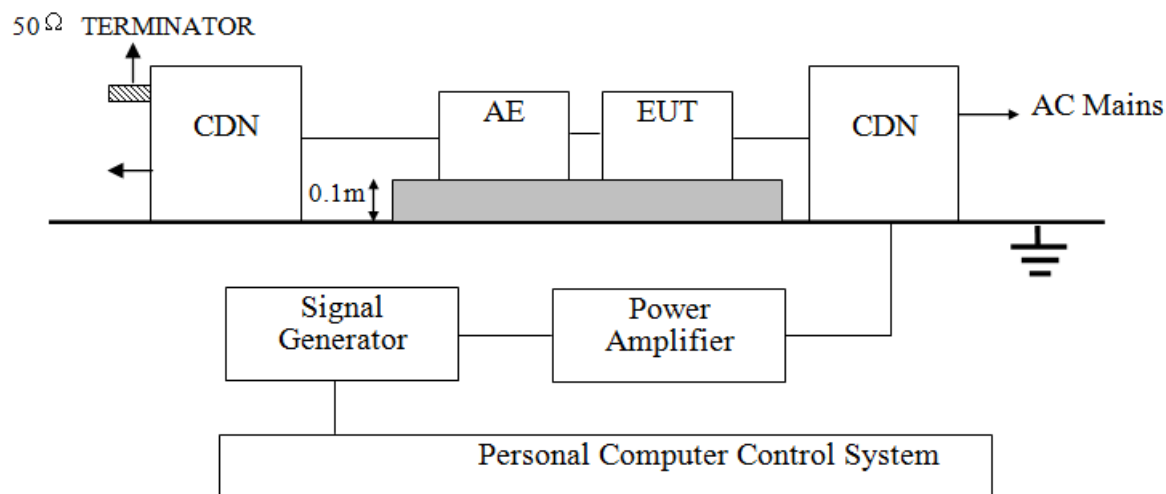

13.2 Test Standard

EN 61547:2009 (EN 61000-4-6)

13.3 Severity Levels and Performance Criterion

Level	Voltage Level (e.m.f.) V
1.	1
2.	3
3.	10
X	Special

13.4 Operating Condition of EUT

The details of test modes are as follows :

No.	Test Mode
1.	Lighting

13.5 Test Procedure

The EUT were placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) was placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT were as short as possible, and their height above the ground reference plane were between 30 and 50 mm (where possible).

The frequency range was swept from 0.15 MHz - 80 MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.

The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency was swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value



13.6 Test Data


Radio-frequency Continuous conducted disturbance Test Results

Voltage (V)	Test Frequency (MHz)	Test mode (worst case)	Injection Method	Required	Observation	Result
3	0.15 –80 MHz	Lighting	CDN-M2	A	A	PASS



14 VOLTAGE DIPS AND INTERRUPTIONS TEST

14.1 Block Diagram of Test Setup

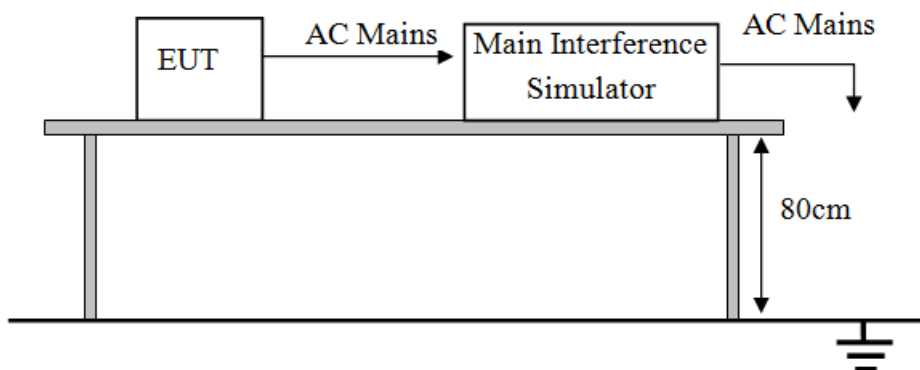

14.2 Test Standard

EN 61547:2009 (EN 61000-4-11)

14.3 Severity Levels and Performance Criterion

Test category	reduction	Periods	Performance criterion
Voltage dips	100%	0.5P	B
Voltage dips	30%	10P	C

14.4 Operating Condition of EUT

The details of test modes are as follows:

No.	Test Mode
1.	Lighting

14.5 Test Procedure

- 1) The EUT and test generator were setup as shown on Section 14.1.
- 2) The interruptions are introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

14.6 Test Data

Voltage Dips and Short Interruptions Immunity Test Result

Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in period)	Criterion	Result
0	100	0.5P	B	PASS
70	30	25P	C	PASS

Remark: The light was flashing during the test, but self-recoverable after the test



15 Test setup photo


Conducted disturbance at mains terminals Test




Radiated Electromagnetic Disturbance Test



Radiated Disturbance Test

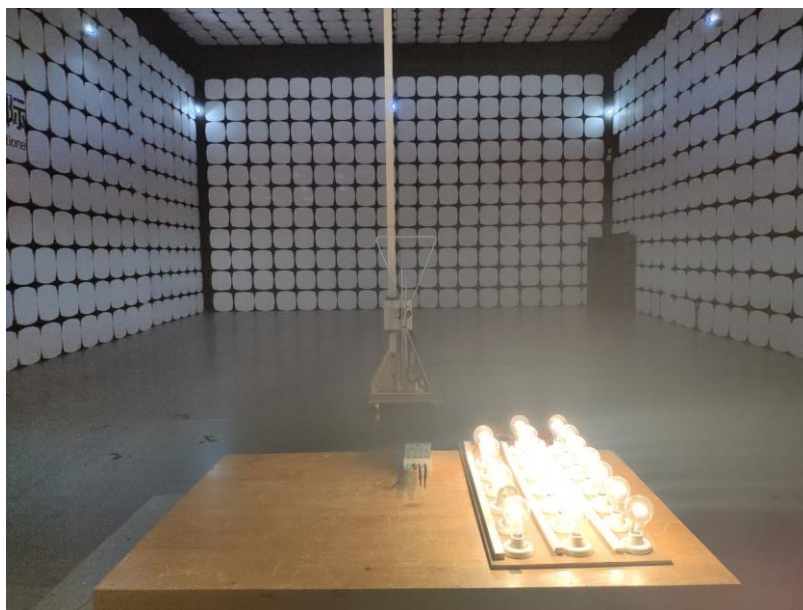


Harmonic current emission & Voltage fluctuations & flicker Test

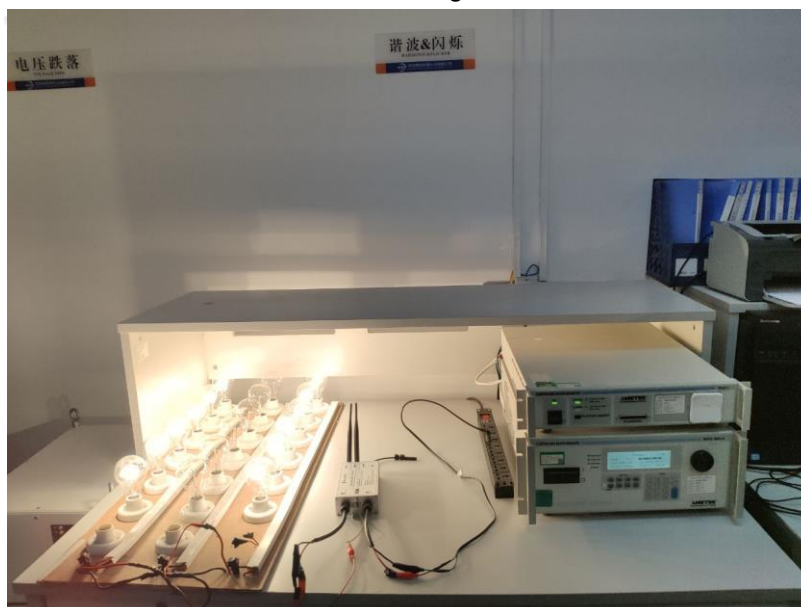

Electrostatic discharge Test



Radio-frequency Continuous radiated disturbance Test

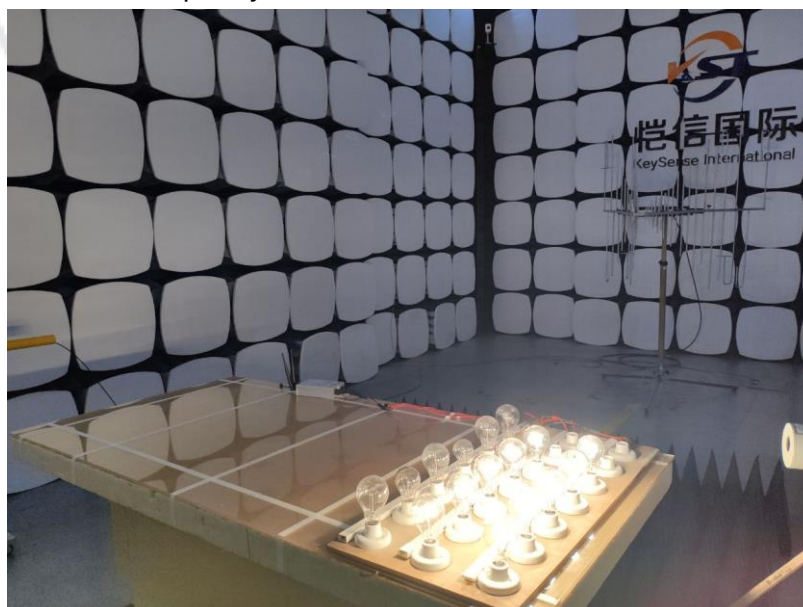

Electrical fast transient Test



Surge Test



Radio-frequency, Continuous conducted disturbance Test





Voltage dips & interruption Test





16 PHOTOS OF THE EUT

EUT photos

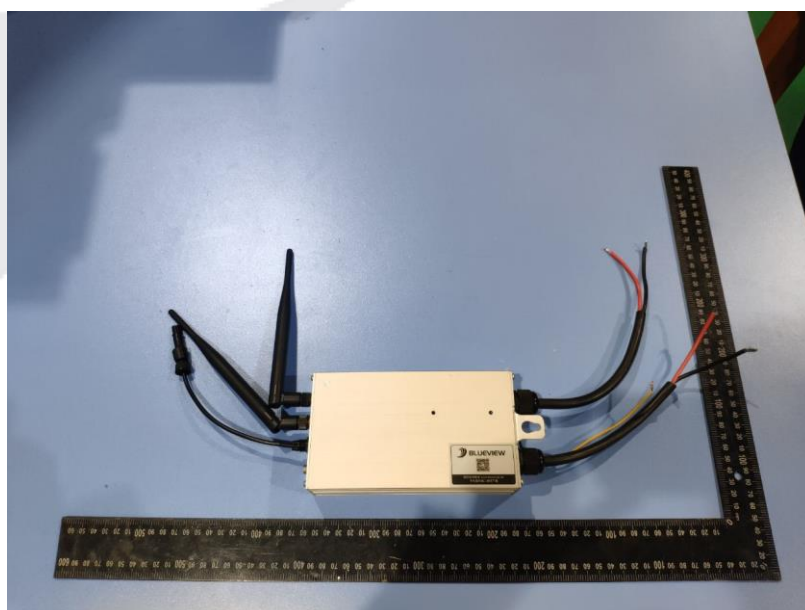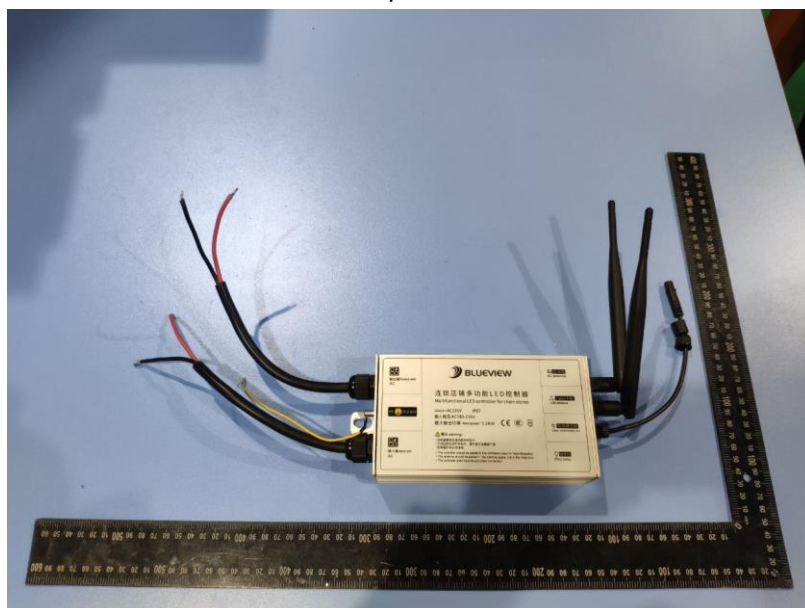

EUT photos

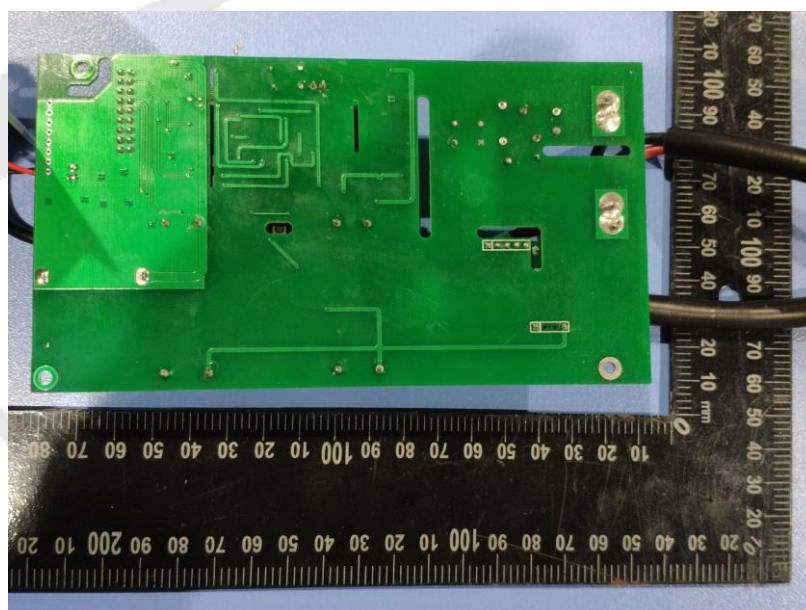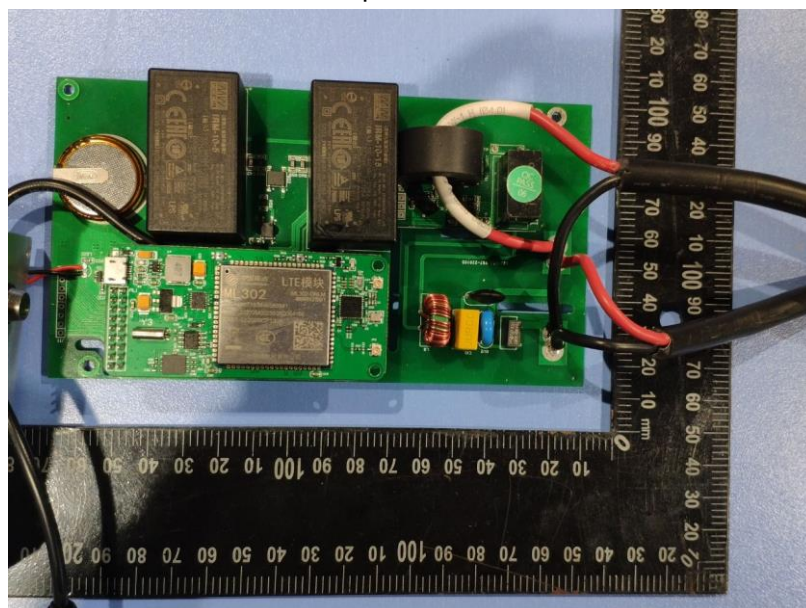

..... End of Report

Statement

1. The calibration and measurement of test equipments used in our laboratory are traceable to National primary standard of measurement and BIPM.
2. The report is invalid without the special test seal of the company.
3. The test report is invalid without the signature of main tester,examiner and approver.
4. The report is invalid if altered and added or deleted.
5. The test results in this report only apply to the tested samples.
6. This test report shall not be reproduced except in full, without the written approval of our laboratory.
7. “☆”item cannot be Accredited by CNAS.
8. Any objections must be raised to KeySense within 15days since the date when report is received.

Test Laboratory: KeySense Testing & Certification International Co., Ltd.

Address: 1-3F,Lab Building,No.29 District,ZhongKai Hi-Tech Industrial
Development Park,Huizhou,Guangdong,China

Postcode: 516006

Fax: 0752-3219929

Tel: 0752-3219929

E-mail: keysense@kst-cert.com