



Version: A1.2

Features

1. Adopts high-brightness 2835LED, and the single brightness can reach 31LM;
2. Secondary optical design, beam angle of 160°;
3. The wired slot design is used to reduce the voltage drop and the brightness is more uniform;
4. Single module can be cut;

Application

Suitable for metal letters, flat letters, backlit light box, ultra-thin light box, etc.

Installation

Fix by adhesive tape or screws



Specification

Model No.	Light Color	CCT/Color Available (K/nm)	Beam Angle	Luminous Flux (lm/pcs)	CRI	Efficacy (lm/W)	Voltage (V DC)	Power (W/pcs)
PT8-S-1	W	5500-6500	160°	30	80+	100	12	0.3
PT8-S-2	W	5500-6500	160°	65	80+	91	12	0.72
	R	620-625		7.5	/	10.5		0.72
	G	520-530		22		46		0.48
	B	455-465		5.3		11		0.48
PT8-S-3	W	5500-6500	160°	93	80+	91	12	1.02
	R	620-625		11	/	15.5		0.72
	G	520-530		33		46		0.72
	B	455-465		8		11		0.72

Other Parameters

Model No.	Quantity(LED Qty/pc)	Product Size L*W(mm)	Standard Run(pcs)	Working Temperature	Storage Temperature
PT8-S-1	1	18.2*11	50	-25~+60℃	-25~+70℃
PT8-S-2	2	38.8*19.3	30		
PT8-S-3	3	60.8*19.3	30		


NOTE:

1. Test environment temperature : 25±2℃.
2. Figures above are typical figures. Actual figures could be different with typical figures, and the data is subject to change without notice.
3. Different color temperature will make luminous flux different.
4. Power tolerance within ±10%.
5. The "Quantity" above means the LED quantity of single module


Profile Drawings

Unit:mm[inch]


PT8-S-1

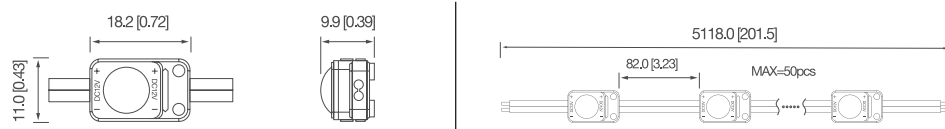


PT8-S-2

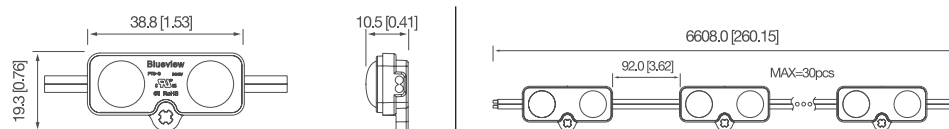

PT8-S-3

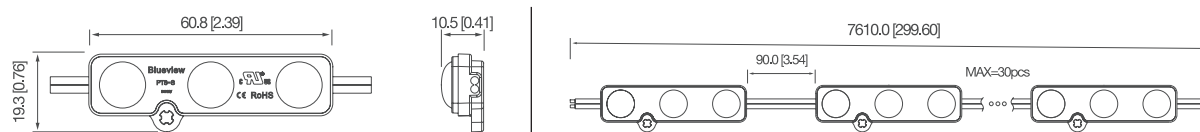

Luminous Intensity Distribution Diagram

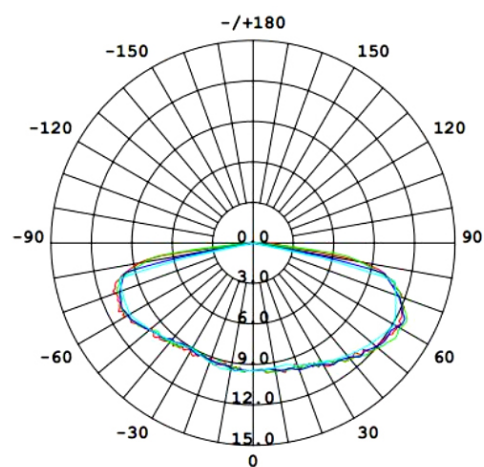

Unit: cd



— C0 /180,164.6°

— C90/270,155.5°


AVERAGE BEAM ANGLE(50%): 161.2°




Color temperature diagram

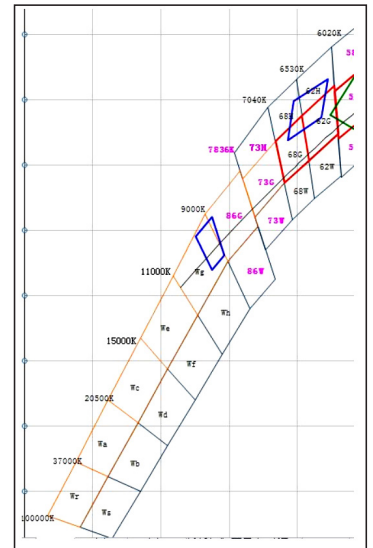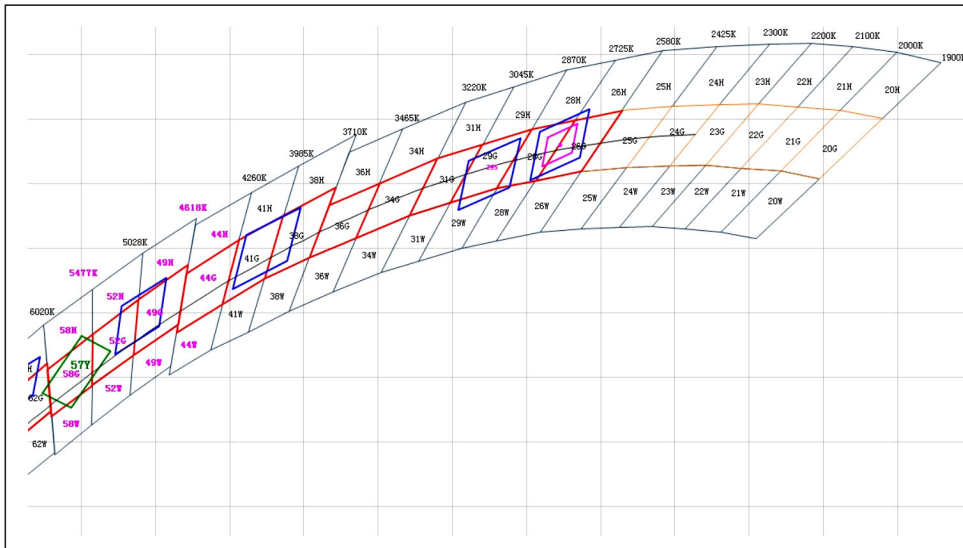


packing




Prepare the desiccant and bind the product.




Put the product and desiccant into static shielding bag.




Seal and label the static shielding bag. (For waterproof product, use the bag with hole; for nonwaterproof products, use the vacuumed bag without hole)




Put the static shielding bag side by side into carton box.



Seal the box.



Label the box;



Use packing belt to pack after adding the edge protectors.



Packaging information

Model No.	Product Size L*W(mm)	Carton Size(mm)	Total(pcs)	Net Weight(kg)	Gross Weight(kg)
PT8-S-1	18.2*11	390*390*325	5600	16.6(1±10%)	17.8(1±10%)
PT8-S-2	38.8*19.3		1440	14.7(1±10%)	15.5(1±10%)
PT8-S-3	60.8*19.3		1440	17.5(1±10%)	19.4(1±10%)

Note:

Packing materials: static shielding bag and carton box.

PT8-S-1 400 groups/bag, 14 bags/carton; PT8-S-2/PT8-S-3 120 groups/bag, 12 bags/carton

The above quantity and weight are only for the illustrated packaging method. There will be differences in the quantity and weight with other packaging methods.

Attentions before installation

- Before installation, check that the product parameters are consistent with the requirements (Seeing product specifications or product labels)
- Load voltage, current, power and power supply should be matched with the product.
- Follow the instructions of wiring diagram (first connect the load and then the power supply) to avoid short circuit.
- Make sure the correct connection of positive and negative poles between products and power supply. Otherwise, the light will not be on.
- Make sure the power cord firmly screwed into the terminal and it should not be pulled out by hands.
- The terminal should have insulation, waterproof and anti-corrosive treatment.

Common Faults and Troubleshoot

Quick Guide		
Problems	Reasons	Solutions
All LEDs can not light on.	No electric supply.	Fix the short circuit problem.
	Automatic power protection from the open or short circuit in output of the power supply.	
	Wrong connection of power supply.	
LEDs can not light on partly.	Some switching mode power supplies are not powered.	Correctly connection.
	Power supply line error.	
	Mistaken wire connection of some of products	
Brightness of LED is inconsistent tor insufficient.	Power overloaded.	Replace with more powerful power.
	Power supply circuit excessive consumption.	Make sure the working voltage of the product within ±5% of standard voltage, or keep balance by circuit power consumption.
	Excessive quantities in series connection of the product	Reduce the quantities of the product in series connection to meet requirement.
LED flicker.	Connection point fault.	Remove bad connection point.
	Switching power supply failure.	Replace a new power supply.
	Wrong Installation or use of products	Please follow the instructions



Warning

- Do not disassemble or retrofit the light. Do not touch the surface of the light with a sharp object.
- Do not do live-line working during installation, especially for high voltage product.
- Do not use any organic chemical solvents.
- Use neutral glass adhesive to fix this product and it needs to be dried 24 hours in the open environment after operation.
- Treat the ends and the circuit connection points that are not connected to the main line with insulation, waterproof, and anti-corrosion in the installation.
- Use 18AWG (0.75mm² cross-sectional area) or thicker core wire to avoid adverse consequences caused by overheating, if the power cable need to lengthen.
- Make sure the input voltage meets the requirements and lines are connected correctly before lighting on.
- This product is for signage, and do not use as general lighting.
- Series connection within the max run.
- The length of the power cable between the power supply and the led strip should not exceed 2 meters. Otherwise, large circuit loss will lead to inconsistent brightness.
- Installation, maintenance and repair should be operated by a qualified technician.

Statements and Recycling

Statements:

- Repair should be operated by a qualified technician, if the external circuit or main line of this product is damaged.
- The parameters given in this manual are typical values and for reference only.
- All illustrations and drawings in this manual are for reference.
- This product is subject to change without notice.

Recycling:

- LED lighting products belongs to electronic products, please do recycling treatment according to the relevant WEEE directives.