

Z18 2.0

2W Edge-Lighting Module

Product name :

2W Edge-Lighting Module



Features :

- 1.2W SMD3535 LED adopted;
- 2.20 pcs is max serial connection quantity at one end power feed;
- 3.Injection material is UV resistance and fire retardant;
- 4.Aluminium PCB exposed outside for better heat dissipation;
- 5.Each Module can be cut.

Application :

Single or double side light box.

Installation Method :

Heat dissipation double-side tape or screw to fix.

Parameters :

Code Name	Color Temperature (K)	Beam Angle (°)	Luminous (lm/piece)	Ra	Light Efficiency (lm/W)	Voltage (V DC)	Power (W/piece)
Z18 2.0	7700-9000	10X45°	165LM	≥77	83	12V	2

Others :


Code Name	Standard serial connection Quantity (pcs)	Max serial connection Quantity at one end power (pcs)	Max serial connection Quantity at two ends power (pcs)	Weight (g/piece)	Working Temperature (°C)	Storage Temperature (°C)	Protection Rate
Z18 2.0	20	20	40	13	-25~+60	-25~+70	IP65

Notes: ① Test environment temperature $25\pm 2^{\circ}\text{C}$;


② All above is typical value, subject to actual test value.

Structure Drawing :

: mm [in]

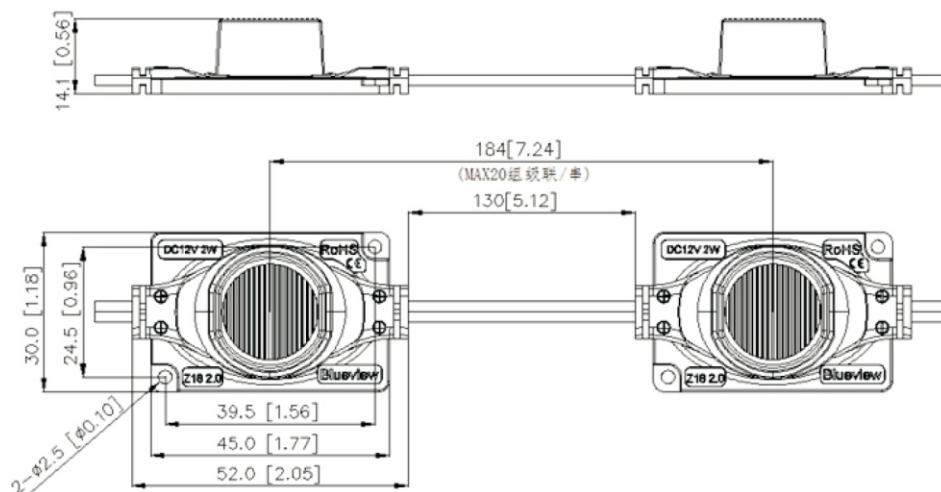

Structure Drawing :

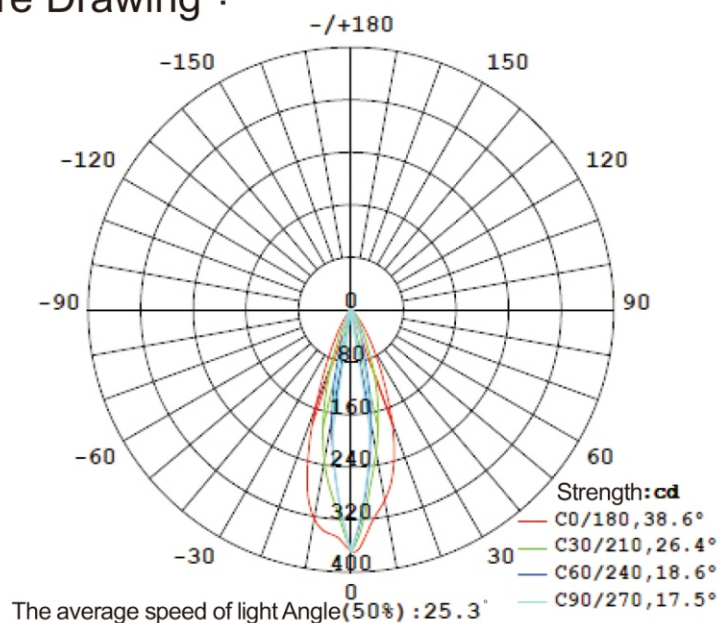


Blueview Elec-Optic Tech Co.,Ltd

Add: No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Chengdu, China

Tel: 0086-28-81480011 Fax: 0086-28-81481268

www.blueview.cn

Packaging Method :

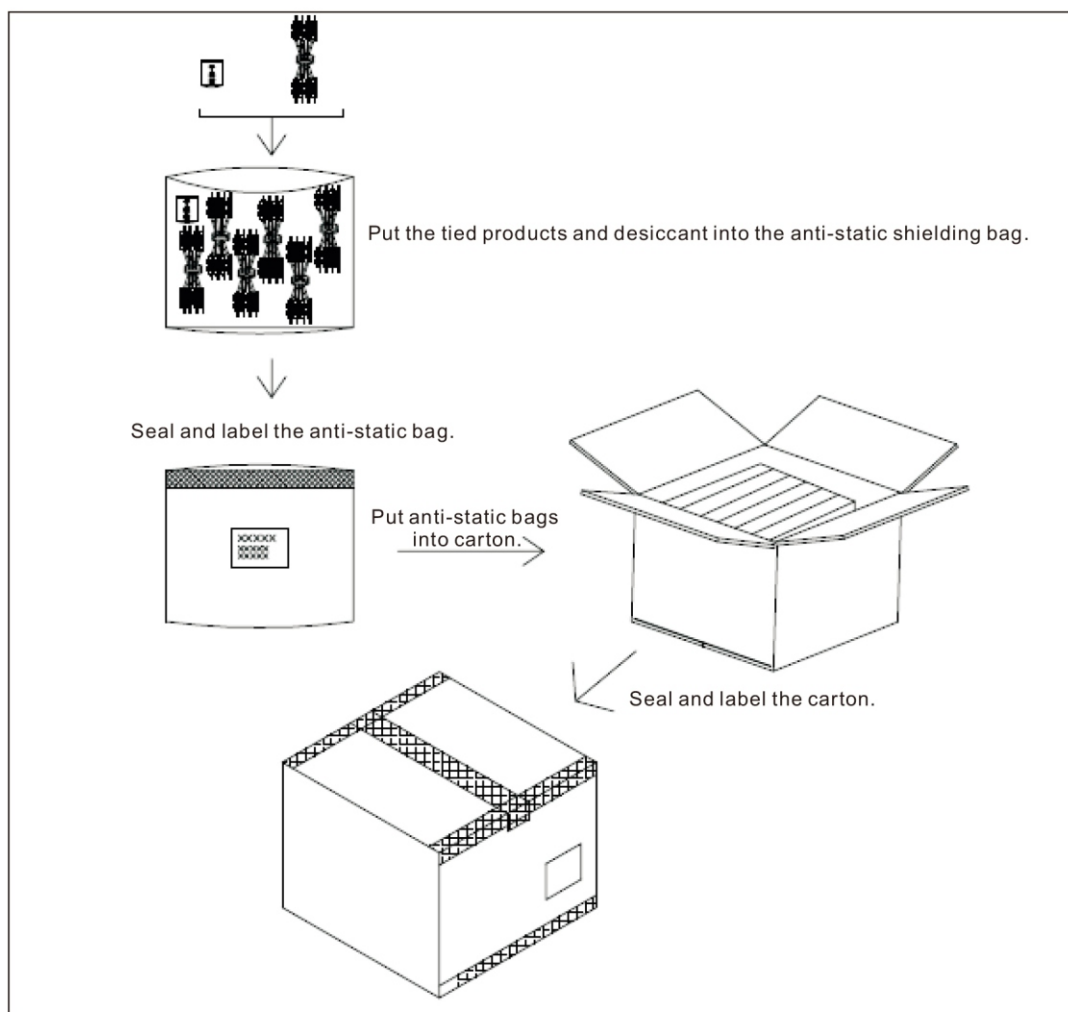

Packaging Instruction :

1. Use anti-static bag as small package;
2. Carton Dimension:570*375*285mm;
3. 20 pcs per string,3 strings per bag,20bags per carton;

4.

Part No.	Product Dimension (mm)	Total Quantity (pcs)	Net Weight (kg)	Gross Weight (kg)
Z18 2.0	52*30	1200	16.3(1±10%)	17.52(1±10%)

5. Above is standard packaging as per the sketch map, subject to actual order packaging.