

LED NEON FLEX


NSF0410





Features

- Color options: Single color.
- Adopt high quality components with stable and reliable performance.
- Side bending, suitable for many shapes and good environmental adaptability.
- Support PWM, 0~10V, DALI, DMX dimming.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

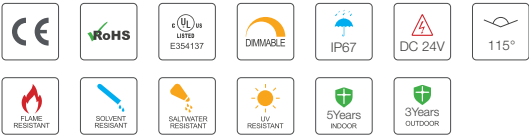

Optical & Electrical Parameters


Model No.	Voltage	Beam Angle	CRI	Color	Lm/m	Lm/W	Rated Power (W/m)
NSF0410-Single color	24V DC	115°	>80	2100K	153	16.2	9.6
				2700K	296	31.0	
				4000K	324	33.9	
				4500K	332	34.4	
				5000K	329	34.4	
			>90	6100K	250	24.0	9.6
			/	Red	79	8.6	
				Green	312	20.7	
				Blue	43	4.6	

Other Parameters

Model No.	LED QTY(pcs/m)	Standard Run	Min. Cuttable Length	Working Temperature	Storage Temperature
NSF0410-Single color	120	5000.0 mm	50.0 mm	-20~+60°C	-20~+70°C

Profile Drawings

Unit:mm[inch]

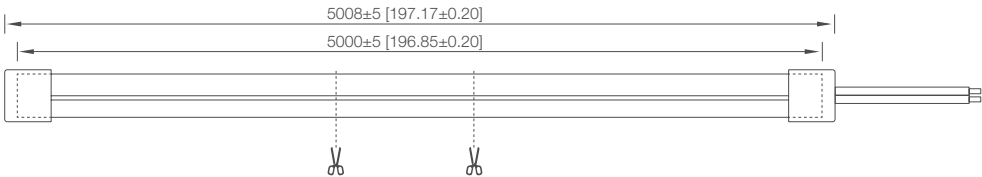


Note: support customization within 5m

Wire Spec

General Wire

Wire with anti-wicking ferrule

- Notes :
- You can choose one of the above two wires.
 - 2/3/4/5 cores are available.
 - The wire length support customization.
 - The anti-wicking ferrule needs to be above water for any underwater applications. Do not disassemble or reprocess the ferrule; otherwise, we will not be responsible for the consequences.

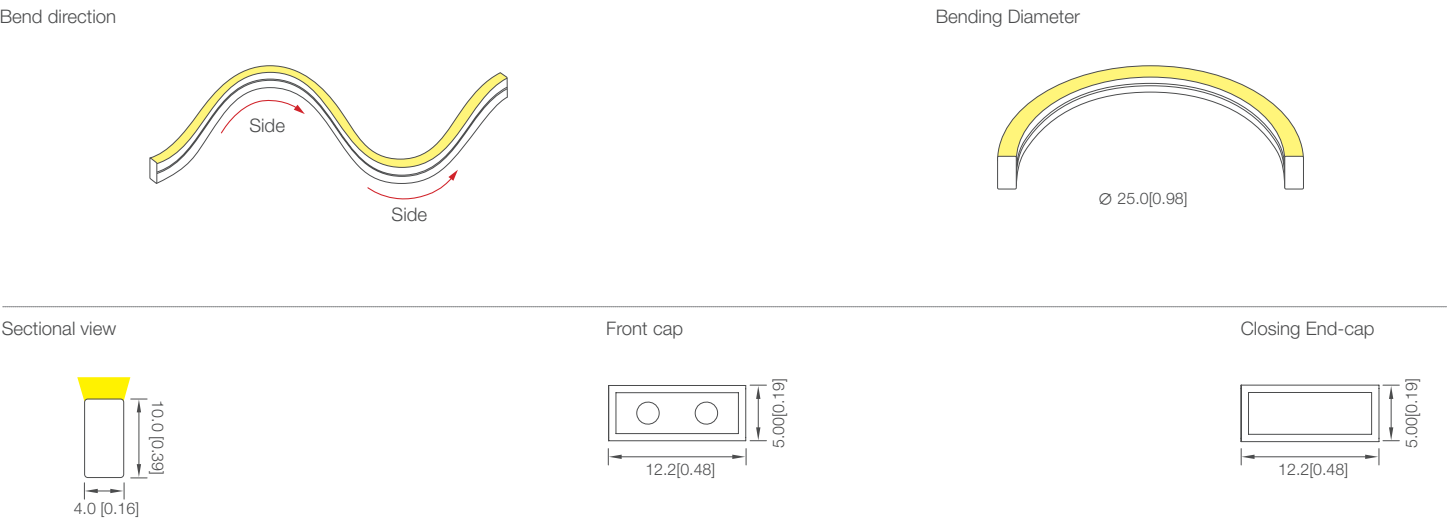


Sectional view

Front cap

Closing End-cap

Luminous Intensity Distribution Diagram

Average Illumination

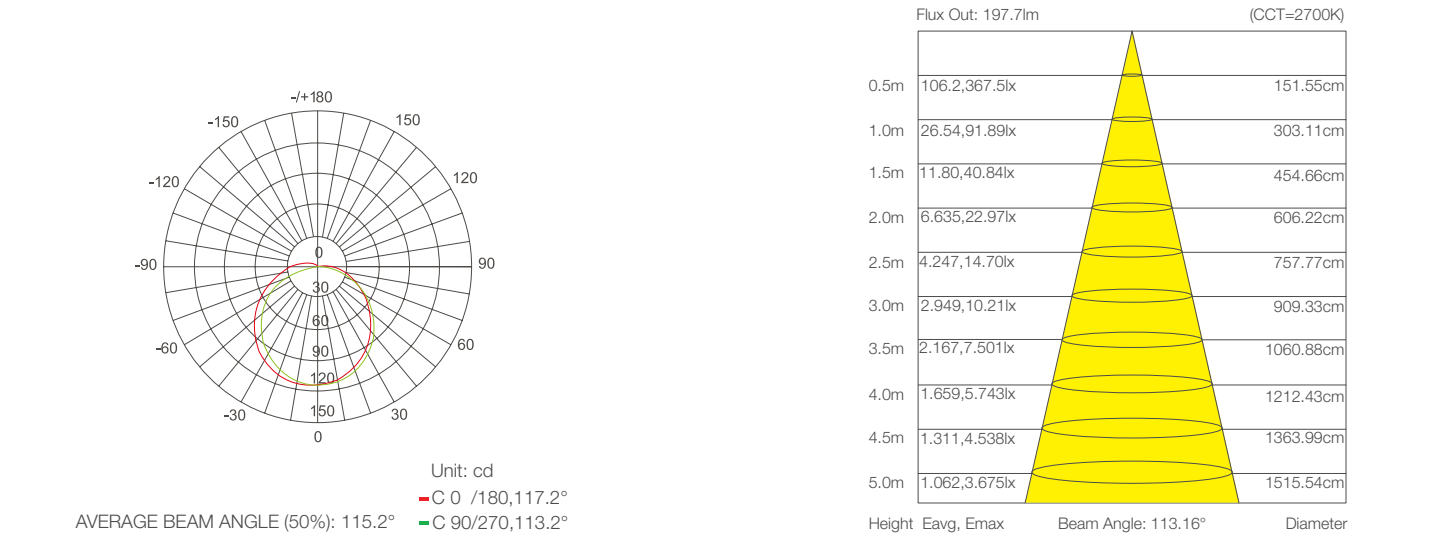


Note: the above data is based on 2700K. For more info, please consult sales rep.


Recommended power supply upon working length

NSF0410-Single color					
Working Length	Current	Rated Voltage	Measured Power	Recommended Power Supply	Power Supply Mode
1m	0.4A	24DC V	9.6W	15W	Single Feed
5m	1.8A	24DC V	43.2W	60W	Single Feed
10m	3.6A	24DC V	86.4W	120W	Double Feed


Products and Tools




Cutter



LED power supply



Electric drill




Electric iron

Product accessories



ASY-NSF0410-N00NNH-EC

Item:	Front cap
Dimensions L*W*H:	10*4.5*12mm
Quantity (5m):	2pcs
Free/Optional	Free



ASY-NSF0410-N00NNX-EC

Item:	Closing End-cap
Dimensions L*W*H:	10*4.5*12mm
Quantity (5m):	2pcs
Free/Optional	Free



Item: Aluminum clip

Dimensions L*W*H:	Optional
Quantity (5m):	
Free/Optional	



ASY-NSF0410-A1NN1000-MT

Item:	Aluminum Channel
Dimensions L*W*H:	1000*8.6*12.5mm
Quantity (5m):	--
Free/Optional	Optional




WR-7516


Item:	Silicone Glue
Dimensions:	45g/pc
Quantity (5m):	--
Free/Optional	Optional

Installation


Details of installation operation at input end



Weld the wire to the PCB board




Fill the end cap with glue, then install it to the strip




Wipe off the excess glue and wait for drying

Closing-end cap installation




Fill the end cap with glue, then install it to the strip




Wipe off the excess glue and wait for drying

- Notes:
- At the welding place, please pay attention to the positive and negative poles of the wire and the strip;
 - Each connection must use 10g silica gel for waterproof and insulating treatment;
 - The screws must be vertical to the mounting surface and be fastened, as shown in the figure on the right;
 - Please choose suitable operation steps according to the actual needs;
 - During mounting, please pay attention to the min bending diameter, and best to use original factory accessories;
 - More information, please feel free to consult us;



Packaging Information

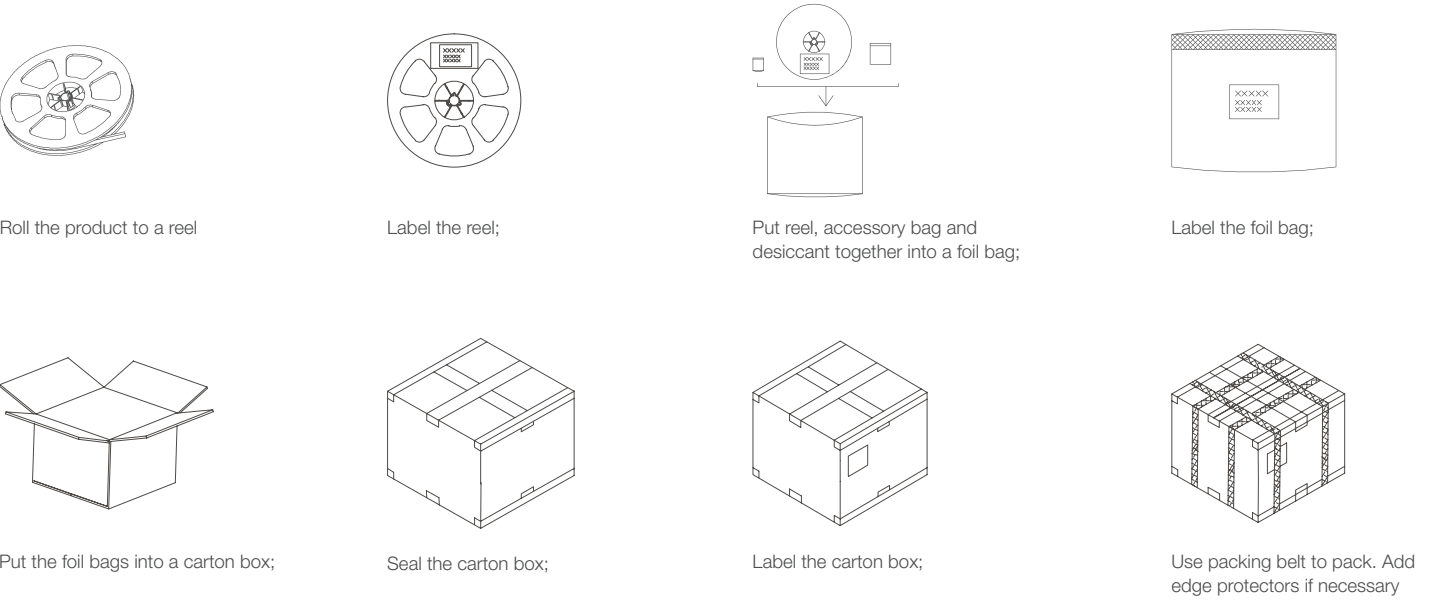

Packaging information


Model No.	Product Size L*W*H (mm)	Carton Size (mm)	Meter/Reel	Reel/Carton	Gross Weight (kg)
NSF0410-Single color	5000*4*10	390*390*325	5	60	21.7(1± 10%)

- One piece(5m) per reel, and the reel is packed in a foil bag, and put into a carton.
- For other customized length packaging, please ask our sales rep.
- The above-mentioned packaging quantity and weight are only for the illustrated packaging method. For other packaging methods, the packaging quantity and weight will be different. The actual weight is subject to the actual product.


Reliability test

Project	Reference standards	Category	Test conditions	Outcome
Environmental test	Blueview standard	PTC test	Test temperature -40°C to 60°C, cycle once every 2h (temperature holding time 15min, heating and cooling time 45min)	Pass
		Room temperature aging test	TH=25°C, continuous power on	
		Temperature cycling test	Th = 60°C/4h, Ta =20°C/1H, TL=- 40°C/4h,continuous cycle lighting	
		High temperature resistance test	Simulated TH=60 °C, continuous power on	
Mechanical strength testing	Blueview standard	Room temperature bending test	Bending diameter 10cm, T=25°C, continuous power on	Pass
		Tensile test	Fix the ends of the sample on the tension machine, then power on and record the tension value when the sample is turned off.	
		Twisting test	24V light on; rotate 360° forward and reverse, if the sample still OK, increase the degree of rotation until the sample broken.	


Warning Mark




Cuttable identifier




Neat and smooth cut




Slide a spindle into the roll and then place the roll with spindle on top of the box provided.




Do not use in convex direction




Do not use in concave direction




Side bending




Do not make irregular cuts.




Do not use in distortions




Do not bend many times, for it can endanger electronic lines.



Do not use on wringing (twist)



Do not bend at right angles



Do not throw or pull when taking products

Note:

1. There are cutting marks on the PCB;
2. Please pay attention to above warnings during transportation and using;

Warning

- Do not disassemble or retrofit the light. Do not touch the surface of the light with a sharp object.
- Do not do live-line working during installation, especially for high voltage product.
- Do not use any organic chemical solvents.
- Use neutral glass adhesive to fix this product and it needs to be dried 4 hours in the open environment after operation.
- Treat the ends and the circuit connection points that are not connected to the main line with insulation, waterproof, and anti-corrosion in the installation.
- Use 18AWG (0.75mm² cross-sectional area) or thicker core wire to avoid adverse consequences caused by overheating, if the power cable need to lengthen.
- Make sure the input voltage meets the requirements and lines are connected correctly before lighting on
- This product is for signage, and do not use as general lighting.
- Series connection within the max run.
- The length of the power cable between the power supply and the led strip should not exceed 2 meters. Otherwise, large circuit loss will lead to inconsistent brightness.
- Installation, maintenance and repair should be operated by a qualified technician.

Attentions before installation

- Before installation, check that the product parameters are consistent with the requirements (Seeing product specifications or product labels)
- Load voltage, current, power and power supply should be matched with the product.
- Follow the instructions of wiring diagram (first connect the load and then the power supply) to avoid short circuit
- Make sure the correct connection of positive and negative poles between products and power supply. Otherwise, the light will not be on.
- Make sure the power cord firmly screwed into the terminal and it should not be pulled out by hands.
- The terminal should have waterproof and anti-corrosive treatment.

Statements and Recycling

Packaging information

- Repair should be operated by a qualified technician or supplier, if the external circuit or main line of this product is damaged.
- The parameters given in this manual are typical values and for reference only
- All illustrations and drawings in this manual are for reference.
- This product is subject to change without notice.

Recycling

- LED lighting products belongs to electronic products, please do recycling treatment according to the relevant WEEE directives.