





LED

STRIP LIGHT MFO1611

DC 24V

FLEXIBLE WALL WASHER

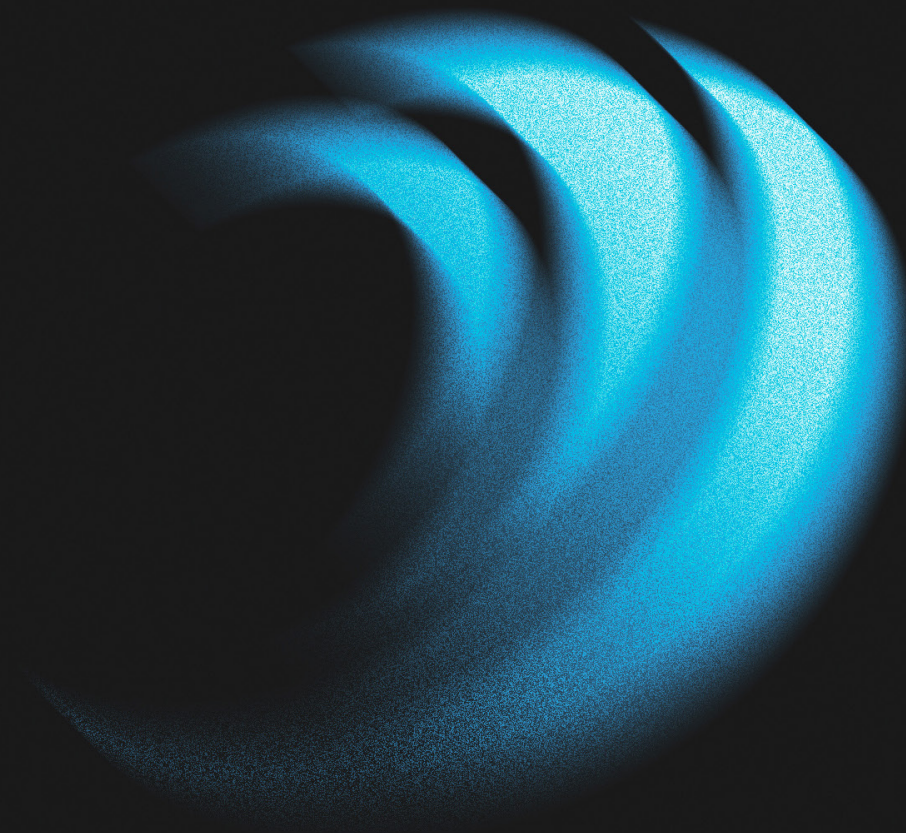

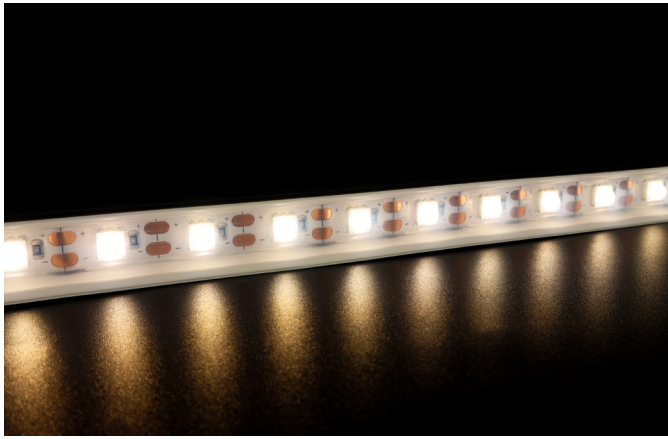

MFO1611-5050-56-24-x-x°

Flexible Wall Washer

FEATURES

- Excellent attenuation performance and long lifespan;
- 3D bending design for easy installation;
- Multiple lens angles available;
- Customizable upon request.
- Supports PWM, 0-10V, and DALI dimming.



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Lens Angle	Color	CCT	Lm/m	Lm/W	W/m
MFO1611-5050-56-24-x°	24V DC	30/45/25×45°	W	4000K	1170	65	18

OTHER PARAMETERS

Model No.	LED Qty (pcs/m)	Standard Packing Length (mm)	Max Run (m)	Min. Cutting Unit (mm)
MFO1611-5050-56-24-x°	56	5000	6	17.9


□ Working Temperature: -20~+50°C

□ Storage Temperature: -20~+70°C

Note:

- Test environment temperature is 25±2°C.
- The above data was measured under standard conditions and actual data may be different. We would update data without further notice.
- The above luminous flux data is based on corresponding light Color.
- If the selected LED chip is different, the color temperature and luminous flux will change accordingly.
- *Typical luminous flux and power error are ± 10%.
- *The Max run length is based on one end power feed.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

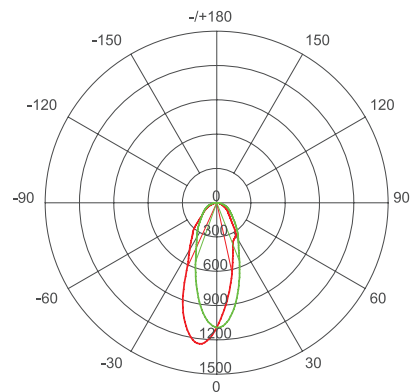


Unit: cd

- C 0 /180,37.1°

- C 90/270,41.3°

AVERAGE BEAM ANGLE(50%): 39.2°

AVERAGE ILLUMINATION

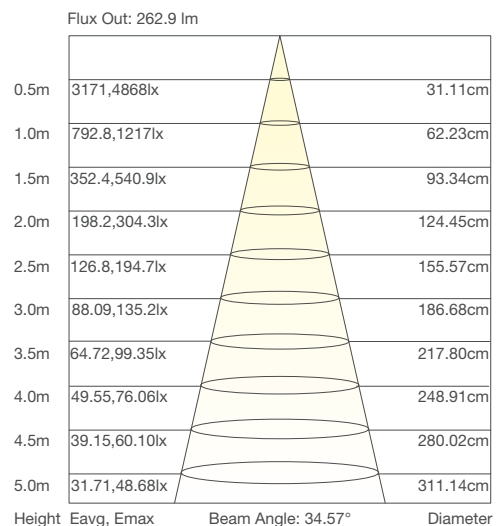


Note: above data tested with MFO1611-5050-56-24-4000K-45° . For other data,please consult sales rep.

RECOMMENDED POWER SUPPLY UPON WORKING LENGTH


MFO1611-5050-56-24-x°

Operating Length (m)	1	4	6	7	10
Operation Voltage (DC V)	24.0	24.0	24.0	24.0	24.0
Total current (A)	0.766	2.783	3.785	4.167	4.941
Total Power (W)	18.4	66.8	90.8	100	119
Head voltage (DC V)	23.8	23.7	23.7	23.6	23.6
Tail voltage (DC V)	23.7	22.7	21.7	21.2	19.6
Head current (mA)	13.43	13.25	13.18	13.18	13.17
Tail current (mA)	13.41	11.77	10.13	9.09	6.58
Head-to-tail voltage drop rate(%)	0.42	4.22	8.44	10.17	6.72
Head-to-tail current drop rate(%)	0.13	11.19	23.17	31.03	50.07
Single/Double feed	Single feed	Single feed	Double feed	Double feed	Double feed

PROFILE DRAWINGS

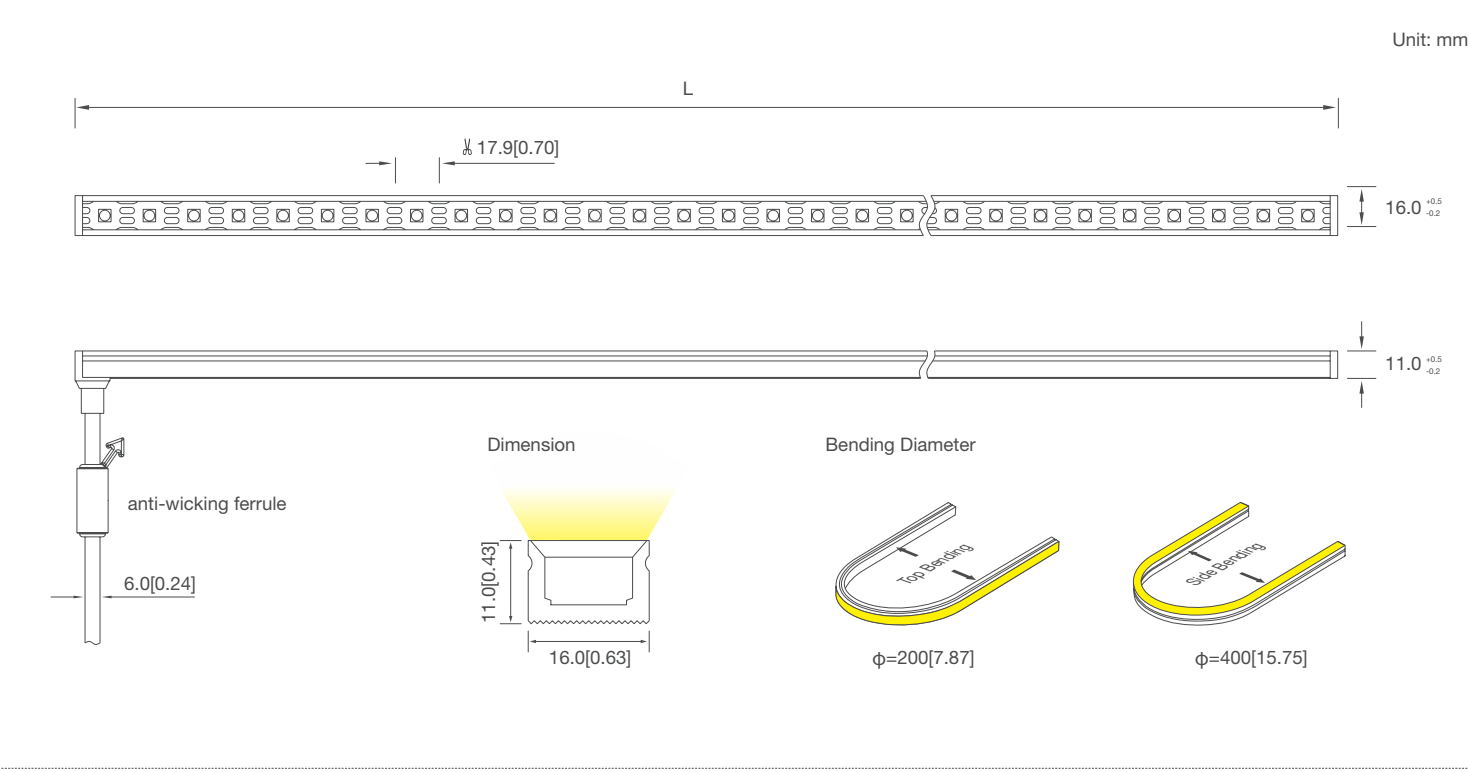


Wiring Diagram

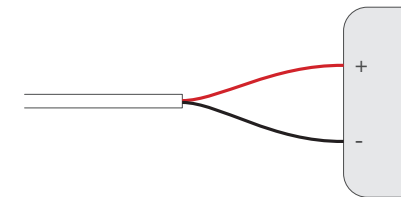


Note: Green wire optional (can be left unconnected).

Strip Length L Tolerance Reference Table (mm)	
Strip Length (mm)	Strip Length Tolerance Reference Table (mm)
1000	1006±10
2000	2006±15
3000	3006±20
4000	4006±25
5000	5006±30

END CAP - OUTLET DIRECTION

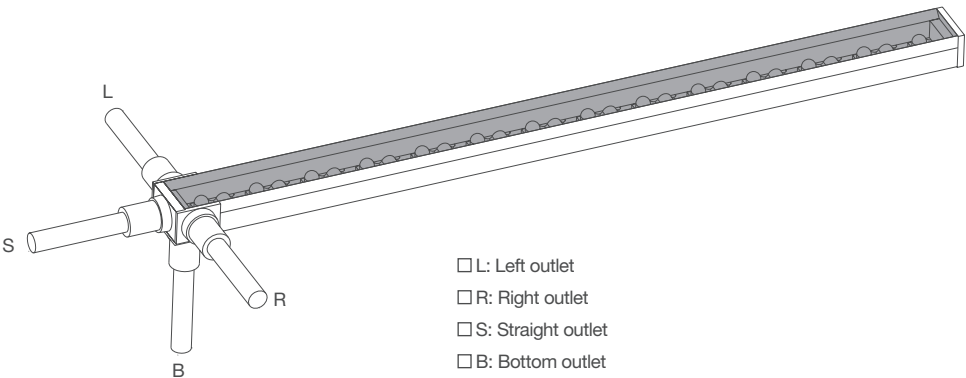


PACKAGING INFORMATION

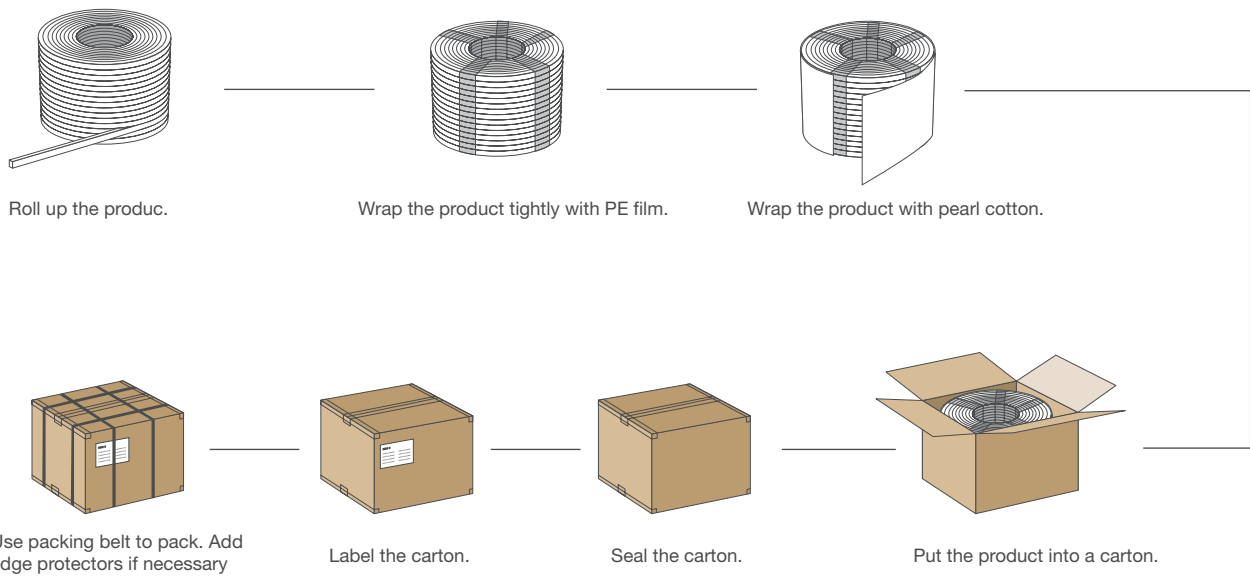


Model No.	Product Size L*W*H (mm)	Carton Size (mm)	Meter/Reel	Reel/Carton	Net Weight (kg)	Gross Weight (kg)
MFO1611-5050-56-24-x°	5000*16*11	505*505*150	5	8	12.52 (1±10%)	13.88 (1±10%)

NOTE:
The above-mentioned packaging quantity and weight are only for the illustrated packaging method. For other packaging methods, the packaging quantity and weight will be different. The actual weight is subject to the actual product.

PRODUCTS AND TOOLS


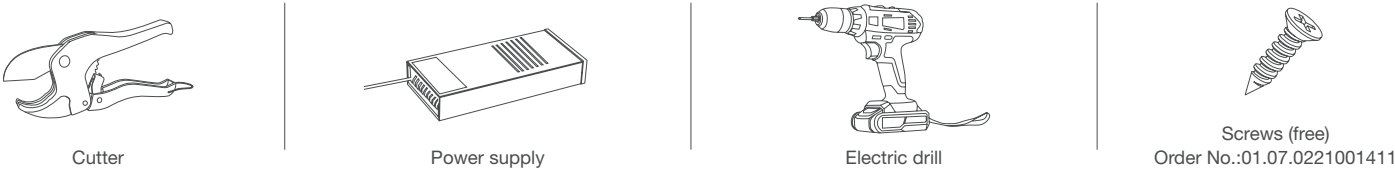


PRODUCT ACCESSORIES




1616 plastic clip (free)
Part No.: 01.06.KL23081613
Size: L16*W20*H13mm

➡ After installing the product




1616 plastic clip (optional)
Part No.: 01.06.KL23083121
Size: L16*W20*H27mm


➡ After installing the product




INSTALLATION METHODS AND STEPS

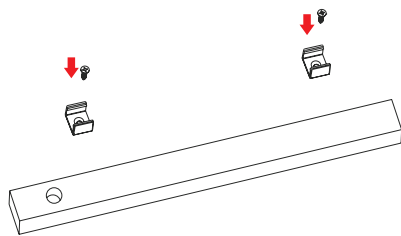

Fix the mounting clips

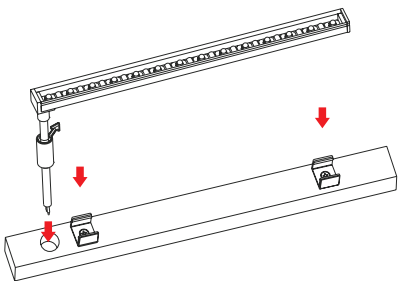


Press the light strip into the mounting clip

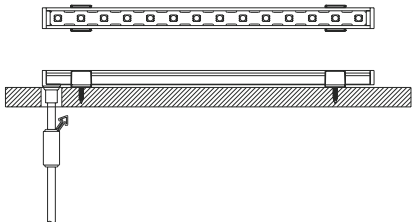

Finished

SUPPORTED DIMMING METHODS AND WIRING DIAGRAM

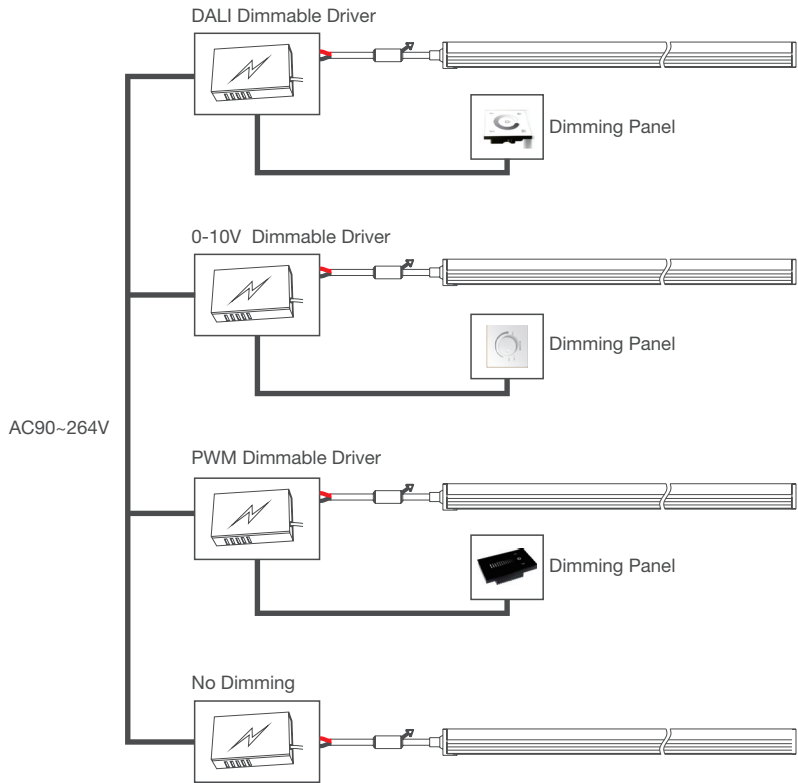

ATTENTIONS BEFORE INSTALLATION

- Before installation, please check whether the parameters of the product are consistent with the requirements (Seeing the Product Specification or Label).
- The voltage, current, and power of the power supply and load used must be consistent with this product.
- Follow the instructions of wiring diagram (first connect the load and then the power supply) to avoid short circuit.
- Product wires must be correctly connected to the positive and negative terminals of the power output, otherwise the light will not turn on.
- The power cord should be tightly screwed into the terminal, with a recommended tightness that cannot be pulled out by hand.
- The connection terminals must be effectively waterproof and corrosion-resistant.
- **If the installation length exceeds the maximum run length, extra power feed is needed.**
- **Install in a well-ventilated area with good heat dissipation. Avoid enclosed or hard-to-install locations.**
- **Ensure proper waterproofing: tighten connectors, seal end caps and wiring points, and do not immerse in water.**
- **Avoid scratching or striking the product with sharp objects.**
- **This product is not suitable for use in environments with strong acids, strong alkalis, diesel, gasoline, or engine oil.**

WARNING

- Do not disassemble or retrofit the light. Do not touch the surface of the light with a sharp object.
- Do not do live-line working during installation,especially for high voltage product.
- Do not use any organic chemical solvents.
- Use neutral glass adhesive to fix this product and it needs to be dried 4 hours in the open environment after operation.
- Treat the ends and the circuit connection points that are not connected to the main line with insulation,waterproof, and anti-corrosion in the installation.
- Use 18AWG (0.75mm² cross-sectional area) or thicker core wire to avoid adverse consequences caused by overheating, if the power cable need to lengthen.
- Make sure the input voltage meets the requirements and lines are connected correctly before lighting on.
- This product is for signage, and do not use as general lighting.
- Series connection within the max run.
- The length of the power cable between the power supply and the led strip should not exceed 2 meters.Otherwise, large circuit loss will lead to inconsistent brightness.
- Installation, maintenance and repair should be operated by a qualified technician.

Version	Content	Date
C1.0	First release	2025-10-24

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

- ☐ Tel: +86-28-8148 0011

☐ Web.: www.blueviewled.com

☐ Fax: +86-28-8148 1258

☐ Email: sales@blueviewled.com
- ☐ Add.: No. 1000, Section 2, Konggang 2nd Road, Shuangliu, Chengdu 610207, Sichuan, CHINA