



# EMC Test Report

**Product Name:** \_\_\_\_\_ Dynamic light box \_\_\_\_\_  
**Model Number:** \_\_\_\_\_ JCD-NW \_\_\_\_\_  
**Applicant:** \_\_\_\_\_ Blueview Elec-optic Tech Co., Ltd. \_\_\_\_\_

**KeySense Testing & Certification International Co., Ltd.**

**1-3F, Lab Building, No.29 District, ZhongKai Hi-Tech Industrial Development Park,  
Huizhou, Guangdong, China**



| <b>Test Report of EMC</b>                         |  |  |              |
|---|--|--|--------------|
| <b>Product name</b>                               | Dynamic light box  |  |              |
| <b>Model number</b>                               | JCD-NW   |  |              |
| <b>Series Model</b>                               | JCD-RGB、Blueview-NW、Blueview-RGB<br>(The just different model number.)                                   |  |              |
| <b>Applicant</b>                                  | <b>Name</b>  | Blueview Elec-optic Tech Co., Ltd.   |              |
|   | <b>Address</b>   | No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Shuangliu District, Chengdu City, Sichuan Province, P.R.China |              |
| <b>Manufacturer</b>                               | <b>Name</b>  | Blueview Elec-optic Tech Co., Ltd.   |              |
|   | <b>Address</b>   | No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Shuangliu District, Chengdu City, Sichuan Province, P.R.China |              |
| <b>Factory</b>                                    | <b>Name</b>  | Blueview Elec-optic Tech Co., Ltd.   |              |
|   | <b>Address</b>   | No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Shuangliu District, Chengdu City, Sichuan Province, P.R.China |              |
| <b>Trade Name</b>                                 | N/A  |  |              |
| <b>Receipt date</b>                               | Nov 02, 2021   | <b>Quantity</b>  | 1            |
| <b>Standard</b>                                   | EN 55032:2015/A11:2020 EN 55035:2017/A11:2020<br>EN IEC 61000-3-2:2019 EN 61000-3-3:2013/A1:2019         |  |              |
| <b>Test site</b>                                  | 1F,Lab Building,No.29 District, ZhongKai Hi-Tech Industrial Development Park, Huizhou, Guangdong, China. |  |              |
| <b>Test period</b>                                | Nov 02, 2021- Nov 09, 2021   | <b>Issue Date</b>  | Nov 15, 2021 |
| <b>Test result</b>                                | The equipment under test was found to be compliance with the requirements of the standards applied.      |  |              |
| <b>Tested by: Bing.He</b>                         | <b>Sign:</b>   | <b>Date:</b> 2021.11.15  |              |
| <b>Reviewed by: Jack,Li</b>                       | <b>Sign:</b>   | <b>Date:</b> 2021.11.15  |              |
| <b>Approved by: Tony.Xu<br/>(General Manager)</b> | <b>Sign:</b>   | <b>Date:</b> 2021.11.15  |              |

## Contents

| Description  | Page      |
|--|-----------|
| <b>1 SUMMARY OF STANDARDS AND RESULTS .....</b>                  | <b>7</b>  |
| 1.1 Description of Standards and Results .....                   | 7         |
| <b>2 GENERAL INFORMATION.....</b>                                | <b>8</b>  |
| 2.1 Description of Device(EUT) .....                             | 8         |
| 2.2 EUT operating mode(s).....                                   | 9         |
| 2.3 Tested Supporting System Details .....                       | 9         |
| 2.4 Block Diagram of connection between EUT and simulators ..... | 10        |
| 2.5 Test Facility .....  | 11        |
| 2.6 Measurement Uncertainty(95% confidence levels, k=2) .....    | 11        |
| 2.7 Test Equipments .....  | 12        |
| <b>3 CONDUCTED EMISSION AT THE MAINS TERMINALS TEST .....</b>    | <b>15</b> |
| 3.1 Block Diagram of Test Setup .....                            | 15        |
| 3.2 Test Standard .....  | 15        |
| 3.3 Limits of mains terminal disturbance voltage.....            | 15        |
| 3.4 Operating Condition of EUT .....                             | 16        |
| 3.5 Test Procedure .....   | 16        |
| 3.6 Test Data .....  | 17        |
| <b>4 RADIATED EMISSION TEST .....</b>                            | <b>19</b> |
| 4.1 Block Diagram of Test Setup .....                            | 19        |
| 4.2 Test Standard .....  | 19        |

---

|          |  |           |
|----------|--|-----------|
| 4.3      | Limits for radiated disturbance.....                 | 19        |
| 4.4      | Operating Condition of EUT .....                     | 20        |
| 4.5      | Test Procedure .....                                 | 20        |
| 4.6      | Test Data .....                                      | 21        |
| <b>5</b> | <b>HARMONIC CURRENT EMISSION TEST .....</b>          | <b>25</b> |
| 5.1      | Block Diagram of Test Setup .....                    | 25        |
| 5.2      | Test Standard .....                                  | 25        |
| 5.3      | Limits of Harmonic Current.....                      | 26        |
| 5.4      | Operating Condition of EUT .....                     | 27        |
| 5.5      | Test Procedure .....                                 | 27        |
| 5.6      | Test Data .....                                      | 28        |
| <b>6</b> | <b>VOLTAGE FLUCTUATIONS &amp; FLICKER TEST .....</b> | <b>31</b> |
| 6.1      | Block Diagram of Test Setup .....                    | 31        |
| 6.2      | Test Standard .....                                  | 31        |
| 6.3      | Limits of Voltage Fluctuation and Flick .....        | 31        |
| 6.4      | Operating Condition of EUT .....                     | 32        |
| 6.5      | Test Procedure .....                                 | 32        |
| 6.6      | Test Data .....                                      | 33        |
| <b>7</b> | <b>IMMUNITY TEST RESULT .....</b>                    | <b>34</b> |
| <b>8</b> | <b>ELECTROSTATIC DISCHARGE TEST .....</b>            | <b>35</b> |
| 8.1      | Block Diagram of Test Setup .....                    | 35        |
| 8.2      | Test Standard .....                                  | 35        |
| 8.3      | Severity Levels and Performance Criterion .....      | 35        |

---

---

|           |  |           |
|-----------|--|-----------|
| 8.4       | Operating Condition of EUT .....                                 | 36        |
| 8.5       | Test Procedure .....   | 36        |
| 8.6       | Test Data .....  | 37        |
| <b>9</b>  | <b>RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST .....</b> | <b>38</b> |
| 9.1       | Block Diagram of Test Setup .....                                | 38        |
| 9.2       | Test Standard.....   | 39        |
| 9.3       | Operating Condition of EUT .....                                 | 40        |
| 9.4       | Test Procedure .....   | 40        |
| 9.5       | Test Data .....  | 41        |
| <b>10</b> | <b>ELECTRICAL FAST TRANSIENT/BURST TEST.....</b>                 | <b>42</b> |
| 10.1      | . Block Diagram of Test Setup.....                               | 42        |
| 10.2      | Test Standard.....   | 42        |
| 10.3      | Severity Levels and Performance Criterion .....                  | 42        |
| 10.4      | Operating Condition of EUT .....                                 | 43        |
| 10.5      | Test Procedure .....   | 43        |
| 10.6      | Test Data .....  | 44        |
| <b>11</b> | <b>SURGE TEST.....</b>   | <b>45</b> |
| 11.1      | Block Diagram of Test Setup .....                                | 45        |
| 11.2      | Test Standard.....   | 45        |
| 11.3      | Severity Levels and Performance Criterion .....                  | 45        |
| 11.4      | Operating Condition of EUT .....                                 | 45        |
| 11.5      | Test Procedure .....   | 46        |
| 11.6      | Test Data .....  | 47        |

---

|   |           |
|---|-----------|
| <b>12 RADIO-FREQUENCY CONTINUOUS CONDUCTED DISTURBANCE TEST .....</b> | <b>48</b> |
| 12.1 Block Diagram of Test Setup .....                                | 48        |
| 12.2 Test Standard.....   | 48        |
| 12.3 Severity Levels and Performance Criterion .....                  | 48        |
| 12.4 Operating Condition of EUT .....                                 | 48        |
| 12.5 Test Procedure .....   | 49        |
| 12.6 Test Data .....  | 50        |
| <b>13 VOLTAGE DIPS AND INTERRUPTIONS TEST .....</b>                   | <b>51</b> |
| 13.1 Block Diagram of Test Setup .....                                | 51        |
| 13.2 Test Standard.....   | 51        |
| 13.3 Severity Levels and Performance Criterion .....                  | 51        |
| 13.4 Operating Condition of EUT .....                                 | 51        |
| The details of test modes are as follows: .....                       | 51        |
| 13.5 Test Procedure .....   | 51        |
| 13.6 Test Data .....  | 52        |
| <b>14 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST.....</b>           | <b>53</b> |
| 14.1 Block Diagram of Test Setup .....                                | 53        |
| 14.2 Test Standard.....   | 53        |
| 14.3 Operating Condition of EUT .....                                 | 53        |
| 14.4 Test Procedure .....   | 53        |
| 14.5 Test Data .....  | 54        |
| <b>15 TEST SETUP PHOTO .....</b>                                      | <b>55</b> |
| <b>16 PHOTOS OF THE EUT.....</b>                                      | <b>60</b> |

## 1 SUMMARY OF STANDARDS AND RESULTS

### 1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

| EMISSION(EN 55032:2015/A11:2020)                 |                           |         |   |                      |
|--|---------------------------|---------|---|----------------------|
| Description of Test Item                         | Standard                  | Results | Remark  |                      |
| Conducted disturbance at mains terminals         | EN 55032:2015/A11:2020    | PASS    | Minimum passing margin is -3.03 dB at 18.7935 MHz   |                      |
| Radiated Disturbance (30-1000MHz)                | EN 55032:2015/A11:2020    | PASS    | Minimum passing margin is -3.80 dB at 34.2760 MHz   |                      |
| Radiated Disturbance (1-6GHz)                    | EN 55032:2015/A11:2020    | PASS    | Minimum passing margin is -26.50 dB at 2431.997 MHz |                      |
| Harmonic current emission                        | EN IEC 61000-3-2:2019     | PASS    | Meet the Class A requirement                        |                      |
| Voltage fluctuations & flicker                   | EN 61000-3-3:2013/A1:2019 | PASS    | Meet the Clause 5 requirement                       |                      |
| IMMUNITY(EN 55035:2017/A11:2020)                 |                           |         |   |                      |
| Description of Test Item                         | Basic Standard            | Results | Performance Criteria                                | Observation Criteria |
| Electrostatic discharge                          | EN 61000-4-2:2009         | PASS    | B   | B                    |
| Radio-frequency Continuous radiated disturbance  | EN IEC 61000-4-3:2020     | PASS    | A   | A                    |
| Electrical fast transient                        | EN 61000-4-4:2012         | PASS    | B   | B                    |
| Surge  | EN 61000-4-5:2014/A1:2017 | PASS    | B   | A                    |
| Radio-frequency Continuous conducted disturbance | EN 61000-4-6:2014/A1:2015 | PASS    | A   | A                    |
| Voltage dips, >95% reduction                     | EN IEC 61000-4-11:2020    | PASS    | B   | A                    |
| Voltage dips, 30% reduction                      |                           | PASS    | C   | A                    |
| Voltage interruptions, >95%                      |                           | PASS    | C   | B                    |
| N/A is an abbreviation for Not Applicable.       |                           |         |   |                      |
| Final Judgment : <b>Pass</b>                     |                           |         |   |                      |

## 2 GENERAL INFORMATION


### 2.1 Description of Device(EUT)

Description: Dynamic light box

Model JCD-NW

Number:

Input: AC110-240V~ 50/60Hz Typical power: 215W

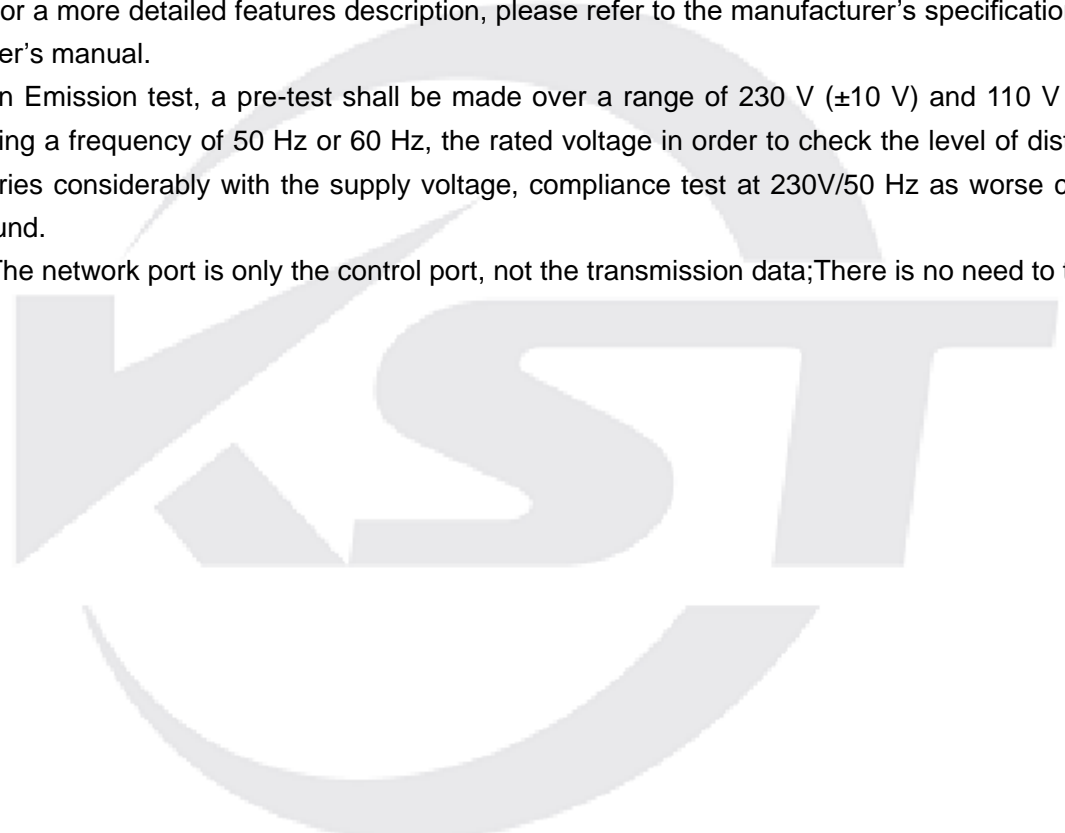- Note:
1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
  2. In Emission test, a pre-test shall be made over a range of 230 V ( $\pm 10$  V) and 110 V ( $\pm 10$  V), using a frequency of 50 Hz or 60 Hz, the rated voltage in order to check the level of disturbance varies considerably with the supply voltage, compliance test at 230V/50 Hz as worse case was found.
  3. The network port is only the control port, not the transmission data; There is no need to test.
- 



## 2.2 EUT operating mode(s)

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

|                  |           |
|------------------|-----------|
| Operating mode 1 | All White |
|------------------|-----------|

After the preliminary scan, mode 2 has the highest emission, was selected and recorded in this report.

## 2.3 Tested Supporting System Details

| No. | Description | KST No. | Manufacturer | Model | Serial Number |
|-----|-------------|---------|--------------|-------|---------------|
| /   | /           | /       | /            | /     | /             |

### Cable Description

| N<br>o. | From   |          | To     |          | Type of Cable |                           |                          |
|---------|--------|----------|--------|----------|---------------|---------------------------|--------------------------|
|         | Device | I/O Port | Device | I/O Port | Length<br>(m) | Shielded or<br>Unshielded | Ferrite<br>Core<br>[Y/N] |
| 1       |        | AC Mains | EUT    | AC Mains | 1.5           | U                         | N                        |


\* Shielded or Unshielded : Unshielded=U, Shielded=S

## 2.4 Block Diagram of connection between EUT and simulators

EMI:



EMS:



## 2.5 Test Facility

Site Description: 1-3F, Lab Building, No.29 District, ZhongKai Hi-Tech Industrial Development Park, Huizhou, Guangdong, China

Name of Firm: KeySense Testing & Certification International Co., Ltd.

EMC Lab: Certificated by CNAS, CHINA

Registration No.:L9678

Date of registration: Feb 07, 2017

## 2.6 Measurement Uncertainty(95% confidence levels, k=2)

| Test Item  | Uncertainty                 |
|--|-----------------------------|
| Uncertainty for Conduction emission test in shielding room | 2.5dB(150kHz to 30MHz)      |
| Uncertainty for Radiation Emission test in 3m chamber      | 4.14dB(30M~1GHz,Polarize:V) |
|  | 4.25dB(30M~1GHz,Polarize:H) |

## 2.7 Test Equipments

### 2.7.1 For Conducted Emission at the Mains Terminals Test

| Equipment | Manufacturer | Model No. | Serial No.  | Last Cal.  | Cal. Interval |
|-----------|--------------|-----------|-------------|------------|---------------|
| Receiver  | R&S          | ESR3      | 102054      | 2020.12.15 | 1 year        |
| LISN      | AFJ          | LS16      | 16011618383 | 2021.09.01 | 1 year        |

### 2.7.2 For radiated emission test

| Equipment                | Manufacturer | Model No.             | Serial No. | Last Cal.  | Cal. Interval |
|--------------------------|--------------|-----------------------|------------|------------|---------------|
| Receiver                 | R&S          | ESR 7                 | 101661     | 2020.12.15 | 1 year        |
| Trilog-boardband antenna | SCHWARZBECK  | VULB 9163D            | 9163-961   | 2019.05.18 | 3 years       |
| Horn antenna             | SCHWARZBECK  | BBHA 9120D            | 9120D-1590 | 2019.04.13 | 3 years       |
| Pre-amplifier            | CLAVIIO      | BDLNA-0118-35<br>2810 | 1600019    | 2019.09.02 | 3 year        |
| Pre-amplifier            | Claviio      | BDLNA-0001-27<br>2007 | 1600015    | 2019.09.02 | 3 year        |

### 2.7.3 For Harmonics Current Emission Test

| Equipment                   | Manufacturer           | Model No.      | Serial No. | Last Cal.  | Cal. Interval |
|-----------------------------|------------------------|----------------|------------|------------|---------------|
| Harmonic & Flicker analyzer | California Instruments | 100-CTS-230    | 1626A00278 | 2021.09.07 | 1 year        |
| Programmable power supply   | California Instruments | 5001iX-CTS-400 | 1629A02598 | 2021.09.01 | 1 year        |

### 2.7.4 For Voltage Fluctuations & Flicker Test

| Equipment                   | Manufacturer           | Model No.      | Serial No. | Last Cal.  | Cal. Interval |
|-----------------------------|------------------------|----------------|------------|------------|---------------|
| Harmonic & Flicker analyzer | California Instruments | 100-CTS-230    | 1626A00278 | 2021.09.07 | 1 year        |
| Programmable power supply   | California Instruments | 5001iX-CTS-400 | 1629A02598 | 2021.09.01 | 1 year        |

## 2.7.5 For Electrostatic discharge Test

| Equipment                         | Manufacturer | Model No. | Serial No. | Last Cal.  | Cal. Interval |
|-----------------------------------|--------------|-----------|------------|------------|---------------|
| Electrostatic discharge generator | Noiseken     | ESS-L1611 | ESS1643151 | 2021.08.28 | 1 year        |

## 2.7.6 For Radio-frequency Continuous radiated disturbance Test

| Equipment                | Manufacturer | Model No.         | Serial No.       | Last Cal.  | Cal. Interval |
|--------------------------|--------------|-------------------|------------------|------------|---------------|
| Signal generator         | R&S          | SMB 100A          | 179706           | 2020.12.15 | 1 year        |
| Power amplifier          | PRANA        | MT400             | 1507-1746        | 2020.12.15 | 1 year        |
| Power amplifier          | RFLIGHT      | NTWPA-046050<br>E | 19069028         | 2021.5.12  | 1 year        |
| Trilog-boardband antenna | SCHWARZBECK  | STLP 9128E        | 9128ES-136       | 2019.09.02 | 3years        |
| Power amplifier          | PRANA        | SV70              | 1602-1820        | 2020.12.15 | 1 year        |
| Horn antenna             | Schwarzbeck  | BBHA 9120E        | BBHA9120E6<br>98 | 2020.10.25 | 3 years       |

## 2.7.7 For Electrical fast transient Test

| Equipment     | Manufacturer | Model No.    | Serial No. | Last Cal.  | Cal. Interval |
|---------------|--------------|--------------|------------|------------|---------------|
| EFT generator | Noiseken     | FNS-AX3-A16C | FNS1621762 | 2021.09.01 | 1 year        |

## 2.7.8 For Surge Test

| Equipment       | Manufacturer | Model No. | Serial No. | Last Cal.  | Cal. Interval |
|-----------------|--------------|-----------|------------|------------|---------------|
| Surge generator | Noiseken     | LSS-6230A | LSS1634248 | 2021.09.01 | 1 year        |

## 2.7.9 For Radio-frequency Continuous conducted disturbance Test

| Equipment        | Manufacturer | Model No. | Serial No. | Last Cal.  | Cal. Interval |
|------------------|--------------|-----------|------------|------------|---------------|
| Signal generator | R&S          | SMC100A   | 105651     | 2020.12.15 | 1 year        |
| CDN              | TESEQ        | M016      | 43434      | 2021.09.01 | 1 year        |
| Power amplifier  | PRANA        | DR220     | 1602-1819  | 2020.12.15 | 1 year        |

## 2.7.10 For Power magnetic field test


| Equipment                      | Manufacturer | Model No. | Serial No. | Last Cal.  | Cal. Interval |
|--------------------------------|--------------|-----------|------------|------------|---------------|
| Power magnetic field simulator | NARDA        | PMM-1008  | 010WT60502 | 2021.09.01 | 1 year        |

## 2.7.11 For Voltage dips and interruptions Test

| Equipment      | Manufacturer | Model No. | Serial No. | Last Cal.  | Cal. Interval |
|----------------|--------------|-----------|------------|------------|---------------|
| Dips simulator | Noiseken     | VDS-2002  | VDS1510396 | 2021.09.01 | 1 year        |

### 3 CONDUCTED EMISSION AT THE MAINS TERMINALS TEST

#### 3.1 Block Diagram of Test Setup

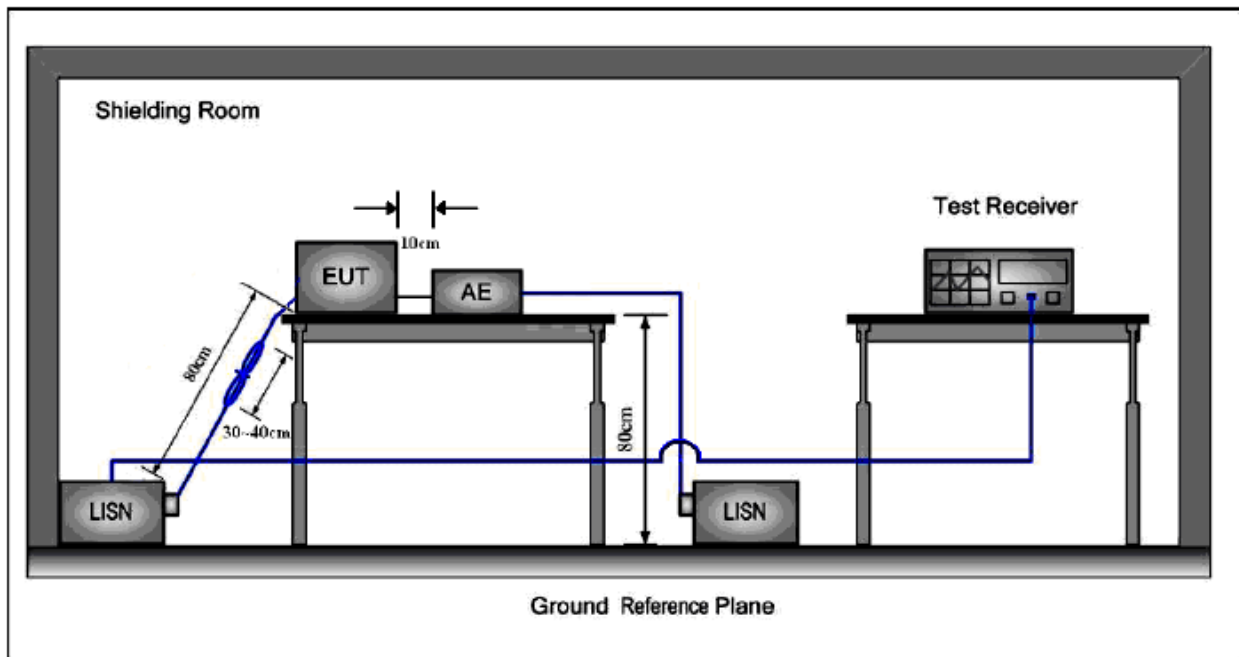

#### 3.2 Test Standard

EN 55032:2015/A11:2020, Class A

#### 3.3 Limits of mains terminal disturbance voltage

| Frequency<br>MHz | Limits dB( $\mu$ V) |               |
|------------------|---------------------|---------------|
|                  | Quasi-peak Level    | Average Level |
| 0.15 ~ 0.50      | 79                  | 66            |
| 0.50 ~ 30.00     | 73                  | 60            |

### 3.4 Operating Condition of EUT


| Test date    | Ambient temperature | Relative humidity | Atmospheric pressure |
|--------------|---------------------|-------------------|----------------------|
| Nov 02, 2021 | 23°C                | 64%               | 101.4kPa             |

### 3.5 Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The side of power line was checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN 55032 Class A on conducted Disturbance test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

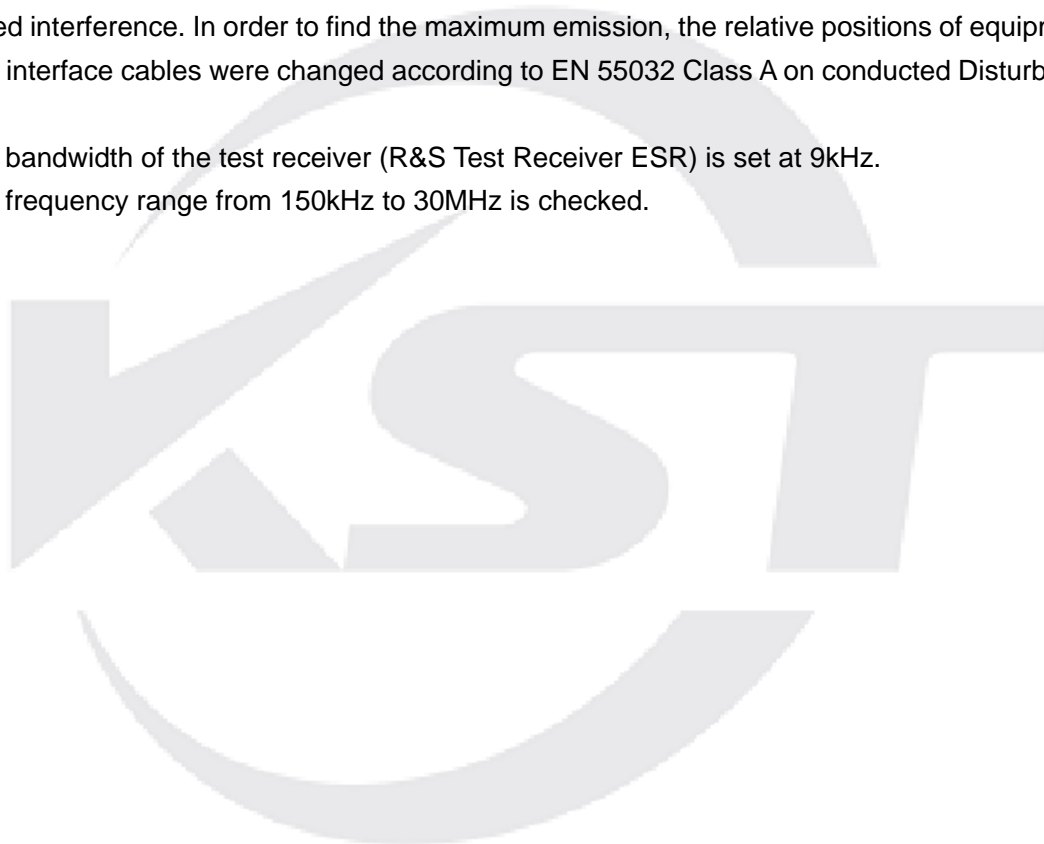



## 3.6 Test Data

|            |                   |               |               |
|------------|-------------------|---------------|---------------|
| EUT:       | Dynamic light box | Model Name:   | JCD-NW        |
| Test Mode: | All White         | Test Date:    | 2021.11.02    |
| Phase:     | Live              | Test Voltage: | AC 230V /50Hz |
| Operator:  | Bing              | Note:         |               |

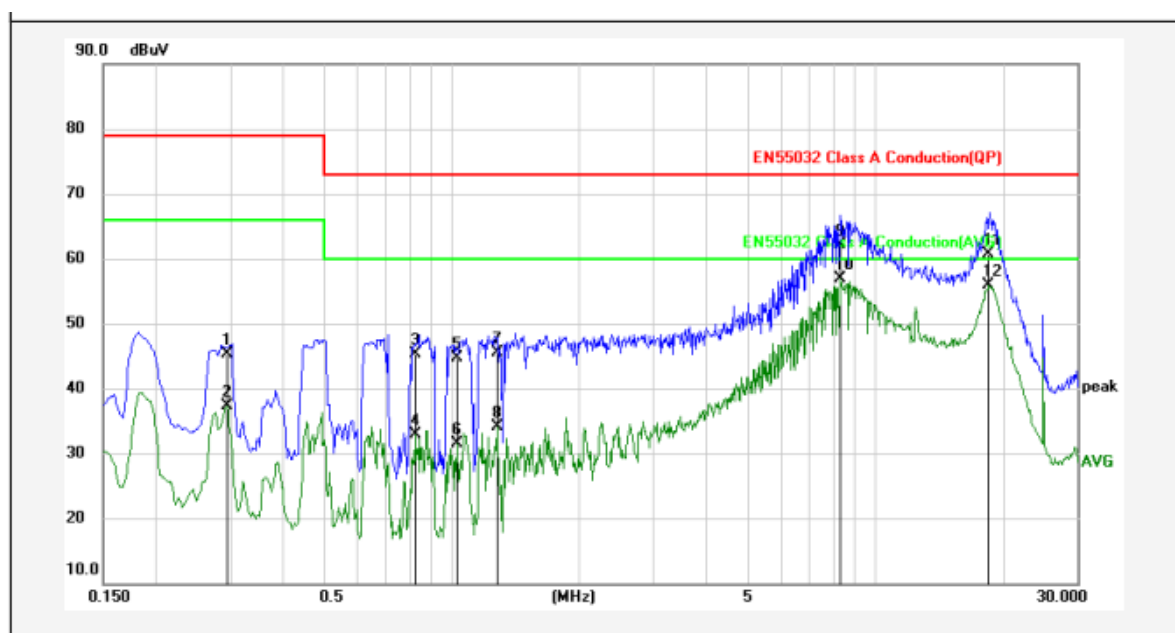


| No. | Frequency (MHz) | Reading (dBuV) | Lisn/Isn (dB) | Cab_L (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-----------------|----------------|---------------|------------|---------------|------------|-------------|----------|--------|
| 1   | 0.2938          | 34.57          | 10.44         | 0.24       | 45.25         | 79.00      | -33.75      | QP       |        |
| 2   | 0.2938          | 26.62          | 10.44         | 0.24       | 37.30         | 66.00      | -28.70      | AVG      |        |
| 3   | 0.8204          | 34.68          | 10.45         | 0.23       | 45.36         | 73.00      | -27.64      | QP       |        |
| 4   | 0.8204          | 22.19          | 10.45         | 0.23       | 32.87         | 60.00      | -27.13      | AVG      |        |
| 5   | 1.0319          | 34.10          | 10.45         | 0.23       | 44.78         | 73.00      | -28.22      | QP       |        |
| 6   | 1.0319          | 20.86          | 10.45         | 0.23       | 31.54         | 60.00      | -28.46      | AVG      |        |
| 7   | 1.2794          | 34.74          | 10.46         | 0.22       | 45.42         | 73.00      | -27.58      | QP       |        |
| 8   | 1.2794          | 23.36          | 10.46         | 0.22       | 34.04         | 60.00      | -25.96      | AVG      |        |
| 9   | 8.3040          | 51.45          | 10.5          | 0.22       | 62.17         | 73.00      | -10.83      | QP       |        |
| 10  | 8.3040          | 46.20          | 10.5          | 0.22       | 56.92         | 60.00      | -3.08       | AVG      |        |
| 11  | 18.5548         | 49.86          | 10.72         | 0.2        | 60.78         | 73.00      | -12.22      | QP       |        |
| 12  | 18.5548         | 44.95          | 10.72         | 0.2        | 55.87         | 60.00      | -4.13       | AVG      |        |

Remarks: 1. Result=Reading+Lisn+Cab\_L

2. If the average limit is met when using a quasi-peak detector. the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

|            |                   |               |               |
|------------|-------------------|---------------|---------------|
| EUT:       | Dynamic light box | Model Name:   | JCD-NW        |
| Test Mode: | All White         | Test Date:    | 2021.11.02    |
| Phase:     | Neutral           | Test Voltage: | AC 230V /50Hz |
| Operator:  | Bing              | Note:         |               |

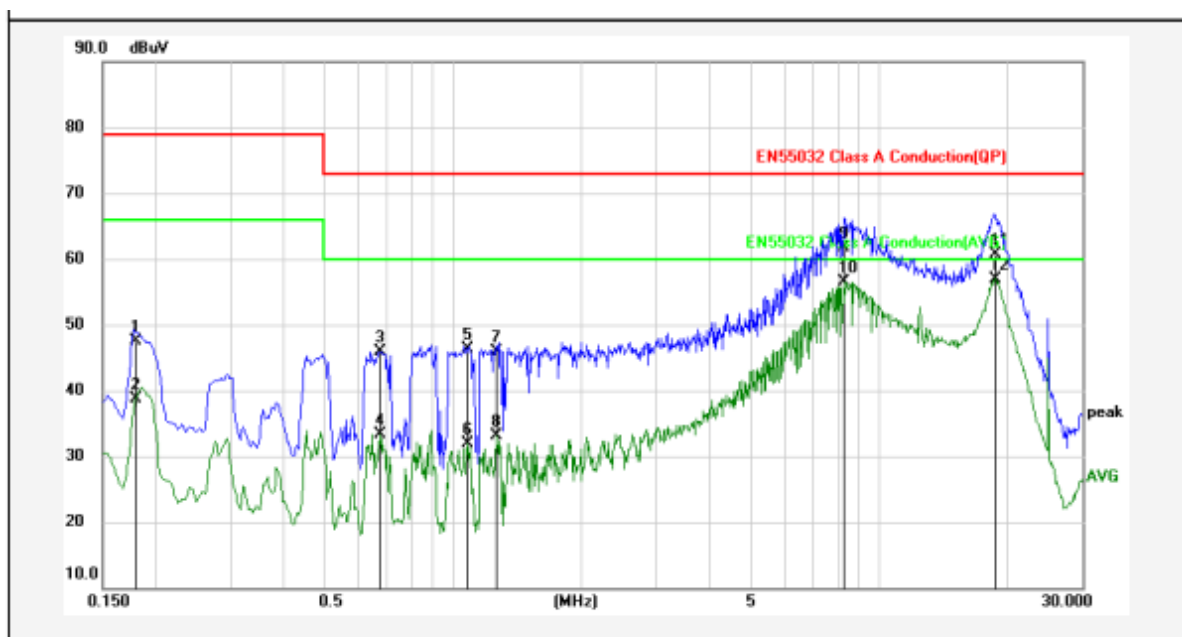


| No. | Frequency (MHz) | Reading (dBuV) | Lisn/Isn (dB) | Cab_L (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-----------------|----------------|---------------|------------|---------------|------------|-------------|----------|--------|
| 1   | 0.1796          | 36.82          | 10.44         | 0.22       | 47.48         | 79.00      | -31.52      | QP       |        |
| 2   | 0.1796          | 28.02          | 10.44         | 0.22       | 38.68         | 66.00      | -27.32      | AVG      |        |
| 3   | 0.6719          | 35.33          | 10.44         | 0.23       | 46.00         | 73.00      | -27.00      | QP       |        |
| 4   | 0.6719          | 22.66          | 10.44         | 0.23       | 33.33         | 60.00      | -26.67      | AVG      |        |
| 5   | 1.0769          | 35.53          | 10.45         | 0.23       | 46.21         | 73.00      | -26.79      | QP       |        |
| 6   | 1.0769          | 21.16          | 10.45         | 0.23       | 31.84         | 60.00      | -28.16      | AVG      |        |
| 7   | 1.2659          | 35.25          | 10.46         | 0.22       | 45.93         | 73.00      | -27.07      | QP       |        |
| 8   | 1.2659          | 22.48          | 10.46         | 0.22       | 33.16         | 60.00      | -26.84      | AVG      |        |
| 9   | 8.3040          | 51.01          | 10.5          | 0.22       | 61.73         | 73.00      | -11.27      | QP       |        |
| 10  | 8.3040          | 45.73          | 10.5          | 0.22       | 56.45         | 60.00      | -3.55       | AVG      |        |
| 11  | 18.7935         | 49.82          | 10.73         | 0.2        | 60.75         | 73.00      | -12.25      | QP       |        |
| 12  | 18.7935         | 46.04          | 10.73         | 0.2        | 56.97         | 60.00      | -3.03       | AVG      |        |

Remarks: 1. Result=Reading+Lisn+Cab\_L

2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## 4 RADIATED EMISSION TEST

### 4.1 Block Diagram of Test Setup

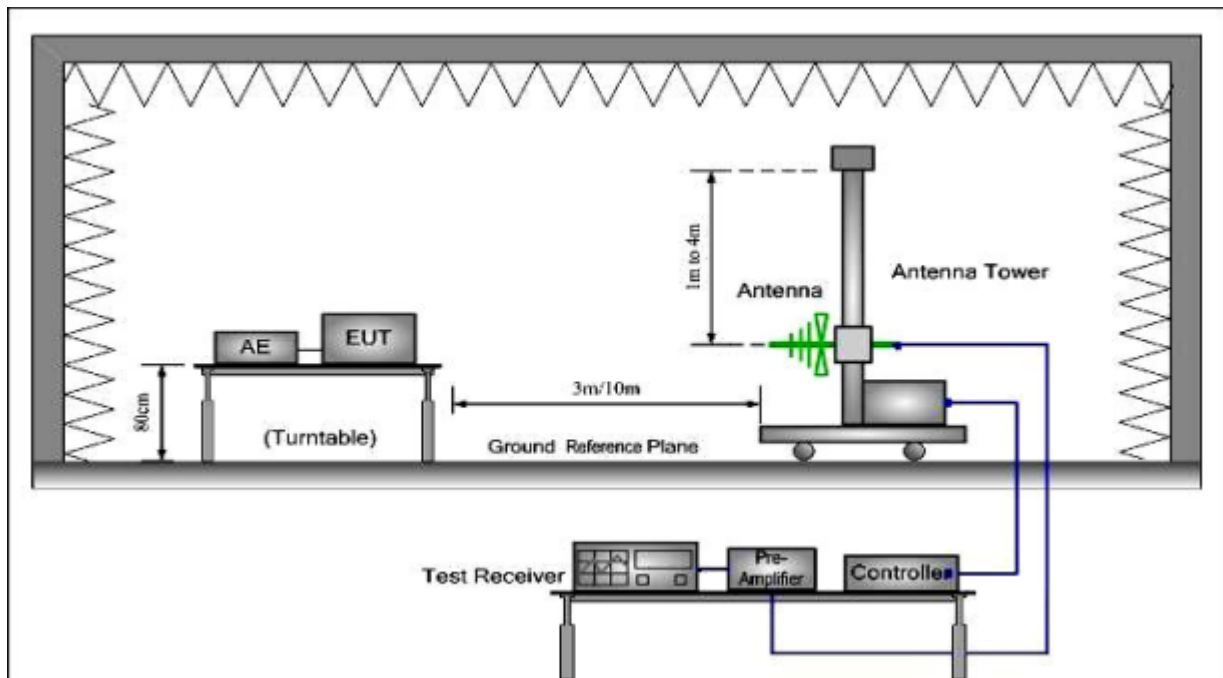

### 4.2 Test Standard

EN 55032:2015/A11:2020, Class A

### 4.3 Limits for radiated disturbance

| Frequency<br>MHz | Distance | Limits dB( $\mu$ V)/m<br>Class A |
|------------------|----------|----------------------------------|
| 30 ~ 230         | 10m      | 40(Quasi Peak)                   |
| 230 ~ 1000       | 10m      | 47(Quasi Peak)                   |
| 1000~3000        | 3m       | 76 (Peak) 56 (Average)           |
| 3000~6000        | 3m       | 80 (Peak) 60 (Average)           |

#### 4.4 Operating Condition of EUT

| Test date    | Ambient temperature | Relative humidity | Atmospheric pressure |
|--------------|---------------------|-------------------|----------------------|
| Nov 03, 2021 | 20°C                | 60%               | 101.5kPa             |


#### 4.5 Test Procedure

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 10 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.


The bandwidth setting on the test receiver was 120 kHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

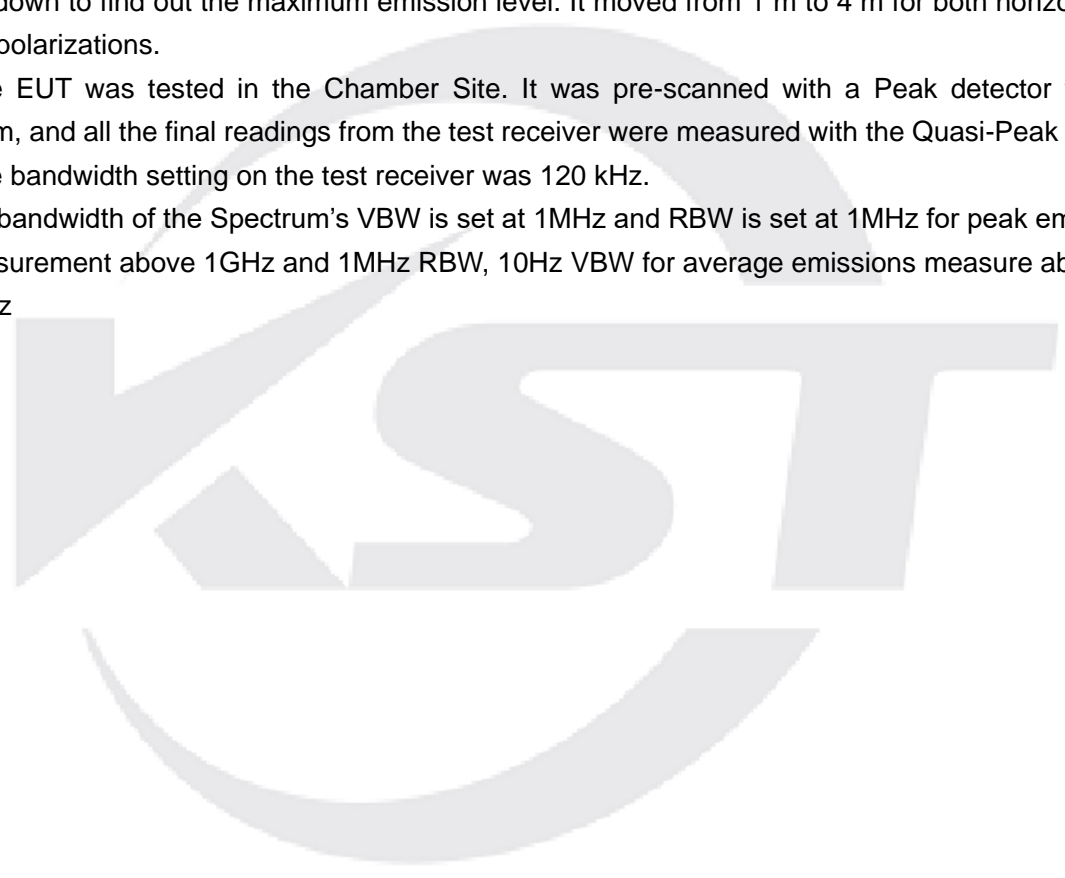

## 4.6 Test Data

|               |                   |               |               |
|---------------|-------------------|---------------|---------------|
| EUT:          | Dynamic light box | Model Name:   | JCD-NW        |
| Test Mode:    | All White         | Test Date:    | 2021.11.03    |
| Polarization: | Horizontal        | Test Voltage: | AC 230V /50Hz |
| Operator:     | Bing              | Note:         |               |

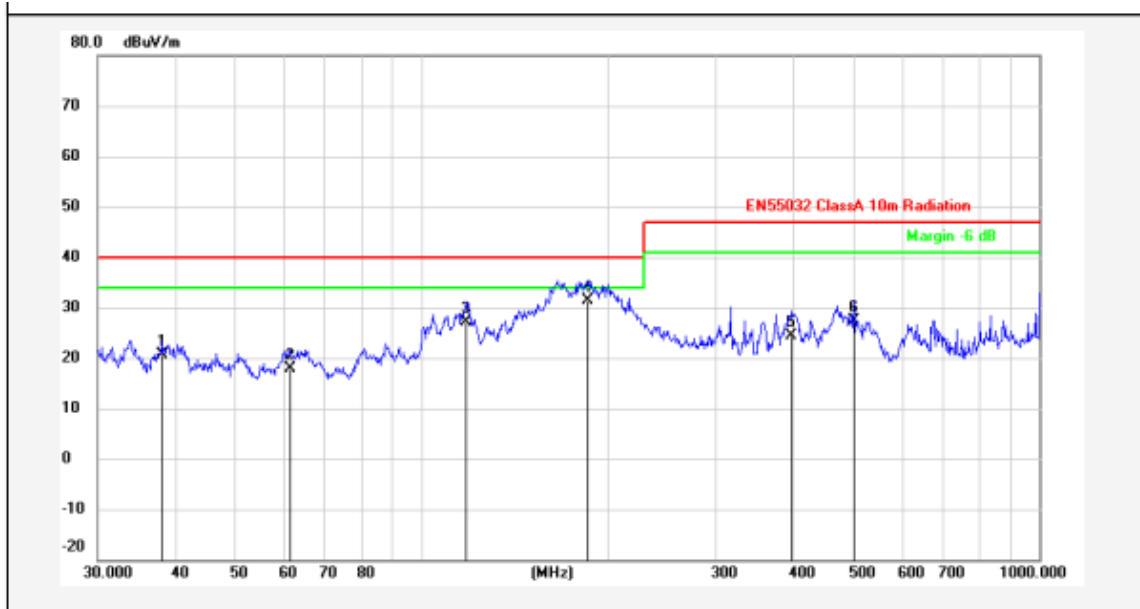


| No. | Frequency (MHz) | Reading (dBuV/m) | Antenna. (dB/m) | Preamp. (dB) | Cable. (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-----------------|------------------|-----------------|--------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 38.0783         | 37.58            | 12.26           | 30.57        | 1.33        | 20.60           | 40.00          | -19.40      | QP       |        |
| 2   | 61.3463         | 35.05            | 11.79           | 30.41        | 1.47        | 17.90           | 40.00          | -22.10      | QP       |        |
| 3   | 118.1862        | 45.45            | 9.92            | 30.03        | 1.76        | 27.10           | 40.00          | -12.90      | QP       |        |
| 4   | 186.4409        | 49.30            | 9.76            | 29.77        | 2.01        | 31.30           | 40.00          | -8.70       | QP       |        |
| 5   | 397.6333        | 35.68            | 15.23           | 29.85        | 3.34        | 24.40           | 47.00          | -22.60      | QP       |        |
| 6   | 501.1790        | 36.57            | 16.86           | 29.88        | 3.85        | 27.40           | 47.00          | -19.60      | QP       |        |

Remarks: 1. Result=Reading+Antenna-Preamp+Cable

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

|               |                   |               |               |
|---------------|-------------------|---------------|---------------|
| EUT:          | Dynamic light box | Model Name:   | JCD-NW        |
| Test Mode:    | All White         | Test Date:    | 2021.11.03    |
| Polarization: | Vertical          | Test Voltage: | AC 230V /50Hz |
| Operator:     | Bing              | Note:         |               |

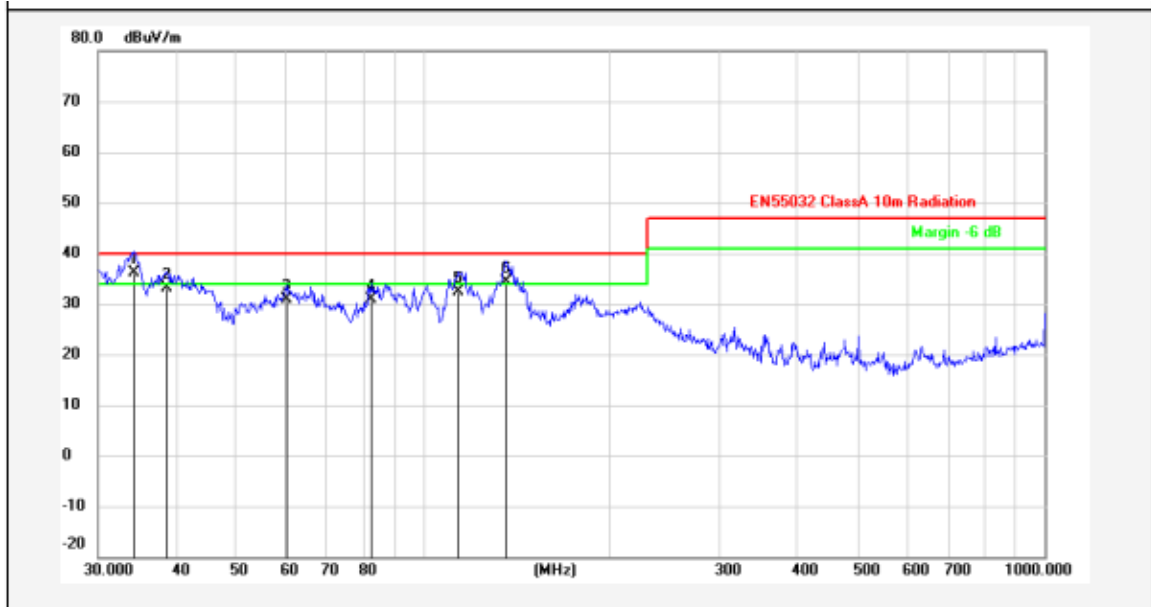


| No. | Frequency (MHz) | Reading (dBuV/m) | Antenna. (dB/m) | Preamp. (dB) | Cable. (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-----------------|------------------|-----------------|--------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 34.2760         | 54.66            | 10.89           | 30.6         | 1.25        | 36.20           | 40.00          | -3.80       | QP       |        |
| 2   | 38.7518         | 50.02            | 12.4            | 30.56        | 1.34        | 33.20           | 40.00          | -6.80       | QP       |        |
| 3   | 60.2800         | 47.79            | 11.96           | 30.42        | 1.47        | 30.80           | 40.00          | -9.20       | QP       |        |
| 4   | 82.3588         | 52.07            | 7.78            | 30.3         | 1.45        | 31.00           | 40.00          | -9.00       | QP       |        |
| 5   | 114.1136        | 50.16            | 10.65           | 30.06        | 1.75        | 32.50           | 40.00          | -7.50       | QP       |        |
| 6   | 135.9822        | 54.77            | 7.72            | 29.92        | 1.83        | 34.40           | 40.00          | -5.60       | QP       |        |

Remarks: 1. Result=Reading+Antenna+Preamp+Cable  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

## 1-6GHz


|               |                   |               |               |
|---------------|-------------------|---------------|---------------|
| EUT:          | Dynamic light box | Model Name:   | JCD-NW        |
| Test Mode:    | All White         | Test Date:    | 2021.11.03    |
| Polarization: | Horizontal        | Test Voltage: | AC 230V /50Hz |
| Operator:     | Bing              | Note:         |               |

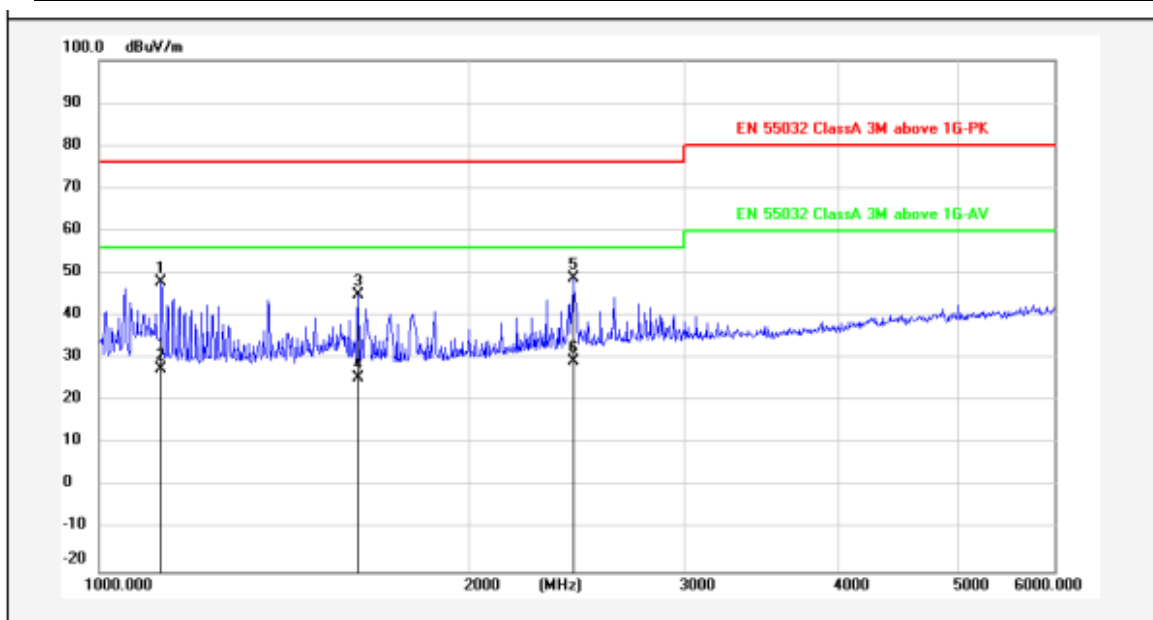

| No. | Frequency (MHz) | Reading (dBuV/m) | Antenna. (dB/m) | Cable. (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-----------------|------------------|-----------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 1123.517        | 59.40            | 24.36           | -35.92      | 47.84           | 76.00          | -28.16      | peak     |        |
| 2   | 1123.517        | 39.06            | 24.36           | -35.92      | 27.50           | 56.00          | -28.50      | AVG      |        |
| 3   | 1625.096        | 55.49            | 24.91           | -35.4       | 45.00           | 76.00          | -31.00      | peak     |        |
| 4   | 1625.096        | 36.09            | 24.91           | -35.4       | 25.60           | 56.00          | -30.40      | AVG      |        |
| 5   | 2431.997        | 55.56            | 27.37           | -34.04      | 48.89           | 76.00          | -27.11      | peak     |        |
| 6   | 2431.997        | 36.17            | 27.37           | -34.04      | 29.50           | 56.00          | -26.50      | AVG      |        |

Remarks: 1. Result=Reading+Antenna+Cable

|               |                   |               |               |
|---------------|-------------------|---------------|---------------|
| EUT:          | Dynamic light box | Model Name:   | JCD-NW        |
| Test Mode:    | All White         | Test Date:    | 2021.11.03    |
| Polarization: | Vertical          | Test Voltage: | AC 230V /50Hz |
| Operator:     | Bing              | Note:         |               |

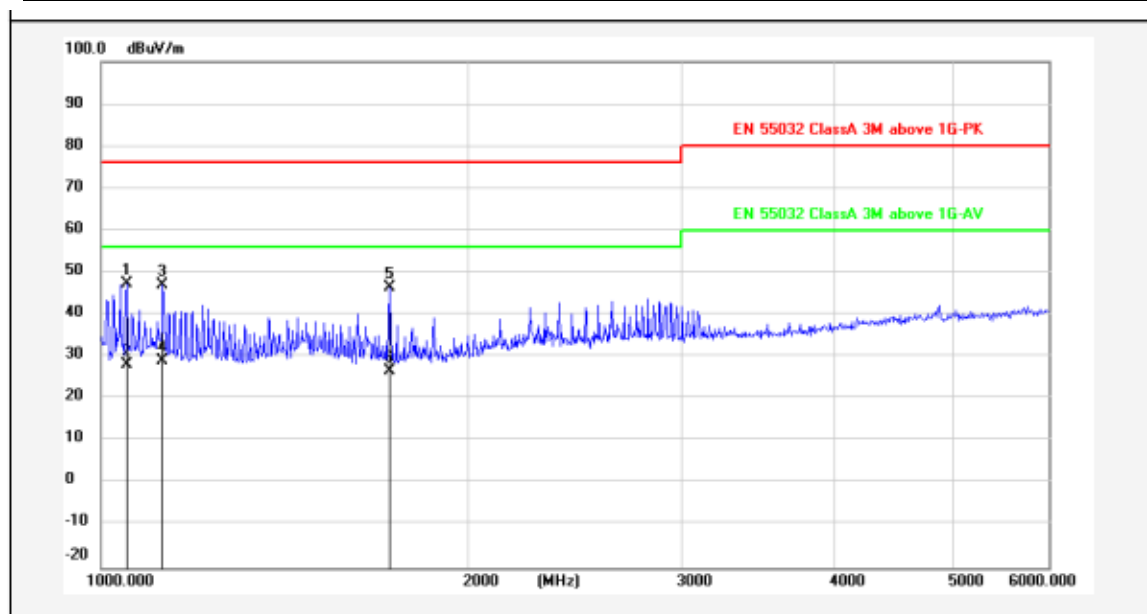


| No. | Frequency (MHz) | Reading (dBuV/m) | Antenna. (dB/m) | Cable. (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-----------------|------------------|-----------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 1049.567        | 59.17            | 24.32           | -36.04      | 47.45           | 76.00          | -28.55      | peak     |        |
| 2   | 1049.567        | 39.82            | 24.32           | -36.04      | 28.10           | 56.00          | -27.90      | AVG      |        |
| 3   | 1123.517        | 58.57            | 24.36           | -35.92      | 47.01           | 76.00          | -28.99      | peak     |        |
| 4   | 1123.517        | 40.76            | 24.36           | -35.92      | 29.20           | 56.00          | -26.80      | AVG      |        |
| 5   | 1724.082        | 56.77            | 24.96           | -35.3       | 46.43           | 76.00          | -29.57      | peak     |        |
| 6   | 1724.082        | 37.14            | 24.96           | -35.3       | 26.80           | 56.00          | -29.20      | AVG      |        |

Remarks:1. Result=Reading+Antenna+Cable



## 5 HARMONIC CURRENT EMISSION TEST

### 5.1 Block Diagram of Test Setup

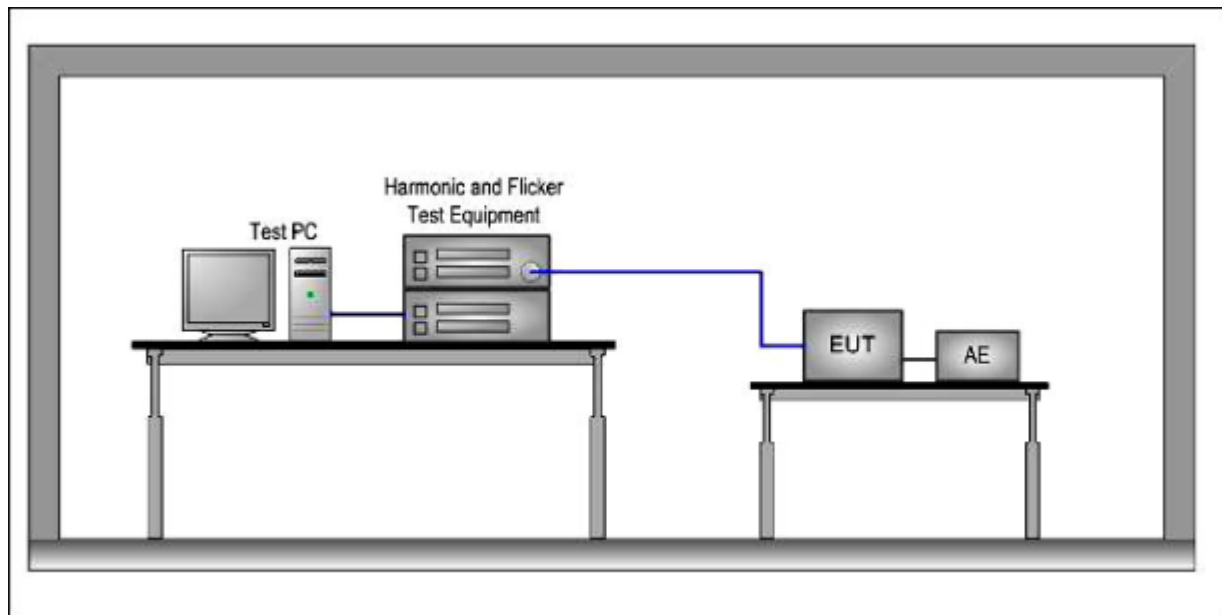

### 5.2 Test Standard

EN IEC 61000-3-2:2019 , Class A

### 5.3 Limits of Harmonic Current

| Limits for Class A equipment |   |
|------------------------------|---|
| Harmonic order<br>n          | Maximum permissible harmonic current<br>A |
| Odd harmonics                |   |
| 3                            | 2.30                                      |
| 5                            | 1.14                                      |
| 7                            | 0.77                                      |
| 9                            | 0.40                                      |
| 11                           | 0.33                                      |
| 13                           | 0.21                                      |
| $15 \leq n \leq 39$          | $0.15 \cdot 15/n$                         |
| Even harmonics               |   |
| 2                            | 1.08                                      |
| 4                            | 0.43                                      |
| 6                            | 0.30                                      |
| $8 \leq n \leq 40$           | $0.23 \cdot 8/n$                          |

Remark: If the EUT power level is below 75 Watts and therefore has no defined limits.

#### 5.4 Operating Condition of EUT

| Test date    | Ambient temperature | Relative humidity | Atmospheric pressure |
|--------------|---------------------|-------------------|----------------------|
| Nov 04, 2021 | 24°C                | 55%               | 101.3kPa             |

The details of test modes are as follows :

| No. | Test Mode |
|-----|-----------|
| 1.  | All White |

#### 5.5 Test Procedure


The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.

The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the necessary for the EUT to be exercised.


### 5.6 Test Data

**Test Result: Pass**      **Source qualification: Normal**

**Current & voltage waveforms**

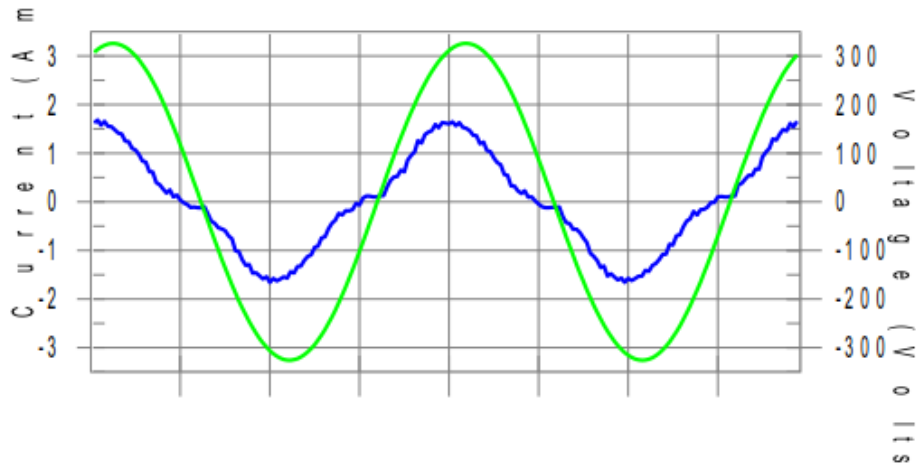

**Harmonics and Class A limit line**      **European Limits**

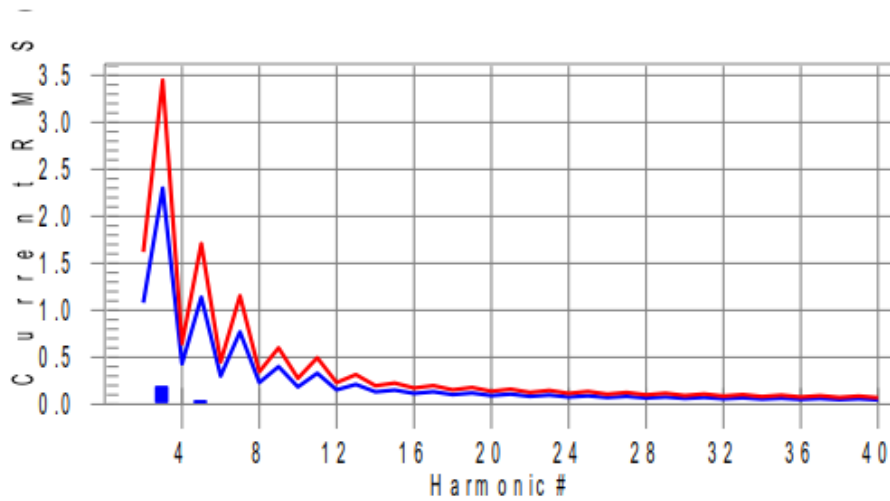

**Test result: Pass**      **Worst harmonics H13-6.6% of 150% limit, H13-9.9% of 100% limit**



Test Result: Pass Source qualification: Normal  
THC(A): 0.188 I-THD(%): 19.0 POHC(A): 0.009 POHC Limit(A): 0.251

Highest parameter values during test:

V\_RMS (Volts): 230.57 Frequency(Hz): 50.00  
I\_Peak (Amps): 1.710 I\_RMS (Amps): 1.009  
I\_Fund (Amps): 0.990 Crest Factor: 1.698  
Power (Watts): 220.8 Power Factor: 0.950

| Harm# | Harms(avg) | 100%Limit | %of Limit | Harms(max) | 150%Limit | %of Limit | Status |
|-------|------------|-----------|-----------|------------|-----------|-----------|--------|
| 2     | 0.002      | 1.080     | N/A       | 0.003      | 1.620     | N/A       | Pass   |
| 3     | 0.183      | 2.300     | 7.9       | 0.184      | 3.450     | 5.3       | Pass   |
| 4     | 0.002      | 0.430     | N/A       | 0.003      | 0.645     | N/A       | Pass   |
| 5     | 0.028      | 1.140     | 2.5       | 0.029      | 1.710     | 1.7       | Pass   |
| 6     | 0.001      | 0.300     | N/A       | 0.001      | 0.450     | N/A       | Pass   |
| 7     | 0.007      | 0.770     | 0.9       | 0.007      | 1.155     | 0.6       | Pass   |
| 8     | 0.001      | 0.230     | N/A       | 0.001      | 0.345     | N/A       | Pass   |
| 9     | 0.002      | 0.400     | N/A       | 0.002      | 0.600     | N/A       | Pass   |
| 10    | 0.001      | 0.184     | N/A       | 0.001      | 0.276     | N/A       | Pass   |
| 11    | 0.016      | 0.330     | 5.0       | 0.016      | 0.495     | 3.3       | Pass   |
| 12    | 0.001      | 0.153     | N/A       | 0.001      | 0.230     | N/A       | Pass   |
| 13    | 0.021      | 0.210     | 9.9       | 0.021      | 0.315     | 6.6       | Pass   |
| 14    | 0.001      | 0.131     | N/A       | 0.001      | 0.197     | N/A       | Pass   |
| 15    | 0.012      | 0.150     | 8.0       | 0.012      | 0.225     | 5.4       | Pass   |
| 16    | 0.000      | 0.115     | N/A       | 0.000      | 0.173     | N/A       | Pass   |
| 17    | 0.006      | 0.132     | 4.8       | 0.006      | 0.198     | 3.2       | Pass   |
| 18    | 0.000      | 0.102     | N/A       | 0.000      | 0.153     | N/A       | Pass   |
| 19    | 0.005      | 0.118     | N/A       | 0.005      | 0.178     | N/A       | Pass   |
| 20    | 0.000      | 0.092     | N/A       | 0.000      | 0.138     | N/A       | Pass   |
| 21    | 0.002      | 0.107     | N/A       | 0.002      | 0.161     | N/A       | Pass   |
| 22    | 0.000      | 0.084     | N/A       | 0.000      | 0.125     | N/A       | Pass   |
| 23    | 0.001      | 0.098     | N/A       | 0.001      | 0.147     | N/A       | Pass   |
| 24    | 0.000      | 0.077     | N/A       | 0.000      | 0.115     | N/A       | Pass   |
| 25    | 0.001      | 0.090     | N/A       | 0.001      | 0.135     | N/A       | Pass   |
| 26    | 0.000      | 0.071     | N/A       | 0.000      | 0.107     | N/A       | Pass   |
| 27    | 0.004      | 0.083     | N/A       | 0.004      | 0.125     | N/A       | Pass   |
| 28    | 0.001      | 0.066     | N/A       | 0.001      | 0.099     | N/A       | Pass   |
| 29    | 0.004      | 0.078     | N/A       | 0.005      | 0.116     | N/A       | Pass   |
| 30    | 0.001      | 0.061     | N/A       | 0.001      | 0.092     | N/A       | Pass   |
| 31    | 0.004      | 0.073     | N/A       | 0.004      | 0.109     | N/A       | Pass   |
| 32    | 0.001      | 0.058     | N/A       | 0.001      | 0.086     | N/A       | Pass   |
| 33    | 0.004      | 0.068     | N/A       | 0.004      | 0.102     | N/A       | Pass   |
| 34    | 0.000      | 0.054     | N/A       | 0.000      | 0.081     | N/A       | Pass   |
| 35    | 0.002      | 0.064     | N/A       | 0.003      | 0.096     | N/A       | Pass   |
| 36    | 0.000      | 0.051     | N/A       | 0.000      | 0.077     | N/A       | Pass   |
| 37    | 0.001      | 0.061     | N/A       | 0.001      | 0.091     | N/A       | Pass   |
| 38    | 0.000      | 0.048     | N/A       | 0.000      | 0.073     | N/A       | Pass   |
| 39    | 0.001      | 0.058     | N/A       | 0.001      | 0.087     | N/A       | Pass   |
| 40    | 0.000      | 0.046     | N/A       | 0.000      | 0.069     | N/A       | Pass   |



Test Result: Pass      Source qualification: Normal


Highest parameter values during test:

|                 |        |                |       |
|-----------------|--------|----------------|-------|
| Voltage (Vrms): | 230.57 | Frequency(Hz): | 50.00 |
| I_Peak (Amps):  | 1.710  | I_RMS (Amps):  | 1.009 |
| I_Fund (Amps):  | 0.990  | Crest Factor:  | 1.698 |
| Power (Watts):  | 220.8  | Power Factor:  | 0.950 |

| Harm# | Harmonics V-rms | Limit V-rms | % of Limit | Status |
|-------|-----------------|-------------|------------|--------|
| 2     | 0.070           | 0.461       | 15.21      | OK     |
| 3     | 0.452           | 2.074       | 21.80      | OK     |
| 4     | 0.038           | 0.461       | 8.21       | OK     |
| 5     | 0.034           | 0.922       | 3.68       | OK     |
| 6     | 0.020           | 0.461       | 4.31       | OK     |
| 7     | 0.067           | 0.691       | 9.70       | OK     |
| 8     | 0.009           | 0.461       | 1.99       | OK     |
| 9     | 0.042           | 0.461       | 9.19       | OK     |
| 10    | 0.010           | 0.461       | 2.24       | OK     |
| 11    | 0.030           | 0.230       | 13.12      | OK     |
| 12    | 0.011           | 0.231       | 4.93       | OK     |
| 13    | 0.015           | 0.230       | 6.45       | OK     |
| 14    | 0.006           | 0.231       | 2.55       | OK     |
| 15    | 0.005           | 0.230       | 2.19       | OK     |
| 16    | 0.005           | 0.230       | 2.11       | OK     |
| 17    | 0.007           | 0.231       | 2.93       | OK     |
| 18    | 0.006           | 0.230       | 2.63       | OK     |
| 19    | 0.008           | 0.230       | 3.34       | OK     |
| 20    | 0.009           | 0.230       | 4.02       | OK     |
| 21    | 0.005           | 0.231       | 2.10       | OK     |
| 22    | 0.003           | 0.231       | 1.27       | OK     |
| 23    | 0.004           | 0.231       | 1.88       | OK     |
| 24    | 0.002           | 0.231       | 0.87       | OK     |
| 25    | 0.003           | 0.231       | 1.38       | OK     |
| 26    | 0.002           | 0.230       | 0.79       | OK     |
| 27    | 0.005           | 0.230       | 2.15       | OK     |
| 28    | 0.002           | 0.231       | 0.93       | OK     |
| 29    | 0.007           | 0.230       | 2.92       | OK     |
| 30    | 0.002           | 0.230       | 0.69       | OK     |
| 31    | 0.004           | 0.231       | 1.93       | OK     |
| 32    | 0.002           | 0.231       | 0.67       | OK     |
| 33    | 0.006           | 0.230       | 2.65       | OK     |
| 34    | 0.002           | 0.231       | 0.70       | OK     |
| 35    | 0.002           | 0.230       | 1.06       | OK     |
| 36    | 0.002           | 0.230       | 0.76       | OK     |
| 37    | 0.004           | 0.231       | 1.84       | OK     |
| 38    | 0.002           | 0.230       | 0.73       | OK     |
| 39    | 0.003           | 0.231       | 1.12       | OK     |
| 40    | 0.006           | 0.231       | 2.54       | OK     |

## 6 VOLTAGE FLUCTUATIONS & FLICKER TEST

### 6.1 Block Diagram of Test Setup

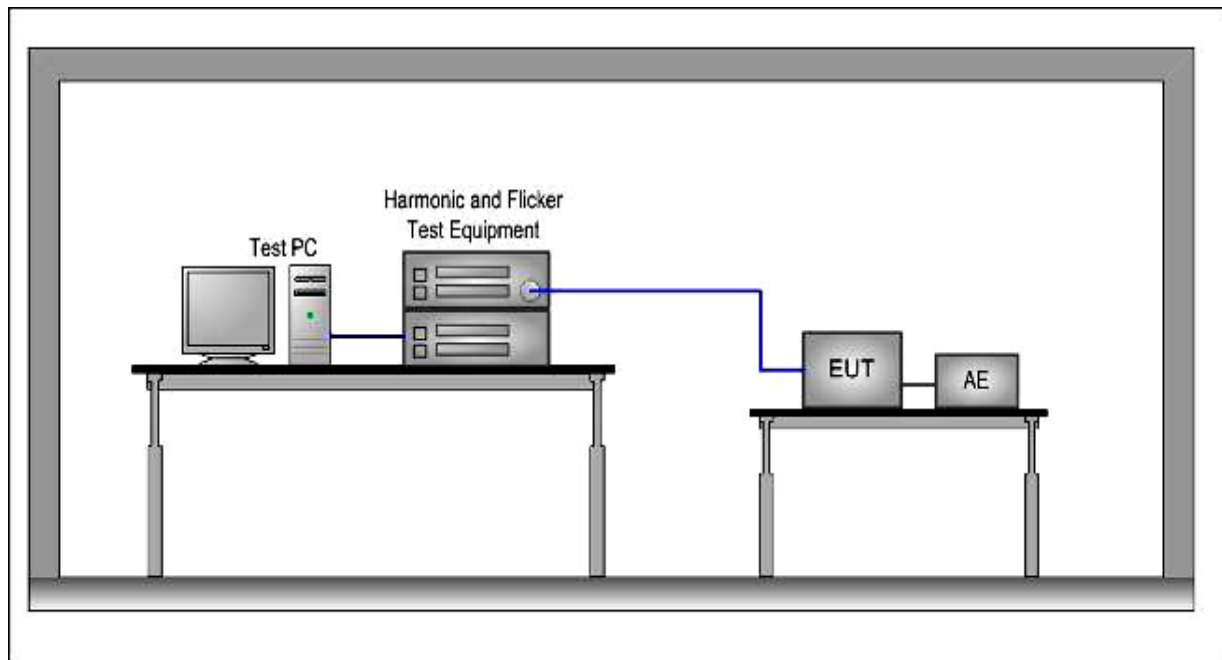

### 6.2 Test Standard

EN 61000-3-3:2013/A1:2019

### 6.3 Limits of Voltage Fluctuation and Flick

| Test Item | Limit | Note   |
|-----------|-------|--|
| Pst       | 1.0   | Pst means Short-term flicker indicator         |
| Plt       | 0.65  | Plt means long-term flicker indicator          |
| Tmax      | 500ms | Tmax means maximum time that d(t) exceeds 3.3% |
| dmax(%)   | 4%    | dmax means maximum relative voltage change.    |
| dc(%)     | 3.3%  | dc means relative steady-state voltage change. |

#### 6.4 Operating Condition of EUT

| Test date    | Ambient temperature | Relative humidity | Atmospheric pressure |
|--------------|---------------------|-------------------|----------------------|
| Nov 04, 2021 | 24°C                | 55%               | 101.3kPa             |

The details of test modes are as follows :

| No. | Test Mode |
|-----|-----------|
| 1.  | All White |

#### 6.5 Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal conditions. During the flicker measurement, the measure time shall include that part of whole operation changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.






### 6.6 Test Data

Test Result: Pass


Status: Test Completed

Pst<sub>i</sub> and limit line

European Limits

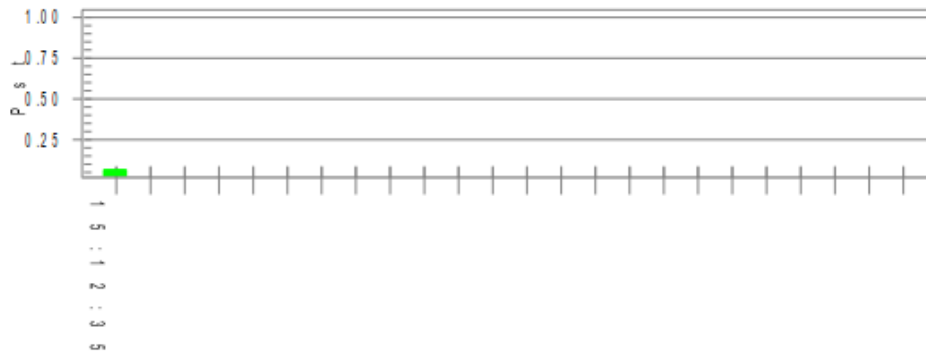

Plt and limit line

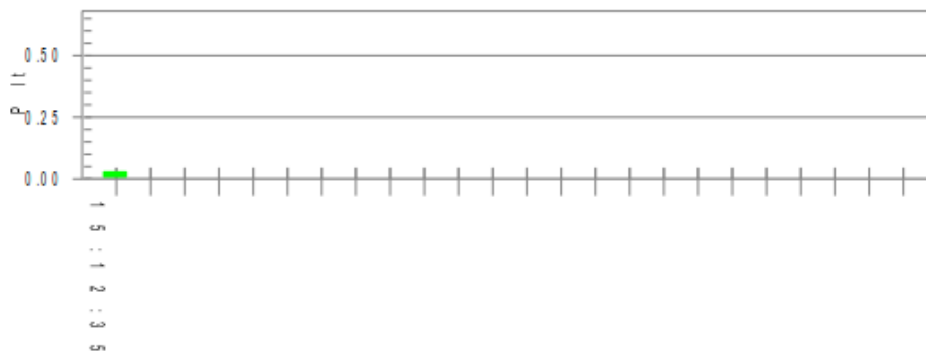

**Parameter values recorded during the test:**

|                                 |        |                  |            |
|---------------------------------|--------|------------------|------------|
| Vrms at the end of test (Volt): | 230.19 |                  |            |
| T-max (mS):                     | 0      | Test limit (mS): | 500.0 Pass |
| Highest dc (%):                 | 0.00   | Test limit (%):  | 3.30 Pass  |
| Highest dmax (%):               | 0.00   | Test limit (%):  | 4.00 Pass  |
| Highest Pst (10 min. period):   | 0.064  | Test limit:      | 1.000 Pass |
| Highest Plt (2 hr. period):     | 0.028  | Test limit:      | 0.650 Pass |

## 7 IMMUNITY TEST RESULT

Description of Performance Criteria:

### Performance criteria A

During and after the test the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

### Performance criteria B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.


### Performance criteria C

During and after testing, a temporary loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a backup, shall not be lost.

## 8 ELECTROSTATIC DISCHARGE TEST

### 8.1 Block Diagram of Test Setup

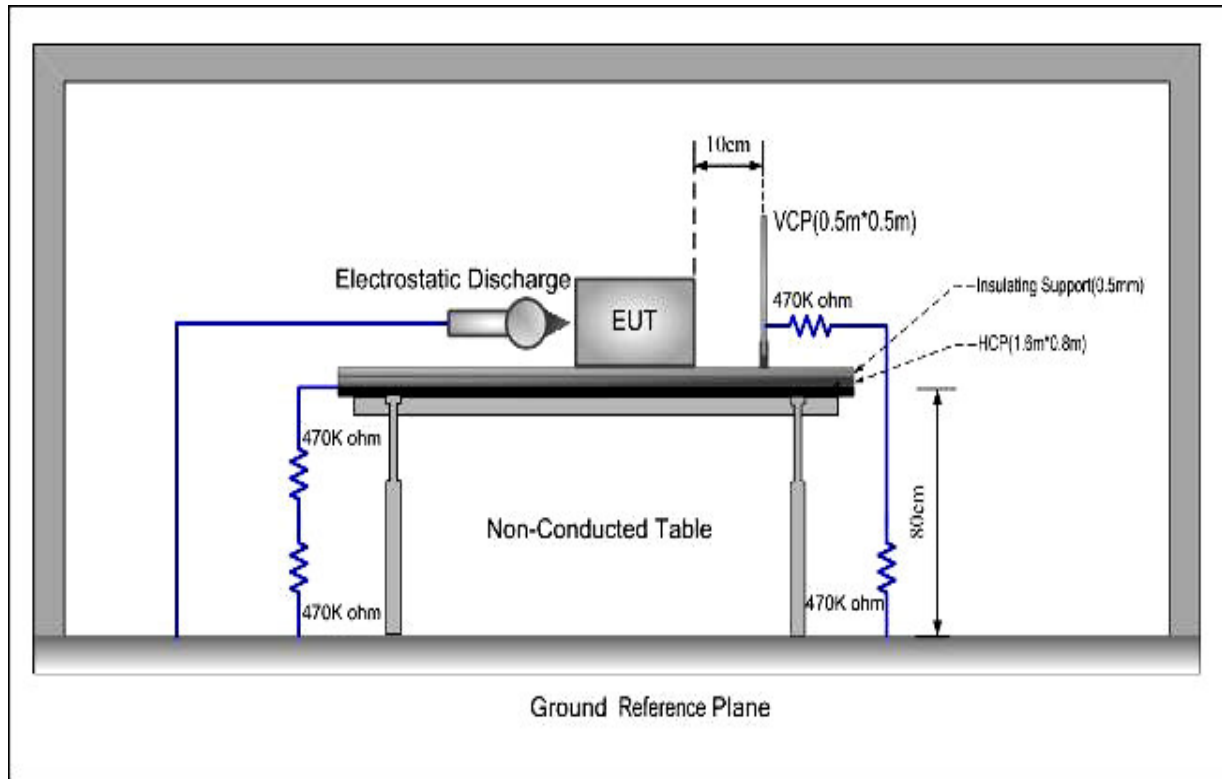

### 8.2 Test Standard

EN 55035:2017/A11:2020 (EN 61000-4-2)

(Severity Level 1&2&3 for Air Discharge at 2kV 4kV 8kV;

Severity Level 1&2 for Contact Discharge at 2kV 4kV)

### 8.3 Severity Levels and Performance Criterion

| Severity Levels | Test Voltage<br>Contact Discharge (kV) | Test Voltage<br>Air Discharge (kV) | Performance<br>criterion |
|-----------------|--|------------------------------------|--------------------------|
| 1.              | 2                                      | 2                                  | B                        |
| 2.              | 4                                      | 4                                  |                          |
| 3.              | 6                                      | 8                                  |                          |
| 4.              | 8                                      | 15                                 |                          |
| x               | Special                                | Special                            |                          |

## 8.4 Operating Condition of EUT

The details of test modes are as follows :

| No. | Test Mode |
|-----|-----------|
| 1.  | All White |

## 8.5 Test Procedure

### 8.5.1 Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed.

### 8.5.2 Contact Discharge:

All the procedure was same as Section 8.5.1. except that the generator was re-triggered for a new single discharge and repeated 50 times for each pre-selected test point. The tip of the discharge electrode was touch the EUT before the discharge switch was operated.

### 8.5.3 Indirect discharge for horizontal coupling plane

At least 20 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

### 8.5.4 Indirect discharge for vertical coupling plane

At least 20 single discharge were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.



8.6 Test Data

Electrostatic Discharge Test Results

|                             |                        |
|-----------------------------|------------------------|
| EUT : Dynamic light box     | Temperature : 24°C     |
| M/N : JCD-NW                | Humidity : 56%         |
| Test Voltage : AC 230V/50Hz | Test Date : 2021.11.05 |
| Test Engineer : Bing        | Pressure : 101.0kPa    |
| Required Performance : B    | Actual Performance : A |

|                               |  |
|-------------------------------|--|
| Air Discharge: ±2kV ±4kV ±8kV | # For Air Discharge each Point Positive >25 times and negative >25 times discharge |
|-------------------------------|--|

|                              |  |
|------------------------------|--|
| Contact Discharge: ±2kV ±4kV | # For Contact Discharge each point positive >25 times and negative >25 times discharge |
|------------------------------|--|

For the time interval between successive single discharges an initial value of one second.  
 After discharge to the ungrounded part of EUT, it needs the bleeder resistor to remove the charge prior to next ESD pulse


| Discharge Voltage (kV) | Type of discharge | Dischargeable Points | Performance |             | Result (Pass/Fail) |
|------------------------|-------------------|----------------------|-------------|-------------|--------------------|
|                        |                   |                      | Required    | Observation |                    |
| ±2                     | Contact           | Center of VCP        | B           | A           | Pass               |
| ±4                     | Contact           | Center of HCP        | B           | A           | Pass               |
| ±2                     | Contact           | 1,2,                 | B           | A           | Pass               |
| ±4                     | Contact           | 1,2,                 | B           | A           | Pass               |
| ±2                     | Air               | 3,4                  | B           | A           | Pass               |
| ±4                     | Air               | 3,4                  | B           | A           | Pass               |
| ±8                     | Air               | 3,4                  | B           | B           | Pass               |

|   |               |    |   |
|---|---------------|----|---|
| 1 | Screw         | 8  | / |
| 2 | Metal surface | 9  | / |
| 3 | Slot          | 10 | / |
| 4 | Display       | 11 | / |
| 5 |               | 12 | / |
| 6 |               | 13 | / |
| 7 |               | 14 | / |

Performance:  
 The screen was flashing during the test, but self-recoverable after the test Criteria : B

## 9 Radio Frequency Electromagnetic Field Immunity Test

### 9.1 Block Diagram of Test Setup

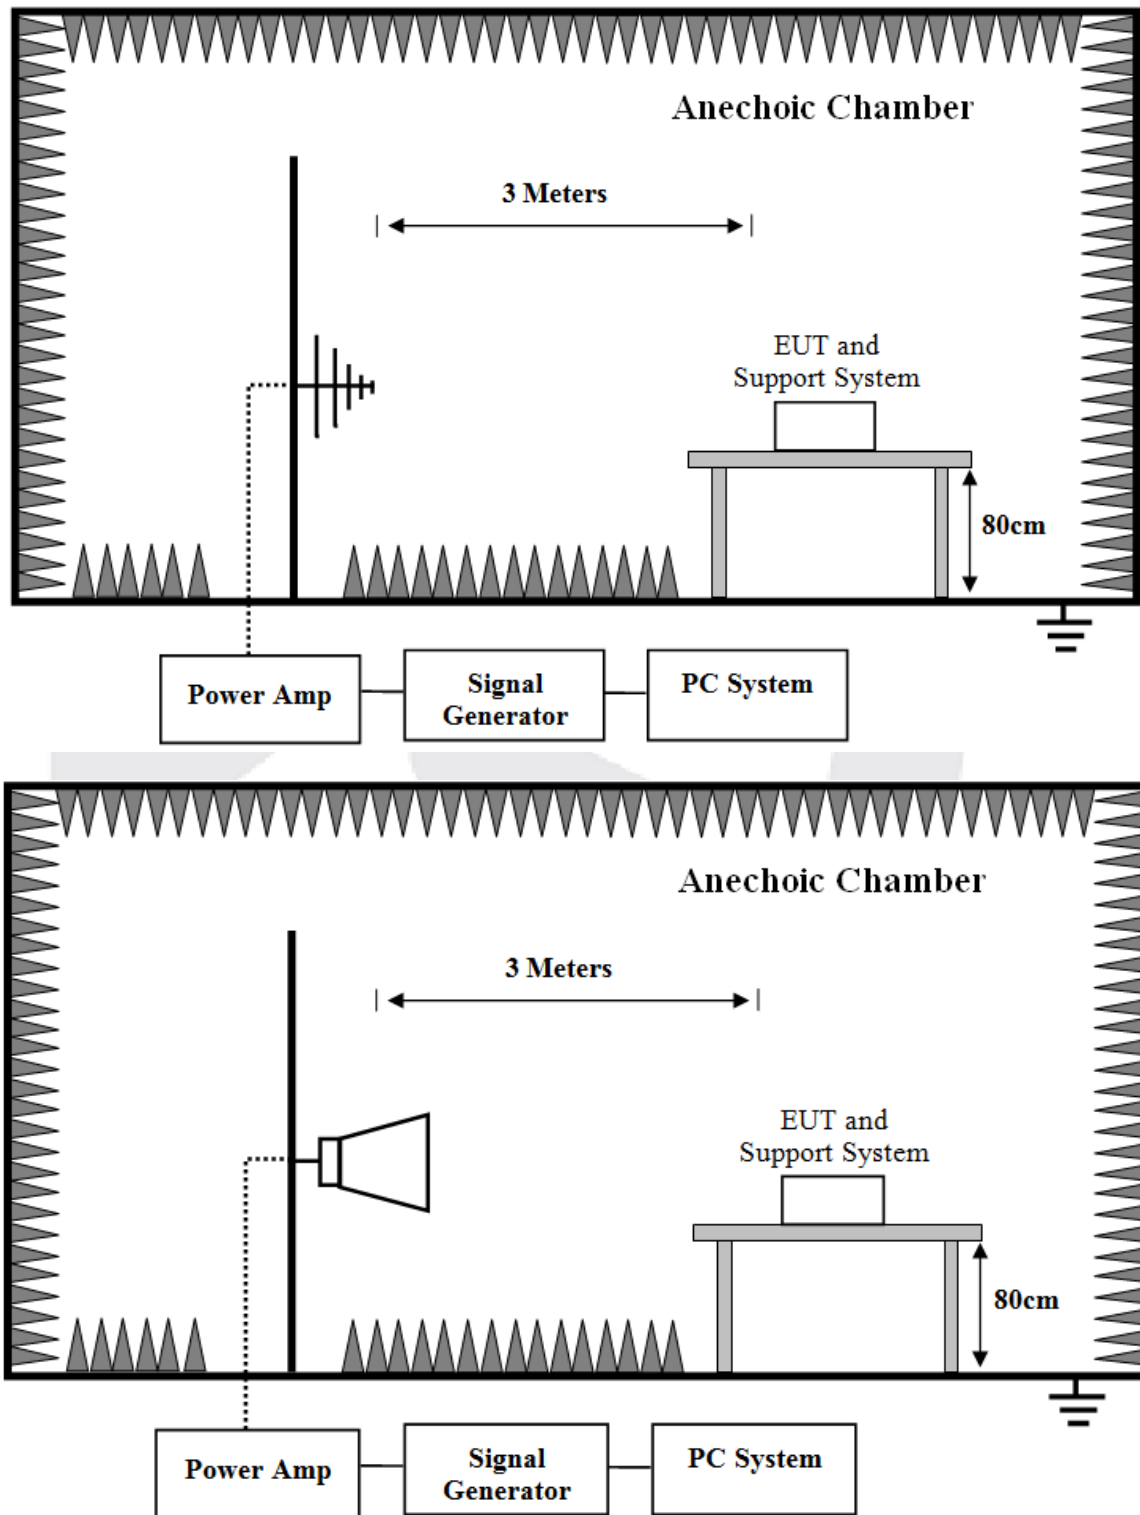

## 9.2 Test Standard

EN 55035:2017/A11:2020 (EN 61000-4-3:2006+A1:2008+A2:2010),  
Frequency Range: 80-1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz  
Severity Level 2 at 3V/m

### Radio Frequency Electromagnetic Field Immunity Test levels

| Level | Test field strength<br>V/m |
|-------|----------------------------|
| 1     | 1                          |
| 2     | 3                          |
| 3     | 10                         |
| 4     | 30                         |
| X     | Special                    |

Note: X is an open test level and the associated field strength may be any value. This level may be given in the product standard.

### 9.3 Operating Condition of EUT

The details of test modes are as follows :

| No. | Test Mode |
|-----|-----------|
| 1.  | All White |

### 9.4 Test Procedure

The field sensor is placed on the EUT table (0.8 meter above the ground) which is 3 meters away from the transmitting antenna. Through the signal generator, power amplifier and transmitting antenna to produce a uniformity field strength (3V/m measured by field sensor) around the EUT table from frequency range specified and records the signal generator 's output level at the same time for whole measured frequency range. Then, put EUT and its simulators on the EUT turn table and keep them 3 meters away from the transmitting antenna which is mounted on an antenna tower and fixes at 1 meter height above the ground. Using the recorded signal generator' s output level to measure the EUT from frequency range specified and both horizontal & vertical polarization of antenna must be set and measured. Each of the four sides of EUT must be faced this transmitting antenna and measures individually.

All the scanning conditions are as follows :

| Test Level           |   |
|----------------------|---|
| Frequency            | 80-1000MHz,1800MHz, 2600MHz, 3500MHz, 5000MHz |
| Test level           | 3V/m (Severity Level 2)                       |
| Antenna polarization | Horizontal & Vertical                         |
| Modulation           | 80%, 1kHz Amplitude Modulation                |
| Steps increment      | 1%  |



## 9.5 Test Data


## Radio-frequency Continuous radiated disturbance Test Results

| Field Strength (V/m) | Test Frequency (MHz)                                       | Test mode (worst case) | Polarization of antenna | Required Performance | Actual Performance | Result |
|----------------------|--|------------------------|-------------------------|----------------------|--------------------|--------|
| 3                    | 80-1000MHz,<br>1800MHz,<br>2600MHz,<br>3500MHz,<br>5000MHz | All White              | H                       | A                    | A                  | PASS   |
|                      |  |                        | V                       | A                    | A                  |        |



## 10 ELECTRICAL FAST TRANSIENT/BURST TEST

### 10.1 . Block Diagram of Test Setup

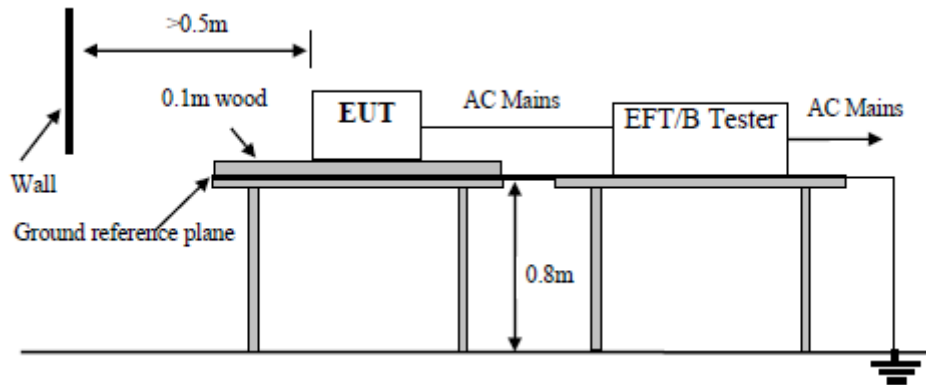

### 10.2 Test Standard

EN 55035:2017/A11:2020 (EN 61000-4-4)

### 10.3 Severity Levels and Performance Criterion

| Open Circuit Output Test Voltage $\pm 10\%$ |                       |   |                       |
|---|-----------------------|---|-----------------------|
| Severity Level                              | On Power Supply Lines | On I/O (Input/Output) Signal data and control lines | Performance criterion |
| 1.  | 0.5KV                 | 0.25KV  | B                     |
| 2.  | 1KV                   | 0.5KV   |                       |
| 3.  | 2KV                   | 1KV   |                       |
| 4.  | 4KV                   | 2KV   |                       |
| X   | Special               | Special   |                       |

The use of 5 kHz repetition frequency is traditional, however, 100 kHz is closer to reality. Product committees should determine which frequencies are relevant for specific products or product types. With some products, there may be no clear distinction between power ports and signal ports, in which case it is up to product committees to make this determination for test purposes.

a "X" can be any level, above, below or in between the others. The level shall be specified in the dedicated equipment specification.

#### 10.4 Operating Condition of EUT

The details of test modes are as follows :

| No. | Test Mode |
|-----|-----------|
| 1.  | All White |

#### 10.5 Test Procedure

The EUT and its simulators were placed on a ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m\*1m metallic sheet with 0.65mm minimum thickness. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. The length of signal and power cable between EUT and EFT generator was 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.

## 10.6 Test Data


## Electrical fast transient Test Results

| Coupling Ports |        | Coupling Voltage | Inject Method | Result |
|----------------|--------|------------------|---------------|--------|
| AC Power Ports | L      | $\pm 1$ kV       | Direct        | Pass   |
|                | N      | $\pm 1$ kV       | Direct        | Pass   |
|                | PE     | $\pm 1$ kV       | Direct        | Pass   |
|                | L-N    | $\pm 1$ kV       | Direct        | Pass   |
|                | L-PE   | $\pm 1$ kV       | Direct        | Pass   |
|                | N-PE   | $\pm 1$ kV       | Direct        | Pass   |
|                | L-N-PE | $\pm 1$ kV       | Direct        | Pass   |

Remark: The screen was flashing during the test ,but self-recoverable after the test . Criteria : B

## 11 SURGE TEST

### 11.1 Block Diagram of Test Setup

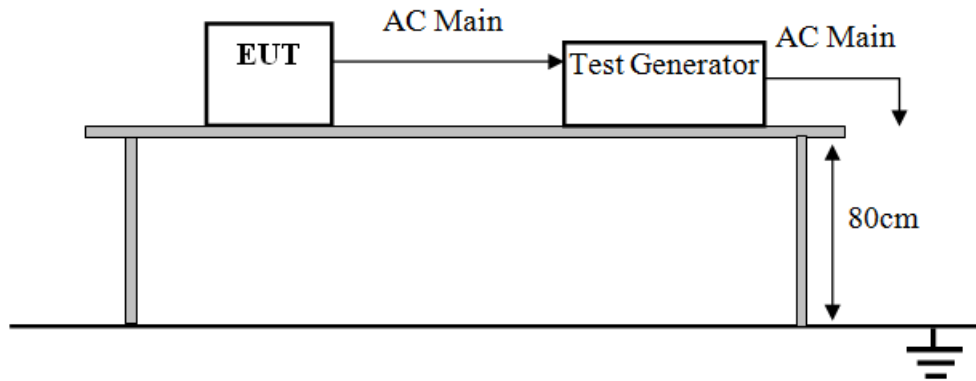

### 11.2 Test Standard

EN 55035:2017/A11:2020 (EN 61000-4-5)

### 11.3 Severity Levels and Performance Criterion

| Severity Level | Open-Circuit Test Voltage<br>kV |
|----------------|---------------------------------|
| 1              | 0.5                             |
| 2              | 1.0                             |
| 3              | 2.0                             |
| 4              | 4.0                             |
| *              | Special                         |

### 11.4 Operating Condition of EUT

The details of test modes are as follows :

| No. | Test Mode |
|-----|-----------|
| 1.  | All White |

## 11.5 Test Procedure

2  $\Omega$  effective output impedance of the generator was used for L-N test. 12  $\Omega$  effective output impedance of the generator was used for L-PE, N-PE test.

5 positive and 5 negative (polarity) tests were applied successively synchronized to the voltage phase, 90° , 270° to L-N respectively. The repetition rate was 1 per minute during test.

(1). For input and AC power ports:


The EUT was connected to the power mains by using a coupling device which coupled the surge interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration was 1 minute.

(2). For signal lines and control lines ports:

None.

(3). For DC input and DC output power ports:

None.

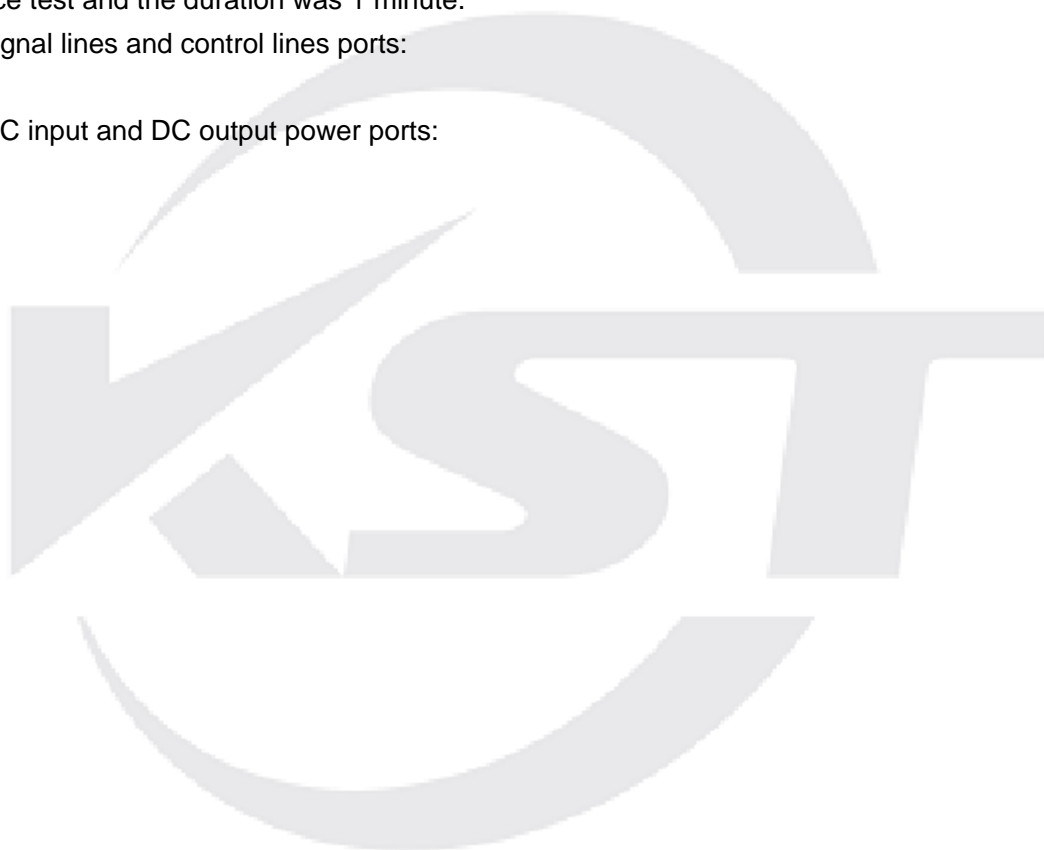

## 11.6 Test Data


## Surge Immunity Test Results

| Coupling Ports   |      | Coupling Voltage | Coupling Phase / Result |      |      |      |
|--|------|------------------|-------------------------|------|------|------|
|  |      |                  | 0°                      | 90°  | 180° | 270° |
| AC power ports   | L-N  | +/-1kV<br>Direct | /                       | Pass | /    | Pass |
|  | L-PE | +/-2kV<br>Direct | /                       | Pass | /    | Pass |
|  | N-PE | +/-2kV<br>Direct | /                       | Pass | /    | Pass |
| Remark: There was no change compared with initial operation during the test. |      |                  |                         |      |      |      |



## 12 RADIO-FREQUENCY CONTINUOUS CONDUCTED DISTURBANCE TEST

### 12.1 Block Diagram of Test Setup

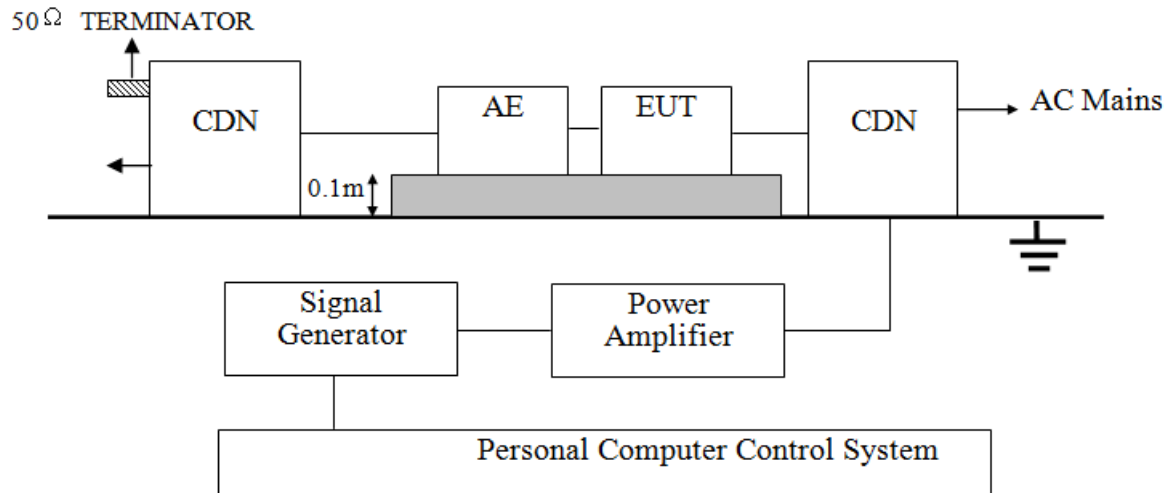

### 12.2 Test Standard

EN 55035:2017/A11:2020(EN 61000-4-6)

### 12.3 Severity Levels and Performance Criterion

| Level | Voltage Level (e.m.f.) V |
|-------|--------------------------|
| 1.    | 1                        |
| 2.    | 3                        |
| 3.    | 10                       |
| X     | Special                  |

### 12.4 Operating Condition of EUT

The details of test modes are as follows :

| No. | Test Mode |
|-----|-----------|
| 1.  | All White |




## 12.5 Test Procedure

The EUT were placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) was placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT were as short as possible, and their height above the ground reference plane were between 30 and 50 mm (where possible).

The frequency range was swept from 0.15 MHz - 10 MHz, 10 MHz – 30 MHz and 30 MHz – 80MHz using 3V, 3 V - 1V, 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.

The rate of sweep shall not exceed  $1.5 \cdot 10^{-3}$  decades/s. Where the frequency was swept incrementally, the step size shall not exceed 1% of the Bingt and thereafter 1% of the preceding frequency value

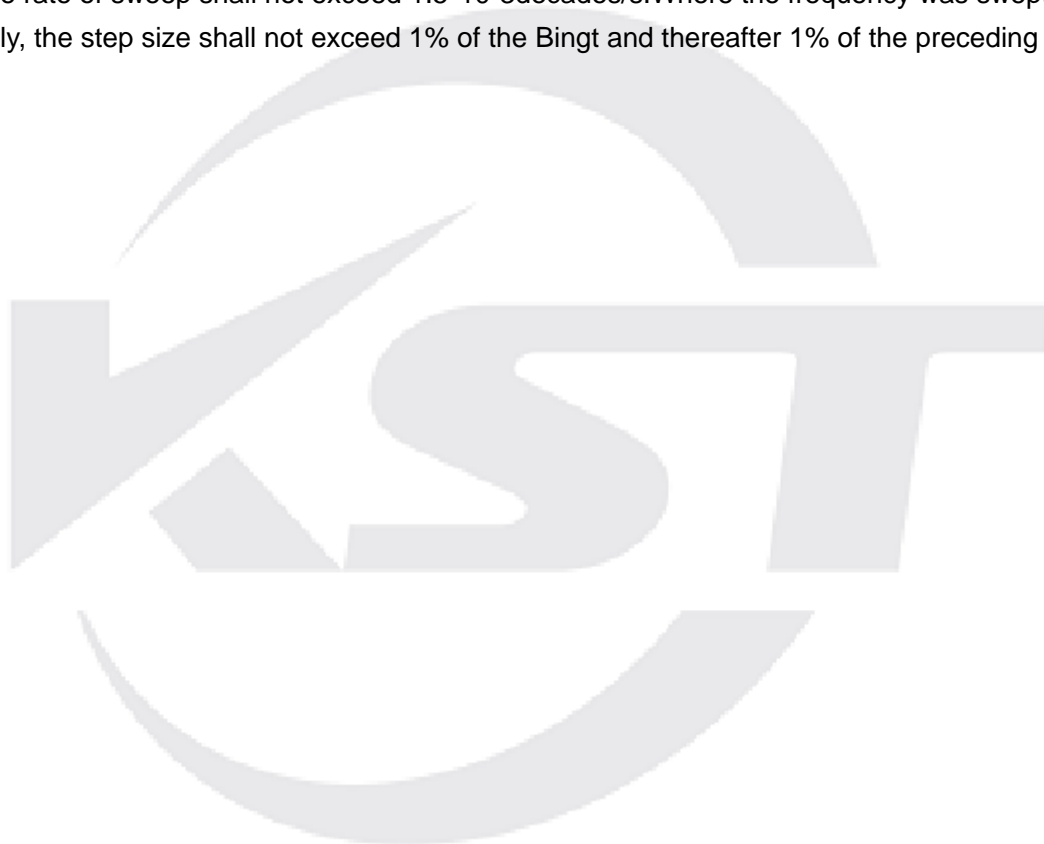

## 12.6 Test Data


## Radio-frequency Continuous conducted disturbance Test Results

| Voltage (V)  | Test Frequency (MHz) | Test mode (worst case) | Injection Method | Required | Observation | Result |
|--|----------------------|------------------------|------------------|----------|-------------|--------|
| 3  | 0.15 –10 MHz         | All White              | CDN-M3           | A        | A           | PASS   |
| 3 -1   | 10–30 MHz            |                        |                  |          |             | PASS   |
| 1  | 30 –80 MHz           |                        |                  |          |             | PASS   |
| Remark: There was no change compared with initial operation during the test. |                      |                        |                  |          |             |        |



## 13 VOLTAGE DIPS AND INTERRUPTIONS TEST

### 13.1 Block Diagram of Test Setup

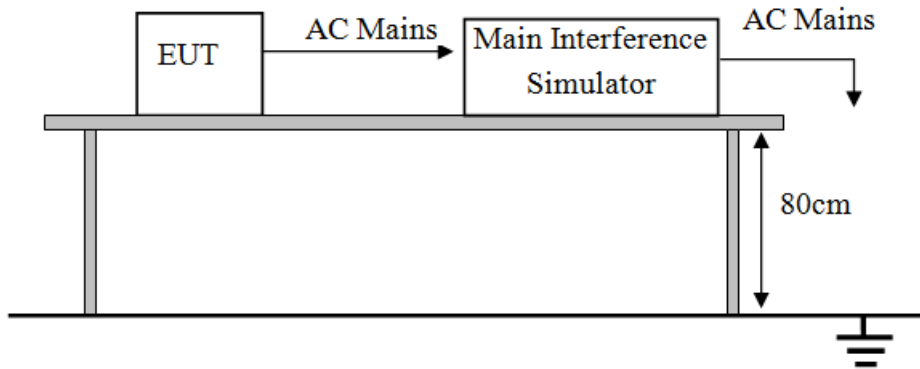

### 13.2 Test Standard

EN 55035:2017/A11:2020 (EN 61000-4-11)

### 13.3 Severity Levels and Performance Criterion

| Test category         | reduction | Periods   | Performance criterion |
|-----------------------|-----------|-----------|-----------------------|
| Voltage dips          | > 95%     | 0.5P      | B                     |
| Voltage dips          | 30%       | 25P/30P   | C                     |
| Voltage interruptions | > 95%     | 250P/300P | C                     |

### 13.4 Operating Condition of EUT

The details of test modes are as follows:

| No. | Test Mode |
|-----|-----------|
| 1.  | All White |

### 13.5 Test Procedure

- 1) The EUT and test generator were setup as shown on Section 13.1.
- 2) The interruptions are introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

## 13.6 Test Data


## Voltage Dips and Short Interruptions Immunity Test Result AC 230V/50Hz

| <b>Test Level</b><br><b>% UT</b> | <b>Voltage Dips &amp;<br/>Short Interruptions</b><br><b>% UT</b> | <b>Duration (in period)</b> | <b>Criterion</b> | <b>Result</b> |
|----------------------------------|--|-----------------------------|------------------|---------------|
| 0                                | 100  | 0.5P                        | B                | PASS          |
| 70                               | 30   | 25P                         | C                | PASS          |
| 0                                | 100  | 250P                        | C                | PASS          |

Performance:


Dips: The EUT was no change compared with initial operation during the test. Criteria : A

Interruptions: The EUT appeared shut down during the test, but self-recoverable after the test Criteria : B

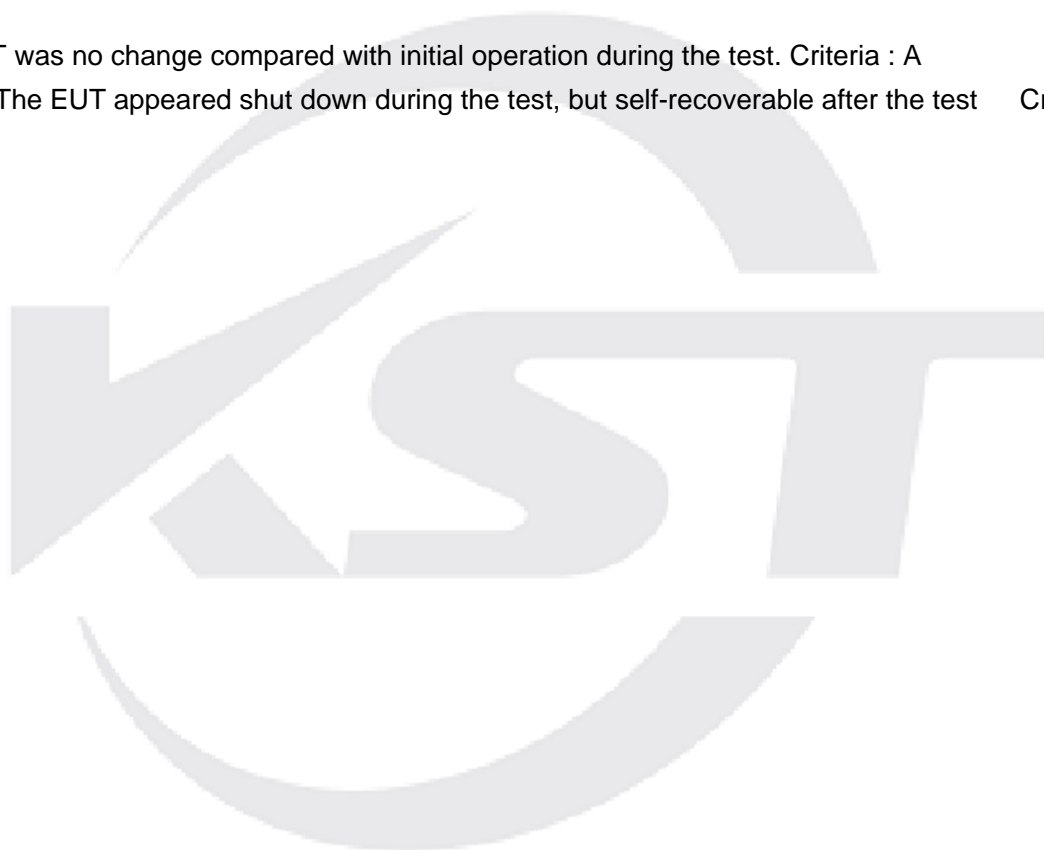

## 14 Power Frequency Magnetic Field Immunity Test

### 14.1 Block Diagram of Test Setup

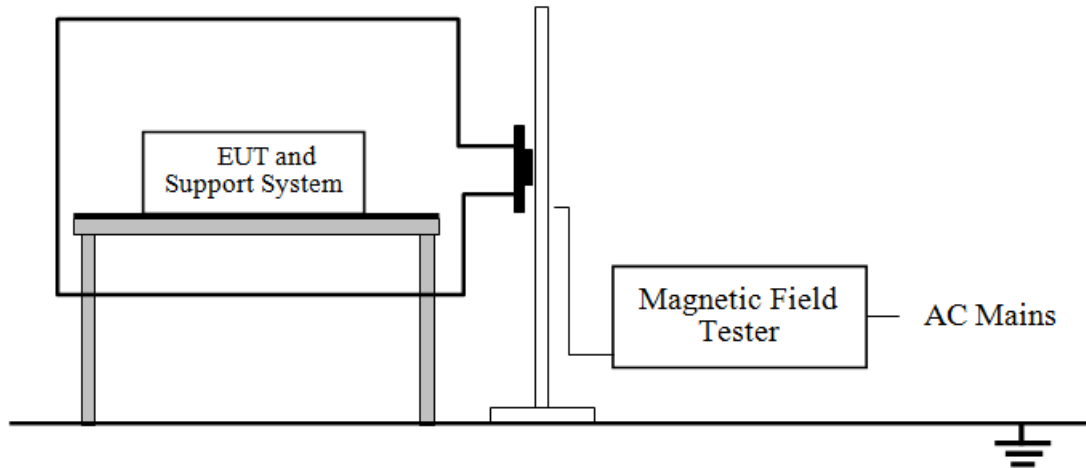

### 14.2 Test Standard

EN 55035:2017/A11:2020 (EN 61000-4-8)

### 14.3 Operating Condition of EUT

The details of test modes are as follows :

| No. | Test Mode |
|-----|-----------|
| 1.  | All White |

### 14.4 Test Procedure

The EUT was subjected to the test magnetic field by using the induction coil of standard dimensions (1m\*1m). The induction coil then was rotated by 90° in order to expose the EUT to the test field with different orientations

#### 14.5 Test Data

Not applicable. This product does not contain any devices susceptible to magnetic fields. There is no need for power frequency magnetic field immunity test to be performed on this product in accordance with Clause 5, Table 1, Remark "a" of EN 55035:2017/A11:2020 which states:

Applicable only to equipment containing devices intrinsically susceptible to magnetic fields, such as CRT monitors, Hall effect elements, electro-dynamic microphones, magnetic field sensors or audio frequency transformers. Refer to D.3.2 for determining the test level when the EUT contains a CRT display.



## 15 Test setup photo


Conducted disturbance at mains terminals Test



Radiated Disturbance Test  
30-1000MHz



1-6GHz

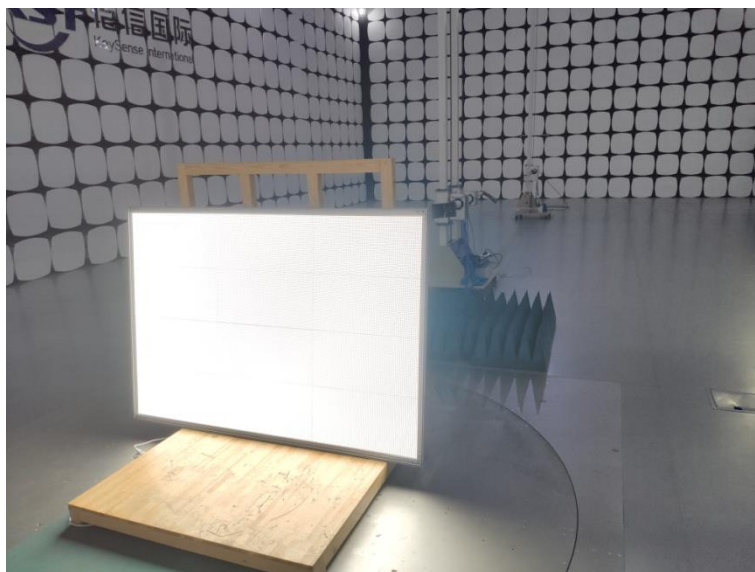


Harmonic current emission & Voltage fluctuations & flicker Test







Electrostatic discharge Test

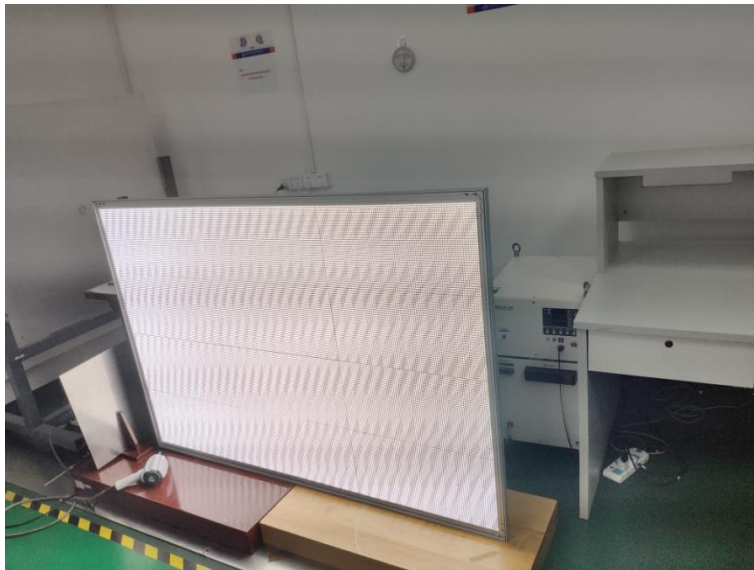

Radio-frequency Continuous radiated disturbance Test

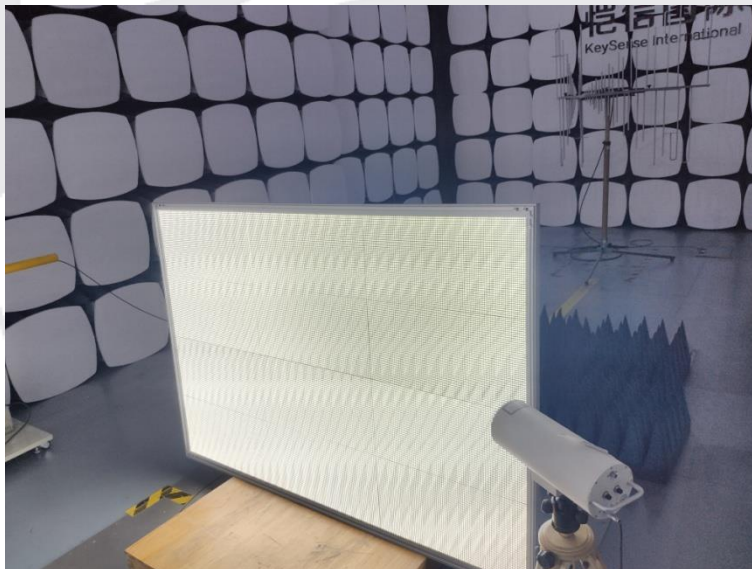


Electrical fast transient Test

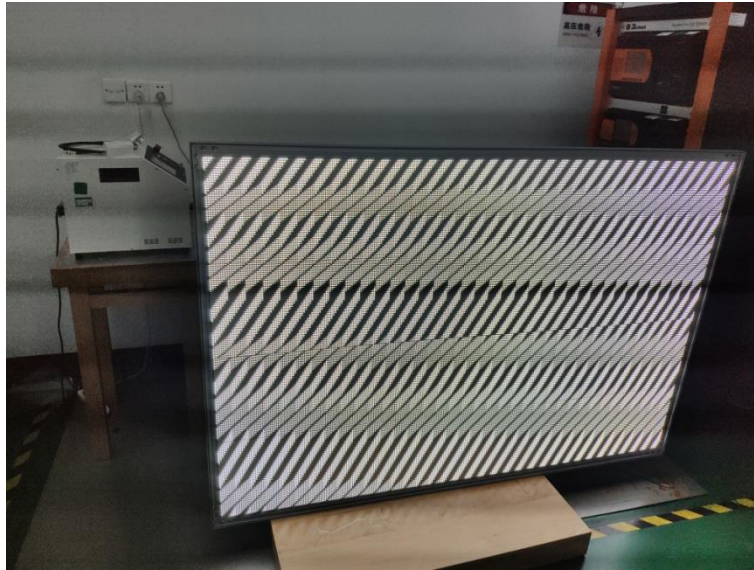


Surge Test



Radio-frequency, Continuous conducted disturbance Test

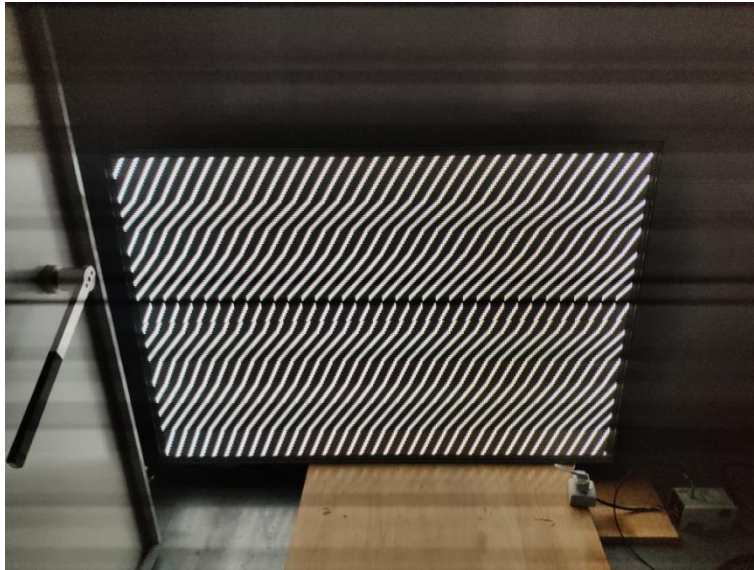


Voltage dips & interruption Test

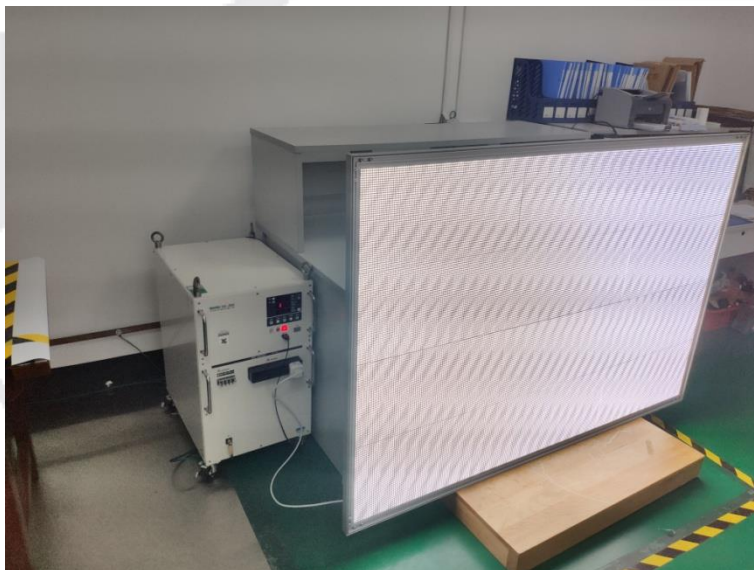


## 16 PHOTOS OF THE EUT

### External photos


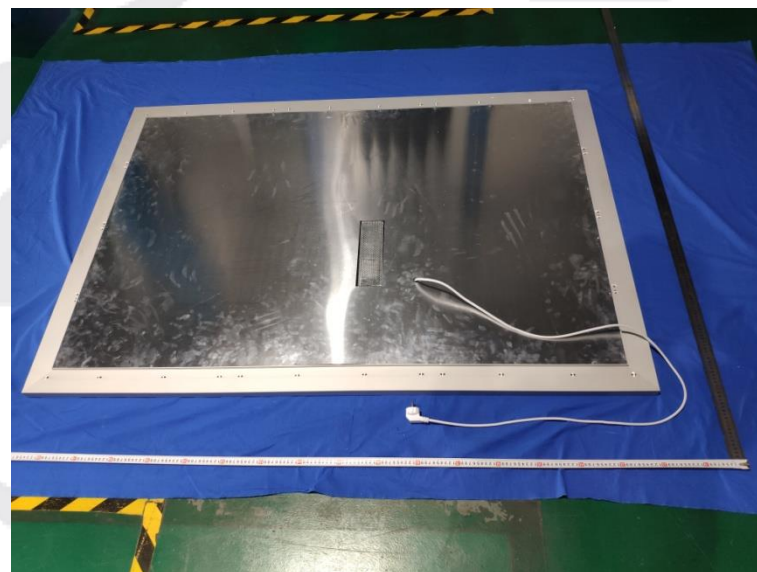






Internal photos

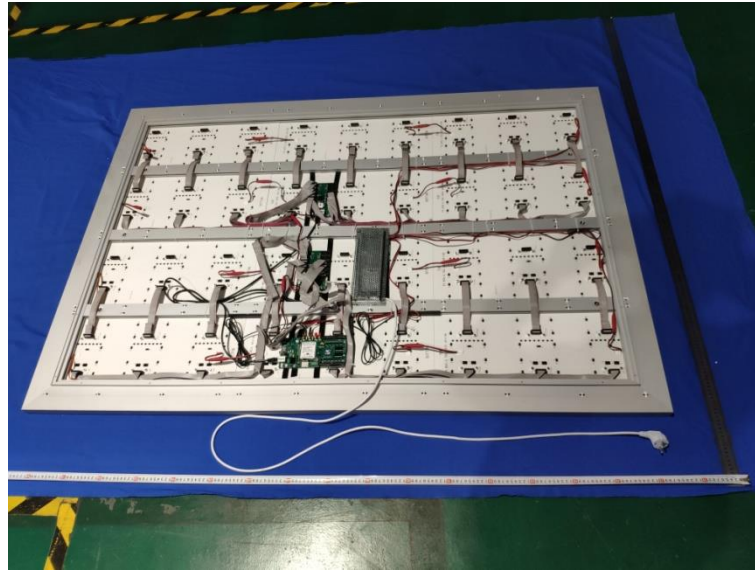

Internal photos

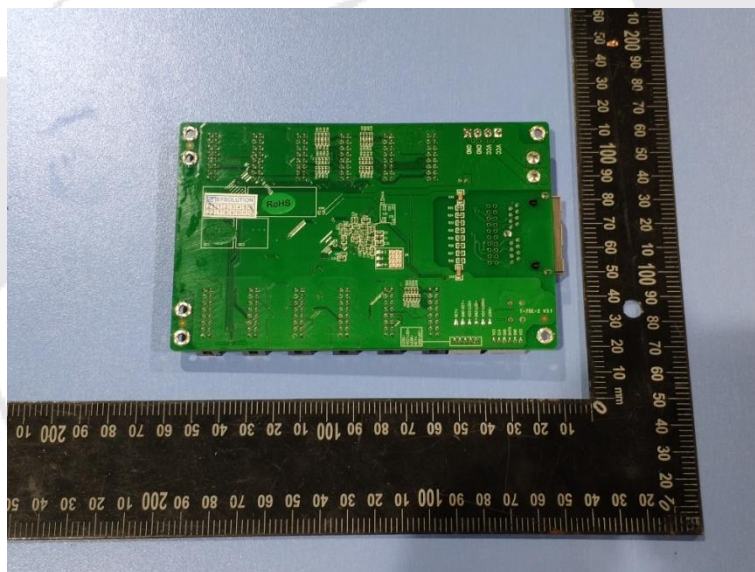
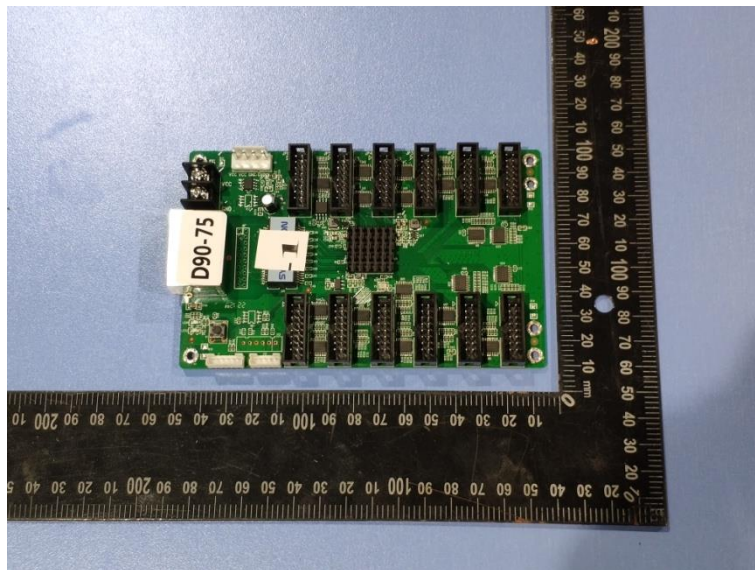


Internal photos

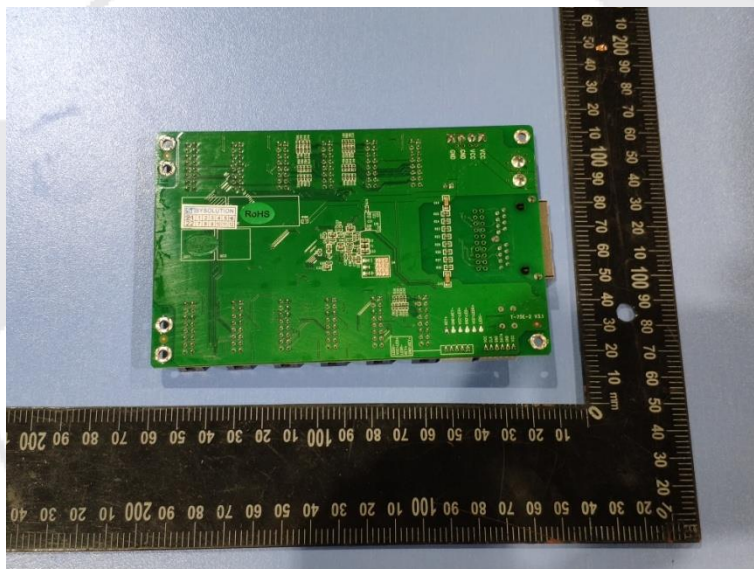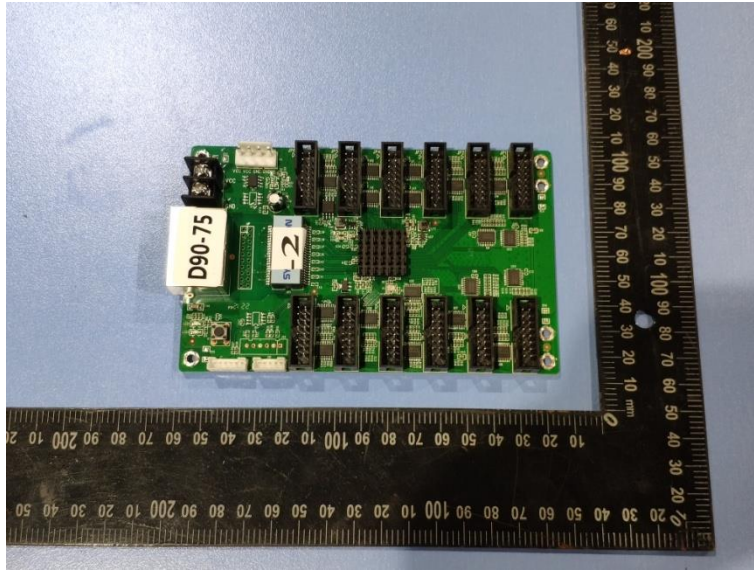



Internal photos

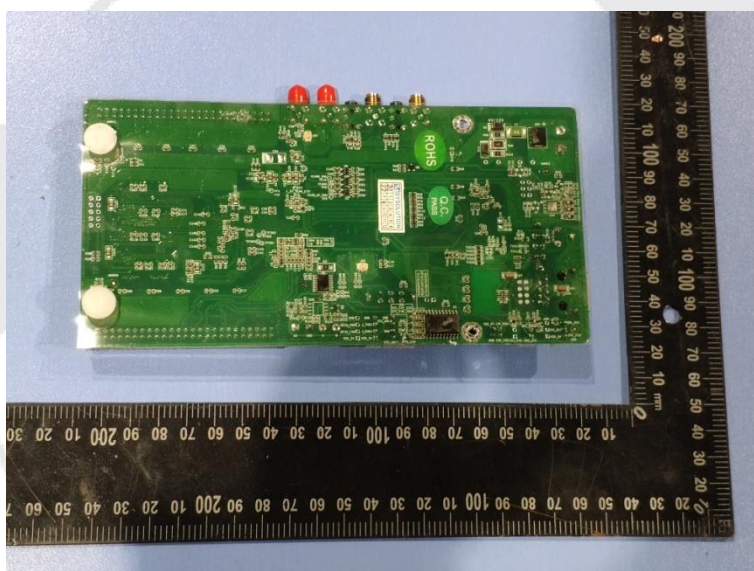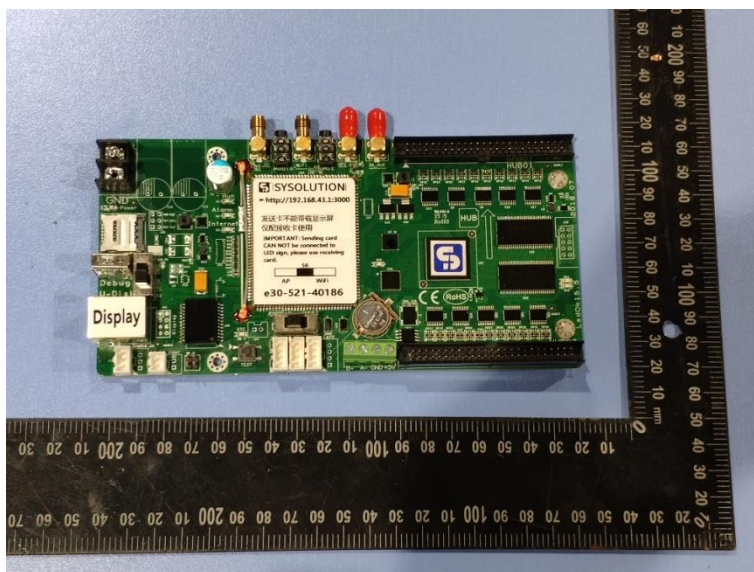

..... End of Report .....



# Statement

1. The calibration and measurement of test equipments used in our laboratory are traceable to National primary standard of measurement and BIPM.
2. The report is invalid without the special test seal of the company.
3. The test report is invalid without the signature of main tester,examiner and approver.
4. The report is invalid if altered and added or deleted.
5. The test results in this report only apply to the tested samples.
6. This test report shall not be reproduced except in full, without the written approval of our laboratory.
7. “☆”item cannot be Accredited by CNAS.
8. Any objections must be raised to KeySense within 15days since the date when report is received.

Test Laboratory: KeySense Testing & Certification International Co., Ltd.

Address: 1-3F,Lab Building,No.29 District,ZhongKai Hi-Tech Industrial  
Development Park,Huizhou,Guangdong,China

Postcode: 516006

Fax: 0752-3219929

Tel: 0752-3219929

E-mail: keysense@kst-cert.com