

TEST REPORT

Application No.: GZEM2206002984LM
Applicant: Blueview Elec-optic Tech Co., Ltd
Address of Applicant: No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Chengdu, Sichuan, China
Manufacturer: The same as applicant
Address of Manufacturer: The same as applicant
Factory: The same as applicant
Address of Factory: The same as applicant
Equipment Under Test (EUT):
EUT Name: Sealed lighting chain (LED strip)
Model No.: FWTU-XXXX-XXX-XX, FWTS-XXXX-XXX-XX, FWE-XXXX-XX-XX-XXX, NDFXXX, NCRXXXX, NDRXXX, NMRXXX, NSFXXXX, NSRXXXX, NMFXXXX, N2-X, WXXXXXX, FN-XXXX-XX-XX-XXX (X= X=0-9 or A-Z) ♣
 ♣ Please refer to section 2 of this report which indicates which item was actually tested and which were electrically identical.
Trade Mark: 
Standard(s) : EN IEC 55015: 2019+A11:2020
 EN IEC 61000-3-2: 2019+A1:2021
 EN 61000-3-3: 2013+A2:2021
 EN 61547: 2009
Date of Receipt: 2022-06-09
Date of Test: 2022-06-10 to 2022-07-06
Date of Issue: 2022-07-26

| | |
|---------------------|--------------|
| Test Result: | Pass* |
|---------------------|--------------|

* In the configuration tested, the EUT complied with the standards specified above.



Kobe Jian
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.198 Kexhu Road, Solentech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

| Revision Record | | | |
|-----------------|------------------|------------|----------|
| Version | Report No. | Date | Remark |
| 01 | GZEM220600298401 | 2022-07-26 | Original |
| | | | |
| | | | |

| | | | | |
|--------------------------|--|----------------------------|--|--|
| Authorized for issue by: | | | | |
| | | Pank Feng | | |
| | | Pank Feng/Project Engineer | | |
| | | Terry Lai | | |
| | | Terry Lai/Reviewer | | |

2 Test Summary

| Emission Part | | | | |
|--|--------------------------------|--------------------------------|-------------|--------|
| Item | Standard | Method | Requirement | Result |
| Conducted Emissions at Mains Terminals (9kHz-30MHz) | EN IEC 55015: 2019+A11:2020 | EN IEC 55015:2019 +A11:2020 | Table 1 | Pass |
| Radiated Emissions (Magnetic Field Induced Current) (9kHz-30MHz) | | EN IEC 55015:2019 +A11:2020 | Table 8 | Pass |
| Radiated Emissions (30MHz-1GHz) | | EN IEC 55015:2019 +A11:2020 | Table 10 | Pass |
| Harmonic Current Emission | EN IEC 61000-3-2: 2019+A1:2021 | EN IEC 61000-3-2: 2019+A1:2021 | Class C | Pass |
| Voltage Fluctuations and Flicker | EN 61000-3-3: 2013+A2:2021 | EN 61000-3-3: 2013+A2:2021 | Clause 5 | Pass |

| Immunity Part | | | | |
|--|----------------|---------------------------------------|---|--------|
| Item | Standard | Method | Requirement | Result |
| Electrostatic Discharge | EN 61547: 2009 | EN 61000-4-2:2009 | 4kV Contact Discharge, 8kV Air Discharge | Pass |
| Radiated Immunity (80MHz-1GHz) | | EN 61000-4-3: 2006 +A1: 2008+A2: 2010 | 3V/m, 80%, 1kHz Amp. Mod, 1% increment | Pass |
| Electrical Fast Transients Burst at AC Mains Power Port | | EN 61000-4-4:2012 | 1kV, 5/50ns Tr/Td, 5kHz Repetition Frequency | Pass |
| Surge at Power Port | | EN 61000-4-5:2014 +A1:2017 | 1.2/50μs Tr/Td, 0.5kV Line to Line | Pass |
| Conducted Immunity at AC Mains Power Port (150kHz-80MHz) | | EN 61000-4-6:2014 | 3Vrms (emf), 80%, 1kHz Amp. Mod. | Pass |
| Voltage Dips and Interruptions | | EN IEC 61000-4-11:2020 | 0 % UT for 0.5cycle, 70 % UT for 10cycles, UT is Supply Voltage | Pass |

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory

No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

✱Declaration of EUT Family Grouping:

Model No.: FWTU-XXXX-XXX-XX, FWTS-XXXX-XXX-XX, FWE-XXXX-XX-XX-XXX, NDFXXX, NCRXXXX, NDRXXX, NMRXXX, NSFXXXX, NSRXXXX, NMFXXXX, N2-X, WXXXXXX, FN-XXXX-XX-XX-XXX (X= X=0-9 or A-Z).

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference on the color temperature and appearance.

Therefore, only one model FWTU-2835T-112-24 was tested in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3 Contents

| | Page |
|---|-----------|
| 1 Cover Page | 1 |
| 2 Test Summary | 3 |
| 3 Contents..... | 5 |
| 4 General Information | 7 |
| 4.1 Details of E.U.T. | 7 |
| 4.2 Description of Support Units..... | 7 |
| 4.3 Measurement Uncertainty | 7 |
| 4.4 Test Location | 7 |
| 4.5 Test Facility | 8 |
| 4.6 Deviation from Standards..... | 9 |
| 4.7 Abnormalities from Standard Conditions | 9 |
| 4.8 EMS Monitor | 9 |
| 5 Equipment List | 10 |
| 6 Emission Test Results..... | 14 |
| 6.1 Conducted Emissions at Mains Terminals (9kHz-30MHz) | 14 |
| 6.1.1 E.U.T. Operation | 14 |
| 6.1.2 Test Mode Description | 14 |
| 6.1.3 Test Setup Diagram | 14 |
| 6.1.4 Measurement Procedure and Data | 14 |
| 6.2 Radiated Emissions (Magnetic Field Induced Current)(9kHz-30MHz) | 17 |
| 6.2.1 E.U.T. Operation | 17 |
| 6.2.2 Test Mode Description | 17 |
| 6.2.3 Test Setup Diagram | 17 |
| 6.2.4 Measurement Procedure and Data | 17 |
| 6.3 Radiated Emissions (30MHz-1GHz)..... | 21 |
| 6.3.1 E.U.T. Operation | 21 |
| 6.3.2 Test Mode Description | 21 |
| 6.3.3 Test Setup Diagram | 21 |
| 6.3.4 Measurement Procedure and Data | 21 |
| 6.4 Harmonic Current Emission..... | 24 |
| 6.4.1 E.U.T. Operation | 24 |
| 6.4.2 Test Mode Description | 24 |
| 6.4.3 Test Setup Diagram | 24 |
| 6.4.4 Measurement Procedure and Data | 24 |
| 6.5 Voltage Fluctuations and Flicker | 30 |
| 6.5.1 E.U.T. Operation | 30 |
| 6.5.2 Test Mode Description | 30 |
| 6.5.3 Test Setup Diagram | 30 |
| 6.5.4 Measurement Procedure and Data | 30 |
| 7 Immunity Test Results..... | 33 |
| 7.1 Electrostatic Discharge..... | 34 |
| 7.1.1 Test Setup Diagram | 34 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

| | | |
|-------|---|----|
| 7.1.2 | E.U.T. Operation | 34 |
| 7.1.3 | Test Mode Description | 34 |
| 7.1.4 | Test Condition and Results: | 34 |
| 7.2 | Radiated Immunity (80MHz-1GHz) | 36 |
| 7.2.1 | Test Setup Diagram | 36 |
| 7.2.2 | E.U.T. Operation | 36 |
| 7.2.3 | Test Mode Description | 36 |
| 7.2.4 | Test Condition and Results: | 36 |
| 7.3 | Electrical Fast Transients Burst at AC Mains Power Port | 37 |
| 7.3.1 | Test Setup Diagram | 37 |
| 7.3.2 | E.U.T. Operation | 37 |
| 7.3.3 | Test Mode Description | 37 |
| 7.3.4 | Test Condition and Results: | 37 |
| 7.4 | Surge at Power Port | 38 |
| 7.4.1 | Test Setup Diagram | 38 |
| 7.4.2 | E.U.T. Operation | 38 |
| 7.4.3 | Test Mode Description | 38 |
| 7.4.4 | Test Condition and Results: | 38 |
| 7.5 | Conducted Immunity at AC Mains Power Port (150kHz-80MHz)..... | 39 |
| 7.5.1 | Test Setup Diagram | 39 |
| 7.5.2 | E.U.T. Operation | 39 |
| 7.5.3 | Test Mode Description | 39 |
| 7.5.4 | Test Condition and Results: | 39 |
| 7.6 | Voltage Dips and Interruptions | 40 |
| 7.6.1 | Test Setup Diagram | 40 |
| 7.6.2 | E.U.T. Operation | 40 |
| 7.6.3 | Test Mode Description | 40 |
| 7.6.4 | Test Condition and Results: | 40 |
| 8 | Test Setup Photo..... | 41 |
| 9 | EUT Constructional Details (EUT Photos) | 48 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply: DC 24V (power by DC power)
Rated Power: 14.4W
Highest operating frequency:
Clock frequency: <30MHz
Cable(s): DC cable:0.3m unshielded

4.2 Description of Support Units

| Description | Manufacturer | Model No. | Serial No. |
|-----------------|--------------|---|------------|
| DC Power Supply | GWINSTEK | GPS-3030DD (Input: AC100-240V, 50/60Hz; Output: DC Max.30V, 3A) | EMC0008 |

4.3 Measurement Uncertainty

| Test Item | Measurement Uncertainty |
|---|--|
| Conducted Emissions at Mains Terminals (9kHz-30MHz) | 3.18dB (9kHz to 150kHz), 2.76dB (150kHz to 30MHz) |
| Radiated Emissions (Magnetic Field Induced Current) (9kHz-30MHz) | 3.08dB(9kHz to 150kHz), 3.12dB(150kHz to 30MHz)(LLAS) |
| Radiated Emissions (30MHz-1GHz) | 5.00dB (30MHz-1GHz):3m; 4.38dB (30MHz-1GHz):10m |
| Remark: The U_{lab} (lab Uncertainty) is less than U_{CISPR} (CISPR Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. | |

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

4.8 EMS Monitor

Visual: LED lighting



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5 Equipment List

| Conducted Emissions at Mains Terminals (9kHz-30MHz) | | | | | |
|---|-------------------|----------------|---------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| Coaxial Cable | HangTianXing | 2m | EMC0107 | 2020-09-09 | 2022-09-08 |
| Shielding Room | ChangZhou ZhongYu | 8m x 3m x 3.8m | EMC0306 | 2019-10-20 | 2022-10-19 |
| Two-Line V-Network-GZ | Rohde & Schwarz | ENV216 | EMC2135 | 2021-09-24 | 2022-09-23 |
| EMI Test Receiver (9kHz-3.6GHz) | Rohde & Schwarz | ESR3 | EMC2221 | 2022-05-20 | 2023-05-19 |
| Test Software E3r | Audix | Ver.6.11812 | GZE100-77 | N/A | N/A |
| Conical Metal Housing | SGS-EMC | N/A | EMC0167 | 2022-04-19 | 2024-04-18 |

| Radiated Emissions (Magnetic Field Induced Current)(9kHz-30MHz) | | | | | |
|---|-----------------|---------------|---------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| EMI Test Receiver (10Hz-26.5GHz) | Rohde & Schwarz | ESIB26 | EMC0522 | 2021-12-17 | 2022-12-16 |
| Test Software E3 | Audix | Ver.6.120110a | GZE100-61 | N/A | N/A |
| Coaxial Cable (RE 2m Loop) | INFINITE | CC223N-10 | EMC0703 | 2021-06-28 | 2023-06-27 |
| 2m Large Loop Antenna System (ZN3040) | ZHINAN | ZN3040 | EMC2187 | 2022-03-26 | 2024-03-25 |

| Radiated Emissions (30MHz-1GHz) | | | | | |
|---------------------------------------|--------------------------------|---------------|---------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| 10m Semi-Anechoic Chamber | ETS | N/A | EMC0530 | 2019-10-20 | 2022-10-19 |
| Chamber cable | HangTianXing | N/A | EMC0542 | 2020-09-09 | 2022-09-08 |
| Amplifier (9kHz-1.3GHz) | HP | 8447F | EMC2065 | 2022-06-21 | 2023-06-20 |
| EMI Test Receiver (1Hz-8GHz) | Rohde & Schwarz | ESW8 | EMC2220 | 2022-05-20 | 2023-05-19 |
| Test Software E3 | Audix | Ver.6.120110a | GZE100-61 | N/A | N/A |
| Trilog Broadband Antenna (25MHz-1GHz) | SCHWARZBECK MESS-ELEKTRONIK | VULB 9168 | EMC2174 | 2022-06-19 | 2025-06-18 |

Harmonic Current Emission

| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
|--|--------------|---------------|---------------|------------|--------------|
| Digital power analyzer for harmonics & flicker testing | EMTEST | DPA 500N | EMC2235 | 2022-04-21 | 2023-04-20 |
| Programmable multifunctional ac/dc power source | EMTEST | NETWAVE 7-400 | EMC2234 | 2022-04-21 | 2023-04-20 |
| NET.Control | EMTEST | Ver 3.2.0 | GZE100-80 | N/A | N/A |

Voltage Fluctuations and Flicker

| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
|--|--------------|---------------|---------------|------------|--------------|
| Digital power analyzer for harmonics & flicker testing | EMTEST | DPA 500N | EMC2235 | 2022-04-21 | 2023-04-20 |
| Programmable multifunctional ac/dc power source | EMTEST | NETWAVE 7-400 | EMC2234 | 2022-04-21 | 2023-04-20 |
| NET.Control | EMTEST | Ver 3.2.0 | GZE100-80 | N/A | N/A |

Electrostatic Discharge

| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
|------------------------|--|-----------|---------------|------------|--------------|
| Temperature & Humidity | Shanghai Meteorological Instrument Factory Co., Ltd. | ZJ1-2B | EMC0078 | 2022-06-26 | 2023-06-25 |
| ESD Ground Plane | SGS-EMC | 3m x 3m | EMC0804 | N/A | N/A |
| Aneroid Barometer | Shanghai Meteorological Instrument Factory Co., Ltd. | YM3 | EMC2181 | 2021-11-26 | 2022-11-25 |
| ESD Simulator-E | EMTEST | NX30 | EMC2186 | 2022-02-27 | 2023-02-26 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

| Radiated Immunity (80MHz-1GHz) | | | | | |
|---------------------------------------|------------------------------|--------------|---------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| 743 Compact 3m Semi-Anechoic Chamber | ChangZhou ZhongYu | N/A | EMC0525 | 2019-10-20 | 2022-10-19 |
| Monitor System | Mitsubish Corp. | M-0552AB | EMC0909 | N/A | N/A |
| Oscilloscope | Tektronix | TDS3052C | EMC2055 | 2021-11-23 | 2022-11-22 |
| Laser Probe Interface | RF Microwave Instrumentation | FI7000 | EMC2089 | N/A | N/A |
| Open Switch And Control Unit | Rohde & Schwarz | OSP130 | EMC2090 | N/A | N/A |
| Broadband Amplifier (80MHz~1GHz/250W) | Rohde & Schwarz | BBA150 | EMC2091 | 2021-12-17 | 2022-12-16 |
| Signal Generator (9kHz-6GHz) | Rohde & Schwarz | SMB100A | EMC2093 | 2021-12-17 | 2022-12-16 |
| Laser Probe | RF Microwave Instrumentation | FL7006 | EMC2094 | 2022-03-03 | 2023-03-02 |
| NRP-Z91 Power Sensor (9kHz-6GHz) | Rohde & Schwarz | NPR-Z91 | EMC2095 | 2021-12-17 | 2022-12-16 |
| NRP-Z91 Power Sensor (9kHz-6GHz) | Rohde & Schwarz | NPR-Z91 | EMC2096 | 2021-12-17 | 2022-12-16 |
| High-Gain Log-preiodic Antenna | Rohde & Schwarz | HL046E | EMC2097 | 2022-02-14 | 2025-02-13 |
| RI Cable | Rohde & Schwarz | 7m | EMC2098 | 2022-05-20 | 2023-05-19 |
| Test Software EMC32 | Rohde & Schwarz | Ver. 9.26.00 | GZE100-63 | N/A | N/A |

| Electrical Fast Transients Burst at AC Mains Power Port | | | | | |
|---|--------------|--------------------------------|---------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| Oscilloscope | Tektronix | TDS3052C | EMC2055 | 2021-11-23 | 2022-11-22 |
| EMC Immunity Test System | TESEQ AG | NSG 3060&CDN306 1&INA 6502 CIB | EMC2072 | 2021-12-17 | 2022-12-16 |
| Test Software WIN 3000 | TESEQ AG | Ver 1.3.2 | GZE100-68 | N/A | N/A |

| Surge at Power Port | | | | | |
|--------------------------|--------------|--------------------------------|---------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| Oscilloscope | Tektronix | TDS3052C | EMC2055 | 2021-11-23 | 2022-11-22 |
| EMC Immunity Test System | TESEQ AG | NSG 3060&CDN306 1&INA 6502 CIB | EMC2072 | 2021-12-17 | 2022-12-16 |
| Test Software WIN 3000 | TESEQ AG | Ver 1.3.2 | GZE100-68 | N/A | N/A |



| Conducted Immunity at AC Mains Power Port (150kHz-80MHz) | | | | | |
|--|-------------------------|--------------|---------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| Dual Directional coupler | Werlatone Inc. | C1795 | EMC1105 | 2022-05-16 | 2023-05-15 |
| CDN M2 | Schaffner Chase | CDN-M2-16 | EMC1107 | 2020-10-23 | 2023-10-22 |
| CDN M2/M3 | Elektronik-Feinmechanik | L-801:M2/M3 | EMC2048 | 2020-08-21 | 2022-08-20 |
| Test System for Conducted and Radiated Immunity | TESEQ AG | NSG 4070B-80 | EMC2115 | 2021-11-23 | 2022-11-22 |
| Test Software NSG4070_Ctrl1 | TESEQ AG | Ver.1.3.0.1 | GZE100-72 | N/A | N/A |
| Oscilloscope | Tektronix | TDS3052C | EMC2055 | 2021-11-23 | 2022-11-22 |

| Voltage Dips and Interruptions | | | | | |
|--------------------------------|--------------|--------------------------------|---------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| Oscilloscope | Tektronix | TDS3052C | EMC2055 | 2021-11-23 | 2022-11-22 |
| EMC Immunity Test System | TESEQ AG | NSG 3060&CDN306 1&INA 6502 CIB | EMC2072 | 2021-12-17 | 2022-12-16 |
| Test Software WIN 3000 | TESEQ AG | Ver 1.3.2 | GZE100-68 | N/A | N/A |

| General used equipment | | | | | |
|------------------------|--------------|----------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| DMM | Fluke | 73 | EMC0006 | 2022-06-24 | 2023-06-23 |
| DMM | Fluke | 73 | EMC0007 | 2022-06-24 | 2023-06-23 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (9kHz-30MHz)

| | |
|--------------------|--|
| Test Requirement: | EN IEC 55015: 2019+A11:2020 |
| Test Method: | EN IEC 55015:2019+A11:2020 |
| Limit: | |
| 0.009MHz – 0.05MHz | 110dB(μV) quasi-peak |
| 0.05MHz – 0.15MHz | 90dB(μV)-80dB(μV) quasi-peak |
| 0.15MHz – 0.5MHz | 66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average |
| 0.5MHz – 5MHz | 56dB(μV) quasi-peak, 46dB(μV) average |
| 5MHz – 30MHz | 60dB(μV) quasi-peak, 50dB(μV) average |
| Detector: | Peak for pre-scan (200Hz resolution bandwidth) 0.009M to 0.15MHz Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz |


6.1.1 E.U.T. Operation

| | |
|------------------------|-----------|
| Operating Environment: | |
| Temperature: | 22.7 °C |
| Humidity: | 52.1 % RH |
| Atmospheric Pressure: | 1005 mbar |

6.1.2 Test Mode Description

| Pre-scan / Mode | Description |
|-----------------|------------------------------------|
| Final test Code | |
| Final test 00 | Test the EUT in LED lighting mode. |

6.1.3 Test Setup Diagram

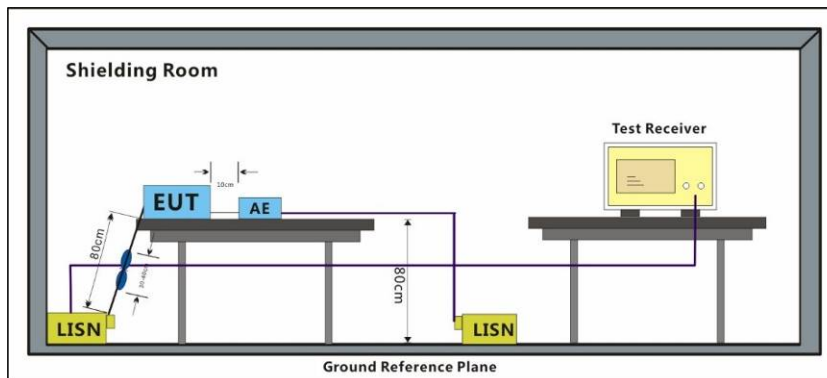


6.1.4 Measurement Procedure and Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

The red line show in graphic is the limit in standard used in this section.

Remark: Level= Read Level+ Cable Loss+ LISN Factor

Test Mode: 00; Line: Live line

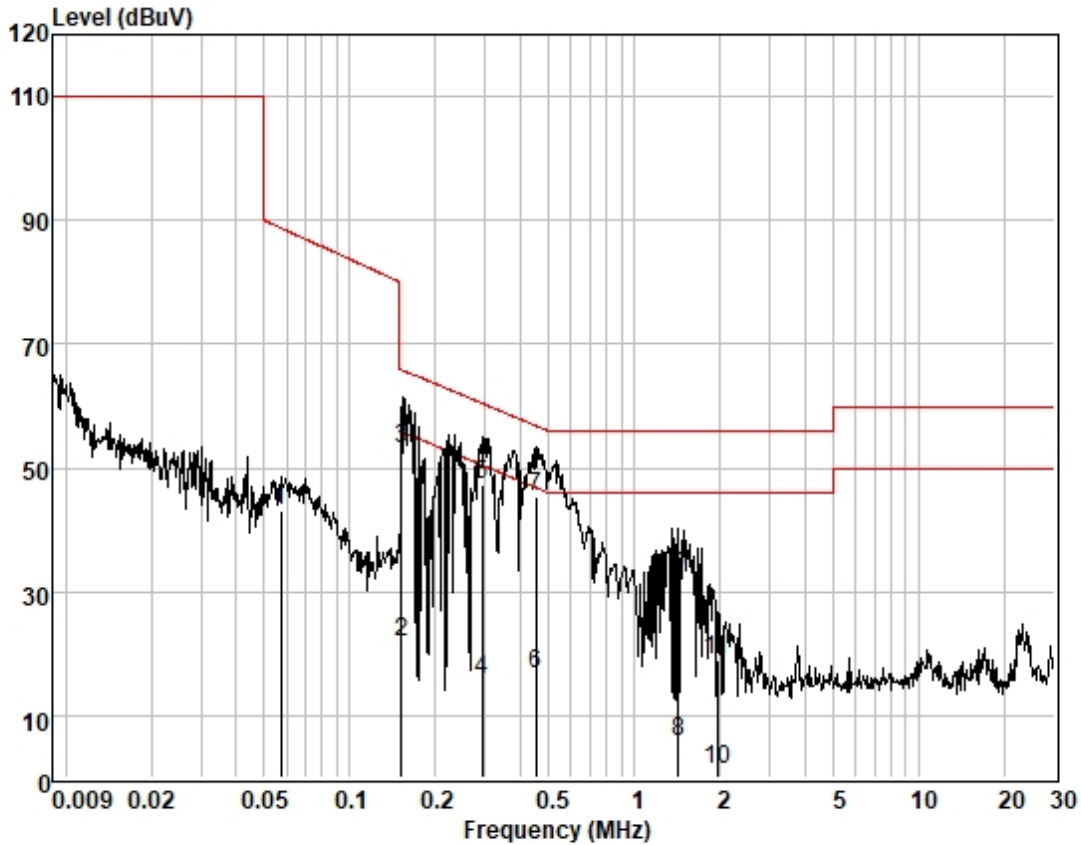

Condition: LINE


Mode :

Model :

| | Freq | Read Level | Cable Loss | LISN Factor | Level | Limit Line | Over Limit | Remark |
|----|-------|------------|------------|-------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.057 | 33.71 | 0.05 | 9.48 | 43.24 | 88.78 | -45.54 | QP |
| 2 | 0.152 | 12.21 | 0.06 | 9.54 | 21.81 | 55.87 | -34.06 | Average |
| 3 | 0.152 | 43.41 | 0.06 | 9.54 | 53.01 | 65.87 | -12.86 | QP |
| 4 | 0.291 | 6.25 | 0.06 | 9.57 | 15.88 | 50.50 | -34.62 | Average |
| 5 | 0.291 | 37.55 | 0.06 | 9.57 | 47.18 | 60.50 | -13.32 | QP |
| 6 | 0.452 | 7.01 | 0.06 | 9.59 | 16.66 | 46.85 | -30.19 | Average |
| 7 | 0.452 | 35.60 | 0.06 | 9.59 | 45.25 | 56.85 | -11.60 | QP |
| 8 | 1.426 | -3.77 | 0.09 | 9.60 | 5.92 | 46.00 | -40.08 | Average |
| 9 | 1.426 | 22.71 | 0.09 | 9.60 | 32.40 | 56.00 | -23.60 | QP |
| 10 | 1.959 | -8.32 | 0.12 | 9.60 | 1.40 | 46.00 | -44.60 | Average |
| 11 | 1.959 | 9.31 | 0.12 | 9.60 | 19.03 | 56.00 | -36.97 | QP |



Test Mode: 00; Line: Neutral Line

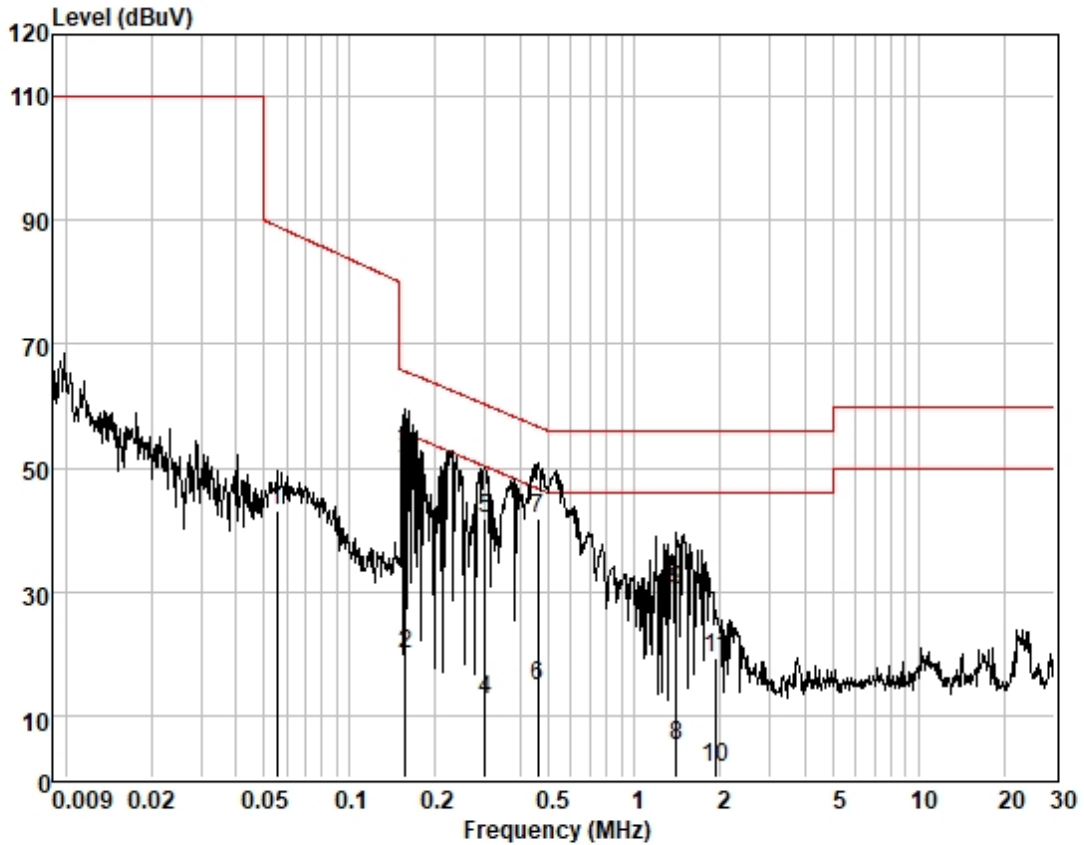

Condition: NEUTRAL

Mode :

Model :

| | Freq | Read Level | Cable Loss | LISN Factor | Level | Limit Line | Over Limit | Remark |
|----|-------|------------|------------|-------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.055 | 33.48 | 0.05 | 9.46 | 42.99 | 89.07 | -46.08 | QP |
| 2 | 0.156 | 10.36 | 0.06 | 9.53 | 19.95 | 55.65 | -35.70 | Average |
| 3 | 0.156 | 41.57 | 0.06 | 9.53 | 51.16 | 65.65 | -14.49 | QP |
| 4 | 0.299 | 2.84 | 0.06 | 9.57 | 12.47 | 50.28 | -37.81 | Average |
| 5 | 0.299 | 32.34 | 0.06 | 9.57 | 41.97 | 60.28 | -18.31 | QP |
| 6 | 0.459 | 5.18 | 0.07 | 9.58 | 14.83 | 46.71 | -31.88 | Average |
| 7 | 0.459 | 32.10 | 0.07 | 9.58 | 41.75 | 56.71 | -14.96 | QP |
| 8 | 1.411 | -4.64 | 0.09 | 9.59 | 5.04 | 46.00 | -40.96 | Average |
| 9 | 1.411 | 20.43 | 0.09 | 9.59 | 30.11 | 56.00 | -25.89 | QP |
| 10 | 1.949 | -8.06 | 0.12 | 9.59 | 1.65 | 46.00 | -44.35 | Average |
| 11 | 1.949 | 9.48 | 0.12 | 9.59 | 19.19 | 56.00 | -36.81 | QP |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.2 Radiated Emissions (Magnetic Field Induced Current)(9kHz-30MHz)

| | |
|-------------------|--|
| Test Requirement: | EN IEC 55015: 2019+A11:2020 |
| Test Method: | EN IEC 55015:2019+A11:2020 |
| Limit: | |
| 0.009MHz-0.07MHz | 88dB(μA) quasi-peak |
| 0.07MHz-0.15MHz | 88dB(μA)-58dB(μA) quasi-peak |
| 0.15MHz-3MHz | 58dB(μA)-22dB(μA) quasi-peak |
| 3MHz-30MHz | 22dB(μA) quasi-peak |
| Detector: | Peak for pre-scan (200Hz resolution bandwidth) 0.009M to 0.15MHz Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz |


6.2.1 E.U.T. Operation

| | | | | | |
|------------------------|---------|-----------|-----------|-----------------------|-----------|
| Operating Environment: | | | | | |
| Temperature: | 22.1 °C | Humidity: | 58.3 % RH | Atmospheric Pressure: | 1000 mbar |

6.2.2 Test Mode Description

| Pre-scan / | Mode | Description |
|------------|------|------------------------------------|
| Final test | Code | |
| Final test | 00 | Test the EUT in LED lighting mode. |

6.2.3 Test Setup Diagram

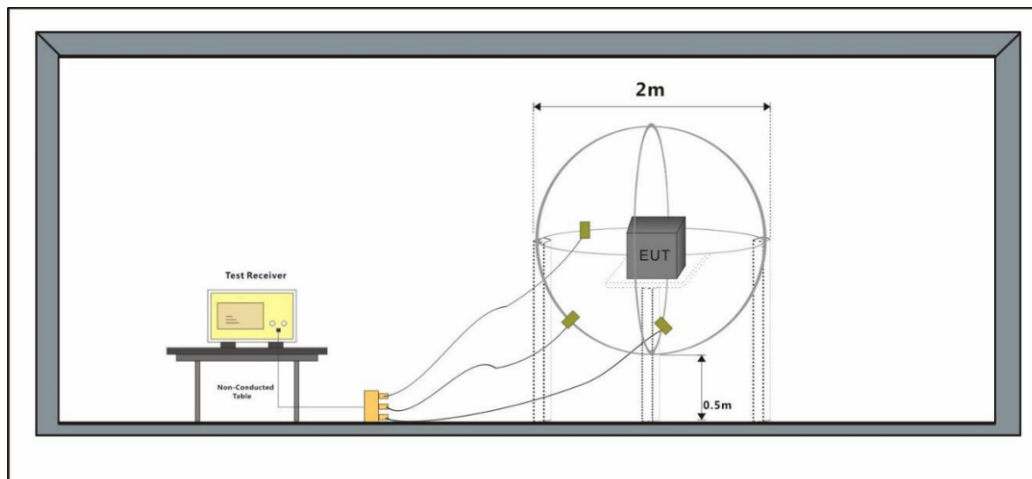


6.2.4 Measurement Procedure and Data

An initial pre-scan was performed in the 2m loop antenna using the spectrum analyser in peak detection mode. The EUT was measured for X(A), Y(B), Z(C) polarities.

Remark: Level= Read Level + Cable Loss + Antenna Factor


Test Mode: 00; Axial:X

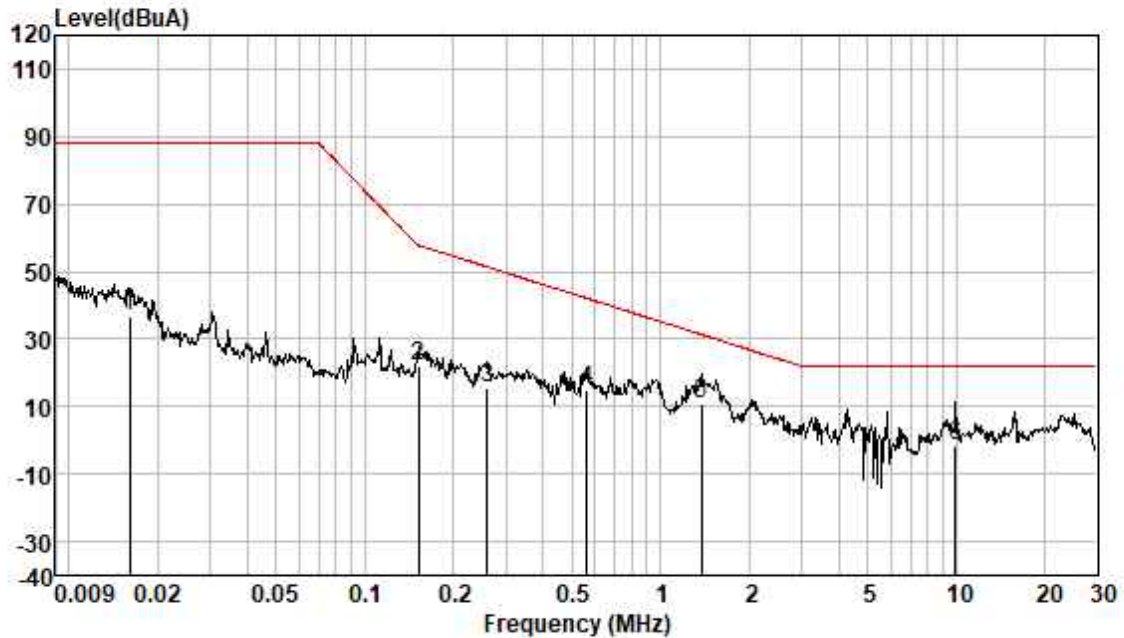

loop : X
Test Mode:
Model :

| Frequency MHz | Read level dBuV | Cable Loss dB | Antenna Factor dB | Measured level dBuA | Limit Line dBuA | Over limit dB | Remark |
|------------------|-----------------------|---------------------|-------------------------|---------------------------|-----------------------|---------------------|--------|
| 0.02 | 36.82 | 0.00 | -0.04 | 36.78 | 88.00 | -51.22 | QP |
| 0.15 | 21.90 | 0.10 | -0.17 | 21.83 | 57.89 | -36.06 | QP |
| 0.26 | 15.69 | 0.10 | -0.14 | 15.65 | 51.45 | -35.80 | QP |
| 0.56 | 14.65 | 0.10 | 0.00 | 14.75 | 42.09 | -27.34 | QP |
| 1.38 | 10.53 | 0.14 | 0.16 | 10.83 | 31.37 | -20.54 | QP |
| 9.95 | -3.12 | 0.60 | 0.90 | -1.62 | 22.00 | -23.62 | QP |


Test Mode: 00; Axial:Y

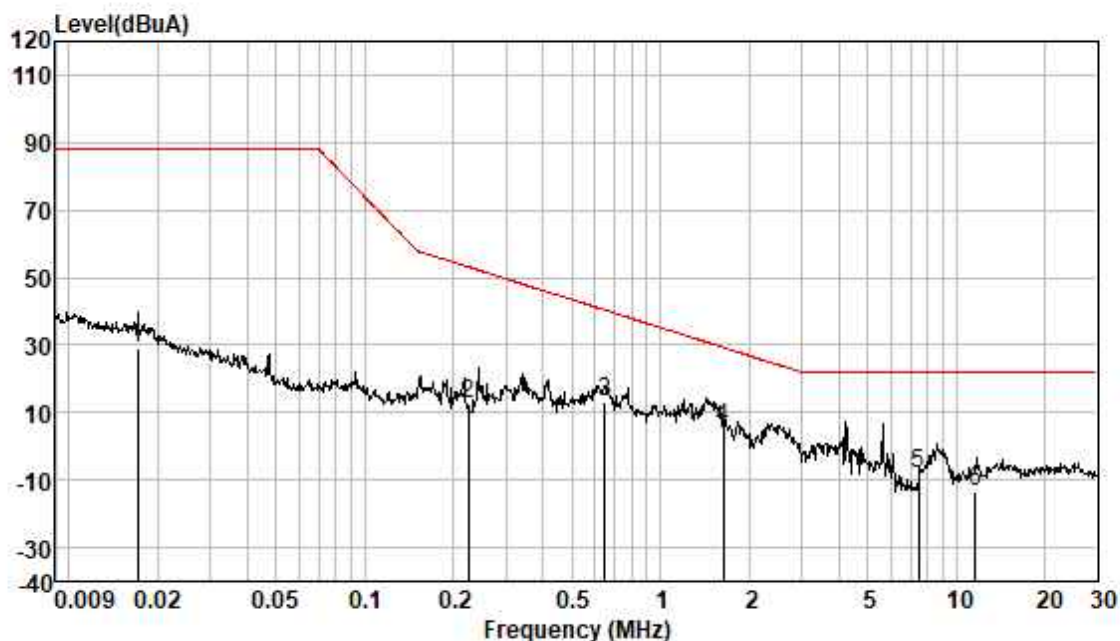

loop : Y
Test Mode:
Model :

| Frequency MHz | Read level dBuV | Cable Loss dB | Antenna Factor dB | Measured level dBuA | Limit Line dBuA | Over limit dB | Remark |
|------------------|-----------------------|---------------------|-------------------------|---------------------------|-----------------------|---------------------|--------|
| 0.02 | 29.62 | 0.00 | -0.46 | 29.16 | 88.00 | -58.84 | QP |
| 0.22 | 12.50 | 0.10 | -0.18 | 12.42 | 53.22 | -40.80 | QP |
| 0.65 | 13.23 | 0.10 | -0.20 | 13.13 | 40.43 | -27.30 | QP |
| 1.64 | 5.45 | 0.18 | -0.04 | 5.59 | 29.29 | -23.70 | QP |
| 7.45 | -9.46 | 0.50 | 0.60 | -8.36 | 22.00 | -30.36 | QP |
| 11.62 | -14.96 | 0.60 | 0.79 | -13.57 | 22.00 | -35.57 | QP |

Test Mode: 00; Axial:Z

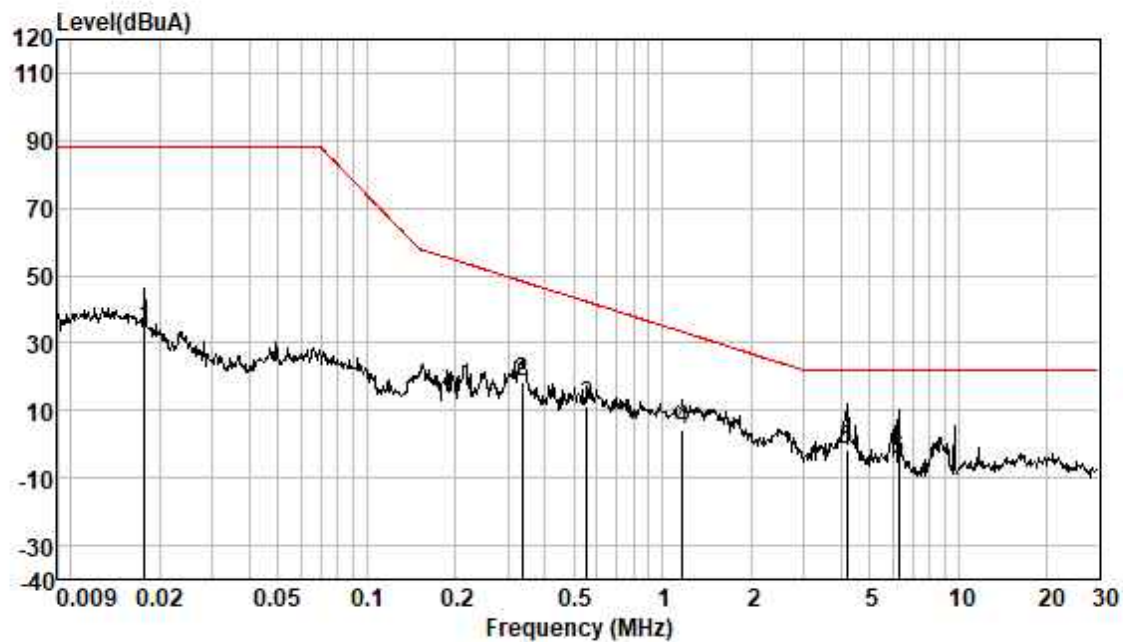

loop : Z
Test Mode:
Model :

| Frequency MHz | Read level dBuV | Cable Loss dB | Antenna Factor dB | Measured level dBuA | Limit Line dBuA | Over limit dB | Remark |
|------------------|-----------------------|---------------------|-------------------------|---------------------------|-----------------------|---------------------|--------|
| 0.02 | 34.03 | 0.00 | 0.08 | 34.11 | 88.00 | -53.89 | QP |
| 0.34 | 18.10 | 0.10 | -0.03 | 18.17 | 48.33 | -30.16 | QP |
| 0.55 | 11.67 | 0.10 | -0.26 | 11.51 | 42.29 | -30.78 | QP |
| 1.17 | 4.05 | 0.11 | -0.06 | 4.10 | 33.32 | -29.22 | QP |
| 4.21 | -2.25 | 0.40 | 0.41 | -1.44 | 22.00 | -23.44 | QP |
| 6.27 | -5.31 | 0.50 | 0.52 | -4.29 | 22.00 | -26.29 | QP |

6.3 Radiated Emissions (30MHz-1GHz)

| | |
|-------------------|--|
| Test Requirement: | EN IEC 55015: 2019+A11:2020 |
| Test Method: | EN IEC 55015:2019+A11:2020 |
| Limit: | |
| Test Distance: | 10m |
| 30MHz-230MHz | 30 dB(μV/m) quasi-peak |
| 230MHz-1GHz | 37 dB(μV/m) quasi-peak |
| Detector: | Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz |


6.3.1 E.U.T. Operation

| | | | |
|------------------------|---------|-----------------------|-----------|
| Operating Environment: | | | |
| Temperature: | 22.1 °C | Humidity: | 58.4 % RH |
| | | Atmospheric Pressure: | 1000 mbar |

6.3.2 Test Mode Description

| Pre-scan / Mode | Description |
|-----------------|------------------------------------|
| Final test Code | |
| Final test 00 | Test the EUT in LED lighting mode. |

6.3.3 Test Setup Diagram

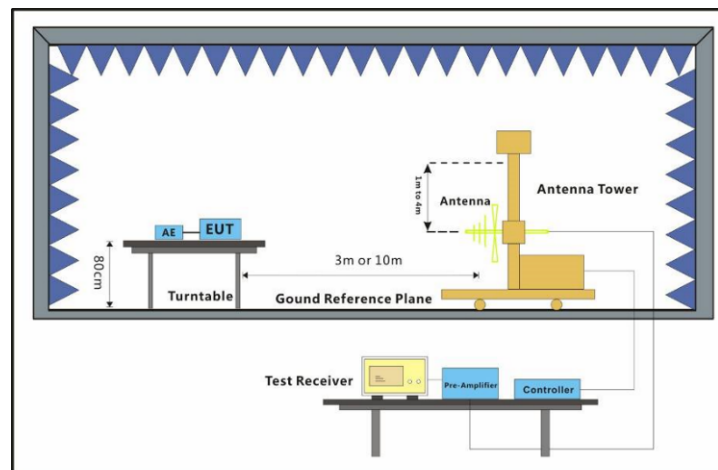


6.3.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

The red line show in graphic is the limit in standard used in this section.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Test Mode: 00; Polarity: Horizontal

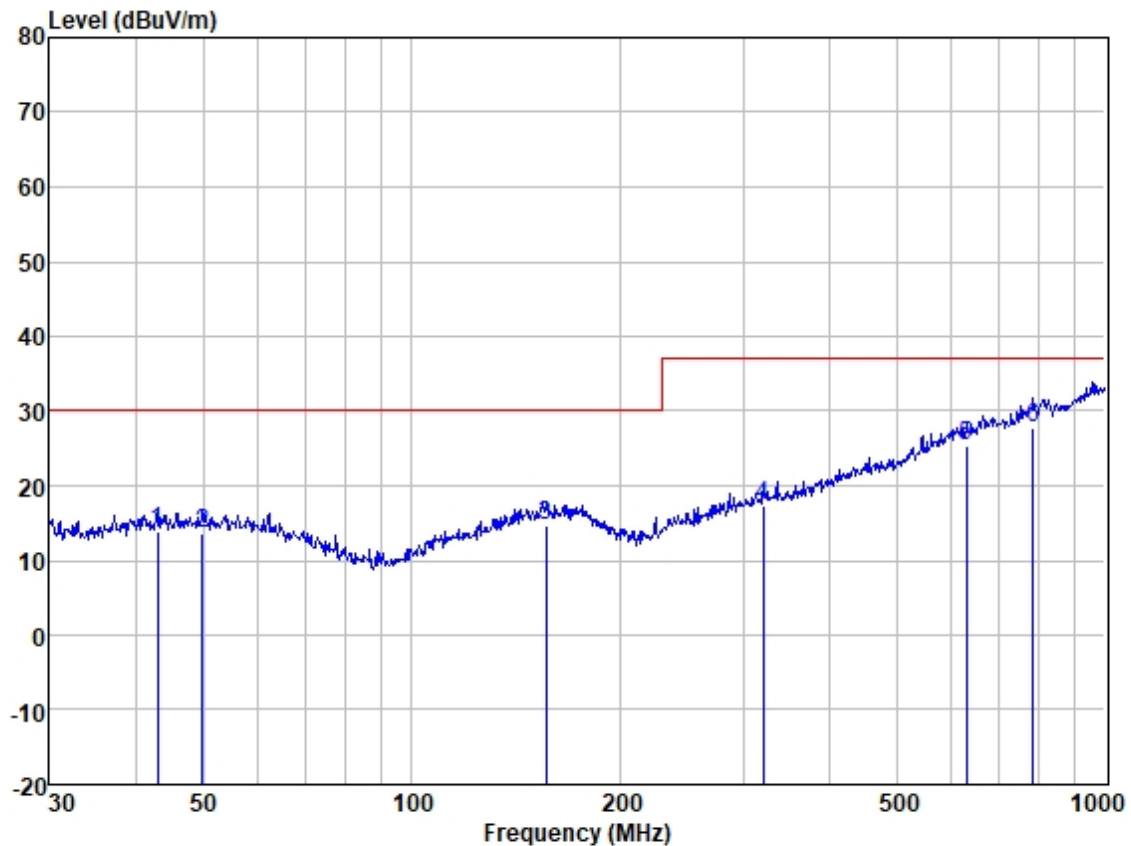

Site : SGS
Job :
Model :
Power :
Test Mode :

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamplifier Factor | Measured Level | Limit Line | Over Limit | Pol/Phase | Remark |
|---|---------|------------|----------------|------------|---------------------|----------------|------------|------------|------------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 42.900 | 26.09 | 13.75 | 1.11 | 27.10 | 13.85 | 30.00 | -16.15 | HORIZONTAL | QP |
| 2 | 49.881 | 25.47 | 13.98 | 1.14 | 27.10 | 13.49 | 30.00 | -16.51 | HORIZONTAL | QP |
| 3 | 155.910 | 25.36 | 13.61 | 2.30 | 26.69 | 14.58 | 30.00 | -15.42 | HORIZONTAL | QP |
| 4 | 321.061 | 26.53 | 14.05 | 3.32 | 26.61 | 17.29 | 37.00 | -19.71 | HORIZONTAL | QP |
| 5 | 629.477 | 28.09 | 20.01 | 5.33 | 28.17 | 25.26 | 37.00 | -11.74 | HORIZONTAL | QP |
| 6 | 787.851 | 26.88 | 22.55 | 6.11 | 27.92 | 27.62 | 37.00 | -9.38 | HORIZONTAL | QP |

Test Mode: 00; Polarity: Vertical

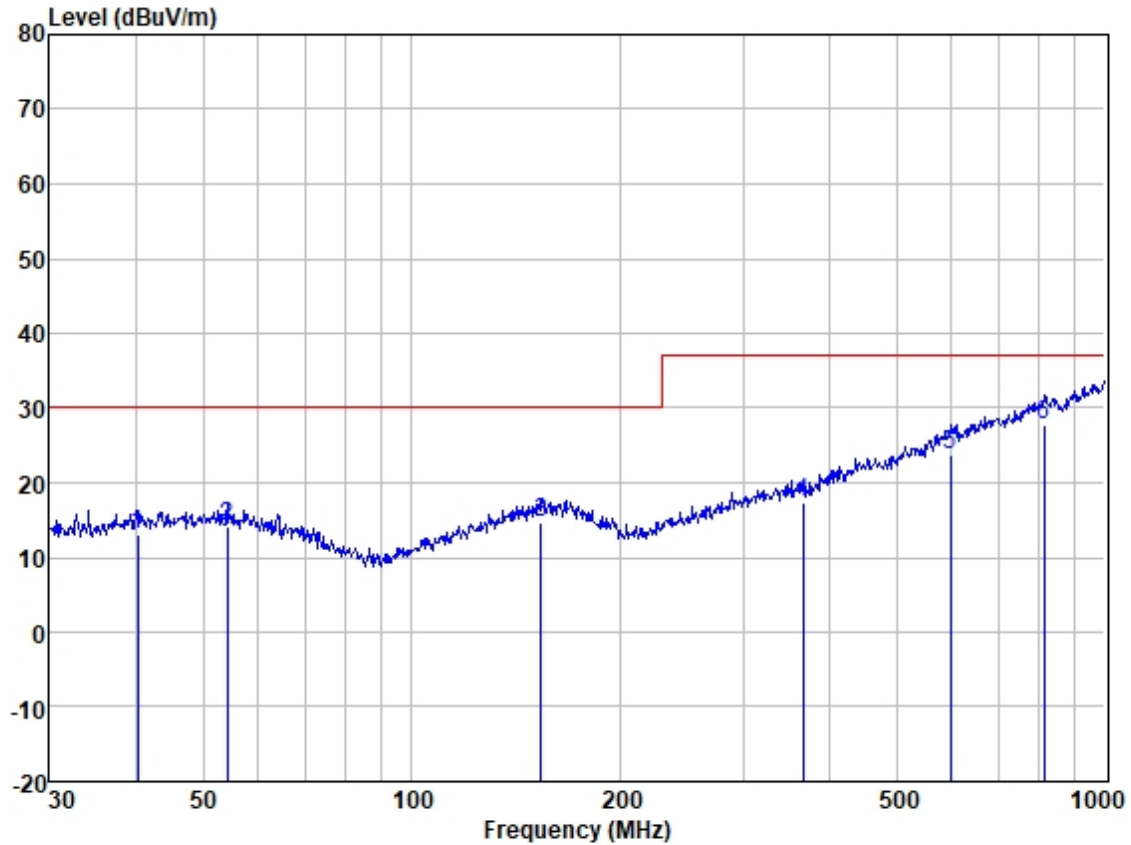

Site : SGS
Job :
Model :
Power :
Test Mode :

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamplifier Factor | Measured Level | Limit Line | Over Limit | Pol/Phase | Remark |
|---|---------|------------|----------------|------------|---------------------|----------------|------------|------------|-----------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 40.135 | 25.67 | 13.50 | 1.10 | 27.10 | 13.17 | 30.00 | -16.83 | VERTICAL | QP |
| 2 | 54.071 | 26.12 | 13.86 | 1.18 | 27.09 | 14.07 | 30.00 | -15.93 | VERTICAL | QP |
| 3 | 153.739 | 25.58 | 13.59 | 2.28 | 26.70 | 14.75 | 30.00 | -15.25 | VERTICAL | QP |
| 4 | 366.823 | 25.88 | 14.76 | 3.76 | 27.06 | 17.34 | 37.00 | -19.66 | VERTICAL | QP |
| 5 | 597.223 | 26.67 | 20.11 | 5.14 | 28.20 | 23.72 | 37.00 | -13.28 | VERTICAL | QP |
| 6 | 815.968 | 26.00 | 23.33 | 6.23 | 27.88 | 27.68 | 37.00 | -9.32 | VERTICAL | QP |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.4 Harmonic Current Emission

Test Requirement: EN IEC 61000-3-2: 2019+A1:2021

Test Method: EN IEC 61000-3-2: 2019+A1:2021

6.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 56.6 % RH

Atmospheric Pressure: 1000 mbar

6.4.2 Test Mode Description

| Pre-scan / Mode | Description |
|-----------------|------------------------------------|
| Final test Code | |
| Final test 00 | Test the EUT in LED lighting mode. |

6.4.3 Test Setup Diagram

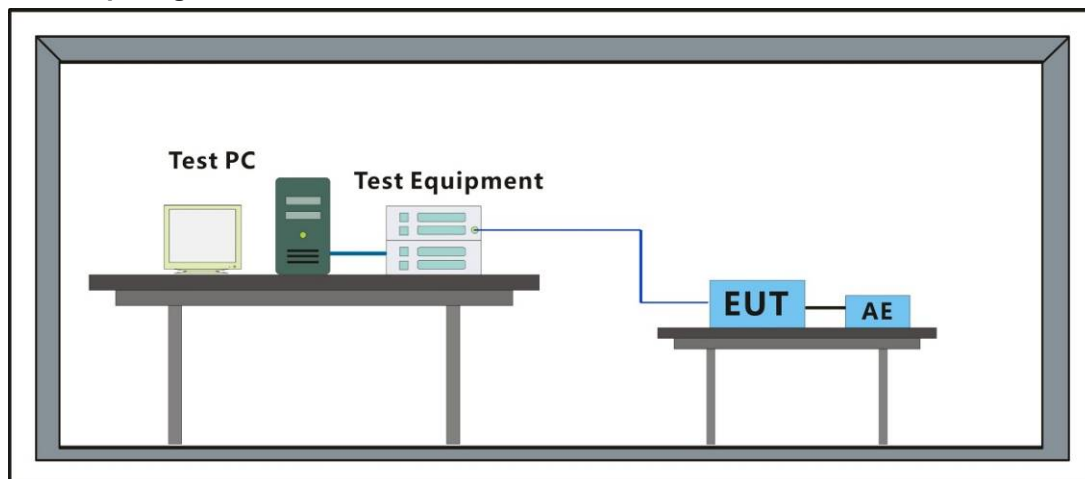

6.4.4 Measurement Procedure and Data

Frequency Range: 100Hz to 2kHz

Test Mode: 00

Standard Specific Results for IEC 61000-3-2 (Edition 5.1)

Standard Group: Industry

Standard Name: IEC 61000-3-2 (Edition 5.1)

Limits for harmonic current emissions (equipment input current < 16 A per phase)

Device Under Test: PASS

Power Source: PASS

Connection Type: L - N

Main Line: 230 V, 50 Hz

Classification: Class C (Rated power ≥ 5 W and ≤ 25 W, Power-related limits)

Appli. of Limits: less than or equal to 150 % (Without POHC Enhancement)

Test Duration: 2 min 30 s

Check Harmonics 2..40

First detected harmonic order > 150 %

Line 1: None

Harmonics orders > 150 %

Line 1: None

Harmonics orders with average > 100 %

Line 1: None

Measured values

Fundamental Current

Line 1: 0.108 A

Active input Power

Line 1: 24.17 W *

Circuit power factor

Line 1: 0.965 *

* Absolute value.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Current Test Result

| Average and Maximum harmonic current results | | | | | | | | | |
|--|----------------------|--------------|-----------|--------|----------------------|--------------|-----------|--------|-----------------|
| Hn | Average | | | | Maximum | | | | Harmonic Result |
| | I _{eff} [A] | of Limit [%] | Limit [A] | Result | I _{eff} [A] | of Limit [%] | Limit [A] | Result | |
| 1 | 0.107 | | | | 0.108 | | | | |
| 2 | 0.001 | | | | 0.001 | | | | |
| 3 | 0.009 | 11.507 | 0.082 | PASS | 0.010 | 8.189 | 0.123 | PASS | PASS |
| 4 | 0.001 | | | | 0.001 | | | | |
| 5 | 0.005 | 11.518 | 0.046 | PASS | 0.005 | 7.832 | 0.069 | PASS | PASS |
| 6 | 0.001 | | | | 0.001 | | | | |
| 7 | 0.003 | 13.974 | 0.024 | n/a | 0.004 | 9.665 | 0.036 | n/a | PASS |
| 8 | 0.002 | | | | 0.002 | | | | |
| 9 | 0.002 | 18.239 | 0.012 | n/a | 0.002 | 12.664 | 0.018 | n/a | PASS |
| 10 | 0.001 | | | | 0.001 | | | | |
| 11 | 0.001 | 13.795 | 0.008 | n/a | 0.001 | 10.117 | 0.013 | n/a | PASS |
| 12 | 0.001 | | | | 0.001 | | | | |
| 13 | 0.001 | 13.936 | 0.007 | n/a | 0.001 | 10.098 | 0.011 | n/a | PASS |
| 14 | 0.001 | | | | 0.001 | | | | |
| 15 | 0.001 | 17.930 | 0.006 | n/a | 0.001 | 12.795 | 0.009 | n/a | PASS |
| 16 | 0.001 | | | | 0.001 | | | | |
| 17 | 0.001 | 18.227 | 0.005 | n/a | 0.001 | 13.473 | 0.008 | n/a | PASS |
| 18 | 0.001 | | | | 0.001 | | | | |
| 19 | 0.001 | 13.351 | 0.005 | n/a | 0.001 | 10.056 | 0.007 | n/a | PASS |
| 20 | 0.001 | | | | 0.001 | | | | |
| 21 | 0.001 | 16.668 | 0.004 | n/a | 0.001 | 12.396 | 0.007 | n/a | PASS |
| 22 | 0.001 | | | | 0.001 | | | | |
| 23 | 0.001 | 21.067 | 0.004 | n/a | 0.001 | 20.128 | 0.006 | n/a | PASS |
| 24 | 0.001 | | | | 0.002 | | | | |
| 25 | 0.001 | 33.899 | 0.004 | n/a | 0.002 | 28.102 | 0.006 | n/a | PASS |
| 26 | 0.001 | | | | 0.001 | | | | |
| 27 | 0.001 | 19.776 | 0.003 | n/a | 0.001 | 19.104 | 0.005 | n/a | PASS |
| 28 | 0.001 | | | | 0.001 | | | | |
| 29 | 0.001 | 27.673 | 0.003 | n/a | 0.001 | 20.336 | 0.005 | n/a | PASS |
| 30 | 0.001 | | | | 0.001 | | | | |
| 31 | 0.001 | 23.635 | 0.003 | n/a | 0.001 | 17.009 | 0.005 | n/a | PASS |
| 32 | 0.001 | | | | 0.001 | | | | |
| 33 | 0.001 | 24.583 | 0.003 | n/a | 0.001 | 18.572 | 0.004 | n/a | PASS |
| 34 | 0.001 | | | | 0.001 | | | | |
| 35 | 0.001 | 23.162 | 0.003 | n/a | 0.001 | 17.236 | 0.004 | n/a | PASS |
| 36 | 0.001 | | | | 0.001 | | | | |
| 37 | 0.001 | 26.995 | 0.003 | n/a | 0.001 | 20.463 | 0.004 | n/a | PASS |
| 38 | 0.001 | | | | 0.001 | | | | |
| 39 | 0.001 | 26.529 | 0.002 | n/a | 0.001 | 19.764 | 0.004 | n/a | PASS |
| 40 | 0.001 | | | | 0.001 | | | | |

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Technical Services Co., Ltd. EEC Laboratory

No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Time Window 1

Time Domain of Time Window 1

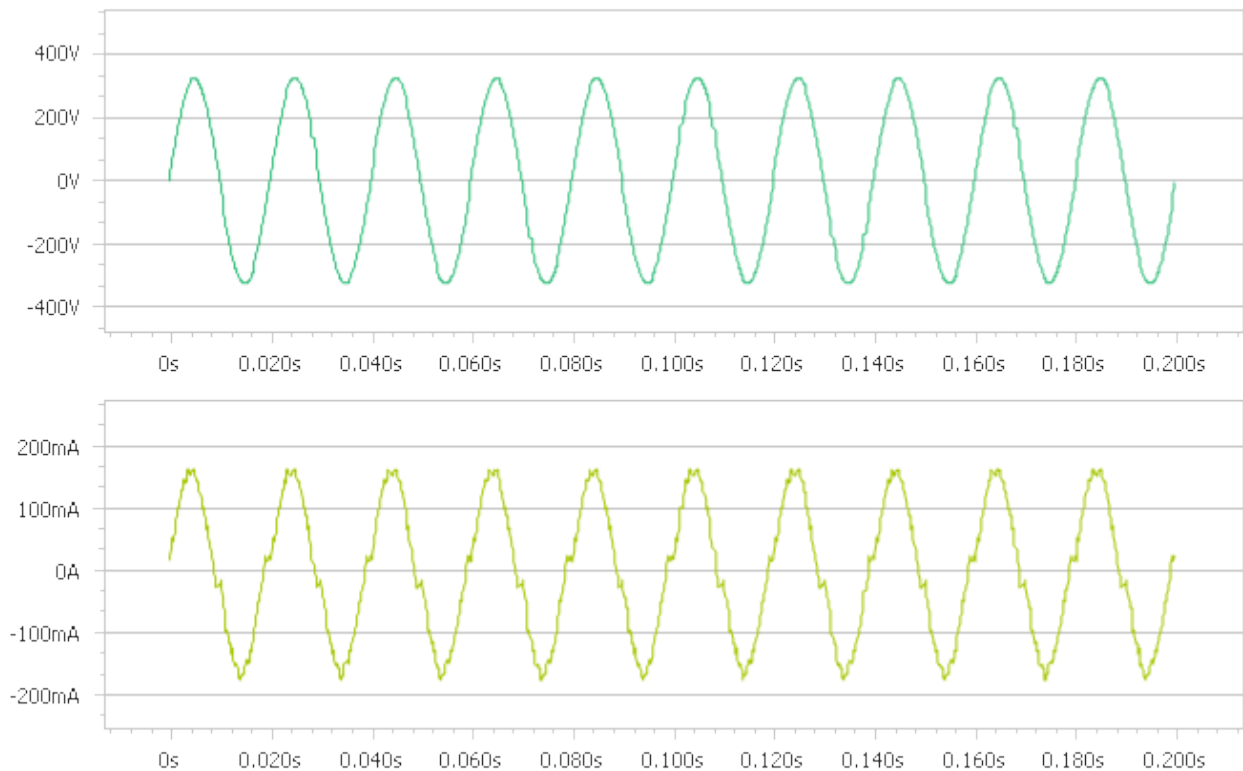

Maximum / Average Values

| | | Line 1 |
|---|--|------------|
| <i>Maximum Values</i> | | |
| Frequency | | 50 Hz |
| Voltage RMS | | 230.6 V |
| Current RMS | | 0.1090 A |
| Peak Current | | 0.1819 A |
| Fundamental Current | | 0.1081 A |
| Current Crest Factor | | 1.683 |
| Active Power P | | 24.23 W |
| Power Factor | | 0.9662 |
| Total Harmonic Current (THC) | | 0.01297 A |
| Instantaneous Partial Odd Harmonic Current (Inst. POHC) | | 3.044e-3 A |
| Total Harmonic Distortion Current (THDC) | | 0.1202 |
| <i>Average Values</i> | | |
| Total Harmonic Current (THC) | | 0.01261 A |
| Instantaneous Partial Odd Harmonic Current (Inst. POHC) | | 2.562e-3 A |
| Total Harmonic Distortion Current (THDC) | | 0.1169 |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Average Harmonics

Average Harmonics (Line 1)

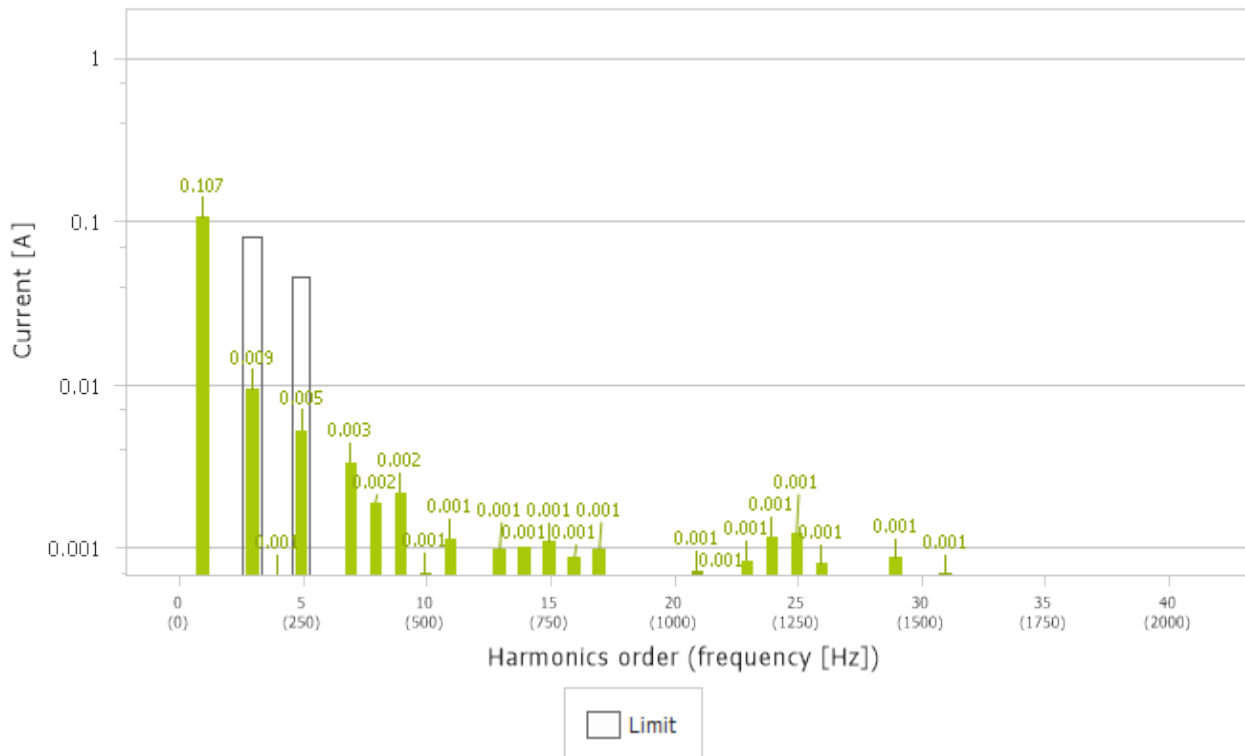

6.5 Voltage Fluctuations and Flicker

Test Requirement: EN 61000-3-3: 2013+A2:2021

Test Method: EN 61000-3-3: 2013+A2:2021

6.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C

Humidity: 56.7 % RH

Atmospheric Pressure: 1000 mbar


6.5.2 Test Mode Description

Pre-scan / Mode Description

Final test Code

Final test 00 Test the EUT in LED lighting mode.

6.5.3 Test Setup Diagram

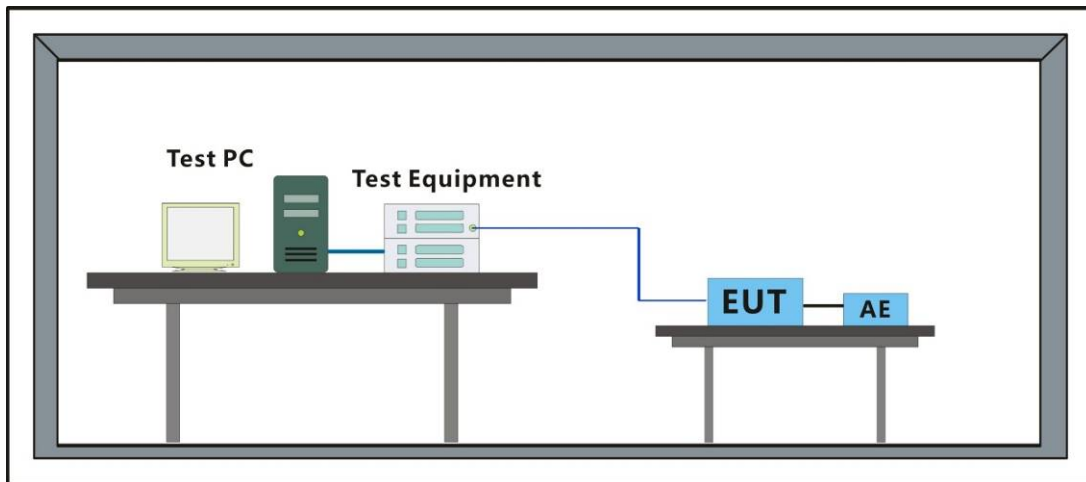

6.5.4 Measurement Procedure and Data

Test Mode: 00

Flicker Results

Standard Specific Results for IEC 61000-3-3 (Edition 3.2)

Standard Group: Industry

Standard Name: IEC 61000-3-3 (Edition 3.2)

Limitation of voltage changes, voltage fluctuations and flicker
in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase
and not subject to conditional connection

Test Condition: General Test Conditions

Analysis Status: PASS

Flicker Measurements Settings

| | |
|--------------------|-------------|
| Main Line: | 230V, 50Hz |
| Flicker Meter: | 230V / 50Hz |
| Flicker Impedance: | Zref |
| Observation Time: | 1 × 10 min |
| Measurements: | 1 |

Flicker Measurements

| | P_{It} | Max P_{st} | Max d_c | Max d_{max} | Max T_{max} |
|----------|----------|--------------|-----------|---------------|---------------|
| Line 1: | 0.047 | 0.107 | 0 | < 0.2 | 0 |
| Limits: | 0.65 | 1 | 3.3 | 4 | 0.5 |
| Results: | PASS | PASS | PASS | PASS | PASS |

Flicker Individual Measurements

| Measurement | P_{st} [%] | | | d_c [%] | | | d_{max} [%] | | | T_{max} [s] | | |
|-------------|--------------|-------|--------|-----------|-------|--------|---------------|-------|--------|---------------|-------|--------|
| | Value | Limit | Result | Value | Limit | Result | Value | Limit | Result | Value | Limit | Result |
| #1 | 0.11 | 1.00 | PASS | 0.00 | 3.30 | PASS | < 0.2 | 4.00 | PASS | 0.00 | 0.50 | PASS |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Pst Data

Short-term Flicker Severity (Pst) (Line 1)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7 Immunity Test Results

Performance Criteria Description in EN 61547: 2009


- Criterion A:** During the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.
- Criterion B:** During the test, the luminous intensity may change to any value. After the test, the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.
- Criterion C:** During and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and/or operating the regulating control.

7.1 Electrostatic Discharge

Test Requirement: EN 61547: 2009

Test Method: EN 61000-4-2:2009

7.1.1 Test Setup Diagram

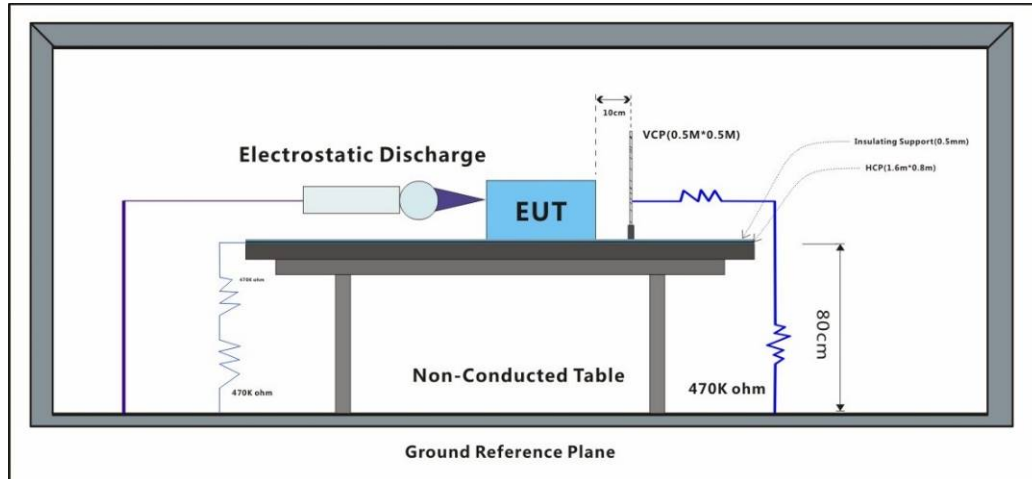

7.1.2 E.U.T. Operation

Operating Environment:

Temperature: 21.3 °C

Humidity: 46.6 % RH

Atmospheric Pressure: 1000 mbar

7.1.3 Test Mode Description

| Pre-scan / Mode | Description |
|-----------------|------------------------------------|
| Final test Code | |
| Final test 00 | Test the EUT in LED lighting mode. |

7.1.4 Test Condition and Results:

Performance Criterion: B

Discharge Impedance: 330 Ω / 150 pF

Discharge Voltage: Air Discharge: 2,4,8 kV; Contact Discharge: 4 kV; VCP/HCP: 4 kV.

Polarity: Positive & Negative

Number of Discharge: Minimum 10 times at each test point

Discharge Mode: Single Discharge

Discharge Period: 1 second minimum

Test Point 1: All insulated enclosure & seams.

Test Point 2: All accessible metal parts of the enclosure.

Test Point 3: All sides.


| Discharge type | Level (kV) | Polarity | Test Point | Result / Observations |
|---------------------|------------|----------|------------|-----------------------|
| Air Discharge | 2,4,8 | + | 1 | A |
| Air Discharge | 2,4,8 | - | 1 | A |
| Contact Discharge | 4 | + | 2 | A |
| Contact Discharge | 4 | - | 2 | A |
| Horizontal Coupling | 4 | + | 3 | A |
| Horizontal Coupling | 4 | - | 3 | A |
| Vertical Coupling | 4 | + | 3 | A |
| Vertical Coupling | 4 | - | 3 | A |

A: No degradation in the performance of the EUT was observed

7.2 Radiated Immunity (80MHz-1GHz)

Test Requirement: EN 61547: 2009

Test Method: EN 61000-4-3: 2006 +A1: 2008+A2: 2010

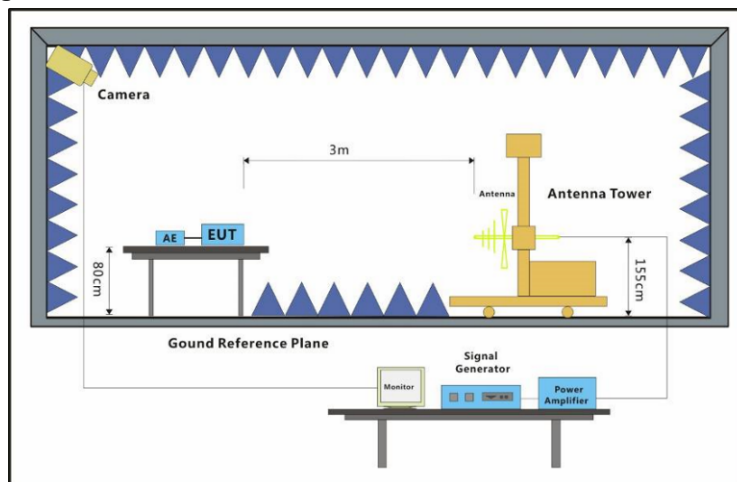7.2.1 Test Setup Diagram**7.2.2 E.U.T. Operation**

Operating Environment:

Temperature: 22.3 °C

Humidity: 57.1 % RH

Atmospheric Pressure: 1005 mbar

7.2.3 Test Mode Description

| Pre-scan / Mode | Description |
|-----------------|------------------------------------|
| Final test Code | |
| Final test 00 | Test the EUT in LED lighting mode. |

7.2.4 Test Condition and Results:

Performance Criterion:A

Frequency Range:80MHz to 1GHz

Test Distance:3m

Antenna Polarisation:Vertical and Horizontal

Modulation1kHz,80% Amp. Mod,1% increment

| Frequency | Level (V/m) | EUT Face | Dwell time | Result / Observations |
|------------|-------------|----------|------------|-----------------------|
| 80MHz-1GHz | 3 | Front | 3s | A |
| 80MHz-1GHz | 3 | Back | 3s | A |
| 80MHz-1GHz | 3 | Left | 3s | A |
| 80MHz-1GHz | 3 | Right | 3s | A |
| 80MHz-1GHz | 3 | Top | 3s | A |
| 80MHz-1GHz | 3 | Bottom | 3s | A |

A: No degradation in the performance of the EUT was observed




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.3 Electrical Fast Transients Burst at AC Mains Power Port

Test Requirement: EN 61547: 2009

Test Method: EN 61000-4-4:2012

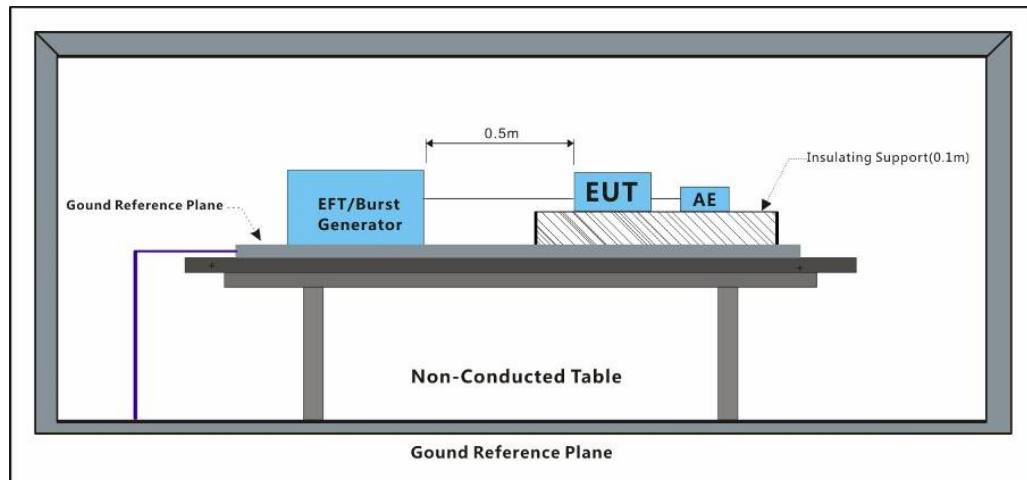7.3.1 Test Setup Diagram**7.3.2 E.U.T. Operation**

Operating Environment:

Temperature: 24.5 °C

Humidity: 68.5 % RH

Atmospheric Pressure: 1005 mbar

7.3.3 Test Mode Description

Pre-scan / Mode Description

Final test Code

Final test 00 Test the EUT in LED lighting mode.

7.3.4 Test Condition and Results:

Performance Criterion: B

Repetition Frequency: 5kHz

Burst Period: 300ms

Test Duration: 2 minute per level & polarity

Test Level: 1.0kV

Polarity: Positive & Negative

| Test Line | Level (kV) | Polarity | CDN/Clamp | Result / Observations |
|---------------|------------|----------|-----------|-----------------------|
| AC power port | 1 | + | CDN | A |
| AC power port | 1 | - | CDN | A |

A: No degradation in the performance of the EUT was observed



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.4 Surge at Power Port

Test Requirement: EN 61547: 2009

Test Method: EN 61000-4-5:2014+A1:2017

7.4.1 Test Setup Diagram

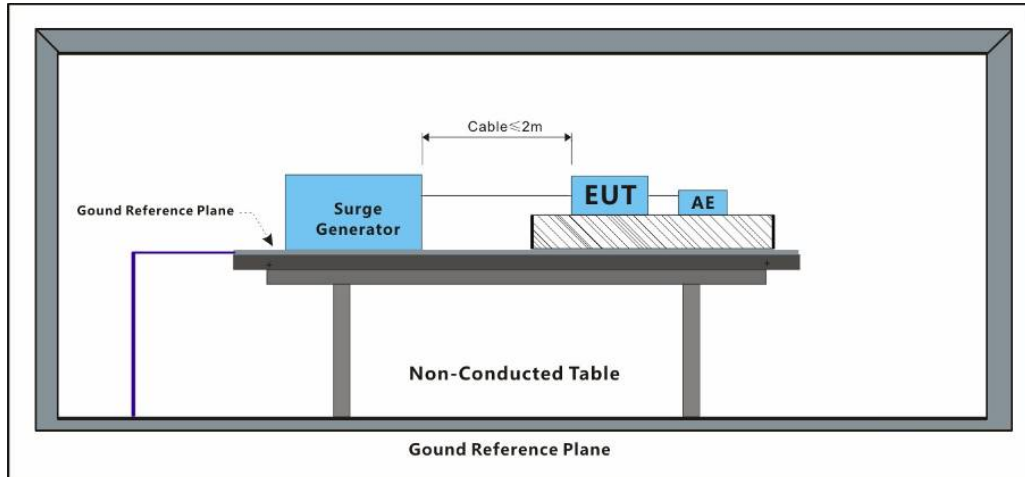

7.4.2 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C

Humidity: 68.5 % RH

Atmospheric Pressure: 1005 mbar

7.4.3 Test Mode Description

| Pre-scan / Mode | Description |
|-----------------|------------------------------------|
| Final test Code | |
| Final test 00 | Test the EUT in LED lighting mode. |

7.4.4 Test Condition and Results:

Performance Criterion: B (Luminaire for emergency lighting),

Performance Criterion: C (for others lighting equipment).

Interval: 60s between each surge

Test Level: $\pm 0.5kV$ Live to Neutral

Polarity: Positive & Negative

Generator source impedance: 2Ω

Trigger Mode: Internal

No. of surges: 5 positive at 90° , 5 negative at 270° .

| Test Line | Level (kV) | Polarity | Phase (deg) | Result / Observations |
|-----------|------------|----------|-------------|-----------------------|
| L-N | 0.5 | + | 90° | A |
| L-N | 0.5 | - | 270° | A |


A: No degradation in the performance of the EUT was observed

7.5 Conducted Immunity at AC Mains Power Port (150kHz-80MHz)

Test Requirement: EN 61547: 2009

Test Method: EN 61000-4-6:2014

7.5.1 Test Setup Diagram

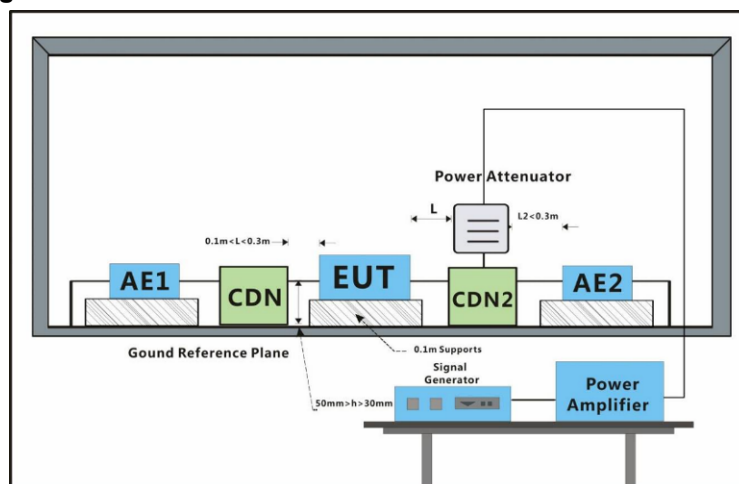

7.5.2 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C

Humidity: 68.5 % RH

Atmospheric Pressure: 1005 mbar

7.5.3 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|--------------------------|--------------|-------------|
|--------------------------|--------------|-------------|

| | | |
|------------|----|------------------------------------|
| Final test | 00 | Test the EUT in LED lighting mode. |
|------------|----|------------------------------------|

7.5.4 Test Condition and Results:

Performance Criterion:A

Step Size 1%

Frequency Range:0.15MHz to 80MHz

Modulation:80%, 1kHz Amplitude Modulation

| Cable port | Level (Vrms) | CDN/Clamp | Dwell time | Result / Observations |
|---------------|--------------|-----------|------------|-----------------------|
| AC power port | 3 | CDN | 3s | A |

A: No degradation in the performance of the EUT was observed

A: No degradation in the performance of the EUT was observed



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and for electronic documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory.

中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 No.198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn

7.6 Voltage Dips and Interruptions

Test Requirement: EN 61547: 2009
Test Method: EN IEC 61000-4-11:2020

7.6.1 Test Setup Diagram

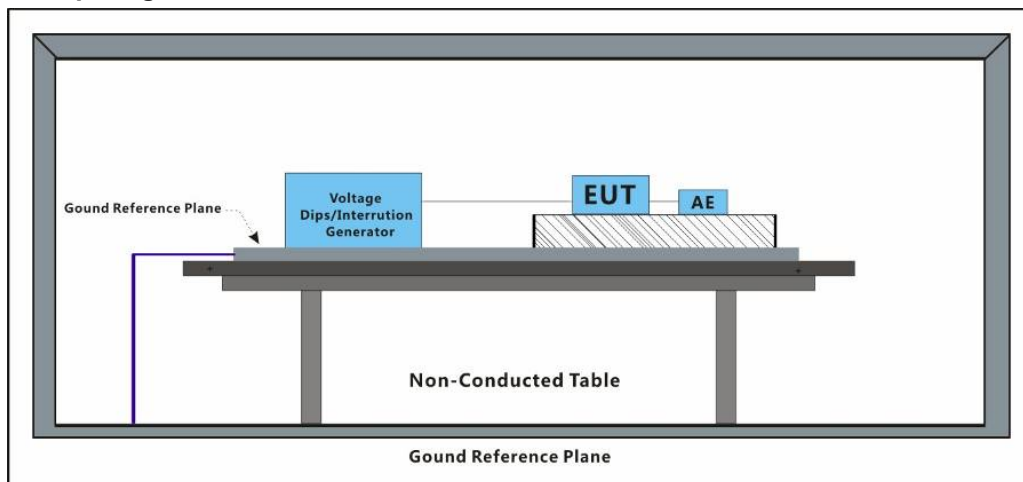

7.6.2 E.U.T. Operation

Operating Environment:
Temperature: 24.5 °C Humidity: 68.5 % RH Atmospheric Pressure: 1005 mbar

7.6.3 Test Mode Description

| Pre-scan / Mode | Description |
|-----------------|------------------------------------|
| Final test Code | |
| Final test 00 | Test the EUT in LED lighting mode. |

7.6.4 Test Condition and Results:


Performance Criterion: 0% of UT (Rated Voltage) for 0.5 Cycle: B; 70% of UT for 10 Cycles: C.
No. of Dips / Interruptions: 3 per Level
Time between dropout: 10s

| Level % UT | Phase (deg) | Duration | No. of Dips / Interruptions | Result / Observations |
|------------|-------------|-----------|-----------------------------|-----------------------|
| 0 | 0° | 0.5 Cycle | 3 | A |
| 0 | 180° | 0.5 Cycle | 3 | A |
| 70 | 0° | 10 Cycles | 3 | A |
| 70 | 180° | 10 Cycles | 3 | A |

A: No degradation in the performance of the EUT was observed

8 Test Setup Photo


Conducted Emissions at Mains Terminals (9kHz-30MHz)

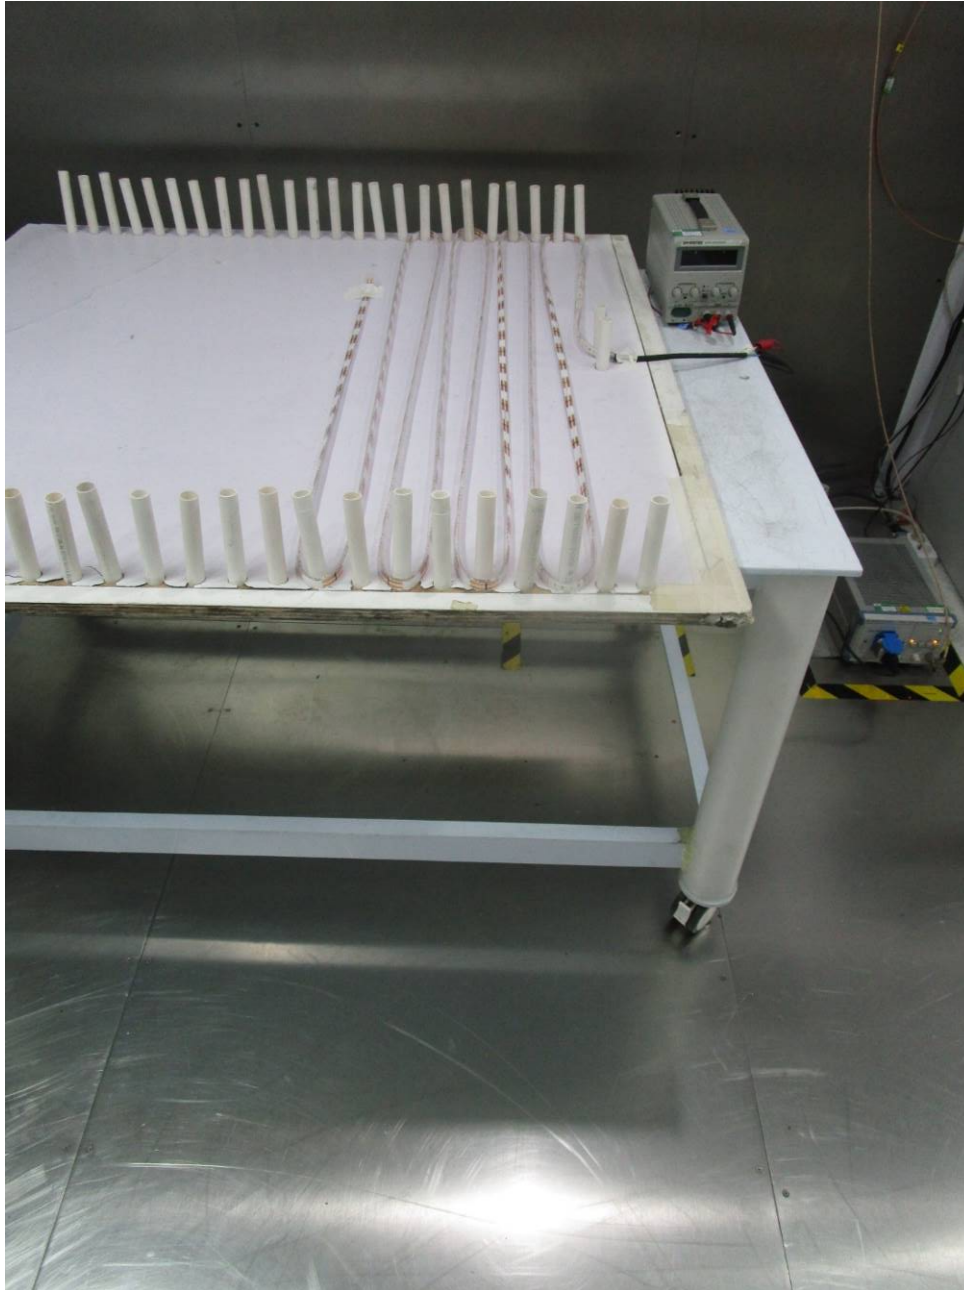


Radiated Emissions (Magnetic Field Induced Current)(9kHz-30MHz)



Radiated Emissions (30MHz-1GHz)

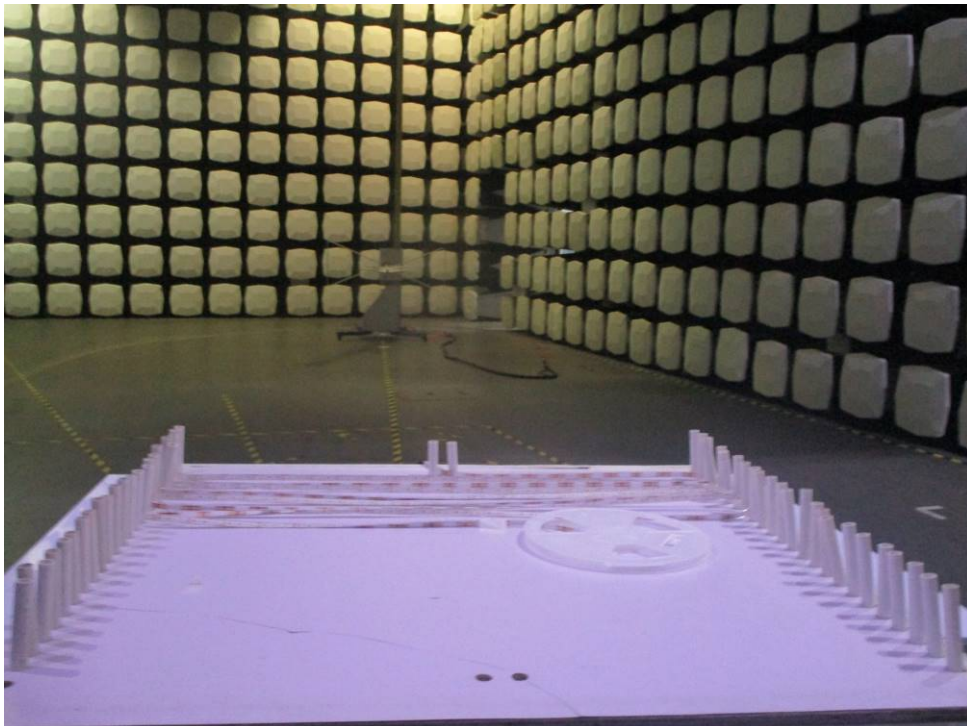


Harmonic Current Emission

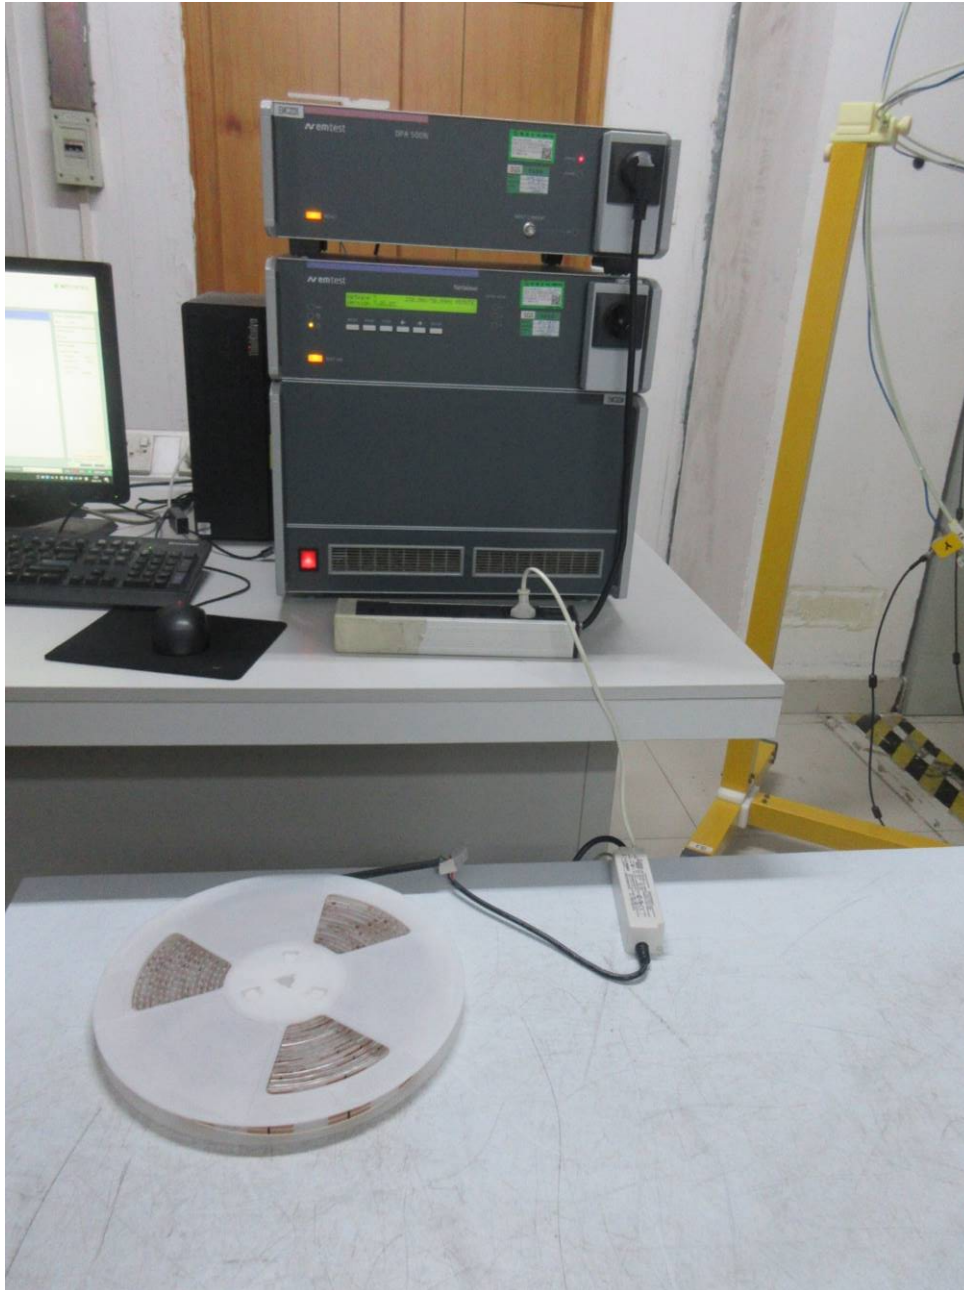

Voltage Fluctuations and Flicker



Electrostatic Discharge

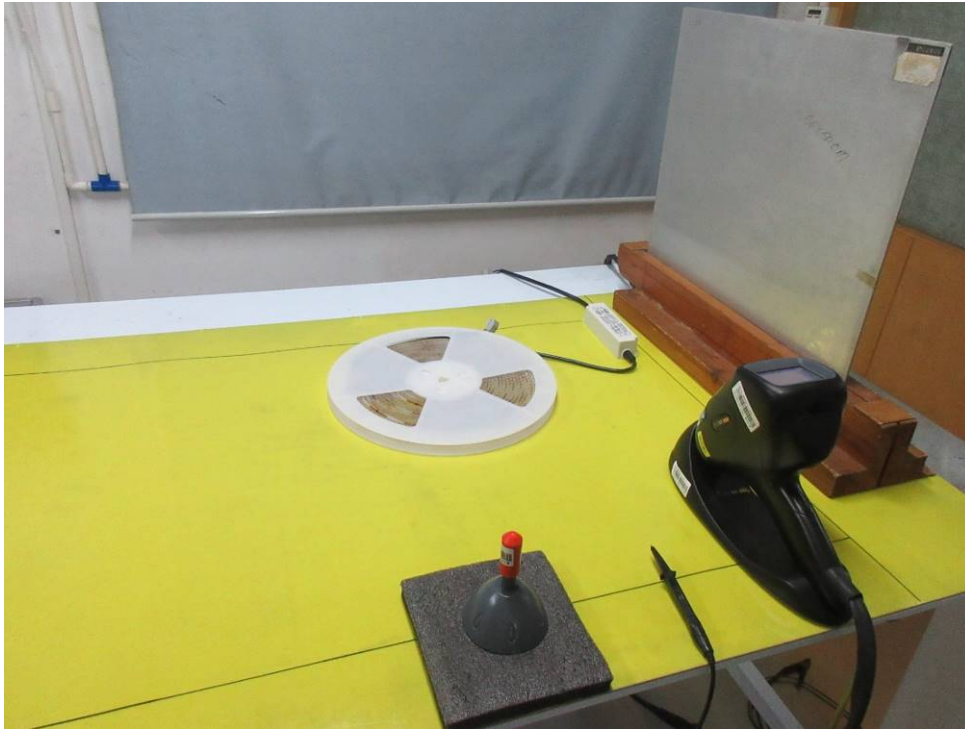

Radiated Immunity (80MHz-1GHz)




Electrical Fast Transients Burst at AC Mains Power Port



Surge at Power Port




Conducted Immunity at AC Mains Power Port (150kHz-80MHz)

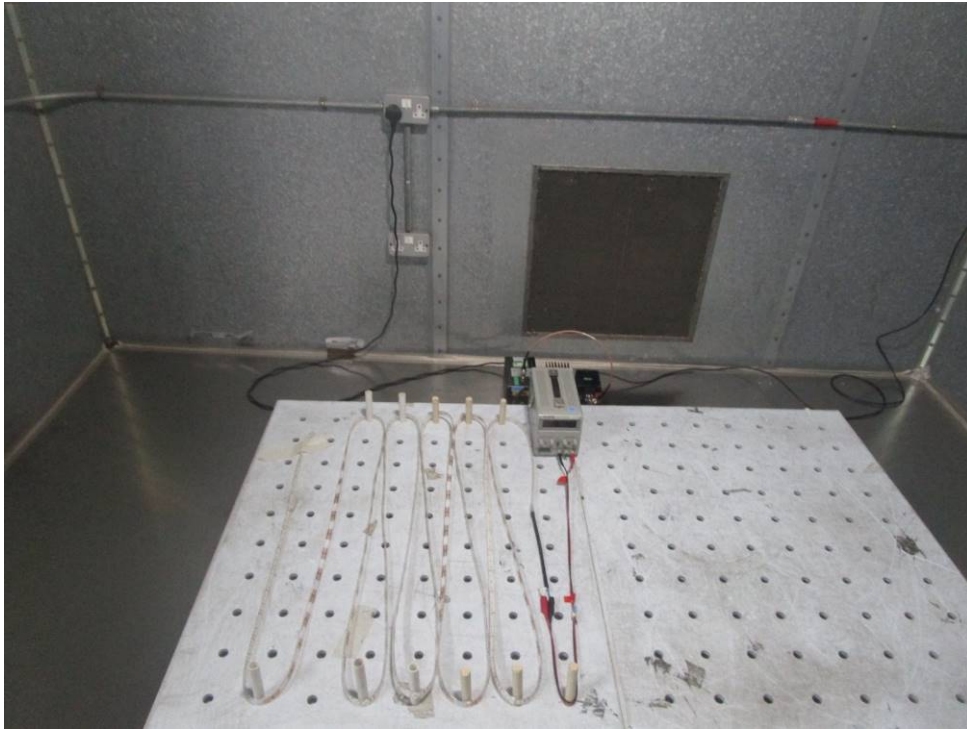


Voltage Dips and Interruptions



9 EUT Constructional Details (EUT Photos)

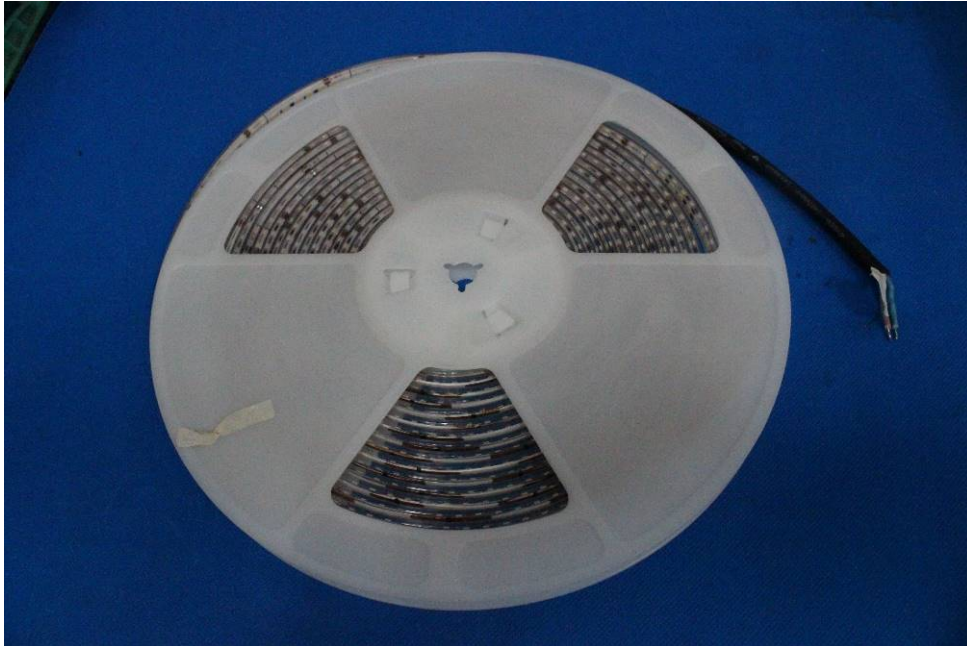

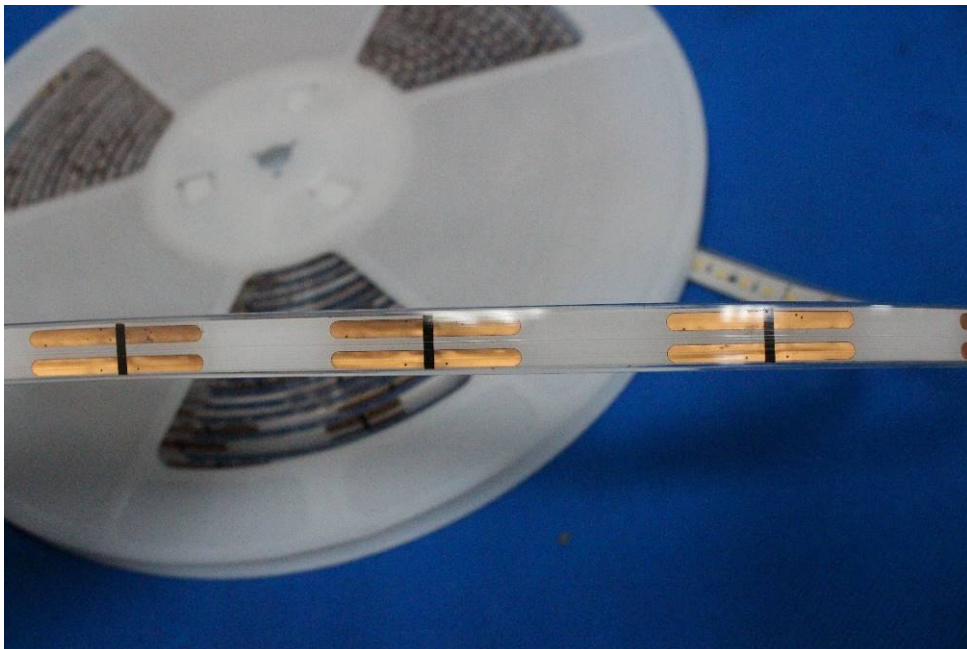

- End of the Report -