

Supper Slim 4mm Non-waterproof Rigid Bar
















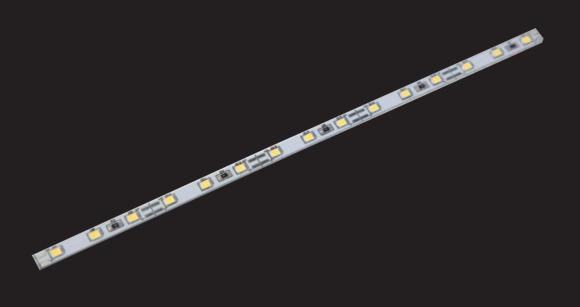

Features

- Applied for light panel with light guidance
- FR4 slim 4mm PCB
- Excellent Light Uniformity
- 2835 LED, 3leds cuttable
- · Long life span

Application

LED light guide plate

BLUEVIEW ELEC-OPTIC TECH CO.,LTD



Supper Slim 4mm Non-waterproof Rigid Bar

Specifications

Code name	BV-BAR-2835-90			
Color	white			
сст(к)	2500-25000k			
View Angle(°)	120°			
Luminous Flux(lm)	687			
RA	>80>90>95			
Light Efficiency(lm/w)	105(Ra80)			
Voltage	12VDC			
Power(w)	6.5			
Standard Serial connection Qty (pcs)	2			
Operating Temperature(°C)	-25~+60			
Storage Temperature(°C)	-25~+70			
Protection Class	IP60			


Color Available






Supper Slim 4mm Non-waterproof Rigid Bar

Luminous Intensity Distribution Diagram //

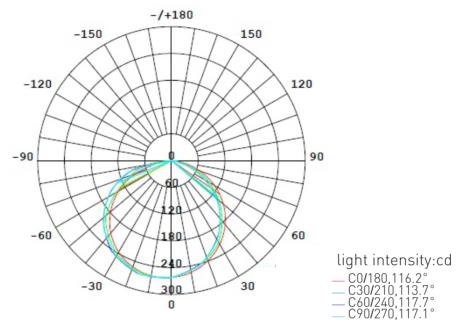

THE AVERAGE BEAM ANGLE(50%):116.2 DEG

Structure Chart

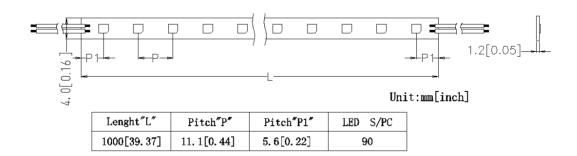


BLUEVIEW ELEC-OPTIC TECH CO.,LTD



Supper Slim 4mm Non-waterproof Rigid Bar


Installation //

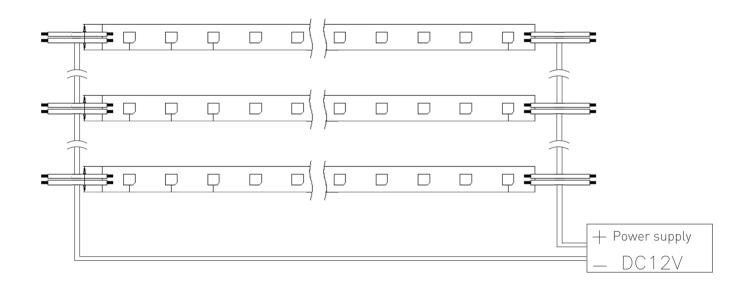



Supper Slim 4mm Non-waterproof Rigid Bar

Package

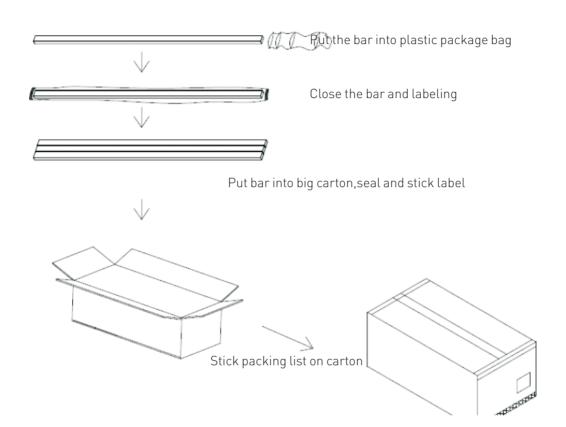

Product	Led Qty	Carton size	Qty per	Net weight	Gross weight
size		(mm)	carton	(NW/kg)	(GW/kg)
1000mm	90	1100*400*380	240	17.6(1±10%)KG	19.0 (1±10%)KG

Notice:

- 1, Carton szie: outer packaged with five layers of cardboard, the five model takes cartons with different sizes, please see as follows.
- 2, Above quantity and weight are subject to the package as diagram shows, please take the pratical product as standard, when package changed.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD