

5730 LED HIGH EFFICACY TAPE LIGHT





ChipBrand















for a CCT range

One BIN only Lifetime


Certified

Certified

Warranty

Certified

Certified

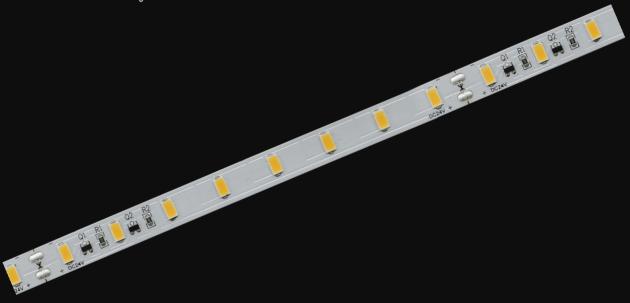

Ra Available

IP Grade Available











Features

- High Light Efficacy
- Constant Voltage 24 VDC system
- Silicone extruded-IP68, Silicone tube encased-IP67, Silicone coated-IP65, indoor-IP22 available
- Epistar chips, LM80 tested
- Ra80+
- CE and RoHS certified
- 5 years warranty

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258 Mail: sales@blueviewled.com Web.: www.blueviewled.com Add: No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Chengdu, Sichuan, China. Zip code: 610207



5730 LED HIGH EFFICACY TAPE LIGHT

HIGH EFFICACY

Specifications

LED Type	SMD 5730	Dimmable	Yes (compatible with BV311 RF dimmer & BV Dimmer)
LED Q'ty/m	64pcs	IP grade	IP22 (IP65 & IP67 & IP68 available upon request)
Input Voltage	24V DC Constant Voltage	Installation	Heat-conductive adhesive tape (Heat sink is necessary)
Power	17.28W/m	Working Temperature	-40~+80 ℃
Cutting length	125mm, 8 LEDs	Max run	5meters(Single Feed)
Strip Width	10mm	Certification	CE, RoHs
Viewing Angle	120°	Warranty	5 years

Order Code	CCT/ Color	Ra	Lumen/M ²
CN-H5730-64-24-27K	2700K	80+	1267
CN-H5730-64-24-30K	3000K	80+	1324
CN-H5730-64-24-35K	3500K	80+	1382
CN-H5730-64-24-40K	4000K	80+	1401
CN-H5730-64-24-50K	5000K	80+	1440
CN-H5730-64-24-65K	6500K	80+	1497

Note: 1.Lumen output are measured according to PMS-80, with a tolerance of \pm -5%

- 2. Standard package: 5m/roll
- 3. The output power must be 24V. Neither higher nor less than 24V to avoid wattage affection on the striplight.

Order Code Model	Quality level	LED Q'ty/M	1 [Input voltage	CCT/Color
CN	H5730	64]-[24	27K
CN-IP22	H5730-5 yrs warranty			24V DC	view table above for options
CWS-IP65	,				,
CWT-IP67					
CWE-IP68					




5730 LED HIGH EFFICACY TAPE LIGHT


HIGH EFFICACY



Unit:mm[in]



Package

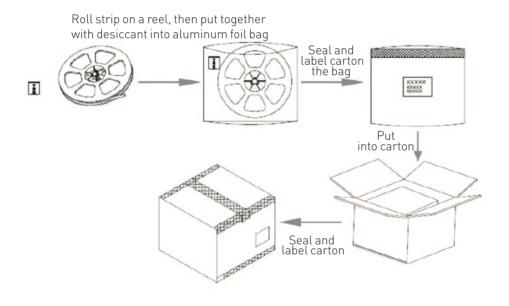

Packing Info

Order Code	Net Weight / CTN	Gross Weight / CTN	Units / CTN	Carton Size
CN-H5730-64-24	5.26 (1±10%) kgs	9.76 (1±10%) kgs	60 rolls	570*375*285mm