

5730 LED HIGH EFFICACY TAPE LIGHT



















ChipBrand

One BIN only for a CCT range

Lifetime


Certified

Certified

Warranty

Certified

Certified

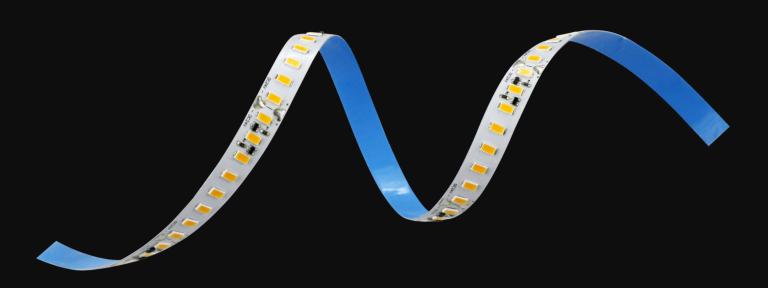

Ra Available

IP Grade Available











Features

- High Light Efficacy
- Constant Voltage 24 VDC system
- Silicone extruded-IP68, Silicone tube encased-IP67, Silicone coated-IP65, indoor-IP22 available
- Epistar chips, LM80 tested
- Ra80+
- CE and RoHS certified
- 5 years warranty

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
Mail: sales@blueviewled.com Web.: www.blueviewled.com
Add: No.1000, Section 2, 2nd Konggang Road, Southwest
Aviation Industrial Development Zone, Chengdu, Sichuan, China.
Zip code: 610207

Specifications are subject to change without notice.

© Blueview™ 2017 – All rights reserved. Made in China.



5730 LED HIGH EFFICACY TAPE LIGHT

HIGH EFFICACY

Specifications

LED Type	SMD 5730	Dimmable	Yes (compatible with BV311 RF dimmer & BV Dimmer)
LED Q'ty/m	128pcs	IP grade	IP22 (IP65 &IP67&IP68 available upon request)
Input Voltage	24V DC	Installation	Heat-conductive adhesive tape (Heat sink is necessary)
Power	23.04W/m	Working Temperature	-40~+80 ℃
Cutting length	62.5mm, 8 LEDs	Max run	6.5 meters(Single Feed)
Strip Width	10mm	Certification	CE, RoHs
Viewing Angle	120°	Warranty	5 years


Order Code	CCT/ Color	Ra	Lumen/M ²
CN-H5730-128-24-27K	2700K	80+	2534
CN-H5730-128-24-30K	3000K	80+	2649
CN-H5730-128-24-35K	3500K	80+	2764
CN-H5730-128-24-40K	4000K	80+	2802
CN-H5730-128-24-50K	5000K	80+	2880
CN-H5730-128-24-65K	6500K	80+	2995

Note^O: The output power must be 24V. Neither higher nor less than 24V to avoid wattage affection to the strip light.

Note $^{\circ}$: Lumen output are measured according to PMS-80, with a tolerance of +/- 5%

Note[®]: Standard package: 5m/roll

Order Code

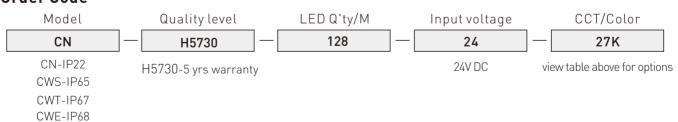



5730 LED HIGH EFFICACY TAPE LIGHT


HIGH EFFICACY



Unit:mm[in]



Package

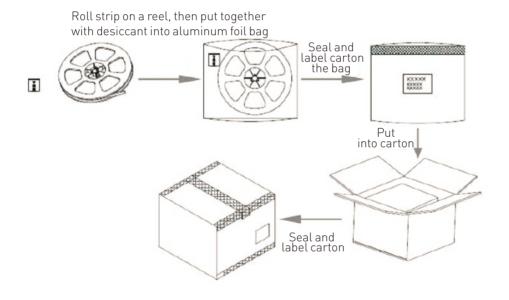

Packing Info

Order Code	Net Weight / CTN	Gross Weight / CTN	Units / CTN	Carton Size
CN-H5730-128-24	5.56 (1±10%) kgs	10.06 (1±10%) kgs	60 rolls	570*375*285mm