



Color 

Features

- Cuttable every 7 LEDs.
- Small size with good flexibility.
- Efficacy of LED up to 115Lm/W, color tolerance ≤ 3 .
- Max 24m run length at double-ended, 12m at single-ended.
- Long lifespan with great lumen maintenance.
- Input voltage at DC24V.

Application

Indoor lighting, entertainment rooms, shopping malls etc.

Scopes: It is for luminous letter, signboard, lightbox or special clothing, artware etc.

Installation

Stick with self adhesive 3M tape.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
Mail: sales@blueviewled.com Web.: www.blueviewled.com
Add: No.1000, Section 2, 2nd Konggang Road, Southwest
Aviation Industrial Development Zone, Chengdu, Sichuan, China.
Zip code: 610207

Specifications are subject to change without notice.
©Blueview™ 2018- All rights reserved. Made in China.

Specifications

Model No.	FN-2835A-126-24
LED Quantities	126
Length (M)	1
Light Color	White
Beam Angle (°)	120
CRI	≥80
Color Temperature (K)	1900-9000
Luminous Flux (Lm/M)	1200-1600
Typical Color Temperature (K)	3000
Typical Luminous Flux (Lm/M)	1464
Typical Efficac (Lm/W)	113
Voltage.(DC/V)	24
Current (A/M)	0.54
Power (W/M)	12.96
Max Run (M)	12
Working Temperature (°C)	-25~+60
Storage Temperature (°C)	-25~+70


Note:

Different color temperature will make luminous flux different.
 Auxiliary cooling is needed, such as affixing led strips to aluminum plate etc.
 The detail color temperature ranges see the below diagram.


CIE Chromaticity Diagram

Unit:mm[in]

HL-AM-2835H421W-S1-08-HR3-3SDCM

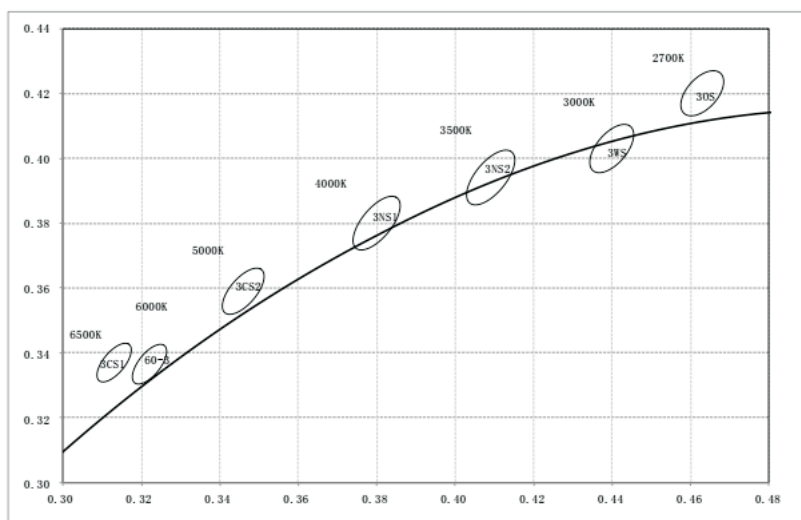

Profile drawings

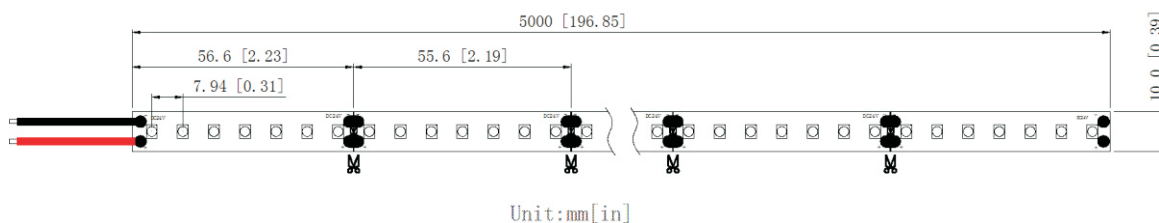


BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu, Sichuan, China.
 Zip code: 610207

Specifications are subject to change without notice.
 ©Blueview™ 2018- All rights reserved. Made in China.

Packaging

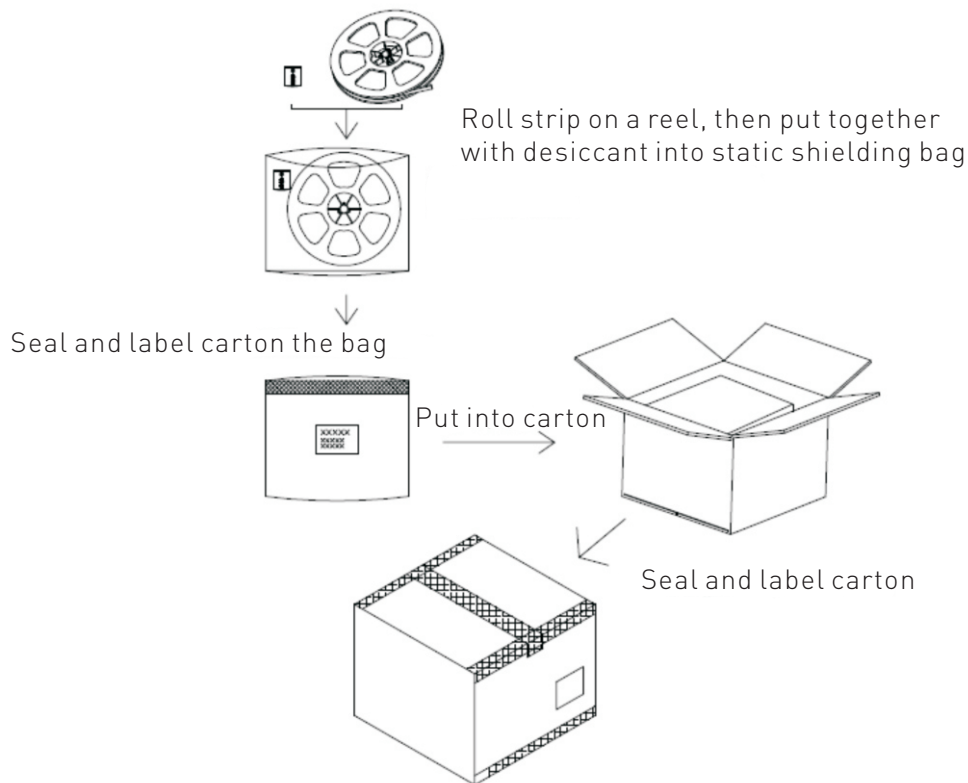

Packaging Information:

Shipping dimension:550*400*340mm
One strip (5M) per reel with packed in static shielding bag.

Model No.	Product Size (mm)	Quantity (pcs)	Net Weight (kg)	Gross Weight(kg)
FN-2835A-126-24	5M*10mm	100	10. 1(1±10%)	14. 9(1±10%)

Note: The above quantity and weight are only for the illustrated packaging method. There will be differences in the quantity and weight with other packaging methods.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu,Sichuan, China.
 Zip code: 610207

Specifications are subject to change without notice.
 ©Blueview™ 2018– All rights reserved. Made in China.