



ChipBrand



One BIN only
for a CCT range



Lifetime



Certified



Certified



Certified



Warranty



Ra Available

IP Grade Available



Features

- Outdoor (IP65&IP67&IP68) & indoor (IP22) are available
- Epistar chips, LM-80
- Ra95+/Ra90+ /80+, with high R9 & R13 value
- Cuttable every 24 LEDs for 24V
- 3M double sided tape for easy installation
- cULus Listed, 5 years warranty














BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu, Sichuan, China.
 Zip code: 610207

Specifications are subject to change without notice.
 ©Blueview™ 2016 – All rights reserved. Made in China.

Specifications

LED Type	SMD 2835	Dimmable	Yes (compatible with BV311 RF dimmer & BV Dimmer)
LED Q'ty/m	432pcs	IP grade	IP22 (IP65 & IP67 & IP68 available upon request)
Input Voltage	24VDC Constant Voltage	Installation	3M™ double sided tape
Power	51.84W/m	Working Temperature	-40~+80 °C
Cutting length	24V 55.5mm 16 LEDs	Max run	24V 5 meters
Strip Width	28mm	Certification	E354137 cULus Listed, CE, RoHs
Viewing Angle	120°	Warranty	5 years/ 3 years [Ⓞ]

Order Code	CCT/ Color	CRI	Lumen/M [Ⓞ]
FN-2835A-432-24-25K	 2425-2580K	80+, 90+	3921
FN-2835A-432-24-27K	 2645-2800K	80+, 90+	3921
FN-2835A-432-24-30K	 2850-3025K	80+, 90+	3921
FN-2835A-432-24-35K	 3270-3545K	80+, 90+	3921
FN-2835A-432-24-42K	 3840-4060K	80+, 90+	4220
FN-2835A-432-24-50K	 4830-5095K	80+, 90+	4942
FN-2835A-432-24-55K	 5400-5800K	80+, 90+	4942
FN-2835A-432-24-65K	 6260-6680K	80+, 90+	4942
FN-2835A-432-24-90K	 7836-9000K	80+	4942
FN-2835A-432-24-R	 620-625nm	-	1400
FN-2835A-432-24-G	 520-525nm	-	3900
FN-2835A-432-24-B	 465-470nm	-	1140
FN-2835A-432-24-Y	 594-596nm	-	1330

- Note:1. Contact Blueview for exact warranty period and policy
 2. Lumen output are measured according to PMS-08, with a tolerance of +/- 5
 3. Standard package: 5m/roll
 4. The output power must be 24V. Neither higher nor less than 24V to avoid wattage affection to the strip light

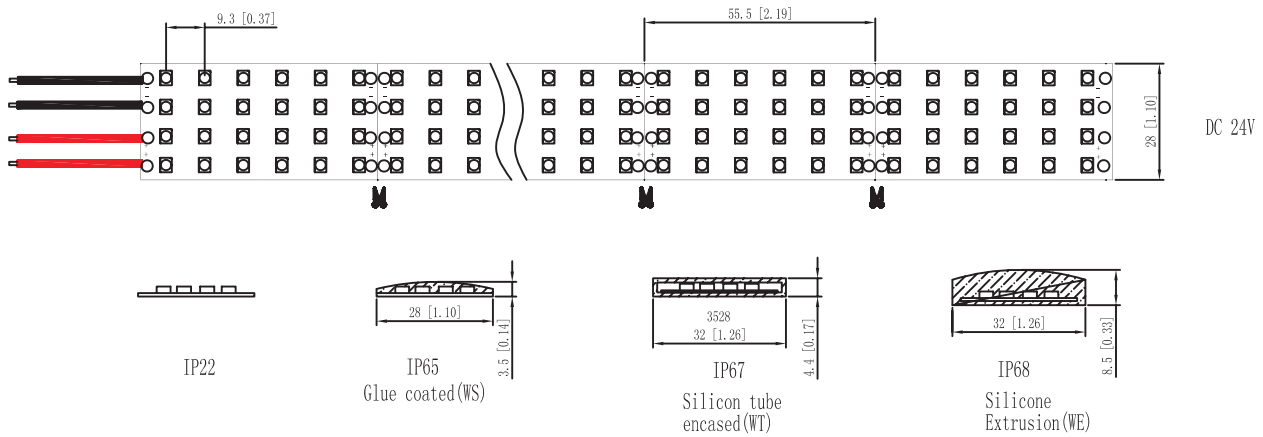
BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu, Sichuan, China.
 Zip code: 610207


Specifications are subject to change without notice.
 ©Blueview™ 2016 – All rights reserved. Made in China.

Dimension

Unit:mm[in]



Package

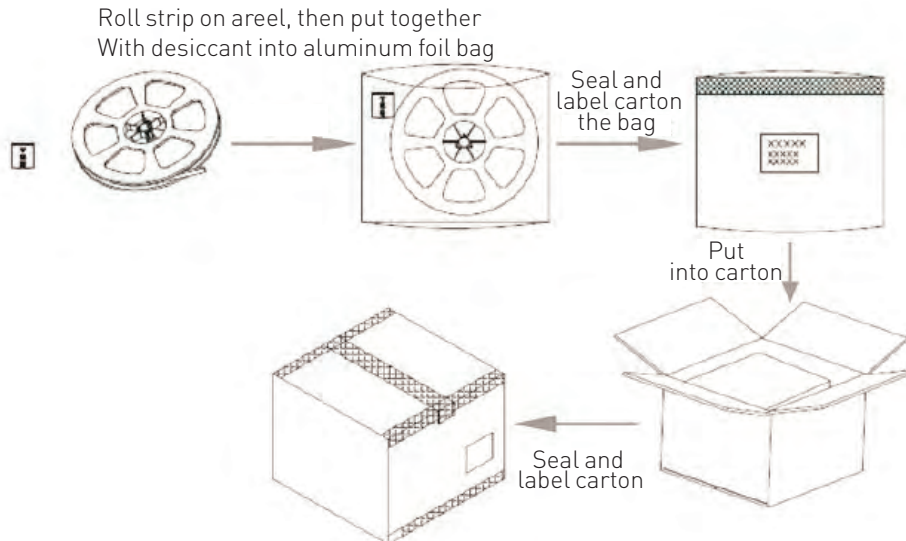

Packing Info

Order Code	Net Weight / CTN	Gross Weight / CTN	Units / CTN	Carton Size
FN-2835A-432	8.12 (1±10%) kgs	11.92 (1±10%) kgs	35 rolls	550*400*340mm

Remark: Data to change according to reality without prior notice.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu,Sichuan, China.
 Zip code: 610207

Specifications are subject to change without notice.
 ©Blueview™ 2016 – All rights reserved. Made in China.