



LUZ SERIES

LINEAR LIGHT

LUZ P/M/W is a linear LED lighting fixture that features by various Optic options. It can be built hundreds of options depending on the lighting environment requires based on various optical options.

The 15° / 30° / 45° louver plus the Wall washer louver are satisfying most of the application.

Fixture features 80+, 90+ or 95+ Ra LEDs. White color from 2700K to 6500K.

Dimmable driver available in Dali, 0/1-10V type, also controllable options in DMX, PWM and 2.4G Static, Tunable white, RGBW solution available.

The fixture is designed in multiple installation in Sus-pendant, Wall / Ceiling Mounted, Trim-less or Trimmed Recessed.

Fixture lengths are available in 2ft, 4ft, 5ft and 8ft, and custom lengths are available in 19.6ft.

Finish


Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications


Indoor - Commercial, Residential, Office, Educational Institutions, Conference Rooms and many other workspace

LUZ SERIES

PANDANT LINEAR LIGHT



**BATWING
OPTICAL LENS**



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY ¹	COLOR TEMP ²	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5085L	W White B Black S Silver	BA -Batwing PMMA Lens	4 - 1182mm Fixed length	3 3-Step MacAdam Ellipse	30 - 3000K 40 - 4000K 50 - 5000K 65 - 6500K	80 80+ CRI 90 ³ 90+ CRI	P Aircraft cable pendant	22 IP22	D1 - DALI D2 - 0-10V D3 - On/off

1. Blueview's standard is 3-Step MacAdam

2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.


3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES

PANDANT LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC
Width / Height	W50mm x H85mm
Length	1182mm
Power (W/m /ft)	31.1 W/pc
Efficacy Up to	90lm/w
Control	Dali , 0-10V, on/off

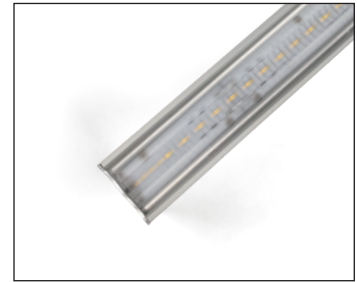


SPECIFICATIONS

	2700K	3000K	3500K	4000K	5000K	6500K
RA 80	2399lm / 1.2m	2526lm / 1.2m	2659lm / 1.2m	2799lm / 1.2m	2799lm / 1.2m	2799lm / 1.2m
RA 90	2127lm / 1.2m	2020lm / 1.2m	1919lm / 1.2m	2239lm / 1.2m	2239lm / 1.2m	2239lm / 1.2m
RA 95	1914lm / 1.2m	1818lm / 1.2m	1727lm / 1.2m	2015lm / 1.2m	2015lm / 1.2m	2015lm / 1.2m
SAMSUNG RA80	2393lm / 1.2m	2273lm / 1.2m	2159lm / 1.2m	2519lm / 1.2m	2519lm / 1.2m	2519lm / 1.2m

Note:

- The given data are typical values in 4000K CRI80+. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

DIMENSIONS



Unit:mm[in]

LED CHIPS AND DRIVER OPTIONS

