



# LUZ SERIES

## LINEAR LIGHT

LUZ P/M/W is a linear LED lighting fixture that features by various Optic options. It can be built hundreds of options depending on the lighting environment requires based on various optical options.

The 15° / 30° / 45° louver plus the Wall washer louver are satisfying most of the application.

Fixture features 80+, 90+ or 95+ Ra LEDs. White color from 2700K to 6500K.

Dimmable driver available in Dali, 0/1-10V type, also controllable options in DMX, PWM and 2.4G Static, Tunable white, RGBW solution available.

The fixture is designed in multiple installation in Sus-pendant, Wall / Ceiling Mounted, Trim-less or Trimmed Recessed.

Fixture lengths are available in 2ft, 4ft, 5ft and 8ft, and custom lengths are available in 19.6ft.

### Finish

Aluminum clear matt anodized  
White / Black powder coating  
Customized RAL color available

### Applications

Indoor - Commercial, Residential, Office, Educational Institutions, Conference Rooms and many other workspace

# LUZ SERIES

WALL WASHER SURFACE LINEAR LIGHT



## ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY <sup>1</sup>	COLOR TEMP <sup>2</sup>	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U508533	W White B Black S Silver	WW Wall Washer Kit	4 - 1208mm CM -Customized	3 3-Step MacAdam Ellipse	30 - 3000K 40 - 4000K 50 - 5000K 65 - 6500K	80 80+ CRI 90 <sup>3</sup> 90+ CRI	P Aircraft cable pendant M Ceiling Mounted	22 IP22	D1 - DALI D2 - 0-10V D3 - On/off

1. Blueview's standard is 3-Step MacAdam

2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.

3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

# LUZ SERIES

## WALL WASHER SURFACE LINEAR LIGHT

### SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W50mm x H85mm	
Length	1208mm with 4sets WW Kit	132.5mm
Power (W/m /ft)	23 W/pc	5W/set
Efficacy Up to	70lm/w	80lm/w
Control	Dali , 0-10V, on/off	



### SPECIFICATIONS


NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1660lm / 1.2m	1840lm / 1.2m	1840lm / 1.2m	1840lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1137lm / 1.2m	1260lm / 1.2m	1260lm / 1.2m	1260lm / 1.2m

**Note:**

- The given data are typical values in 4sets wall washer kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

### BEAM ANGLE

### LED CHIPS AND DRIVER OPTIONS

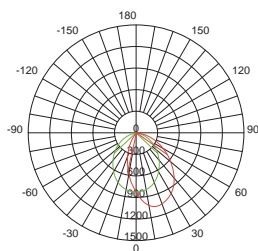

Direct Lighting









### DIMENSIONS

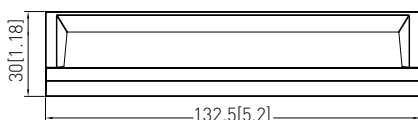

Unit:mm[in]