



Features

- Cuttable every 3 or 6 LEDs
- Bendable with high efficacy LED
- Long lifespan with great lumen maintenance
- Input voltage: DC24V/DC12V
- Excellent of UV resistance

Application

Ideal for the residential and commercial use, such as kitchen, bedroom, closet, stair, shops, retails, offices etc.

Installation

Stick with 3M self adhesive tape.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
Mail: sales@blueviewled.com Web.: www.blueviewled.com
Add: No.1000, Section 2, 2nd Konggang Road, Southwest
Aviation Industrial Development Zone, Chengdu, Sichuan, China.
Zip code: 610207

Specifications are subject to change without notice.
©Blueview™ 2018- All rights reserved. Made in China.

Specifications


Model No.	MN-2835A-60-12	MN-2835A-60-24
Input Vol.	12V DC	24V DC
Power (W/m)	4.8	
Beam Angle	120°	
Typical Luminous Flux (6500K) (Lm)	456-478	
Efficacy (Lm/W)	95	
Current (A/m)	0.4	0.2
Ra	≥80	
Color Temperature (K)	1900-9000	1900-9000
Standard Series Connection(M)	Single ended:3 Double ended:6	Single ended:5 Double ended:10
Working Temperature	-25~+60°C	
Storage Temperature	-25~+70°C	
Ingress Protection	IP22	
Light Color	White	

Note: The above data is tested by A type LED, and different color temperature will make luminous flux different.
 Test environment temperature : 25±2°C
 The above data is typical values. The actual data of each single product may differ from the typical values.
 The data is subject to change without notice.
 Different color temperature will make luminous flux different.


Profile drawings

Unit:mm[in]

MN-2835A-60-12

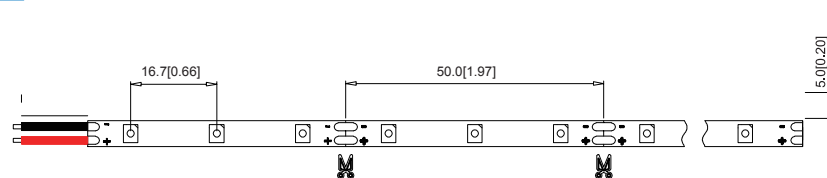

MN-2835A-60-24

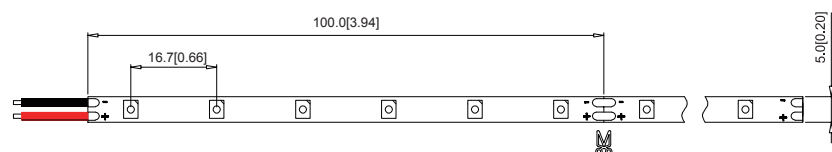


BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu,Sichuan, China.
 Zip code: 610207


Specifications are subject to change without notice.
 ©Blueview™ 2018– All rights reserved. Made in China.

CIE Chromaticity Diagram

The diagram is for reference only. Different suppliers might have different diagram.

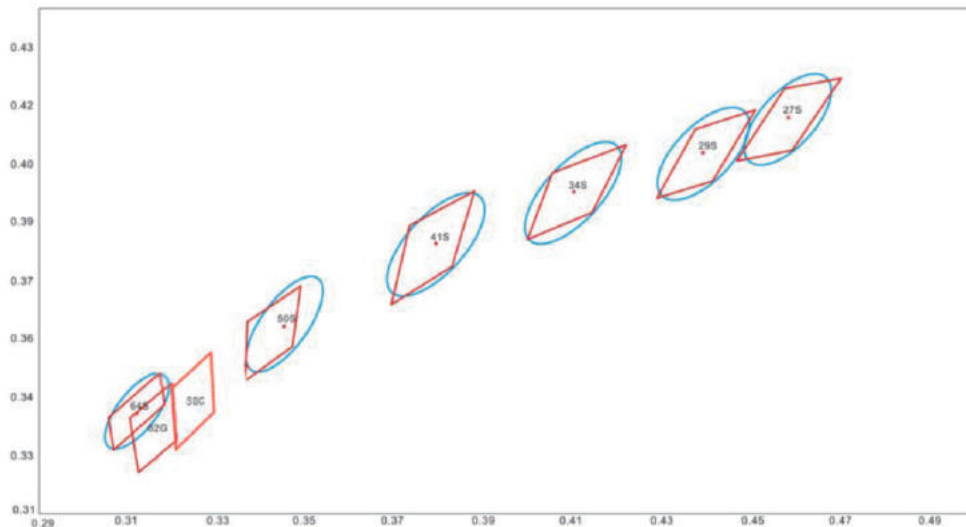

Luminous Intensity Distribution Diagram

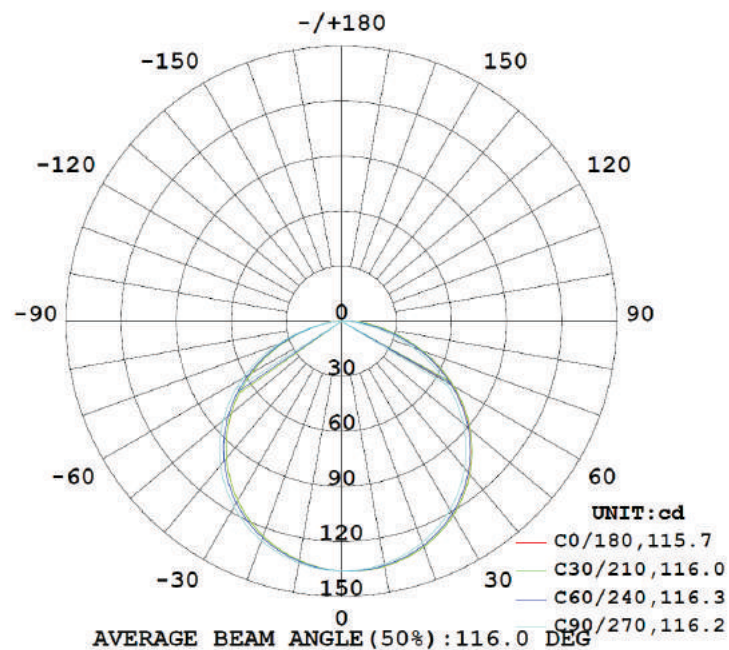

BLUEVIEW ELEC-OPTIC TECH CO.,LTD


Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu, Sichuan, China.
 Zip code: 610207

Specifications are subject to change without notice.
 ©Blueview™ 2018- All rights reserved. Made in China.

Packaging

Roll strip on a reel, then put together with desiccant into static shielding bag

Seal and label the bag

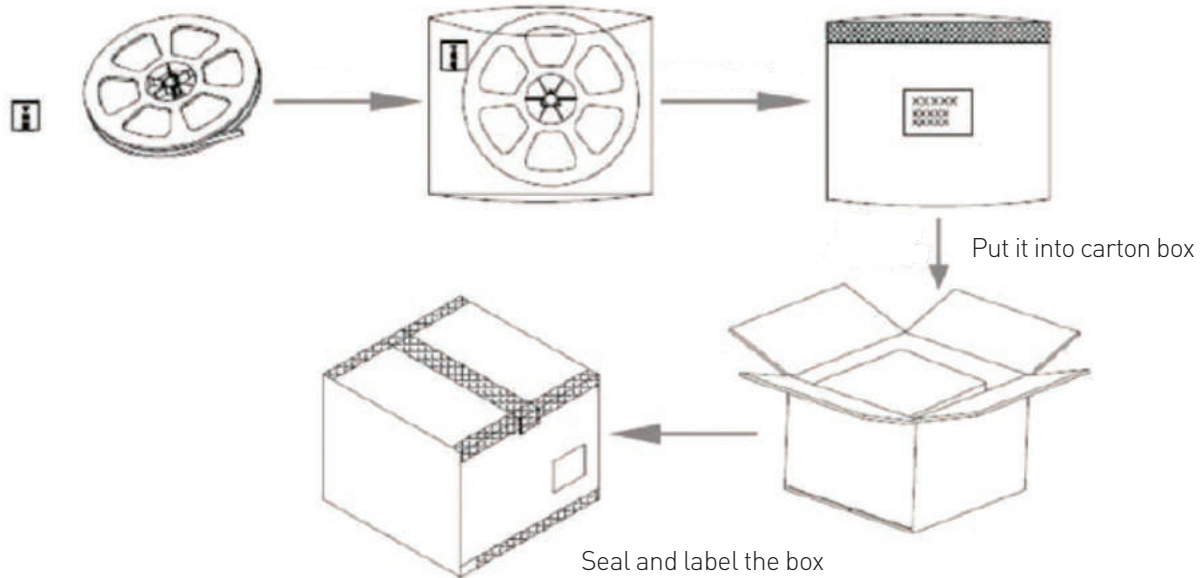

Packaging Information:

Shipping Dimension: 550*400*340mm

One strip (5M) per reel with packed in static shielding bag

Model No.	Product Size (mm)	Quantity (pcs)	Net Weight (kg)	Gross Weight (kg)
MN-2835A-60-12/24	5M*5mm	140	5.1(1±10%)	10.1(1±10%)

The above quantity and weight are only for the illustrated packaging method.
There will be differences in the quantity and weight with other packaging methods.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu, Sichuan, China.
 Zip code: 610207

Specifications are subject to change without notice.
 ©Blueview™ 2018- All rights reserved. Made in China.