

# O600610P

## O600610P 360DEG ROUND PENDANT LINEAR LIGHT

O600610P is linear LED lighting fixture that features a 360° lighting. It's mostly simulating the natural lighting environment.

Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V, Triac type. Fixture lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available in 19.6ft.

### **Finish**


Aluminum clear matt anodized  
White / Black powder coating  
Customized RAL color available

### **Applications**

Indoor - Office, Educational Institutions, Conference Rooms and many other workspaces.

# 0600610P

360DEG LINEAR LIGHT

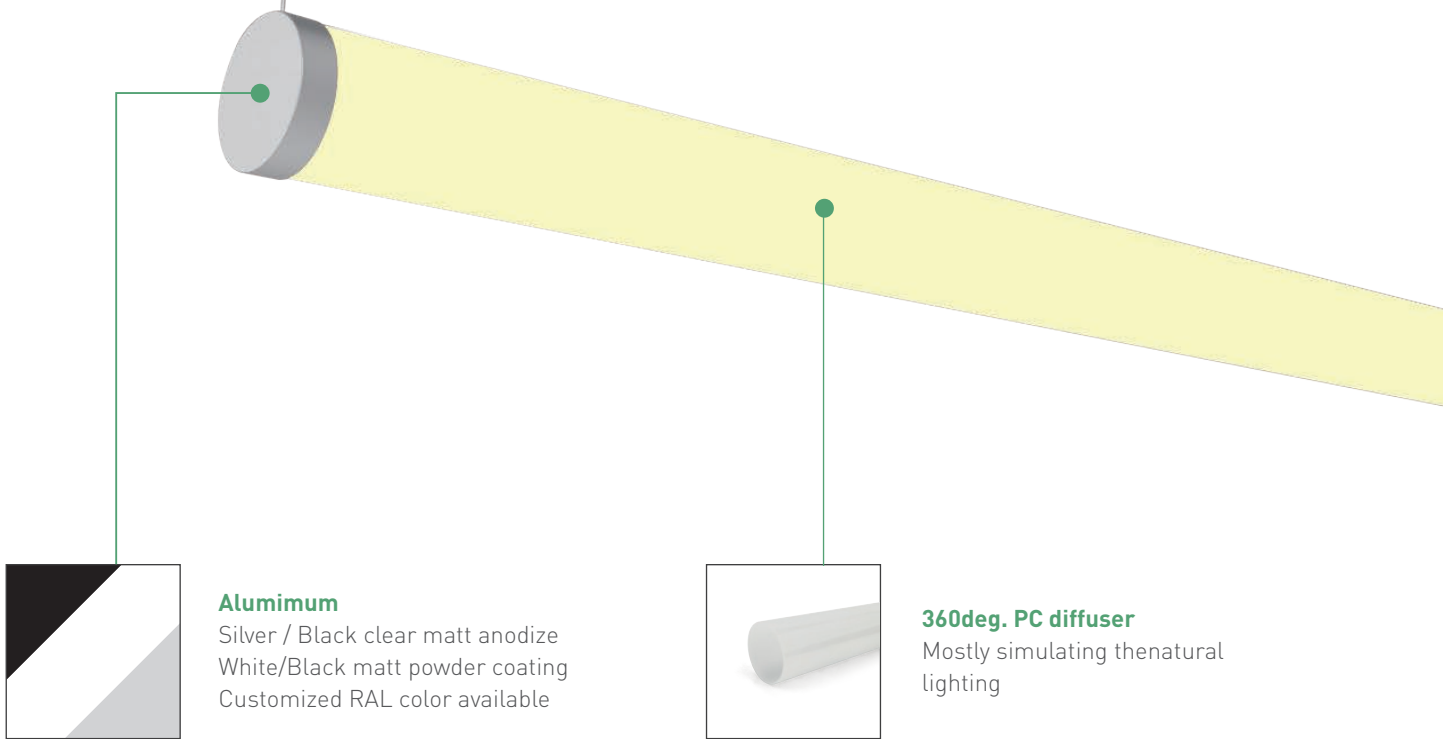

**Aluminum**  
Silver / Black clear matt anodize  
White/Black matt powder coating  
Customized RAL color available

**360deg. PC diffuser**  
Mostly simulating thenatural  
lighting



# O600610P

360DEG LINEAR LIGHT

## ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY <sup>1</sup>	COLOR TEMP <sup>2</sup>	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
O600610P	W White	D Diffuser	2 - 630mm	3	27 - 2700K	95	P Vertical Pendant	22 IP22	D1 - DALI D2 - 0-10V D3 - On/off
			4 - 1230mm	3-Step MacAdam Ellipse	30 - 3000K	95+ CRI			
	5 - 1530mm		5 5-Step MacAdam Ellips	35 - 3500K	95	HP Horizontal Pendant			
	6 - 1830mm			40 - 4000K	95+ CRI				
				50 - 5000K	95				
				60 - 6000K	95+ CRI				
		65 - 6500K							

1. Blueview's standard is 3-Step MacAdam

2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


## SPECIFICATION

Voltage	220V-240VAC / 100V-240 VAC			
Width / Height	φ 63mm			
Length	630mm	1230mm	1530mm	1830mm
Power (W/m /ft)	13 W/pc	27 W/pc	33.5 W/pc	40 W/pc
Efficacy Up to	100lm/w	108lm/w	108lm/w	108lm/w
Control	Dali , 0-10V, on/off			

## LED CHIPS AND DRIVER OPTIONS



## INSTALLATION

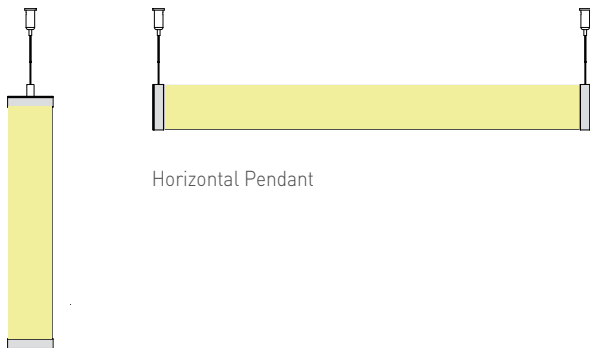

Vertical Cylinder

Horizontal Pendant

## ACCESSORIES



Aircraft Cable Pendant Kit


## SPECIFICATIONS

	Color Temperature	Lumen / Length			
RA 80	2700K	1204lm / 0.6m	2500lm / 1.2m	2585lm / 1.5m	3704lm / 1.8m
	3000K	1267lm / 0.6m	2632lm / 1.2m	2721lm / 1.5m	3899lm / 1.8m
	3500K	1334lm / 0.6m	2770lm / 1.2m	2864lm / 1.5m	4104lm / 1.8m
	4000K	1404lm / 0.6m	2916lm / 1.2m	3015lm / 1.5m	4320lm / 1.8m
	5000K	1404lm / 0.6m	2916lm / 1.2m	3015lm / 1.5m	4320lm / 1.8m
	6000K	1404lm / 0.6m	2916lm / 1.2m	3015lm / 1.5m	4320lm / 1.8m
	6500K	1404lm / 0.6m	2916lm / 1.2m	3015lm / 1.5m	4320lm / 1.8m
RA 90	2700K	963lm / 0.6m	2000lm / 1.2m	2068lm / 1.5m	2963lm / 1.8m
	3000K	1014lm / 0.6m	2106lm / 1.2m	2177lm / 1.5m	3119lm / 1.8m
	3500K	1067lm / 0.6m	2216lm / 1.2m	2291lm / 1.5m	3283lm / 1.8m
	4000K	1123lm / 0.6m	2333lm / 1.2m	2412lm / 1.5m	3456lm / 1.8m
	5000K	1123lm / 0.6m	2333lm / 1.2m	2412lm / 1.5m	3456lm / 1.8m
	5500K	1123lm / 0.6m	2333lm / 1.2m	2412lm / 1.5m	3456lm / 1.8m
	6500K	1123lm / 0.6m	2333lm / 1.2m	2412lm / 1.5m	3456lm / 1.8m
RA 95	2700K	867lm / 0.6m	1800lm / 1.2m	1861lm / 1.5m	2666lm / 1.8m
	3000K	912lm / 0.6m	1895lm / 1.2m	1959lm / 1.5m	2807lm / 1.8m
	3500K	960lm / 0.6m	1995lm / 1.2m	2062lm / 1.5m	2955lm / 1.8m
	4000K	1011lm / 0.6m	2100lm / 1.2m	2171lm / 1.5m	3110lm / 1.8m
	6500K	1011lm / 0.6m	2100lm / 1.2m	2171lm / 1.5m	3110lm / 1.8m
SAMSUNG RA 80	3000K	1141lm / 0.6m	2368lm / 1.2m	2449lm / 1.5m	3509lm / 1.8m
	4000K	1264lm / 0.6m	2624lm / 1.2m	2714lm / 1.5m	3888lm / 1.8m
	6500K	1264lm / 0.6m	2624lm / 1.2m	2714lm / 1.5m	3888lm / 1.8m

**Note:**

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

## DIMENSIONS



Unit:mm[in]