



ChipBrand



One BIN only  
for a CCT range



Lifetime



Certified




Certified



Certified



Warranty

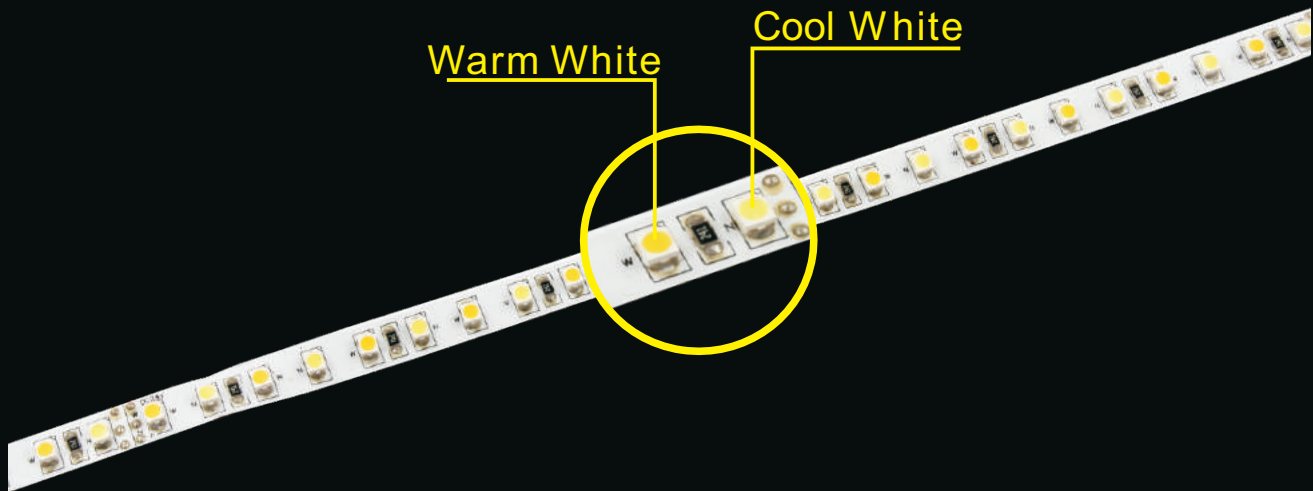

Ra Available

IP Grade Available



## Features

- Color temperature adjustable, with 3528 warm white & cool white LEDs alternative
- Epistar chips, LM-80 tested
- Ra90+ /80+, with high R9 & R13 value
- Silicone extrusion (IP68), tube encased (IP67), silicone coated (IP65) & indoor (IP22) are available
- Cutable every 6 LEDs for 12V, 12 LEDs for 24V
- 3M double sided tape for easy installation
- cULus Listed, 5 years warranty



BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011      Fax: +86-28-8148 1258  
 Mail: sales@blueviewled.com      Web.: www.blueviewled.com  
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest  
 Aviation Industrial Development Zone, Chengdu, Sichuan, China.  
 Zip code: 610207

Specifications are subject to change without notice.  
 ©Blueview™ 2016 – All rights reserved. Made in China.

### Specifications

<b>LED Type</b>	SMD 3528	<b>Dimmable</b>	Yes (compatible with BV311 RF dimmer & BV Dimmer)
<b>LED Q'ty/m</b>	120pcs	<b>IP grade</b>	IP22 (IP65/67/68 available upon request)
<b>Input Voltage</b>	12V / 24VDC Constant Voltage	<b>Installation</b>	3M™ double sided tape (mounting clips for IP67/68)
<b>Power</b>	9.6W	<b>Working Temperature</b>	-40~+80 °C
<b>Cutting length</b>	12V 50mm 6 LEDs 24V 100mm 12 LEDs	<b>Max run</b>	12V 2 meters 24V 4 meters
<b>Strip Width</b>	8mm	<b>Certification</b>	E354137 cULus Listed, CE, RoHs
<b>Viewing Angle</b>	120°	<b>Warranty</b>	5 years/3 years <sup>①</sup>

Order Code	CCT/ Color	CRI	Lumen/M <sup>②</sup>
TN-3528A-120-12or24-WN	 2700-3000K	90+	750
	 6000-6500K		

Note<sup>①</sup>: Contact Blueview for exact warranty period and policy


Note<sup>②</sup>: Lumen output are measured according to PMS-80, with a tolerance of +/- 5%

Note<sup>③</sup>: Standard package: 5m/roll


### Order Code

Model	Quality level	LED Q'ty/M	Input voltage	CCT/Color
<b>TN</b>	<b>3528A</b>	<b>120</b>	<b>12</b>	<b>WW/CW</b>
TN-IP22	3528A-5 yrs warranty		12-12V DC	
TWS-IP65	3528B-3 yrs warranty		24-24V DC	
TWT-IP65				
TWE-IP68				

### Dimension

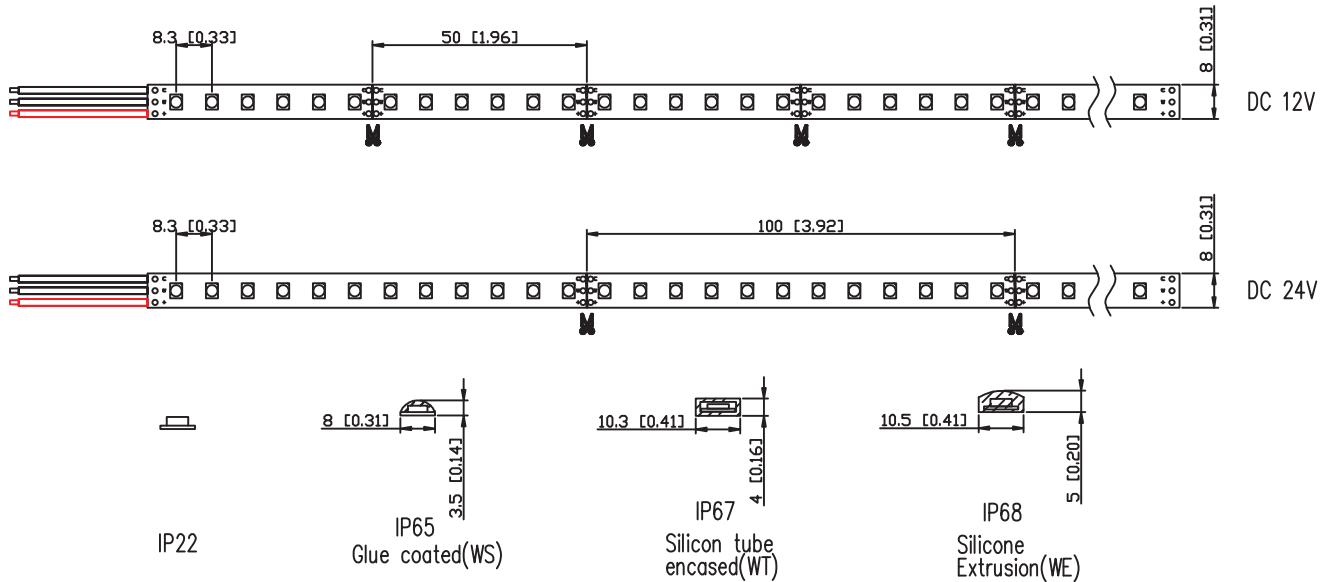

### Package

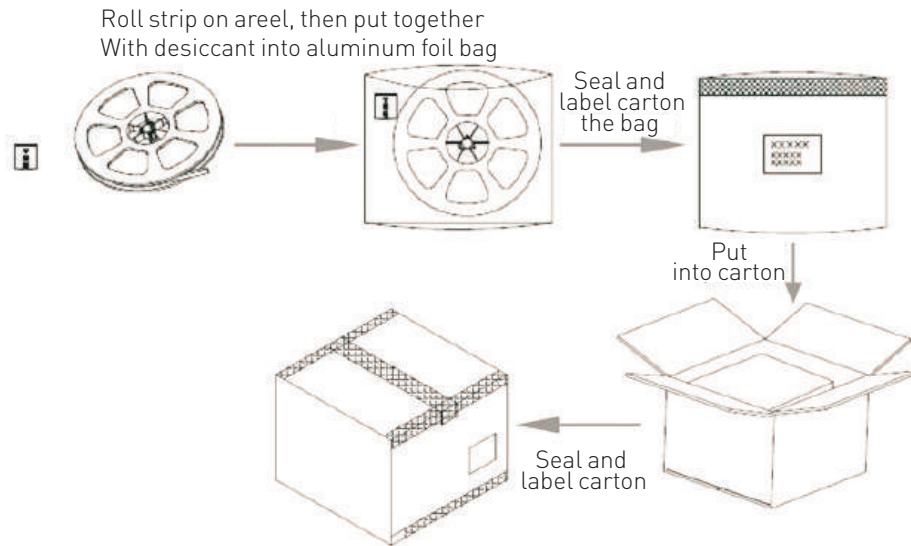

### Packing Info

Order Code	Net Weight / CTN	Gross Weight / CTN	Units / CTN	Carton Size
TN-3528A-120	12 (±10%) kgs	15 (±10%) kgs	100 rolls	550*400*340mm
TWS-3528A-120	25 (±10%) kgs	26 (±10%) kgs	100 rolls	550*400*340mm
TWT-3528A-120	25 (±10%) kgs	26 (±10%) kgs	100 rolls	550*400*340mm
TWE-3528A-120	30 (±10%) kgs	32 (±10%) kgs	60 rolls	550*400*340mm