


THERE IS NOT

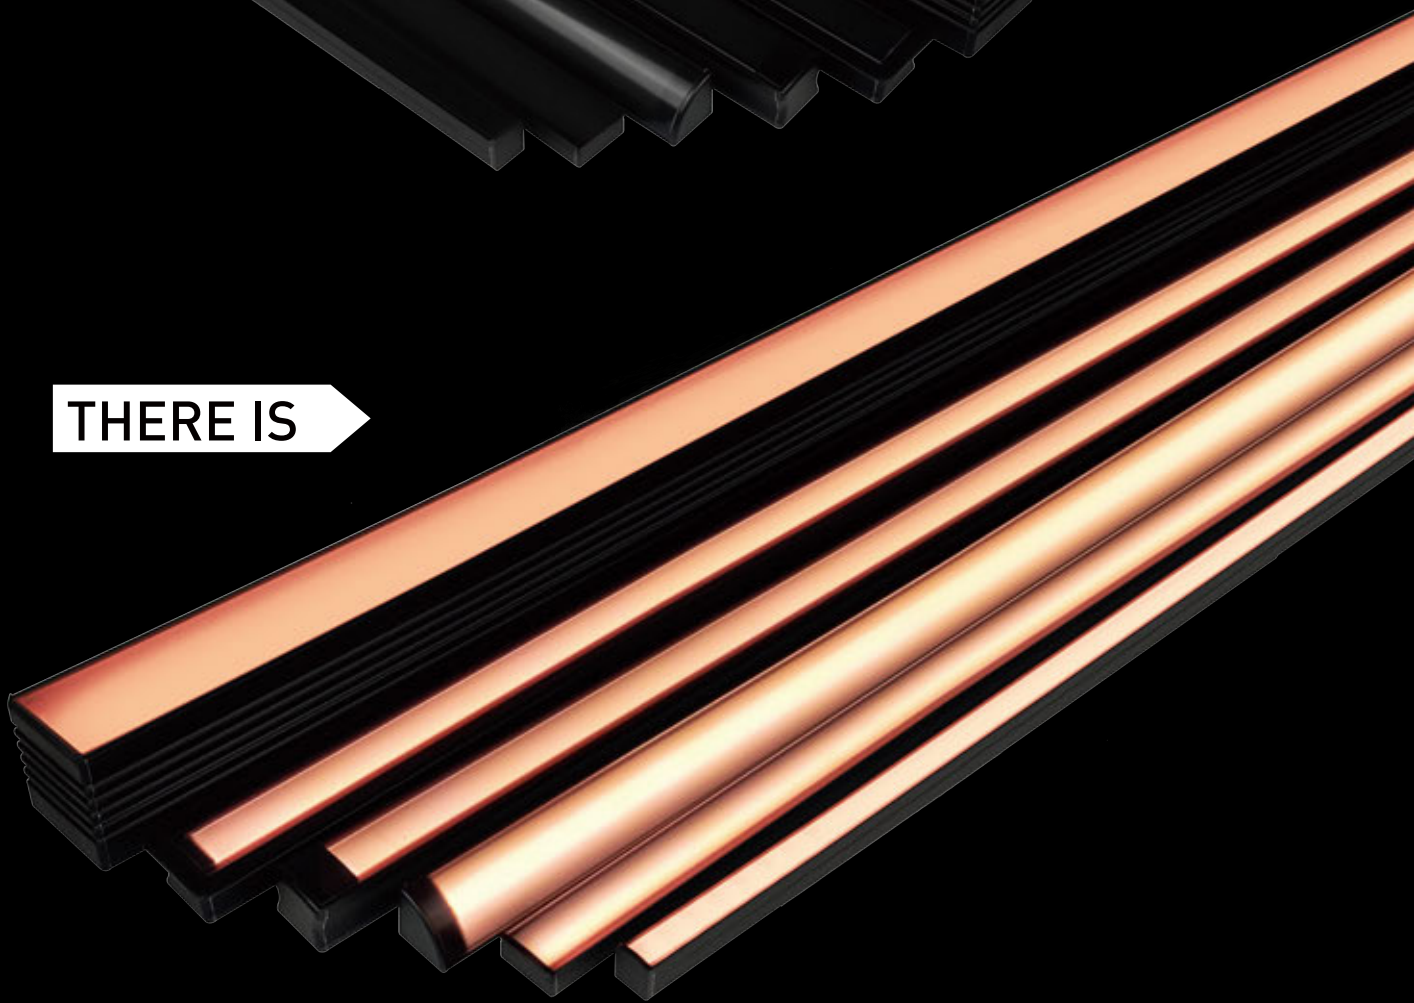


THERE IS

SPARKLE LINEAR LIGHT


Black lens in Trimless, Trimmed Recessed, Surface, Pendant solutions over 40 models.
More fit for architecture aesthetics.

SL-B503524

TRIMED RECESSED

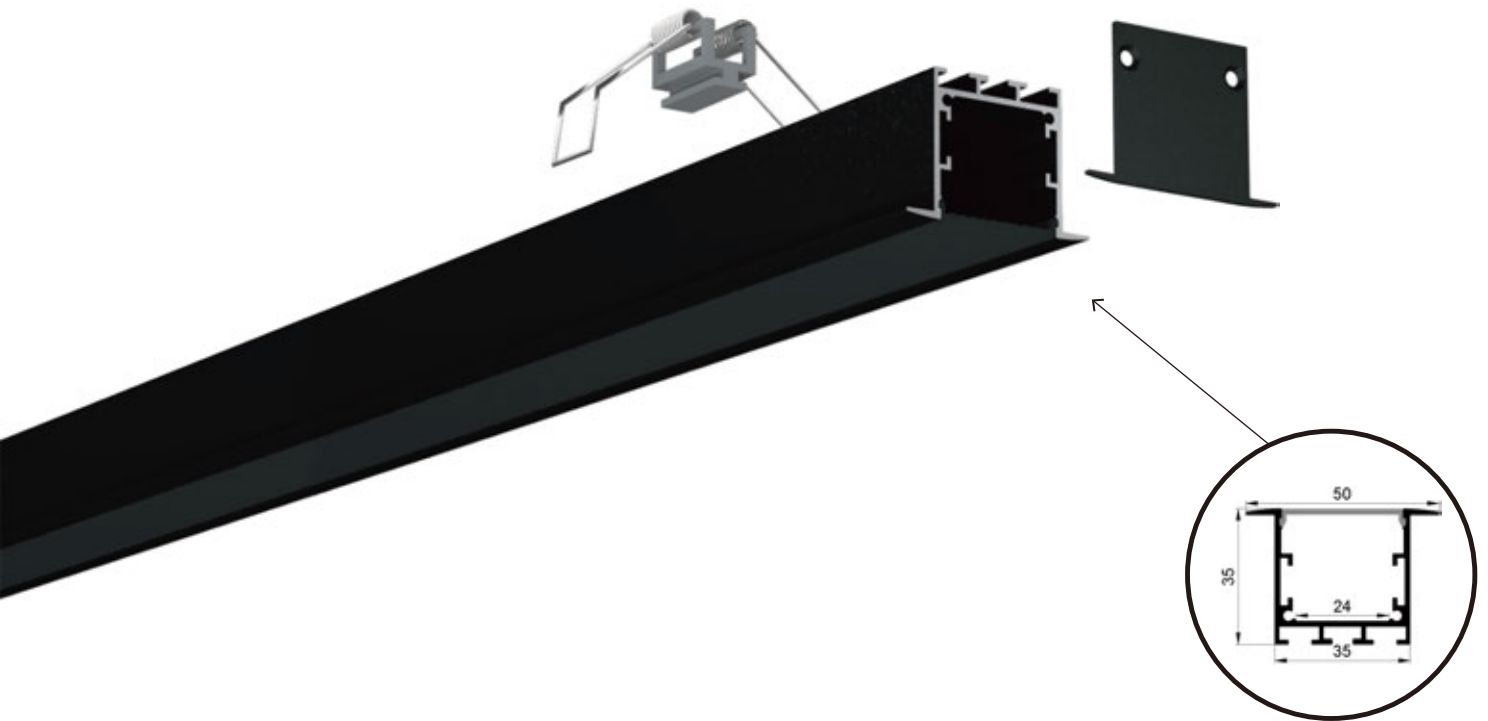

RECOMMEND FLEXIBLE LIGHT SOURCE



4000K 5000K 6000K

Model No.		LED QTY	Input Vol.	Power	CRI	Light Source Lumen	Black Lens Lumen	Cuttable length	Max Run
FN-2835-240	Standard	240pcs/m	24VDC	28.8W/m	80+/90+	2600lm/m	390lm/m	25mm	5m
	High Efficiency	240pcs/m	24VDC	21.6W/m	80+/90+	3024lm/m	423lm/m	33.33mm	5m
FN-2835-120	Standard	120pcs/m	12/24VDC	9.6W/m	80+/90+	1300lm/m	195lm/m	12V=25mm, 24V=50mm	12V=3m, 24V=6m
	High Efficiency	128pcs/m	24VDC	11.5W/m	80+	1698lm/m	255lm/m	62.5mm	5m
	Short Cut	120pcs/m	24VDC	21.6W/m	80+/90+	1922lm/m	288lm/m	16.7mm	3.5m