



BLUEVIEW ELEC-OPTIC TECH CO.,LTD


Tel: +86-28-8148 0011
Fax: +86-28-8148 1258
Mail: info@bvinspiration.com
Web: www.blueviewled.com
Web: www.bvinspiration.com

Add: No. 1000, Section 2,
2nd Konggang Road, Southwest
Aviation Industrial Development Zone,
Shuangliu, Chengdu, Sichuan,
China.610207

ZHONGSHAN LINEAR DIVISION

Add: Building F3 LuBo Industrial area, No.400 North
DongAn Road Guzhen Town Zhongshan,GuangDong,
China 528422

BLUEVIEW LINEAR LIGHT 2021-2022

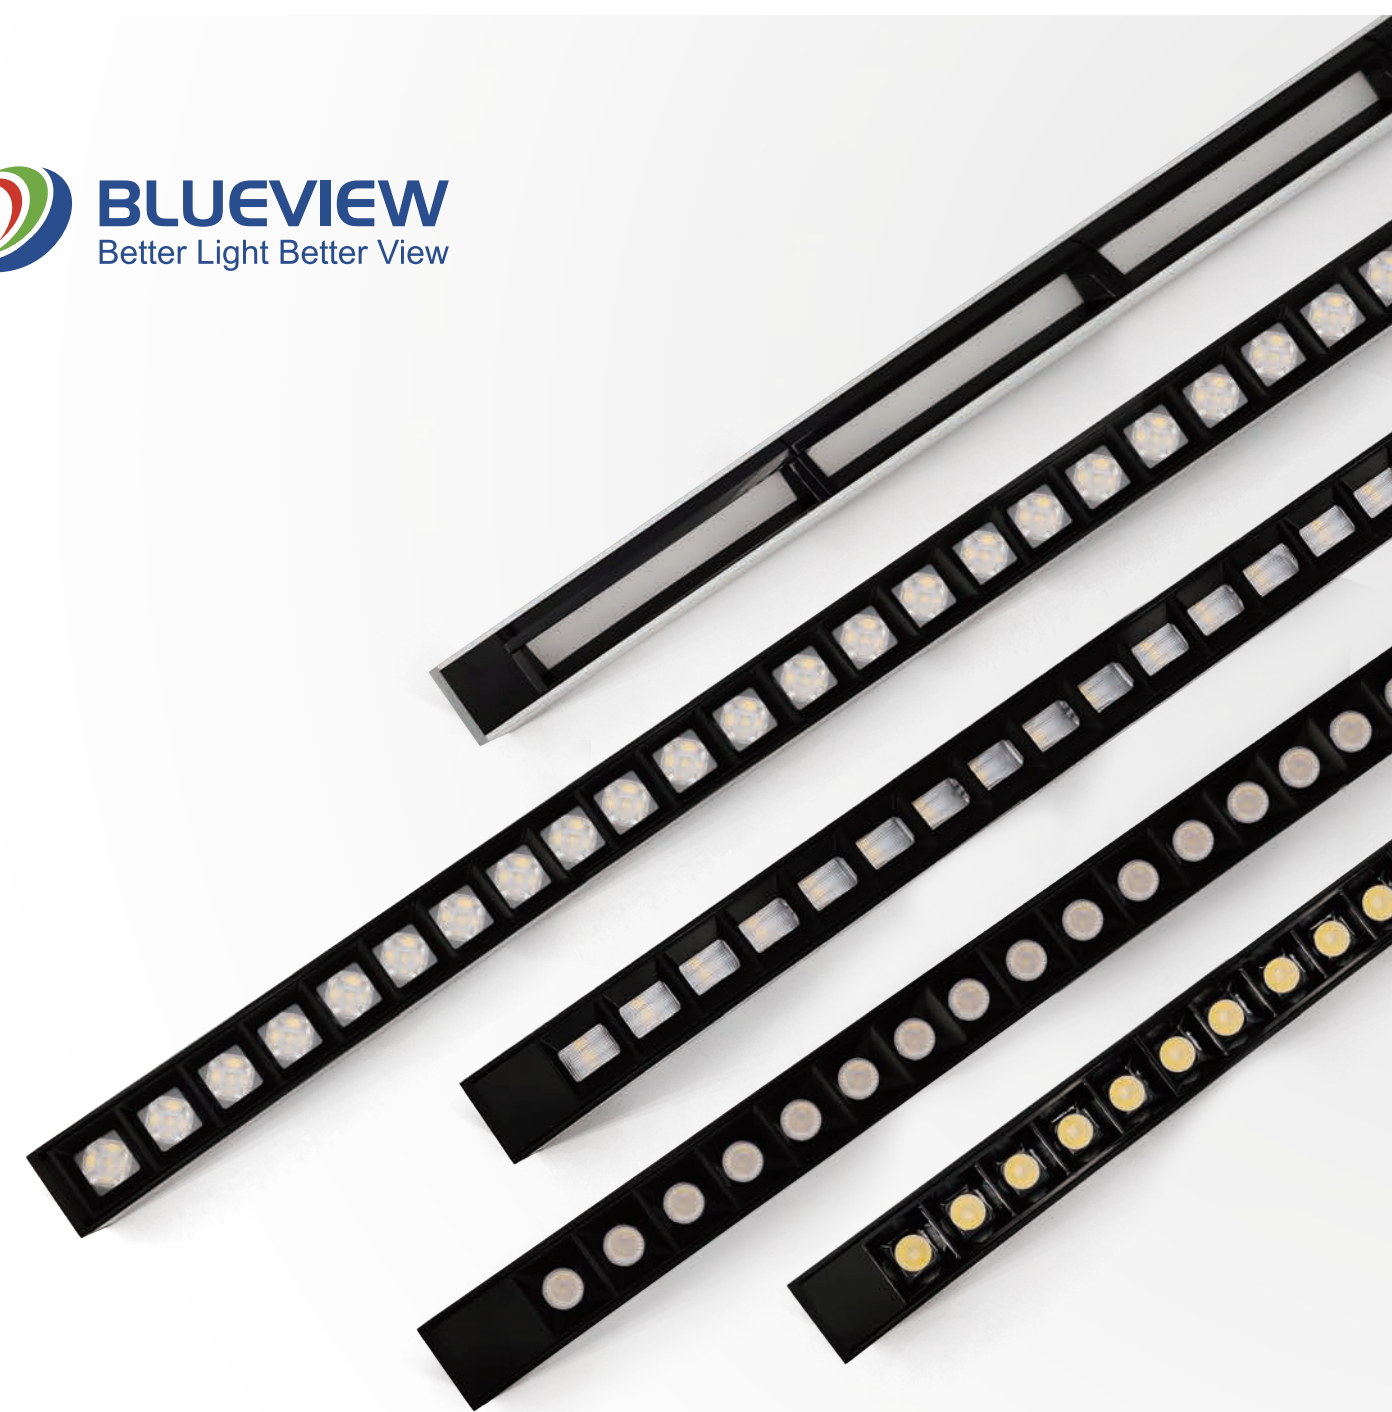

LINEAR LIGHTING



**BETTER
LIGHT
BETTER
VIEW**



INTRODUCTION

Blueview Elec-optic Tech Co., Ltd (BV Lighting) is one of the 1st movers in LED lighting manufacturer since 2004. We are the participants and witness of the LED development history. We've been offering integrated and innovative solutions in a wide range of signage and lighting products.

Blueview™ Linear Lighting System is a new lighting generation which is apply to General or local lighting in Office, Conference Rooms, Retail, Restaurants, Residential, Corridors or Public Building, etc.

The **Modular** and customizable character of the Light Engine. The system offers **million** variations.

Multiple installation engineering by Wall / Ceiling Surface or Pendant mounting enables the user to choose the orientation, direction and overall layout of the Light fixture in relation to a space. Most of the fixture has 3 installation function to Minimize inventory but keep various solution options. Uninterrupted lines of light for maximum uniformity and **Aesthetics**.

Vision and Mission

Our vision is continually creating and being a part of the LED lighting industrial's new history. Our mission is to help our customers to build the solid lighting solutions.

Our Values

- Team-Work
- Results-Driven
- Active Listening
- Customer Satisfaction
- Commitment to Continuous improvement
- Solid quality in competitive price

Our Strengths

- An outstanding international reputation after 17 years serving as LED manufacturer.
- Quality is Everything is firmly anchored to all BV's employees. It's reflected in each process of raw material vendors selection, new products development, production and QA.
- A highly motivated team, collaborating with rigor and respect
- A strong commitment to research and development and innovation

TOP5 REASONS TO CHOOSE BLUEVIEW LINEAR LIGHTING

#1

BEST-IN-CLASS SERVICES

- Customized spec support, private label service
- 24 hours response policy
- Solution offering with result-oriented
- Technical, Sales, Marketing team service

#2

EXPERIENCE YOU CAN TRUST

- Aiming to long-term partner relationship
- Focus on the advantage LED manufacturing technology
- Serving for High-end Market over since 2004, 972 employees
- Over than 55 million US Dollar annual sales

#3

CLASSIC ENGINEERING DESIGN

- Modular system offers more than million variations
- Blue light harzard less lighting source
- Min labor cost on installation & maintenance

#4

HIGH STANDARD QUALITY CONTROL

- TÜV Rheinland authorized laboratory
- Operations accredited to ISO 9001:2008
- 50% overseas sales in North America, all products meet all regulatory requirements including Title 24 and other unique standards
- Over than 20 process on reliability testing for one item

#5

ODM & OEM AVAILABLE

- 55 Engineers team
- Over than 50 R&D Patents
- Strong Supply Chain System



CONTENT

01	INTRODUCTION
03	TOP 5 TO CHOOSE BLUEVIEW LINEAR LIGHT
05	GRAZER SERIES
15	SLIM SERIES
31	LUZ SERIES
60	HONG DIRECT & INDIRECT SERIES
68	HILA IP44 / DIRECT & INDIRECT SERIES
72	U516833 PENDANT LINEAR LIGHT
76	EXTERNAL DRIVER -UGR<19
80	EXTERNAL DRIVER RECESSED -UGR<19
83	O30 DOUBLE SIDED RING
85	O20 DIRECT RING
87	O60 360DEGREE
91	O100 DIRECT RING
93	S100 DIRECT SQUARE

GRAZER SEREIS

BVG INTERIOR & OUTDOOR GRAZER LINEAR LIGHT

- Blueview's BVG Grazer Linear Lighting has Interior Grazer TIR lens type / BVG-T, Interior Extruded lens type / BVG-E, Interior Louver type / BVG-L & outdoor IP65 type / BVG-O.
- BVG-T and BVG-O are both engineering design with 12 optical lens options, it provides a narrow optic and clean light beam to highlight wall textures without shadow and hotspot. Featuring injected high-efficiency acrylic precision TIR lens, BVG delivers high-performance light evenly to graze the wall continuously in DC24V.
- BVG-T's optics provide from narrow 9 ° to flood 39 °x59 ° that enhance the wall textures from ceiling to floor.
- BVG can be installed by ceiling mounted bracket or Swivel bracket to satisfy different applications.

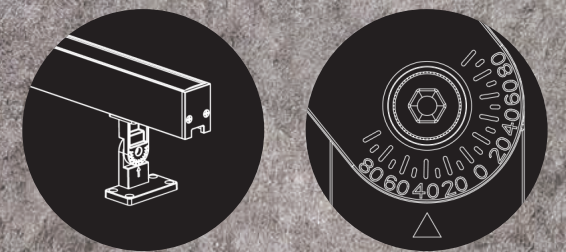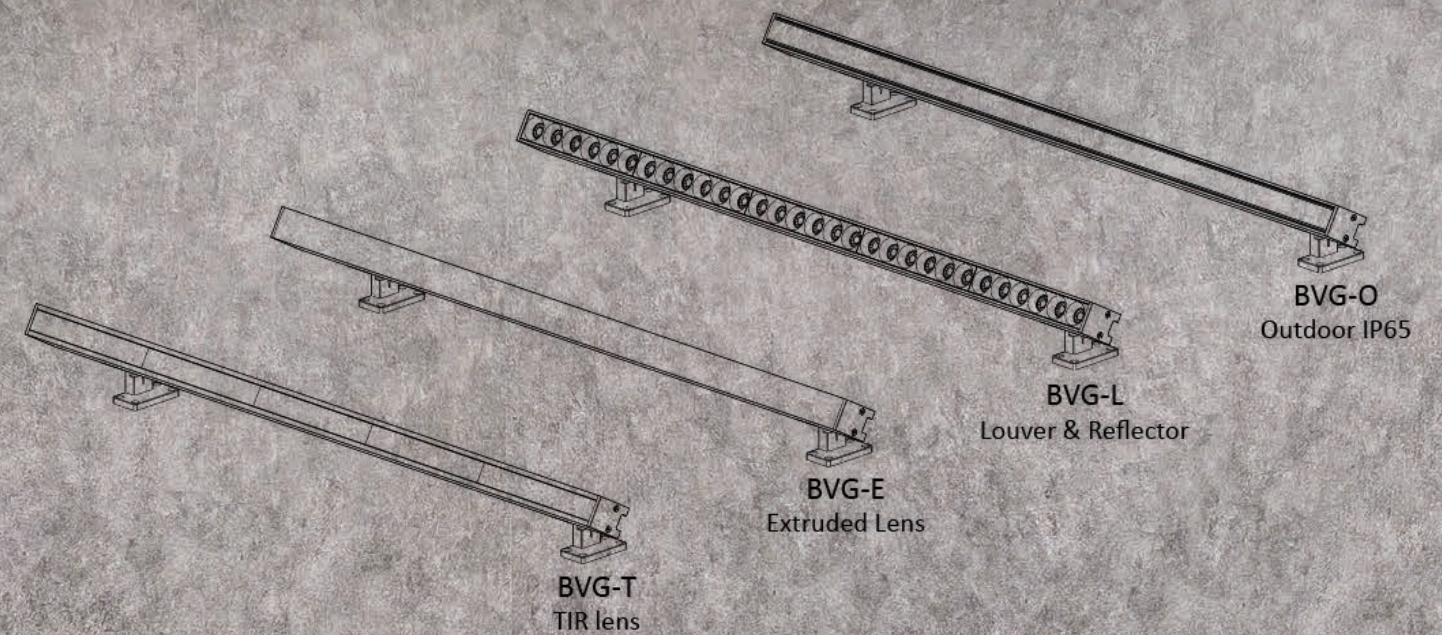


Die-casted Swivel bracket in -85° to 85° adjustable

GRAZER SERIES


BVG-L LOUVER OPICAL INTERIOR GRAZER LINEAR LIGHT

GRAZER SERIES

BVG-L LOUVER OPICAL INTERIOR GRAZER LINEAR LIGHT



LIGHTING DISTRIBUTION



ORDERING INFORMATION

LUMINAIRE	FINISH	BEAM ANGLE	POWER	COLOR QUALITY	COLOR TEMP	CRI	LENGTH	IP GRADE	DIMMING OPTOINS
BVG-L	W- White	30- Spot 30°	15- 15W/m	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	12- 1207mm	22- IP22	D1- On/off
	B- Black	50- Flood 50°		5- 5-Step MacAdam Ellips	30- 3000K	90- 90+ CRI	XX- Custom length 120mm increments.		
					35- 3500K	95- 95+ CRI			
					40- 4000K				
					50- 5000K				
				65- 6500K					

SPECIFICATION

Luminaire	BVG-L
Input Voltage	24VDC
Power	15W/m
Lumen Efficacy Up to	1425lm/m [95lm/W]
CRI	80+,90+,95+
Finish	White / Black - Matt powder coated Silver - Anodized
Width / Height	W25 x H35mm
Weight	1.20kgs/m
Max Run	2.5m [8ft]
IP Grade	IP22
Control	On/off
Installation	Surface Mounted, Pendant / Swivel Brackets

INSTALL ACCESSORIES




Adjustable Swivel Mounting Bracket



Surface Mounted Bracket

LIGHTING DISTRIBUTION

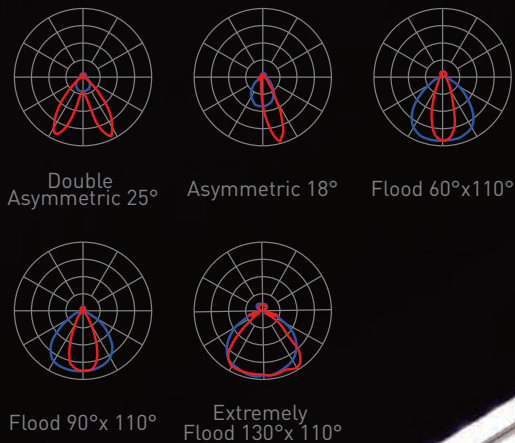

ORDERING INFORMATION

LUMINAIRE	FINISH	BEAM ANGLE	POWER	COLOR QUALITY	COLOR TEMP	CRI	LENGTH	IP GRADE	DIMMING OPTOINS
BVG-E	W- White	AS25 - Double Asymmetric 25°	14- 14.4W/m (Various LED tape light source optional)	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	12- 1207mm	22- IP22	D1- On/Off
	B- Black	AS18- Asymmetric 18°		5- 5-Step MacAdam Ellips	30- 3000K	90- 90+ CRI	XX- Custom length 100mm increments.		
	S- Silver	6011- Flood 60x110°			35- 3500K	95- 95+ CRI			
		9011- Flood 90x110°			40- 4000K				
					50- 5000K				
					60- 6000K				
65- 6500K									



SPECIFICATION

Luminiare	BVG-E
Input Voltage	24VDC
Power	14.4W/m (various LED tape light source optional)
Lumen Efficacy Up to	1650l;m/m [110lm/W]
CRI	80+,90+,95+
Finish	White / Black - Matt powder coated Silver - Anodized
Width / Height	W25 x H35mm
Weight	1.22kgs/m
Length	Custom length 100mm increments.
Max Run	5m [16.5ft]
IP Grade	IP22
Control	On/off
Installation	Surface Mounted, Pendant / Swivel Brackets

INSTALL ACCESSORIES




Adjustable Swivel Mounting Bracket



Surface Mounted Bracket

LIGHTING DISTRIBUTION

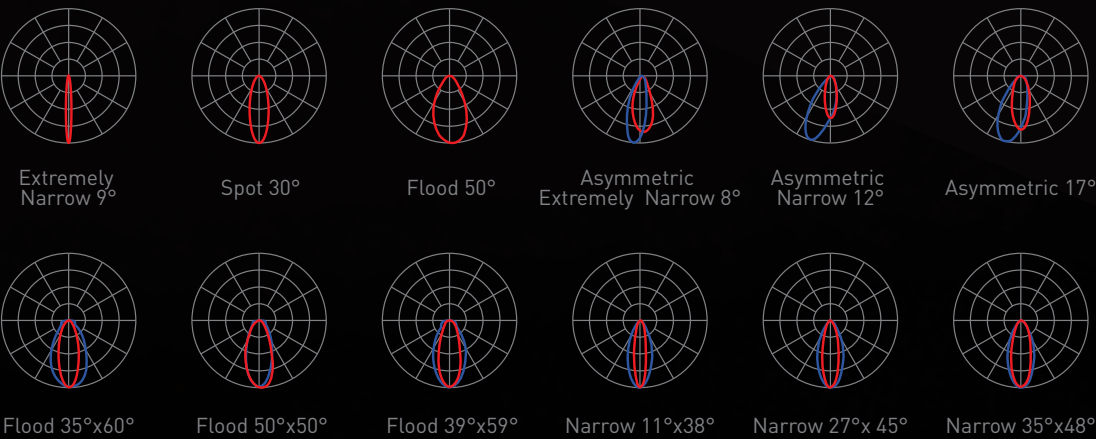

ORDERING INFORMATION

LUMINAIRE	FINISH	BEAM ANGLE	POWER	COLOR QUALITY	COLOR TEMP	CRI	LENGTH	IP GRADE	DIMMING OPTOINS	
BVG-O	W- White	09- 9° Extremely Narrow	18- 18.75W/m	3- 3-Step MacAdam Ellipse	27- 2700K	80	12- 1207mm	65- IP65	D1- On/Off	
		30- 30° Spot				80+ CRI				
	B- Black	50- 50° Flood		5- 5-Step MacAdam Ellips	30- 3000K	90				XX- Custom length 120mm increments
		S- Silver			AS08- 8° Asymmetric	40- 4000K				
	AS12- 12°Asymmetric									
	AS17- 17°Asymmetric									
	3560- 35° x 60° Flood									
	5050- 50° x 50° Flood									
	3959- 39° x 59° Flood									
	1138- 11° x 38° Narrow									
	2745- 27° x 45° Narrow									
	0548- 5° x 48° Narrow									



SPECIFICATION

Luminaire	BVG-O
Input Voltage	24VDC
Power	18.75W/m
Lumen Efficacy Up to	1780lm/m [95lm/W]
CRI	80+,90+,95+
Finish	White / Black - Matt powder coated Silver - Anodized
Width / Height	W30 x H36mm
Weight	1.9kgs/m
Length	1207mm (Custom length 120mm increments + 7mm endcaps.
Max Run	2.5m [8ft]
IP Grade	IP65
Control	On/off
Installation	Surface Mounted, Pendant / Swivel Brackets

INSTALL ACCESSORIES



Adjustable Swivel Mounting Bracket



Surface Mounted Bracket

LIGHTING DISTRIBUTION



ORDERING INFORMATION

LUMINAIRE	FINISH	BEAM ANGLE	POWER	COLOR QUALITY	COLOR TEMP	CRI	LENGTH	IP GRADE	DIMMING OPTOINS
BVG-T	W White	09- 9° Extremely Narrow	18- 18.75W/m	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	12- 1207mm	22-IP22	D1- On/Off
		30- 30° Spot							
	B Black	50- 50° Flood		5- 5-Step MacAdam Ellips	30- 3000K	90- 90+ CRI	XX- Custom length 120mm increments		
	S Silver	AS08- 8° Asymmetric							
		AS12- 12°Asymmetric							
		AS17- 17°Asymmetric							
		3560- 35° x 60° Flood			40- 4000K				
		5050- 50° x 50° Flood			50- 5000K				
		3959- 39° x 59° Flood							
		1138- 11° x 38° Narrow							
		2745- 27° x 45° Narrow							
		0548- 5° x 48° Narrow							



SPECIFICATION

Luminiare	BVG-T
Input Voltage	24VDC
Power	18.75W/m
Lumen Efficacy Up to	2100lm/m [112lm/W]
CRI	80+,90+,95+
Finish	White / Black - Matt powder coated Silver - Anodized
Width / Height	W25 x H35mm
Weight	1.25kgs/m
Length	1207mm.Custom length 120mm increments.
Max Run	2.5m [8ft]
IP Grade	IP22
Control	On/off
Installation	Surface Mounted, Pendant / Swivel Brackets

INSTALL ACCESSORIES



Adjustable Swivel
Mounting Bracket



Surface Mounted
Bracket

SLIM SEREIS

SLIM SERIES PENDANT LINEAR LIGHT

Slim Series P/M is a linear LED lighting fixture with internal drivers that features by various Optic options. It can be built hundreds of options depending on the lighting environment requires based on various optical options. The 15° / 30° / 45° / 50° / 50x50° / 35x75° louver or TRI lens plus the Wall washer louver are satisfying most of the application. Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V type, also controllable options in DMX, PWM and 2.4G Static, Tunable white, RGBW solution available. The fixture is designed in multiple installation in Sus-pendant, Ceiling Mounted. Fixture lengths are available in 2ft, 4ft, 5ft and 8ft, and custom lengths are available in 19.6ft.

Finish


Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications

Indoor - Office, Educational Institutions, Conference Rooms and many other workspaces.

SLIM SERIES

SURFACE PC DIFFUSER LINEAR LIGHT

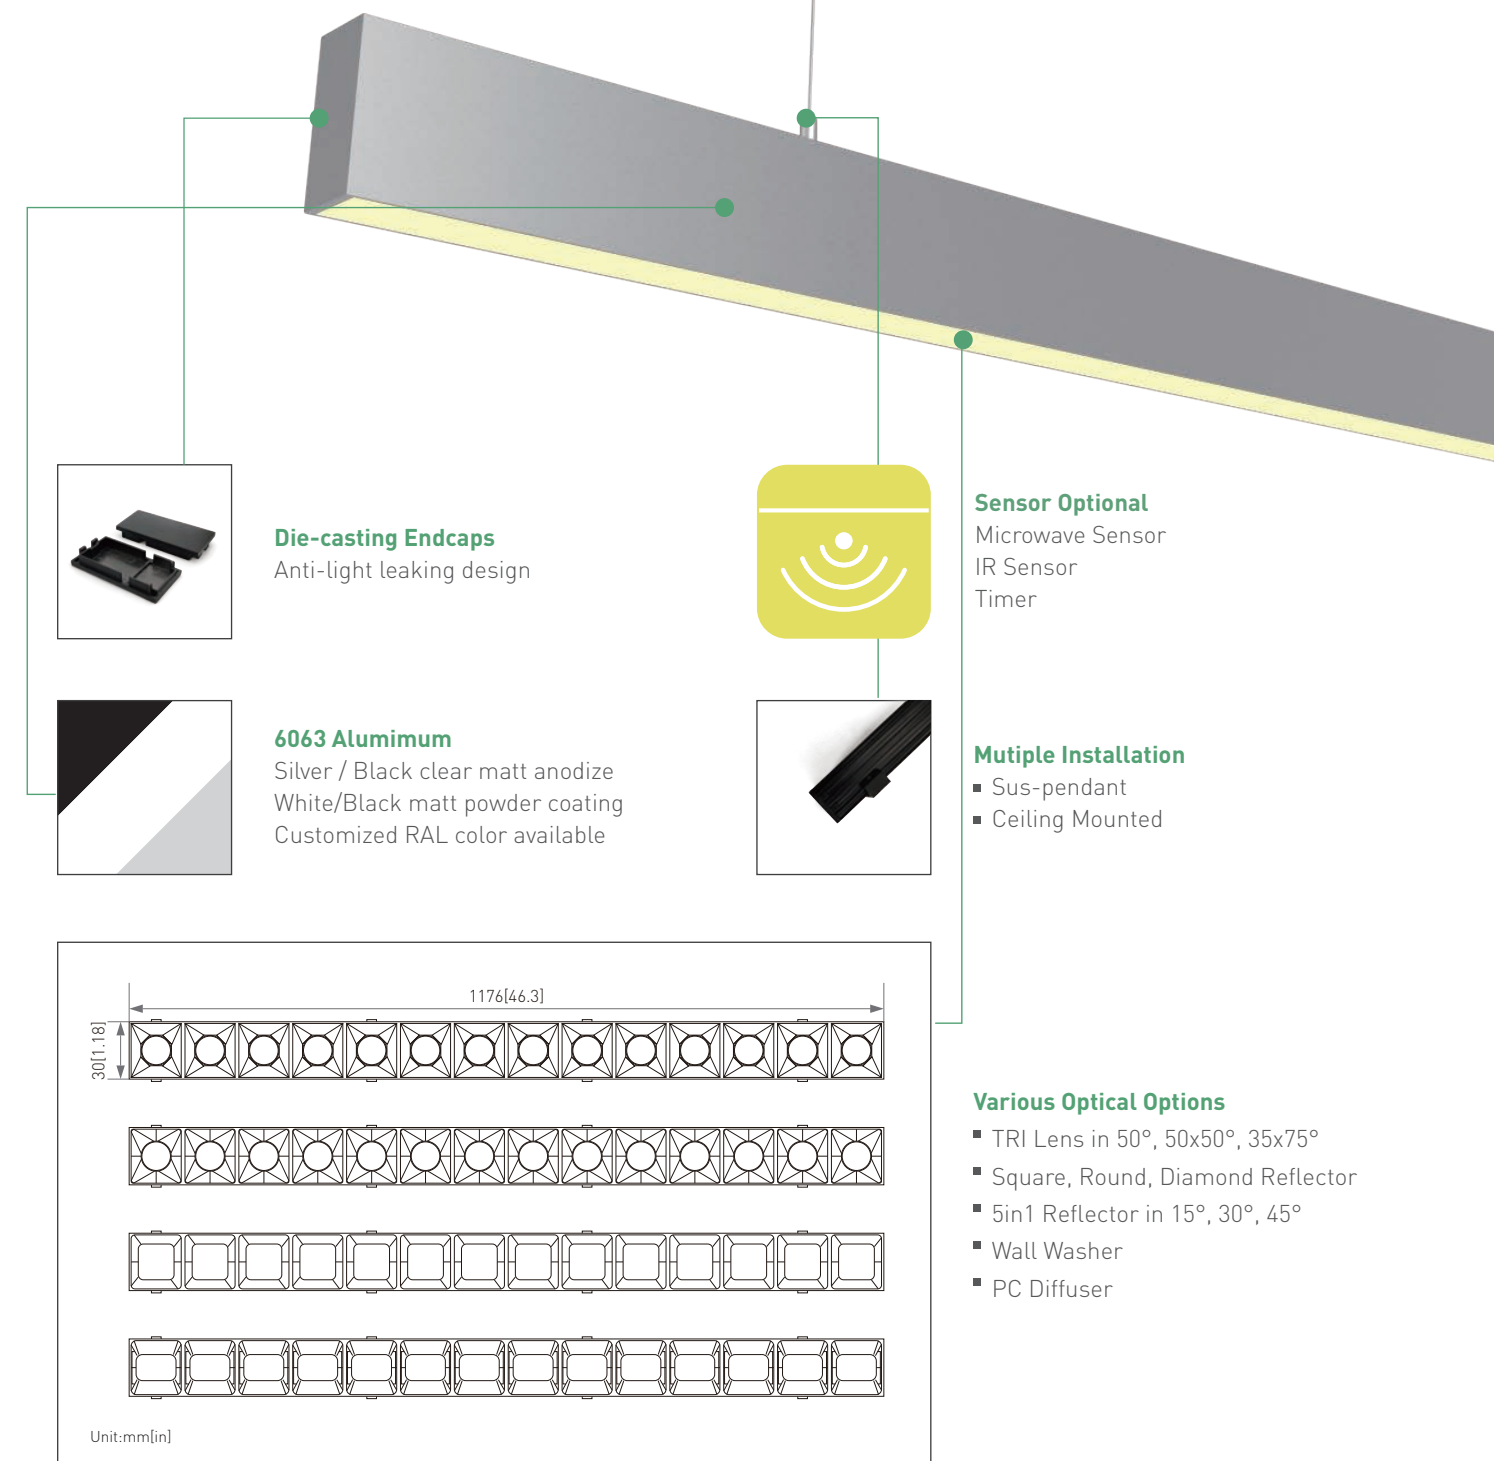


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS				
U357228	W- White	D- Diffuser	2- 608mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	P- Aircraft cable pendant	22- IP22	D1- DALI				
	B- Black		4- 1208mm		30- 3000K								
			5- 1508mm		35- 3500K	90- 90+ CRI				M- Ceiling Mounted			
	S- Silver		8- 2408mm	5- 5-Step MacAdam Ellips	40- 4000K								
					50- 5000K	95- 95+ CRI							
					60- 6000K								
					65- 6500K								


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC			
Width / Height	W35mm x H73mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	11.5 W/pc	23 W/pc	27 W/pc	46.5 W/pc
Efficacy Up to	85lm/w	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off			



INSTALLATION

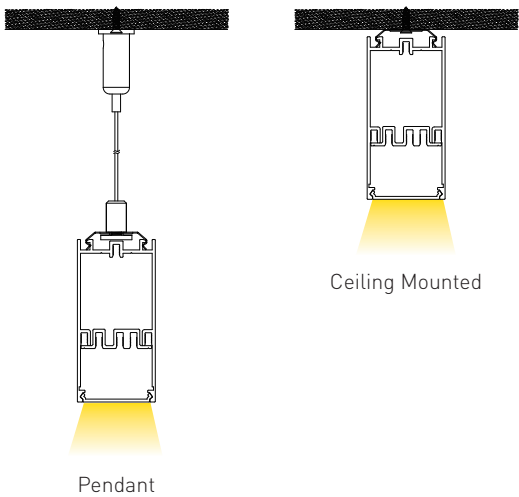

ACCESSORIES




SPECIFICATIONS

Color Temperature		Lumen / Length			
RA 80	2700K	887lm / 0.6m	1775lm / 1.2m	2083lm / 1.5m	3588lm / 2.4m
	3000K	934lm / 0.6m	1868lm / 1.2m	2193lm / 1.5m	3777lm / 2.4m
	3500K	983lm / 0.6m	1967lm / 1.2m	2309lm / 1.5m	3976lm / 2.4m
	4000K	1035lm / 0.6m	2070lm / 1.2m	2430lm / 1.5m	4185lm / 2.4m
	5000K	1035lm / 0.6m	2070lm / 1.2m	2430lm / 1.5m	4185lm / 2.4m
	6000K	1035lm / 0.6m	2070lm / 1.2m	2430lm / 1.5m	4185lm / 2.4m
	6500K	1035lm / 0.6m	2070lm / 1.2m	2430lm / 1.5m	4185lm / 2.4m
RA 90	2700K	710lm / 0.6m	1420lm / 1.2m	1667lm / 1.5m	2870lm / 2.4m
	3000K	747lm / 0.6m	1495lm / 1.2m	1754lm / 1.5m	3022lm / 2.4m
	3500K	787lm / 0.6m	1573lm / 1.2m	1847lm / 1.5m	3180lm / 2.4m
	4000K	828lm / 0.6m	1656lm / 1.2m	1944lm / 1.5m	3348lm / 2.4m
	5000K	828lm / 0.6m	1656lm / 1.2m	1944lm / 1.5m	3348lm / 2.4m
	5500K	828lm / 0.6m	1656lm / 1.2m	1944lm / 1.5m	3348lm / 2.4m
	6500K	828lm / 0.6m	1656lm / 1.2m	1944lm / 1.5m	3348lm / 2.4m
RA 95	2700K	639lm / 0.6m	1277lm / 1.2m	1500lm / 1.5m	2583lm / 2.4m
	3000K	673lm / 0.6m	1345lm / 1.2m	1579lm / 1.5m	2719lm / 2.4m
	3500K	708lm / 0.6m	1416lm / 1.2m	1662lm / 1.5m	2863lm / 2.4m
	4000K	745lm / 0.6m	1490lm / 1.2m	1749lm / 1.5m	3013lm / 2.4m
	6500K	745lm / 0.6m	1490lm / 1.2m	1749lm / 1.5m	3013lm / 2.4m
SAMSUNG RA 80	3000K	841lm / 0.6m	1681lm / 1.2m	1974lm / 1.5m	3340lm / 2.4m
	4000K	932lm / 0.6m	1863lm / 1.2m	2187lm / 1.5m	3767lm / 2.4m
	6500K	932lm / 0.6m	1863lm / 1.2m	2187lm / 1.5m	3767lm / 2.4m

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

DIMENSIONS

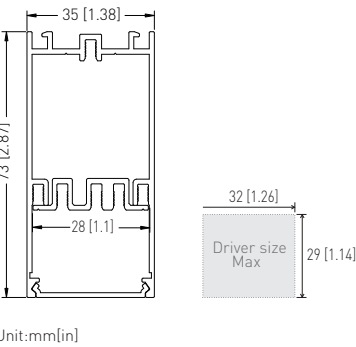

LED CHIPS AND DRIVER OPTIONS



SLIM SERIES

SURFACE WALL WASHER LINEAR LIGHT



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY ¹	COLOR TEMP ²	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White B- Black S- Silver	W- Wall Washer Kit	4 - 1208mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam

2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.

3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES

SURFACE WALL WASHER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W35mm x H73mm	
Length	1208mm with 4sets WW Kit	132.5mm
Power (W/m /ft)	21W/pc	5.5 W/pc
Efficacy Up to	70lm/w	90lm/w
Control	Dali , 0-10V, on/off	



SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1661lm / 1.2m	1840lm / 1.2m	1840lm / 1.2m	1840lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1137lm / 1.2m	1260lm / 1.2m	1260lm / 1.2m	1260lm / 1.2m

Note:


- The given data are typical values in 30deg Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.

- Above data based on Non-Dimmable for all luminaires.

- More customized LED and CCT available.


BEAM ANGLE

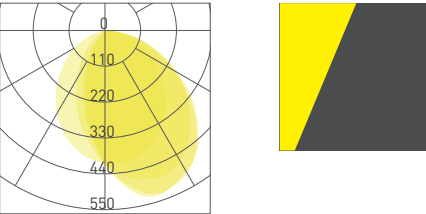

LED CHIPS AND DRIVER OPTIONS



DIMENSIONS



Unit:mm[in]



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White	15- 15Deg. Reflector Louver	4- 1208mm	3- 3-Step MacAdam Ellipse	30- 3000K	80- 80+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off
	B- Black		CM- Customized		40- 4000K	90- 90+ CRI			
	S- Silver	30- 30Deg. Reflector Louver			50- 5000K				
		45- 45Deg. Reflector Louver			65- 6500K				

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W35mm x H73mm	
Length	1208mm with 4sets Reflector Kit	132.5mm
Power (W/m /ft)	21 W/pc	5.5 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS


NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1717lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m

- Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - 10% less on UGR<19 version.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.
 - LM-80, IES TM-30-15 testing report available for led.

BEAM ANGLE

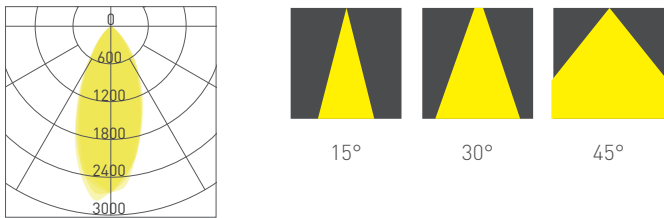

DIMENSIONS




Unit:mm[in]

LED CHIPS AND DRIVER OPTIONS



UGR
<16

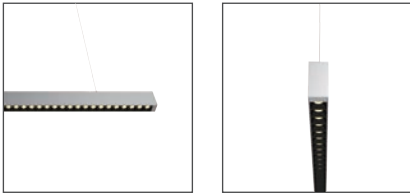

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White B- Black S- Silver	T50R- Round in Square 50° TIR Lens in Square Louver	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off



SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1717lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m

Note:
- The given data are typical values in 50deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.


BEAM ANGLE




LED CHIPS AND DRIVER OPTIONS



DIMENSIONS

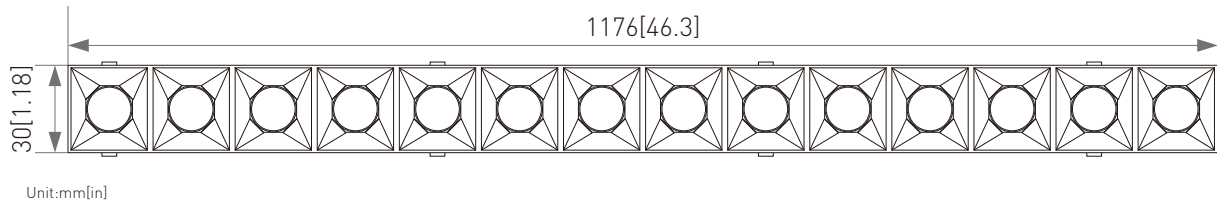

UGR
<16

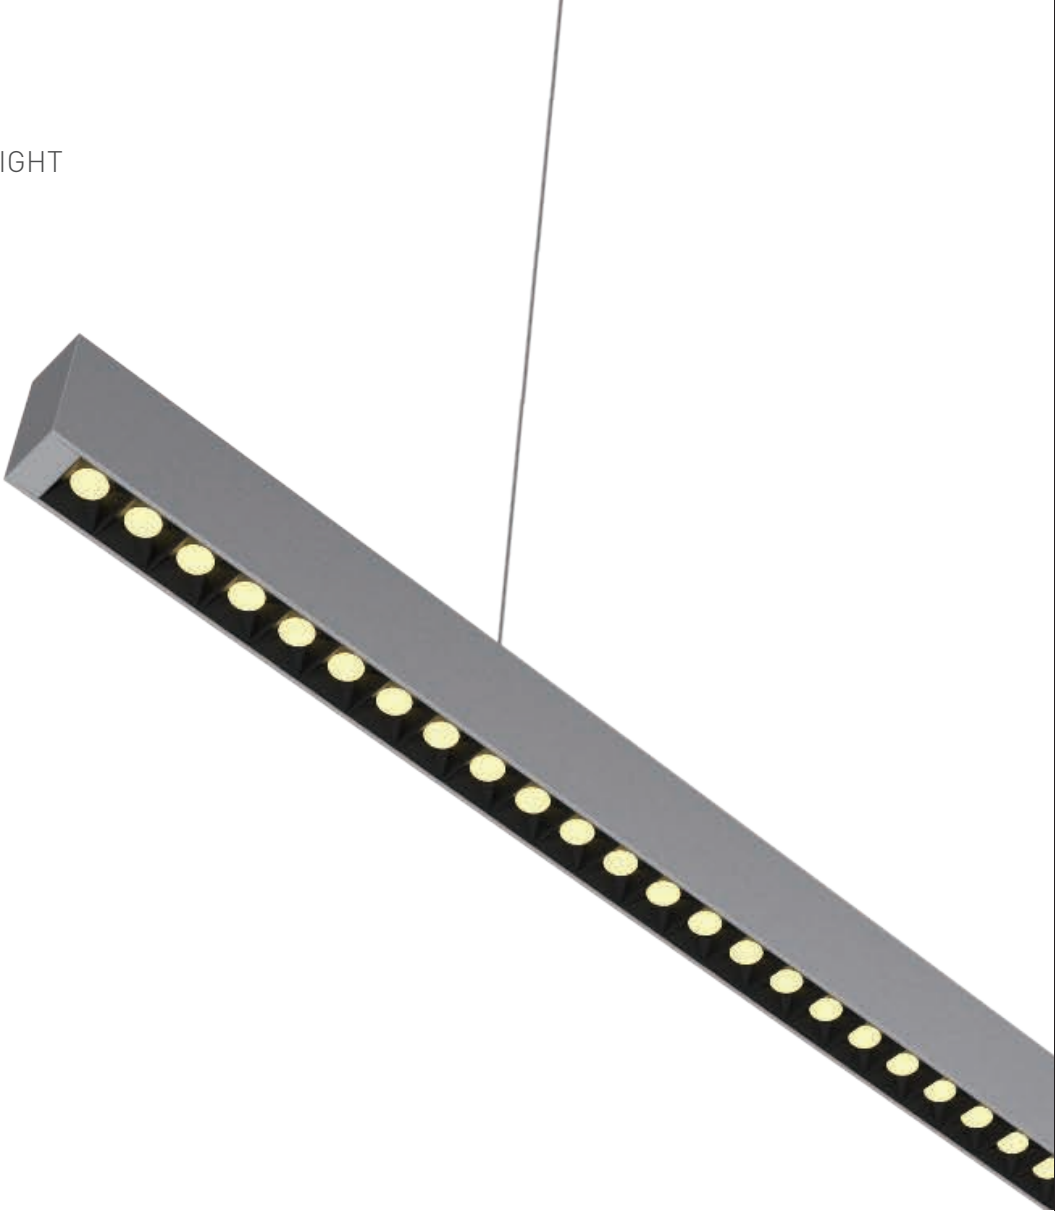


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White B- Black S- Silver	T50D- Round in Diamond 50° TIR Lens in Diamond Louver	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off



SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1717lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m

Note:
- The given data are typical values in 50deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.


BEAM ANGLE





LED CHIPS AND DRIVER OPTIONS



DIMENSIONS

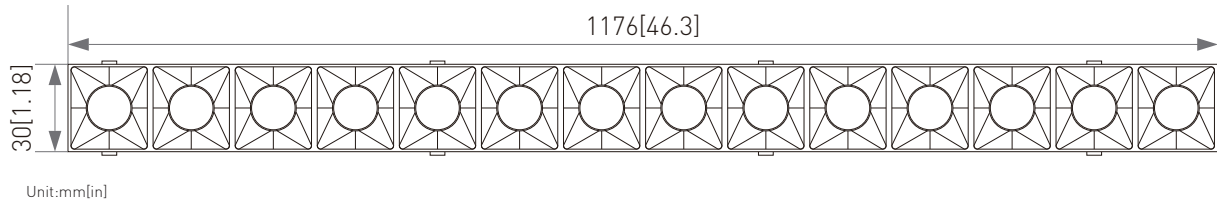

UGR
<16

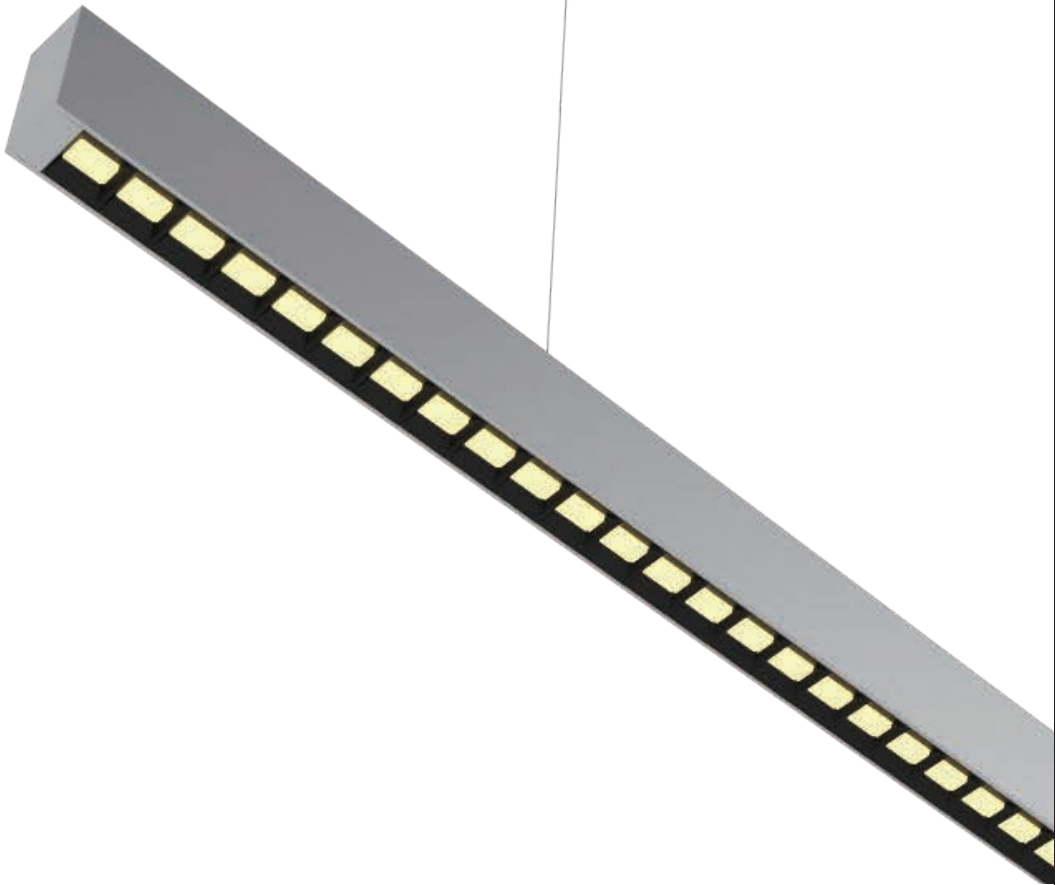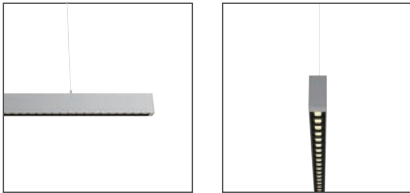


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS		
U357228	W- White	T3575-35° x 75° TIR Lens in Rectangle Louver	4- 1208mm	3- 3-Step MacAdam Ellipse	30- 3000K	80- 80+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI		
	B- Black		8- 2408mm		40- 4000K	90- 90+ CRI			D2- 0-10V		
	S- Silver		Fixed length only		50- 5000K				D3- On/off		
					65- 6500K						

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1717lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m

Note:
- The given data are typical values in 50deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.


BEAM ANGLE

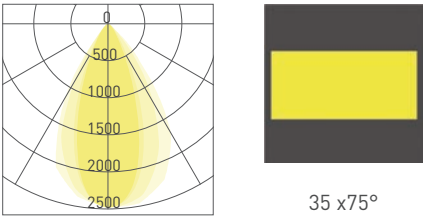



LED CHIPS AND DRIVER OPTIONS

NICHIA **EPISTAR** **SAMSUNG**
TRIDONIC **OSRAM** **LiFi**

DIMENSIONS

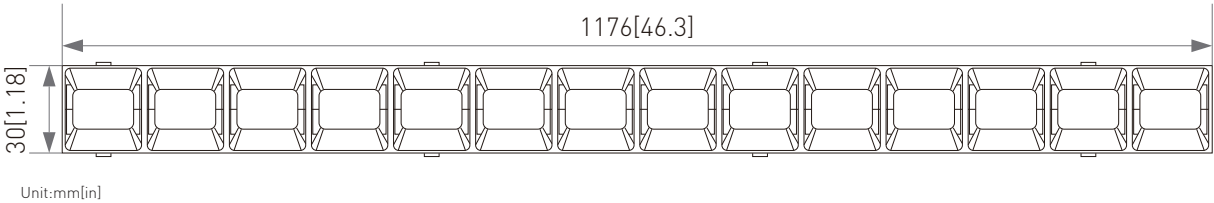

UGR
<16

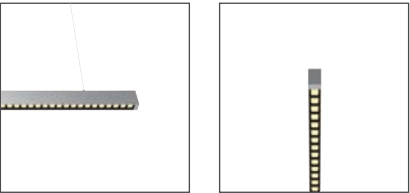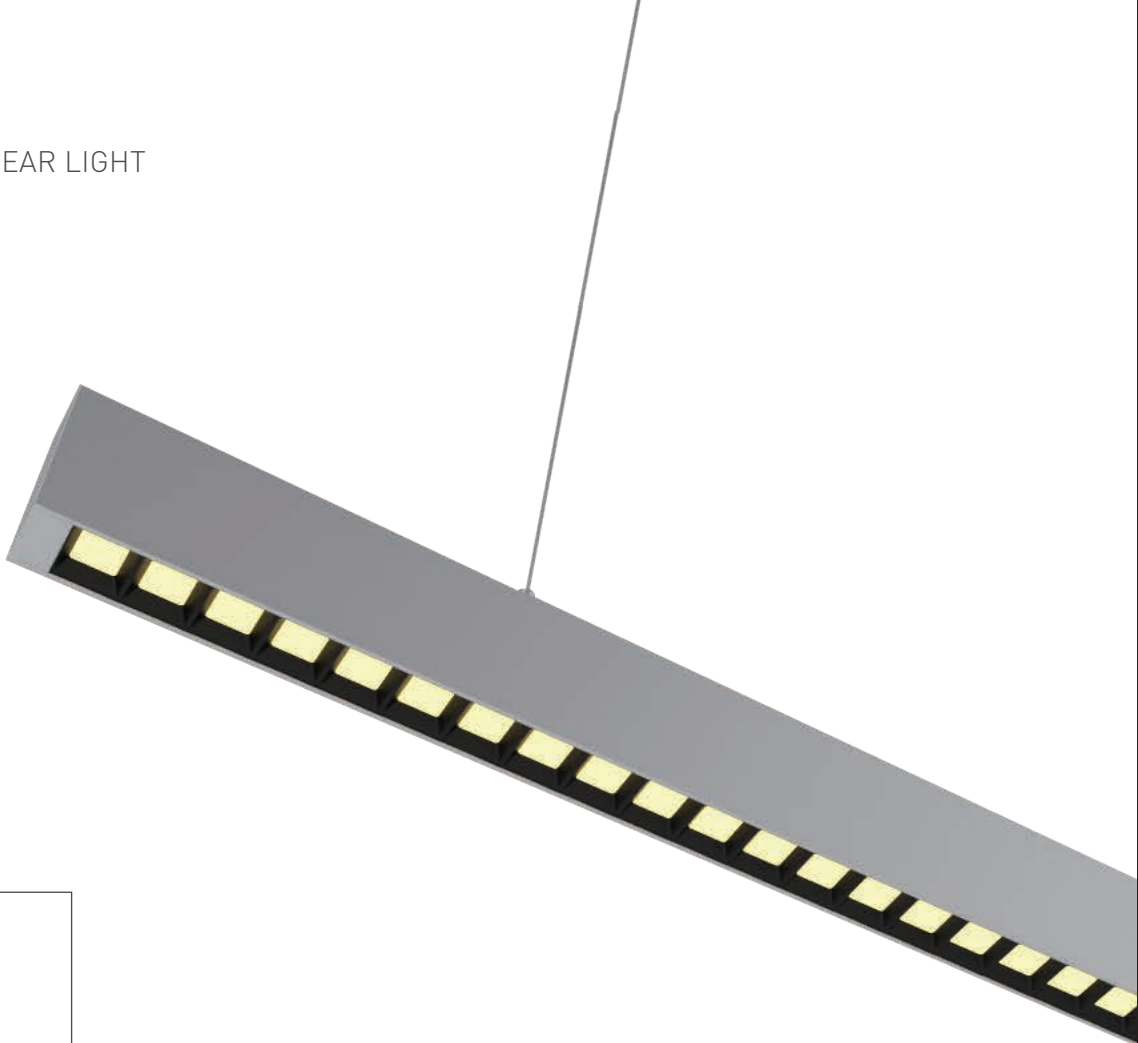

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White	T5050-50° x 50° TIR Lens in Square Louver	4- 1208mm	3- 3-Step MacAdam Ellipse	30- 3000K	80- 80+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI
	B- Black		8- 2408mm		40- 4000K	90- 90+ CRI			D2- 0-10V
	S- Silver		Fixed length only		50- 5000K				D3- On/off
					65- 6500K				

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1717lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m

Note:
- The given data are typical values in 50deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

BEAM ANGLE


LED CHIPS AND DRIVER OPTIONS



50 x50°

NICHIA EPISTAR SAMSUNG
TRIDONIC OSRAM LIFUD

DIMENSIONS

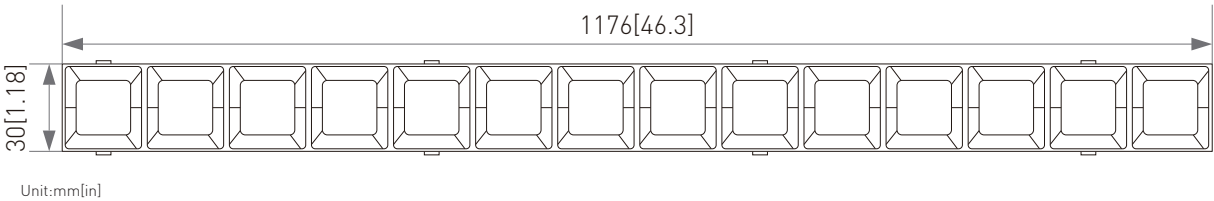

UGR
<19

LUZ SERIES

LINEAR LIGHT

LUZ P/M/W is a linear LED lighting fixture that features by various Optic options. It can be built hundreds of options depending on the lighting environment requires based on various optical options.

The 15° / 30° / 45° louver plus the Wall washer louver are satisfying most of the application.

Fixture features 80+, 90+ or 95+ Ra LEDs. White color from 2700K to 6500K.

Dimmable driver available in Dali, 0/1-10V type, also controllable options in DMX, PWM and 2.4G Static, Tunable white, RGBW solution available.

The fixture is designed in multiple installation in Sus-pendant, Wall / Ceiling Mounted, Trim-less or Trimmed Recessed.

Fixture lengths are available in 2ft, 4ft, 5ft and 8ft, and custom lengths are available in 19.6ft.

Finish

Aluminum clear matt anodized

White / Black powder coating

Customized RAL color available


Applications

Indoor - Commercial, Residential, Office, Educational Institutions, Conference Rooms and many other workspace




Multiple Installation

- Sus-pendant
- Wall Mounted
- Ceiling Mounted



Die-casting Endcaps

- Anti-light leaking design



Optical options

- Various Beam angle Lens
- Anti-Glare Film, UGR<19
- Prismatic Lens, UGR<19



Sensor Optional

- Microwave Sensor
- IR Sensor
- Timer



6063 Aluminum

- Silver / Black clear matt anodize
- White/Black matt powder coating
- Customized RAL color available

ORDERING INFORMATION


LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U508533	W- White	A- Anti-Glare Film UGR<19	2- 608mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	P- Aircraft cable pendant	22- IP22	D1- DALI
	B- Black		4- 1208mm		30- 3000K	90- 90+ CRI			D2- 0-10V
	S- Silver	P- Prismatic Lens UGR<19	5- 1508mm	5- 5-Step MacAdam Ellips	35- 3500K	95- 95+ CRI	W- Wall Mounted		D3- On/off
		D- Diffuser	8- 2408mm		40- 4000K		M- Ceiling Mounted		
					50- 5000K				
					60- 6000K				
					65- 6500K				

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC			
Width / Height	W50mm x H85mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	15.6 W/pc	31.1 W/pc	37.8 W/pc	62 W/pc
Efficacy Up to	85lm/w	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off			


INSTALLATION

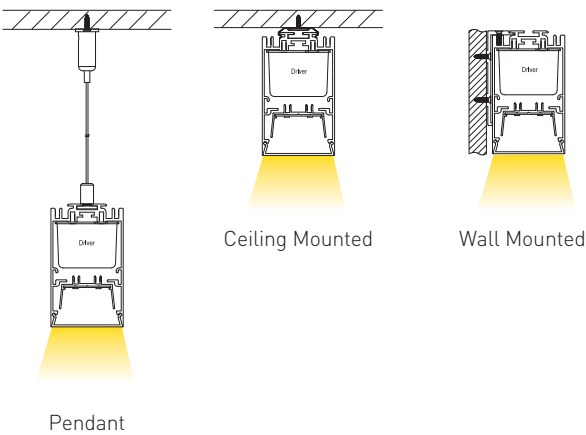

LED CHIPS AND DRIVER OPTIONS



ACCESSORIES

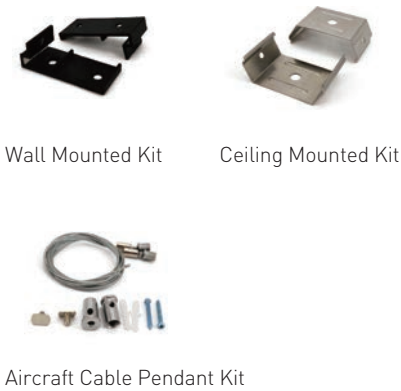


SPECIFICATIONS


Color Temperature		Lumen / Length			
RA 80	2700K	1204lm / 0.6m	2400lm / 1.2m	2917lm / 1.5m	4784lm / 2.4m
	3000K	1267lm / 0.6m	2526lm / 1.2m	3070lm / 1.5m	5036lm / 2.4m
	3500K	1334lm / 0.6m	2659lm / 1.2m	3232lm / 1.5m	5301lm / 2.4m
	4000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	5000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	6000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	6500K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
RA 90	2700K	963lm / 0.6m	1920lm / 1.2m	2333lm / 1.5m	3827lm / 2.4m
	3000K	1014lm / 0.6m	2021lm / 1.2m	2456lm / 1.5m	4029lm / 2.4m
	3500K	1067lm / 0.6m	2127lm / 1.2m	2586lm / 1.5m	4241lm / 2.4m
	4000K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
	5000K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
	5500K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
	6500K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
RA 95	2700K	867lm / 0.6m	1728lm / 1.2m	2100lm / 1.5m	3445lm / 2.4m
	3000K	912lm / 0.6m	1819lm / 1.2m	2211lm / 1.5m	3626lm / 2.4m
	3500K	960lm / 0.6m	1915lm / 1.2m	2327lm / 1.5m	3817lm / 2.4m
	4000K	1010lm / 0.6m	2015lm / 1.2m	2449lm / 1.5m	4017lm / 2.4m
	6500K	1010lm / 0.6m	2015lm / 1.2m	2449lm / 1.5m	4017lm / 2.4m
SAMSUNG RA 80	3000K	1200lm / 0.6m	2393lm / 1.2m	2909lm / 1.5m	4771lm / 2.4m
	4000K	1263lm / 0.6m	2519lm / 1.2m	3061lm / 1.5m	5022lm / 2.4m
	6500K	1263lm / 0.6m	2519lm / 1.2m	3061lm / 1.5m	5022lm / 2.4m

- Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - 10% less on UGR<19 version.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.
 - LM-80, IES TM-30-15 testing report available for led.

DIMENSIONS

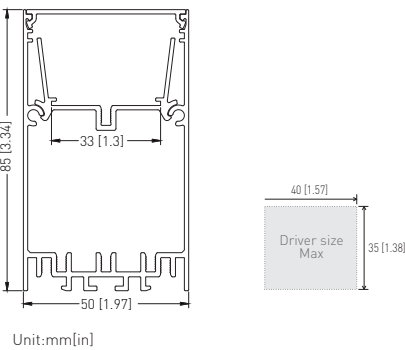


BEAM ANGLE

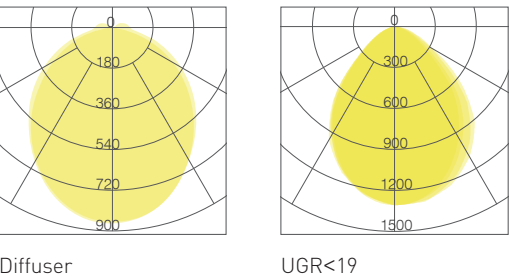

LUZ SERIES

WALL WASHER SURFACE LINEAR LIGHT

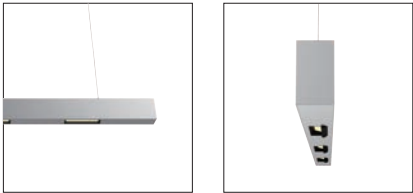

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U508533	W- White B- Black S- Silver	WW- Wall Washer Kit	4- 1208mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3. Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES

WALL WASHER SURFACE LINEAR LIGHT



SPECIFICATIONS


Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W50mm x H85mm	
Length	1208mm with 4sets WW Kit	132.5mm
Power (W/m /ft)	23 W/pc	5W/set
Efficacy Up to	70lm/w	80lm/w
Control	Dali , 0-10V, on/off	

SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1660lm / 1.2m	1840lm / 1.2m	1840lm / 1.2m	1840lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1137lm / 1.2m	1260lm / 1.2m	1260lm / 1.2m	1260lm / 1.2m

- Note:
- The given data are typical values in 4sets wall washer kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

BEAM ANGLE





LED CHIPS AND DRIVER OPTIONS

NICHIA EPISTAR SAMSUNG

TRIDONIC OSRAM LIFUD

DIMENSIONS

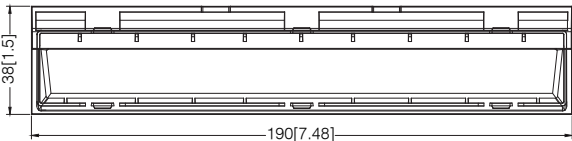

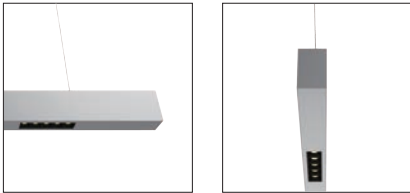

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U508533	W- White	12- 12Deg.	4- 1208mm	3- 3-Step MacAdam Ellipse	30- 3000K	80- 80+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI
	B- Black	24- 24Deg.	CM- Customized		40- 4000K	90- 90+ CRI			D2- 0-10V
	S- Silver	38- 38Deg.			50- 5000K				D3- On/off
		3575- 35x75Deg.			65- 6500K				
		5050- 50x50Deg. Reflector Louver							

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W50mm x H85mm	
Length	1208mm W 4sets louver reflector Kit	132.5mm
Power (W/m /ft)	23 W/pc	5.5 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1717lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m


Note:

- The given data are typical values in 4sets 30Deg. Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

BEAM ANGLE

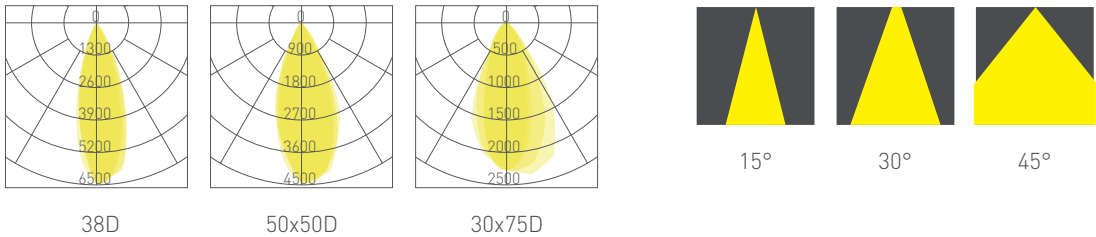

DIMENSIONS

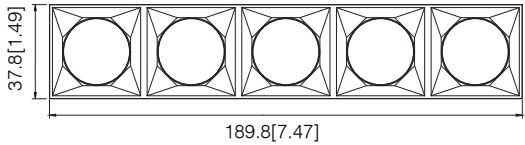



Unit:mm[in]

LED CHIPS AND DRIVER OPTIONS



LUZ SERIES

PANDANT LINEAR LIGHT



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5085L	W- White	60-60Deg. PMMA Lens	4-1182mm	3-3-Step MacAdam Ellipse	30- 3000K	80- 80+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI
	B- Black				40- 4000K	90- 90+ CRI			D2- 0-10V
	S- Silver				50- 5000K				D3- On/off
					65- 6500K				

1. Blueview's standard is 3-Step MacAdam
 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES

PANDANT LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC
Width / Height	W50mm x H85mm
Length	1182mm
Power (W/m /ft)	26 W/pc
Efficacy Up to	110lm/w
Control	Dali , 0-10V, on/off

LED CHIPS AND DRIVER OPTIONS




SPECIFICATIONS


	2700K	3000K	3500K	4000K	5000K	6500K
RA 80	2453lm / 1.2m	2582lm / 1.2m	2717lm / 1.2m	2860lm / 1.2m	2860lm / 1.2m	2860lm / 1.2m
RA 90	2280lm / 1.2m	2324lm / 1.2m	2446lm / 1.2m	2574lm / 1.2m	2574lm / 1.2m	2574lm / 1.2m
RA 95	1988lm / 1.2m	2092lm / 1.2m	2202lm / 1.2m	2317lm / 1.2m	2317lm / 1.2m	2317lm / 1.2m



Note:
 - The given data are typical values in 4000K CRI80+. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

DIMENSIONS

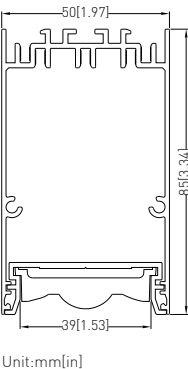

INSTALLATION

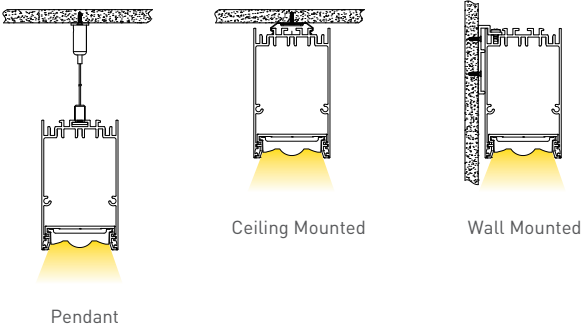



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5085L	W- White	90- 90Deg. PMMA Lens	4- 1182mm	3- 3-Step MacAdam Ellipse	30- 3000K	80- 80+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI
	B- Black				40- 4000K	90- 90+ CRI			D2- 0-10V
	S- Silver				50- 5000K				D3- On/off
					65- 6500K				

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC
Width / Height	W50mm x H85mm
Length	1182mm
Power (W/m /ft)	26 W/pc
Efficacy Up to	110lm/w
Control	Dali , 0-10V, on/off

LED CHIPS AND DRIVER OPTIONS




SPECIFICATIONS


	2700K	3000K	3500K	4000K	5000K	6500K
RA 80	2453lm / 1.2m	2582lm / 1.2m	2717lm / 1.2m	2860lm / 1.2m	2860lm / 1.2m	2860lm / 1.2m
RA 90	2280lm / 1.2m	2324lm / 1.2m	2446lm / 1.2m	2574lm / 1.2m	2574lm / 1.2m	2574lm / 1.2m
RA 95	1988lm / 1.2m	2092lm / 1.2m	2202lm / 1.2m	2317lm / 1.2m	2317lm / 1.2m	2317lm / 1.2m

Note:
- The given data are typical values in 4000K CRI80+. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.



DIMENSIONS

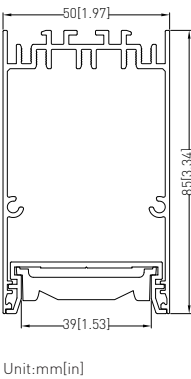

INSTALLATION

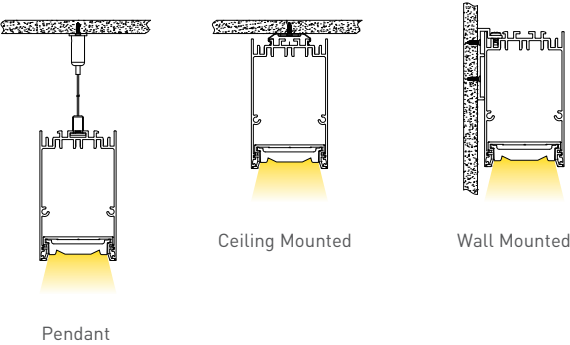

LUZ SERIES
PANDANT LINEAR LIGHT



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5085L	W- White B- Black S- Silver	BA -Batwing PMMA Lens	4- 1182mm	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES
PANDANT LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC
Width / Height	W50mm x H85mm
Length	1182mm
Power (W/m /ft)	26 W/pc
Efficacy Up to	110lm/w
Control	Dali , 0-10V, on/off

LED CHIPS AND DRIVER OPTIONS




SPECIFICATIONS


	2700K	3000K	3500K	4000K	5000K	6500K
RA 80	2453lm / 1.2m	2582lm / 1.2m	2717lm / 1.2m	2860lm / 1.2m	2860lm / 1.2m	2860lm / 1.2m
RA 90	2280lm / 1.2m	2324lm / 1.2m	2446lm / 1.2m	2574lm / 1.2m	2574lm / 1.2m	2574lm / 1.2m
RA 95	1988lm / 1.2m	2092lm / 1.2m	2202lm / 1.2m	2317lm / 1.2m	2317lm / 1.2m	2317lm / 1.2m

Note:
- The given data are typical values in 4000K CRI80+. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.


DIMENSIONS

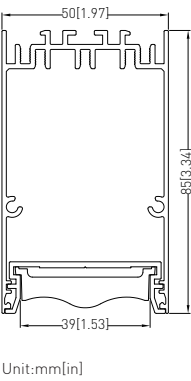



INSTALLATION

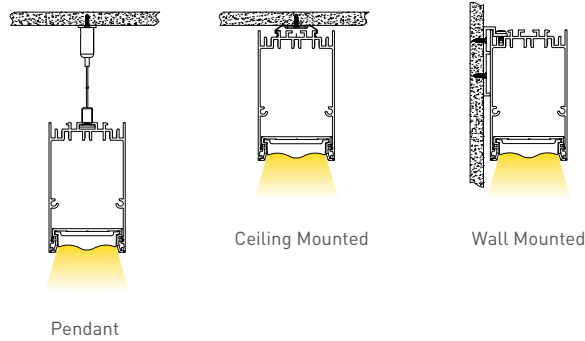

LUZ SERIES
WALL WASHER PANDANT LINEAR LIGHT



ASYMMETRIC
OPTICAL LENS



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5085L	W- White B- Black S- Silver	AS- Asymmetric PMMA Lens	4- 1182mm	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES
WALL WASHER PANDANT LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC
Width / Height	W50mm x H85mm
Length	1182mm
Power (W/m /ft)	26 W/pc
Efficacy Up to	110lm/w
Control	Dali , 0-10V, on/off

LED CHIPS AND DRIVER OPTIONS




SPECIFICATIONS


	2700K	3000K	3500K	4000K	5000K	6500K
RA 80	2453lm / 1.2m	2582lm / 1.2m	2717lm / 1.2m	2860lm / 1.2m	2860lm / 1.2m	2860lm / 1.2m
RA 90	2280lm / 1.2m	2324lm / 1.2m	2446lm / 1.2m	2574lm / 1.2m	2574lm / 1.2m	2574lm / 1.2m
RA 95	1988lm / 1.2m	2092lm / 1.2m	2202lm / 1.2m	2317lm / 1.2m	2317lm / 1.2m	2317lm / 1.2m

Note:
- The given data are typical values in 4000K CRI80+. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

DIMENSIONS


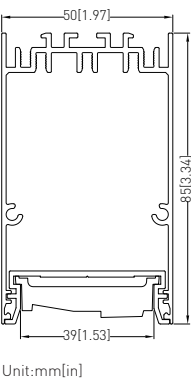


INSTALLATION

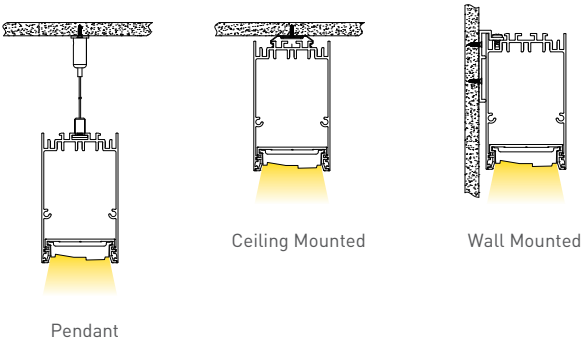

UGR

<19

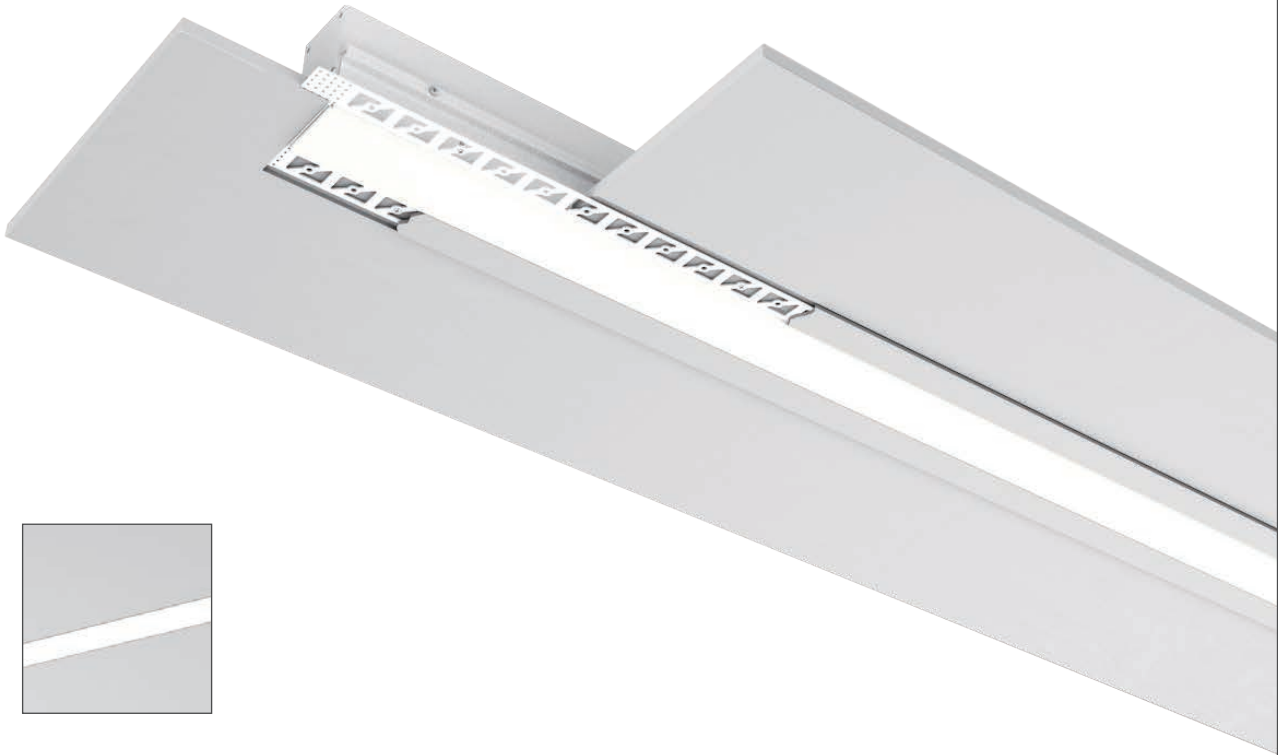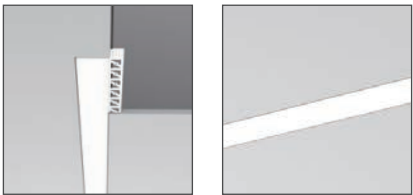

ORDERING INFORMATION


LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U1008533	W- White	A- Anti-Glare Film UGR<19	2- 647mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	TLR- Trim-Less Recessed	22- IP22	D1- DALI
	B- Black		4- 1247mm		30- 3000K	90- 90+ CRI			D2- 0-10V
	S- Silver	P- Prismatic Lens UGR<19	5- 1547mm	5- 5-Step MacAdam Ellips	35- 3500K	95- 95+ CRI			D3- On/off
		D- Diffuser	8- 2447mm		40- 4000K				
					50- 5000K				
					60- 6000K				
					65- 6500K				

1. Blueview's standard is 3-Step MacAdam


2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC			
Width / Height	W100mm x H85mm With Mud-flange			
Length	647mm	1247mm	1547mm	2447mm
Power (W/m /ft)	15.6 W/pc	31.1 W/pc	37.8 W/pc	62 W/pc
Efficacy Up to	85lm/w	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off			



INSTALLATION



Trim-Less Recessed

LED CHIPS AND DRIVER OPTIONS

NICHIA

EPistar


SAMSUNG

TRIDONIC


OSRAM

LiFud

DIMENSIONS

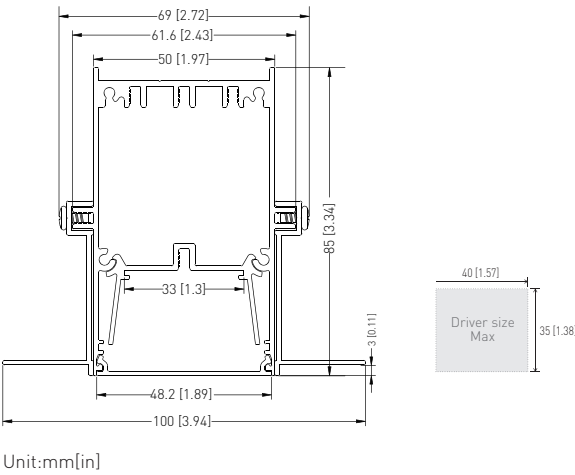


BEAM ANGLE

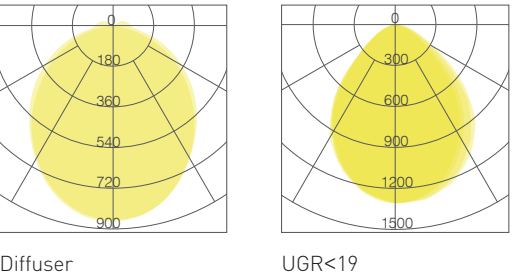

LUZ SERIES

TRIMLESS RECESSED WALL WASHER LINEAR LIGHT

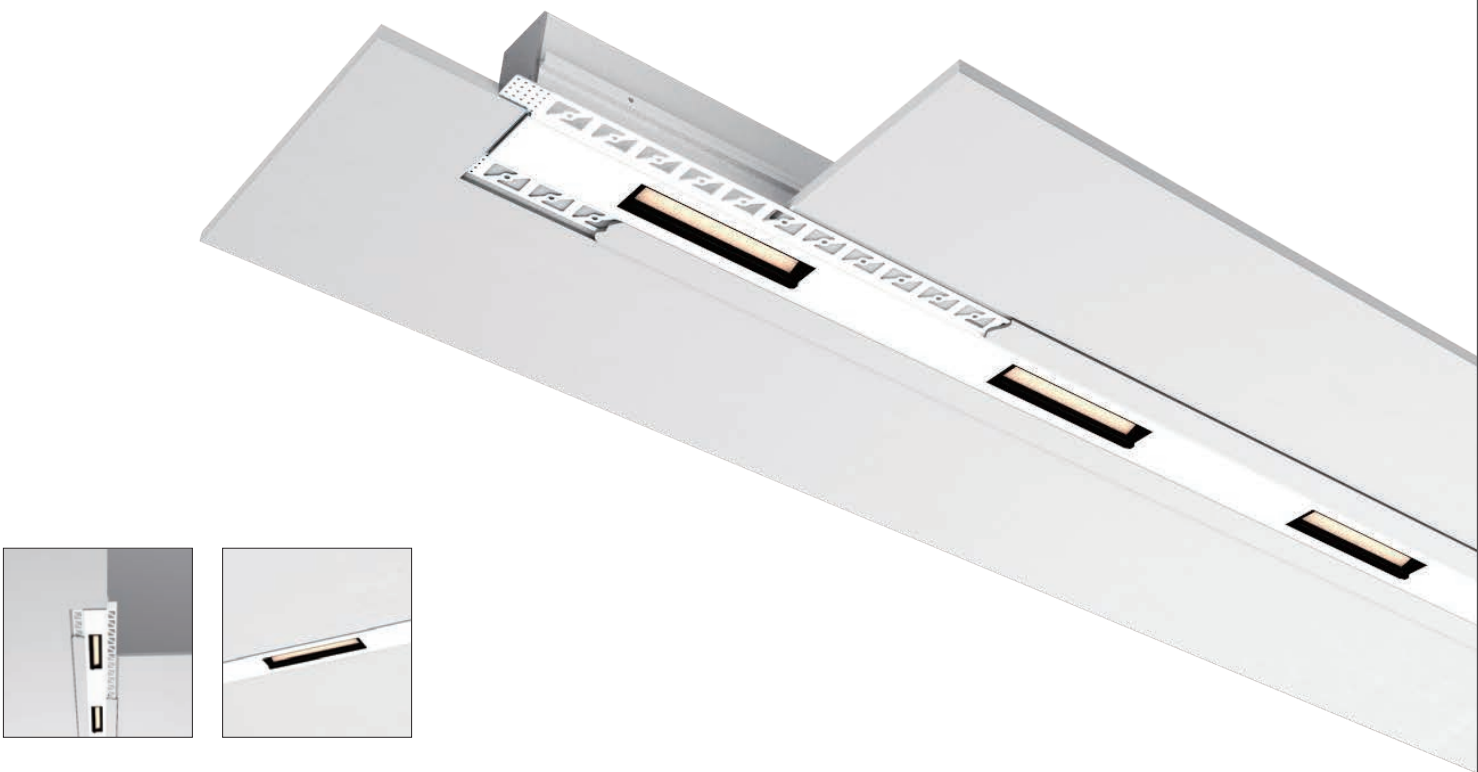

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U1008533	W- White B- Black S- Silver	WW- Wall Washer Kit	4- 1247mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TLR- Trim-Less Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES

TRIMLESS RECESSED WALL WASHER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W100mm x H85mm with mudflange	
Length	1247mm with 4sets WW Kit	132.5mm
Power (W/m /ft)	23 W/pc	5.5W/pc
Efficacy Up to	70lm/w	70lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1660lm / 1.2m	1840lm / 1.2m	1840lm / 1.2m	1840lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1137lm / 1.2m	1260lm / 1.2m	1260lm / 1.2m	1260lm / 1.2m

Note:

- The given data are typical values in 4sets wall washer kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.


BEAM ANGLE

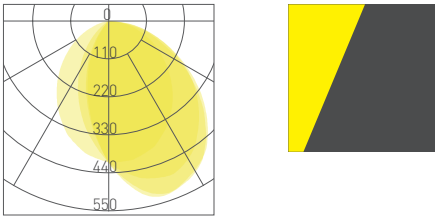


LED CHIPS AND DRIVER OPTIONS



DIMENSIONS

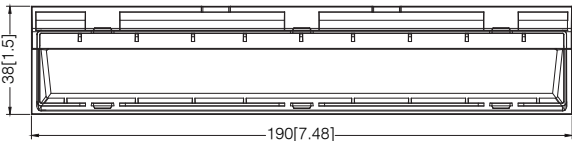

UGR
<16

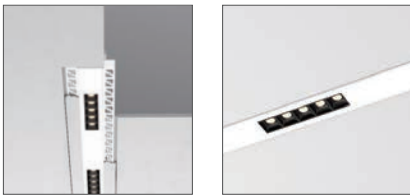

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U1008533	W- White	15- 15Deg. Reflector Louver	4- 1247mm	3- 3-Step MacAdam Ellipse	30- 3000K	80- 80+ CRI	TLR- Trim-Less Recessed	22- IP22	D1- DALI
	B- Black	30 -30Deg. Reflector Louver	CM- Customized		40- 4000K	90- 90+ CRI			D2- 0-10V
	S- Silver	45- 45Deg. Reflector Louver			50- 5000K				D3- On/off
					65- 6500K				

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W100mm x W85mm with mudflange	
Length	1247mm W 4sets louver reflector Kit	132.5mm
Power (W/m /ft)	23 W/pc	5.5 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS


NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1717lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m

Note:
- The given data are typical values in 4sets 30Deg. Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

BEAM ANGLE

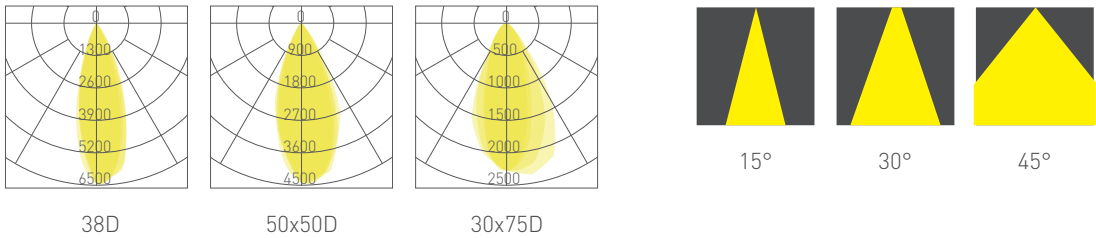

DIMENSIONS

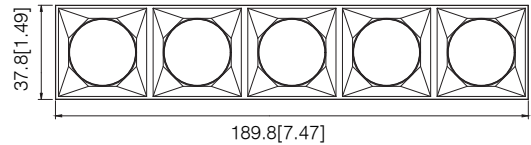

Unit:mm[in]



LED CHIPS AND DRIVER OPTIONS



LUZ SERIES

TRIMED RECESSED LINEAR LIGHT

UGR
<19

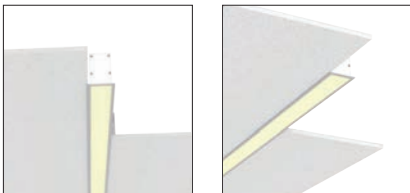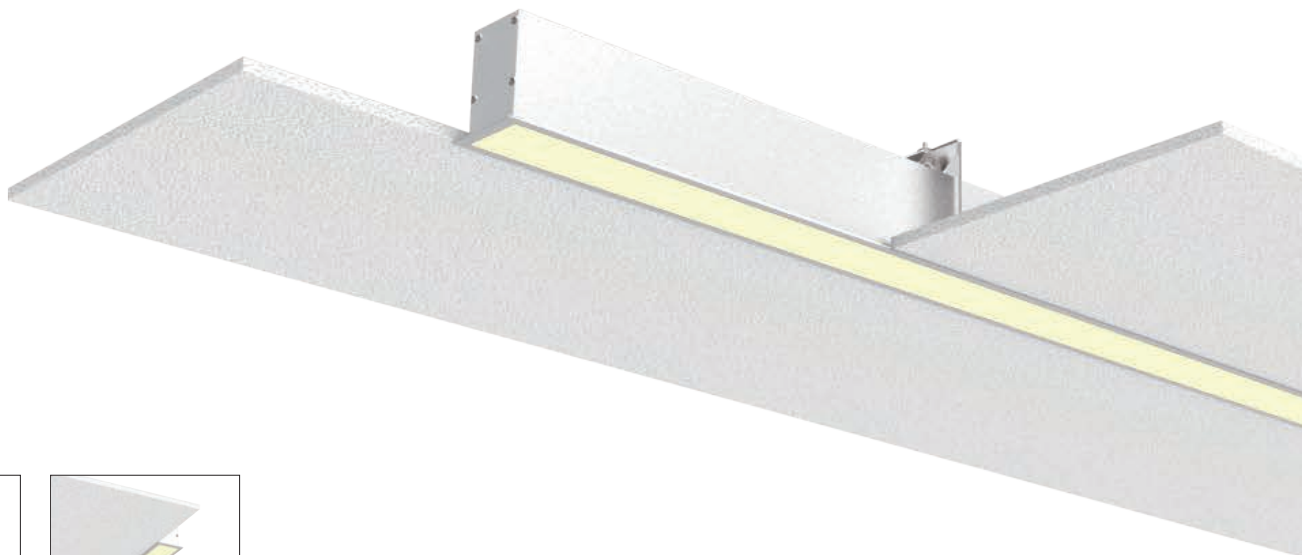

LUZ SERIES

TRIMED RECESSED LINEAR LIGHT


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U668533	W- White B- Black S- Silver	A- Anti-Glare Film UGR<19 P- Prismatic Lens UGR<19 D- Diffuser	2- 608mm 4- 1208mm 5- 1508mm 8- 2408mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI	TR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC			
Width / Height	W66mm x H85mm			
Length	622mm	1222mm	1522mm	2422mm
Power (W/m /ft)	15.6 W/pc	31.1 W/pc	37.8 W/pc	62 W/pc
Efficacy Up to	85lm/w	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off			




Diffuser




UGR<19

DIMENSIONS

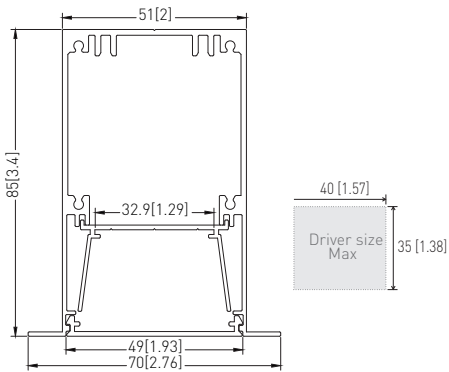

Unit:mm[in]

INSTALLATION




Trimmed Recessed

SPECIFICATIONS

Color Temperature		Lumen / Length			
RA 80	2700K	1204lm / 0.6m	2400lm / 1.2m	2917lm / 1.5m	4784lm / 2.4m
	3000K	1267lm / 0.6m	2526lm / 1.2m	3070lm / 1.5m	5036lm / 2.4m
	3500K	1334lm / 0.6m	2659lm / 1.2m	3232lm / 1.5m	5301lm / 2.4m
	4000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	5000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	6000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	6500K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
RA 90	2700K	963lm / 0.6m	1920lm / 1.2m	2333lm / 1.5m	3827lm / 2.4m
	3000K	1014lm / 0.6m	2021lm / 1.2m	2456lm / 1.5m	4029lm / 2.4m
	3500K	1067lm / 0.6m	2127lm / 1.2m	2586lm / 1.5m	4241lm / 2.4m
	4000K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
	5000K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
	5500K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
	6500K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
RA 95	2700K	867lm / 0.6m	1728lm / 1.2m	2100lm / 1.5m	3445lm / 2.4m
	3000K	912lm / 0.6m	1819lm / 1.2m	2211lm / 1.5m	3626lm / 2.4m
	3500K	960lm / 0.6m	1915lm / 1.2m	2327lm / 1.5m	3817lm / 2.4m
	4000K	1010lm / 0.6m	2015lm / 1.2m	2449lm / 1.5m	4017lm / 2.4m
	6500K	1010lm / 0.6m	2015lm / 1.2m	2449lm / 1.5m	4017lm / 2.4m
SAMSUNG RA 80	3000K	1200lm / 0.6m	2393lm / 1.2m	2909lm / 1.5m	4771lm / 2.4m
	4000K	1263lm / 0.6m	2519lm / 1.2m	3061lm / 1.5m	5022lm / 2.4m
	6500K	1263lm / 0.6m	2519lm / 1.2m	3061lm / 1.5m	5022lm / 2.4m

- Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - 10% less on UGR<19 version.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.
 - LM-80, IES TM-30-15 testing report available for led.

LED CHIPS AND DRIVER OPTIONS

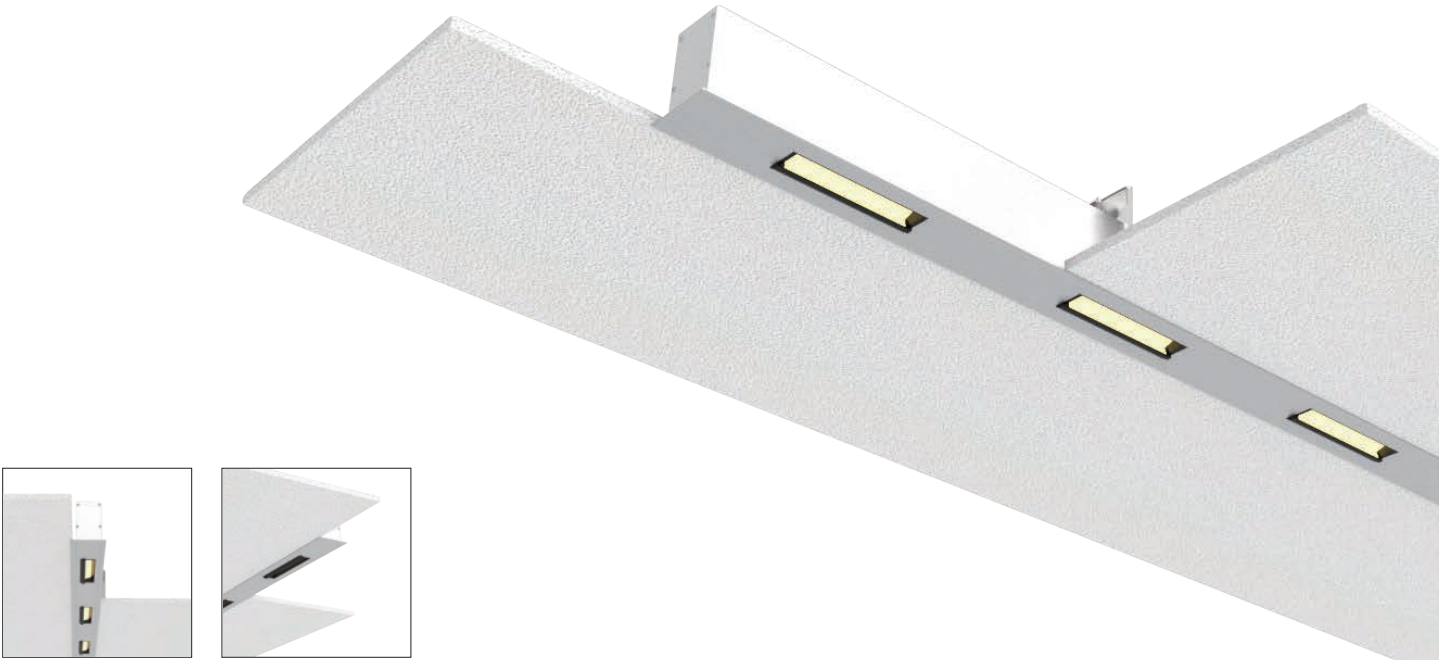

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U668533	W- White B- Black S- Silver	WW- Wall Washer Kit	4- 1247mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES

TRIMED RECESSED WALL WASHER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC	29-34 VDC Constant Current
Width / Height	W66mm x W85mm with trim	
Length	1222mm with 4sets WW Kit	132.5mm
Power (W/m /ft)	23 W/pc	5.5 W/pc
Efficacy Up to	70lm/w	70lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1661lm / 1.2m	1840lm / 1.2m	1840lm / 1.2m	1840lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1137lm / 1.2m	1260lm / 1.2m	1260lm / 1.2m	1260lm / 1.2m

- Note:**
- The given data are typical values in 4sets wall washer kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

BEAM ANGLE




LED CHIPS AND DRIVER OPTIONS

NICHIAEPISTAR
TRIDONICOSRAMLiFud

SAMSG

DIMENSIONS

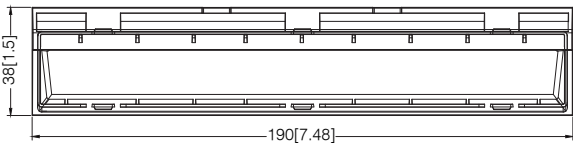


LUZ SERIES

TRIMED RECESSED LINEAR LIGHT

UGR

<16

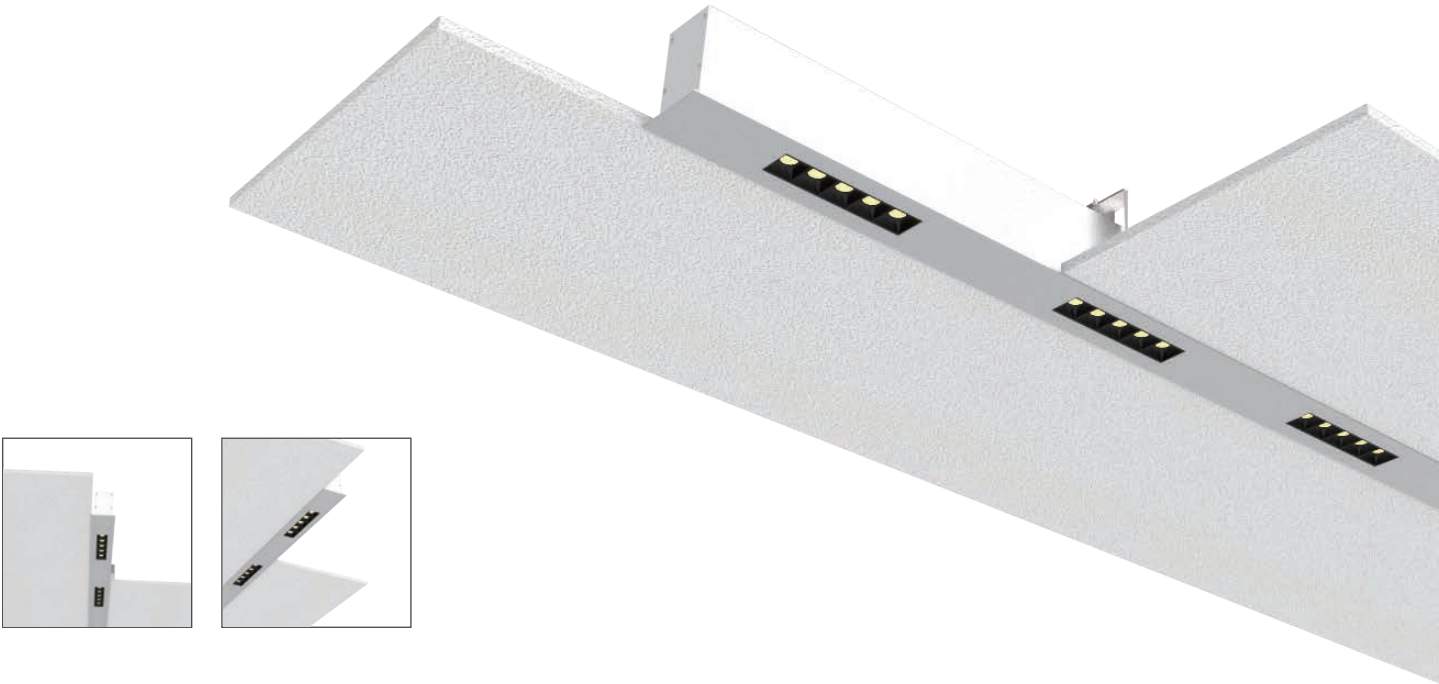

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U668533	W- White B- Black S- Silver	15- 15Deg. Reflector Louver 30 -30Deg. Reflector Louver 45- 45Deg. Reflector Louver	4- 1247mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES

TRIMED RECESSED LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC	29-34 VDC Constant Current
Width / Height	W66mm x W85mm with trim	
Length	1222mm with 4sets Reflector Kit	132.5mm
Power (W/m /ft)	23 W/pc	5.5 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS


NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1717lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m

- Note:
- The given data are typical values in 4sets 30Deg. Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

SPECIFICATIONS

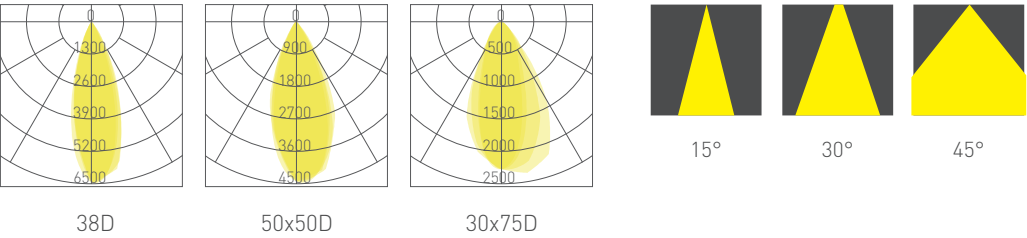

DIMENSIONS

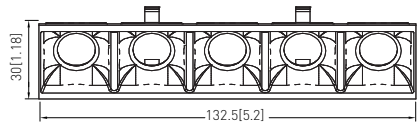

Unit:mm[in]

LED CHIPS AND DRIVER OPTIONS



HONG SERIES


DIRECT&INDIRECT PENDANT LINEAR LIGHT

HONG P / M / W Direct&Indirect is a linear LED lighting fixture that features direct and indirect lighting. Fixture features 95+, 90+ or 80+ LM80 LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V type, also controable options in DMX, PWM and 2.4G Static,Tunable white, RGBW solution available. The fixture is designed in multiple installation in Sus-pendant , Wall / Ceiling Mounted / Trimless / Trimmed Recessed. Fixture lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available in 19.6ft.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications
Indoor - Office, Commercial, Educational Instiutuions, Conference Rooms and many other workspaces.



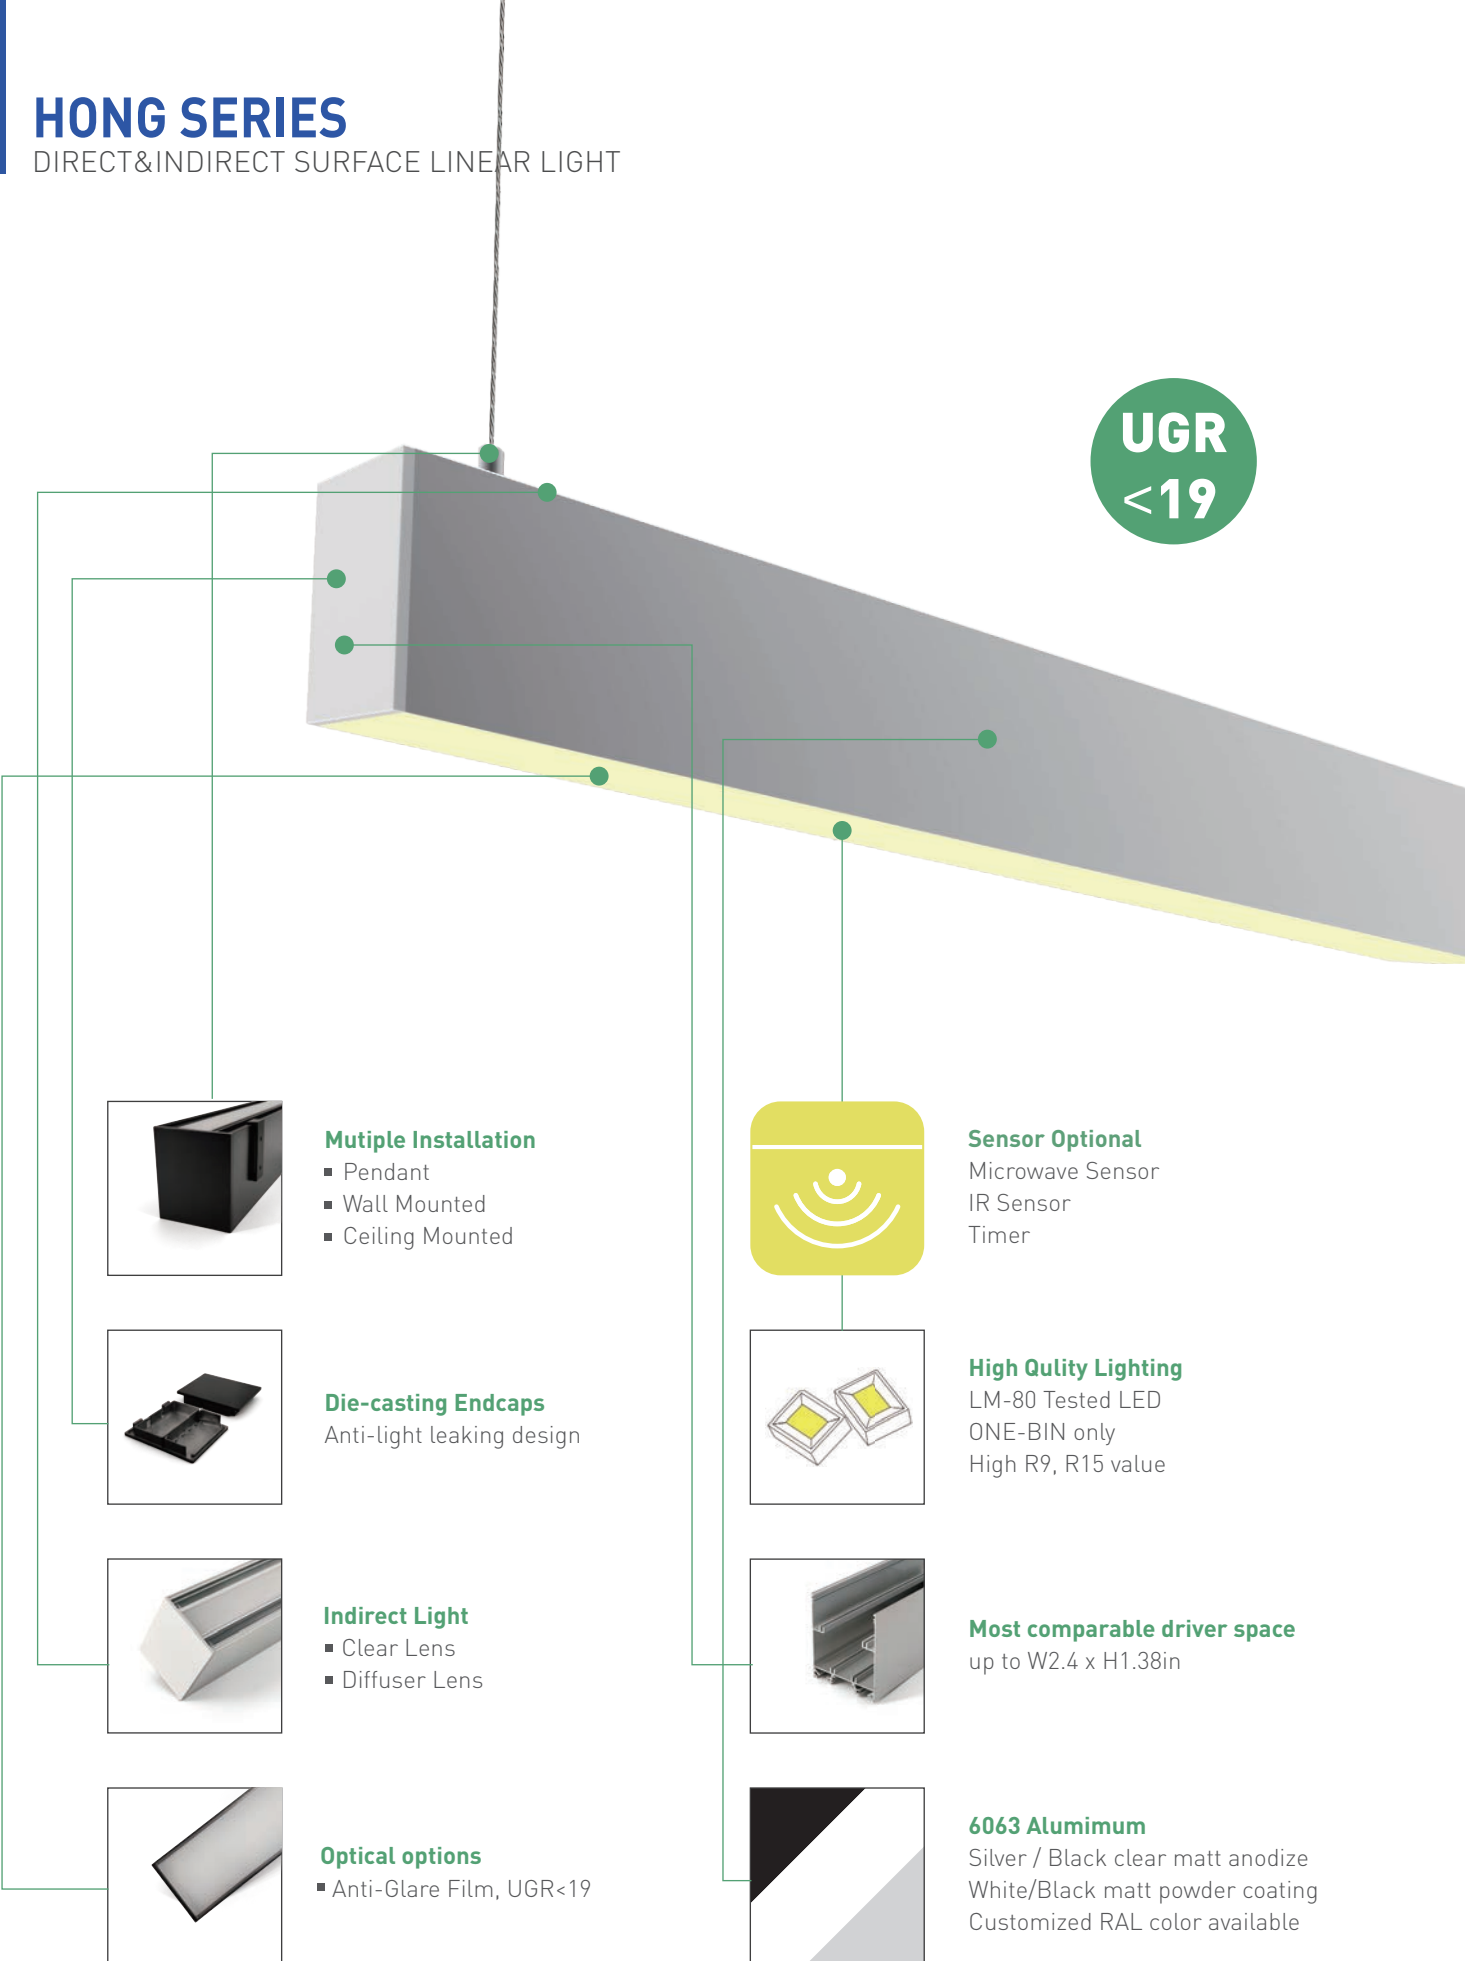

Mutple Installation

- Pendant
- Wall Mounted
- Ceiling Mounted

Die-casting Endcaps

- Anti-light leaking design

Indirect Light

- Clear Lens
- Diffuser Lens

Optical options

- Anti-Glare Film, UGR<19

Sensor Optional

- Microwave Sensor
- IR Sensor
- Timer

High Qulity Lighting

- LM-80 Tested LED
- ONE-BIN only
- High R9, R15 value

Most comparable driver space

- up to W2.4 x H1.38in

6063 Alumimum

- Silver / Black clear matt anodize
- White/Black matt powder coating
- Customized RAL color available


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
H7590 Direct & Indirect Linear Light	W- White	U- UGR<19 Kit	2- 608mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	P- Aircraft cable pendant	22- IP22	D1- DALI
U7590 Direct Linear Light	B- Black	D- Diffuser	4- 1208mm		30- 3000K	90- 90+ CRI	W- Wall Mounted		D2- 0-10V
	S- Silver		5- 1508mm	5- 5-Step MacAdam Ellips	35- 3500K	95- 95+ CRI	M- Ceiling Mounted		D3- On/off
			8- 2408mm		40- 4000K				
					50- 5000K				
					60- 6000K				
					65- 6500K				


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATION

Voltage	220-240 VAC / 100V-240 VAC			
Width / Height	75mm x 90mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	28 W/pc	56 W/pc	64 W/pc	112 W/pc
Efficacy Up to	85lm/w	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off			




Direct&Indirect Lighting




Direct Lighting

INSTALLATION

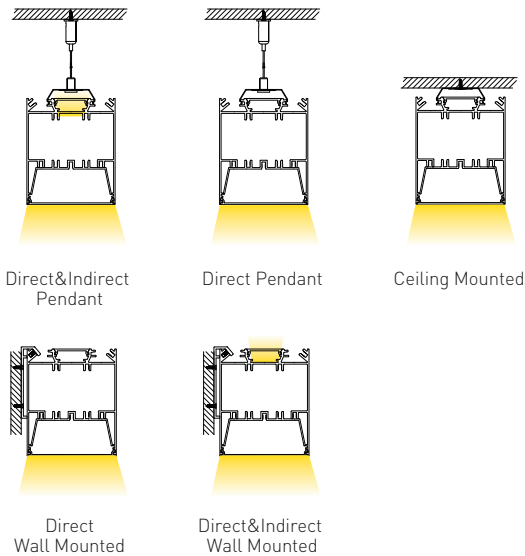

ACCESSORIES

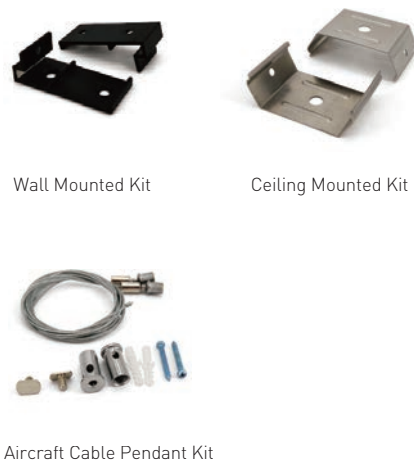


SPECIFICATIONS

Color Temperature		Lumen / Length			
RA 80	2700K	2161lm / 0.6m	4321lm / 1.2m	4938lm / 1.5m	8642lm / 2.4m
	3000K	2274lm / 0.6m	4549lm / 1.2m	5198lm / 1.5m	9097lm / 2.4m
	3500K	2394lm / 0.6m	4788lm / 1.2m	5472lm / 1.5m	9576lm / 2.4m
	4000K	2520lm / 0.6m	5040lm / 1.2m	5760lm / 1.5m	10080lm / 2.4m
	5000K	2520lm / 0.6m	5040lm / 1.2m	5760lm / 1.5m	10080lm / 2.4m
	6000K	2520lm / 0.6m	5040lm / 1.2m	5760lm / 1.5m	10080lm / 2.4m
	6500K	2520lm / 0.6m	5040lm / 1.2m	5760lm / 1.5m	10080lm / 2.4m
RA 90	2700K	1728lm / 0.6m	3457lm / 1.2m	3951lm / 1.5m	6914lm / 2.4m
	3000K	1819lm / 0.6m	3639lm / 1.2m	4159lm / 1.5m	7278lm / 2.4m
	3500K	1915lm / 0.6m	3830lm / 1.2m	4378lm / 1.5m	7661lm / 2.4m
	4000K	2016lm / 0.6m	4032lm / 1.2m	4608lm / 1.5m	8064lm / 2.4m
	5000K	2016lm / 0.6m	4032lm / 1.2m	4608lm / 1.5m	8064lm / 2.4m
	6000K	2016lm / 0.6m	4032lm / 1.2m	4608lm / 1.5m	8064lm / 2.4m
	6500K	2016lm / 0.6m	4032lm / 1.2m	4608lm / 1.5m	8064lm / 2.4m
RA 95	2700K	1555lm / 0.6m	3110lm / 1.2m	3556lm / 1.5m	6222lm / 2.4m
	3000K	1637lm / 0.6m	3274lm / 1.2m	3743lm / 1.5m	6449lm / 2.4m
	3500K	1723lm / 0.6m	3447lm / 1.2m	3940lm / 1.5m	6894lm / 2.4m
	4000K	1814lm / 0.6m	3628lm / 1.2m	4147lm / 1.5m	7257lm / 2.4m
	6500K	1814lm / 0.6m	3628lm / 1.2m	4147lm / 1.5m	7257lm / 2.4m
SAMSUNG RA 80	3000K	2047lm / 0.6m	4094lm / 1.2m	4679lm / 1.5m	8187lm / 2.4m
	4000K	2268lm / 0.6m	4536lm / 1.2m	5184lm / 1.5m	9072lm / 2.4m
	6500K	2268lm / 0.6m	4536lm / 1.2m	5184lm / 1.5m	9072lm / 2.4m

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- 10% less on UGR<19 version.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.


DIMENSIONS

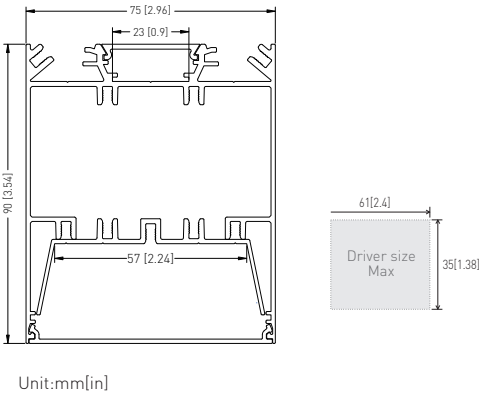

LED CHIPS AND DRIVER OPTIONS

NICHIA **EPISTAR** **SAMSUNG**
TRIDONIC **OSRAM** **LIFUD**

UGR
<19

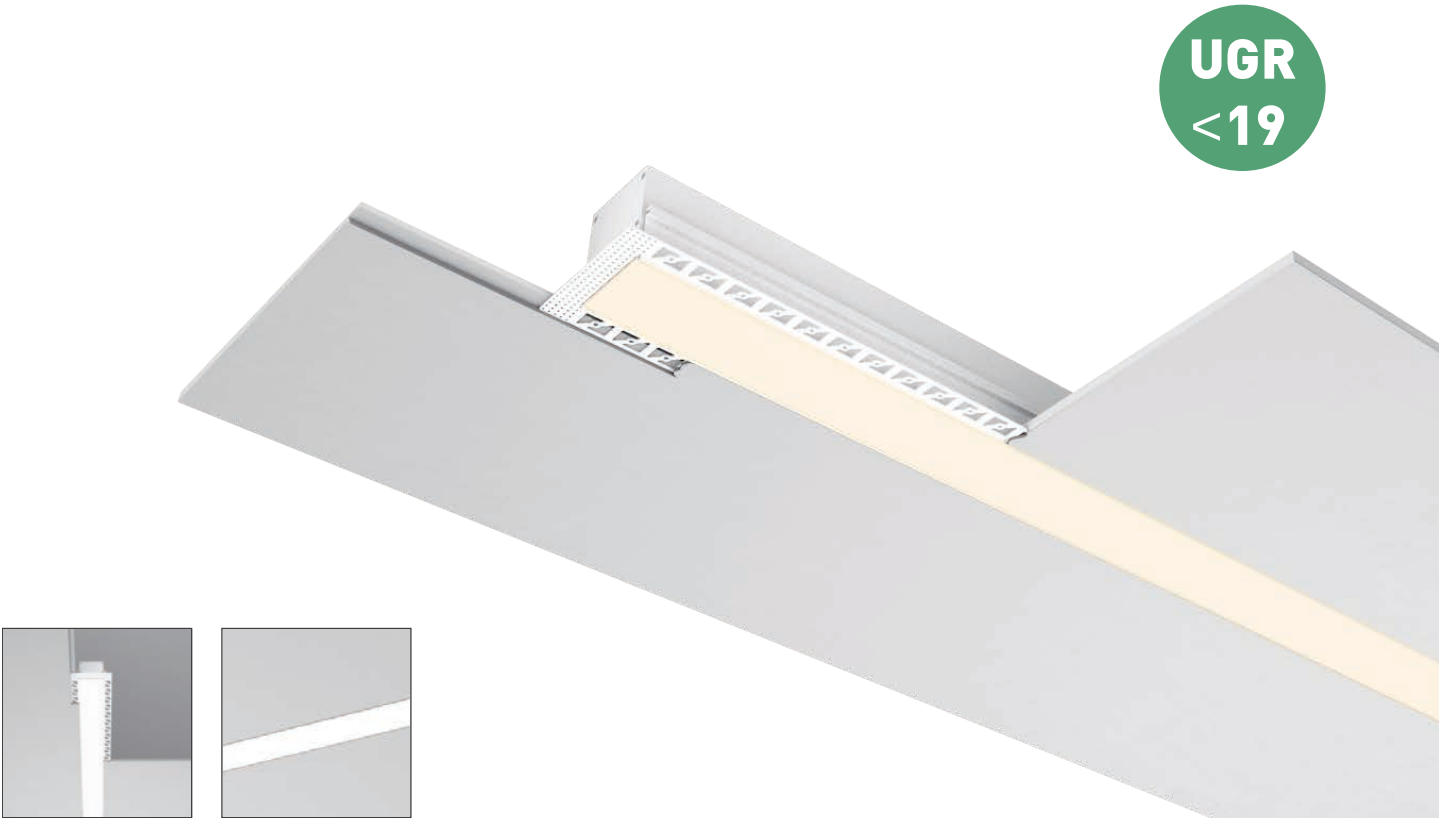


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U1259057	W- White	U- UGR<19 Kit	2- 647mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	TR- Trimmed Recessed Installation	22- IP22	D1- DALI
	B- Black	D- Diffuser	4- 1247mm		30- 3000K	90- 90+ CRI			D2- 0-10V
	S- Silver		5- 1547mm	5- 5-Step MacAdam Ellips	35- 3500K	95- 95+ CRI			D3- On/off
			8- 2447mm		40- 4000K				
					50- 5000K				
					60- 6000K				
					65- 6500K				


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATION


Voltage	220-240 VAC / 100V-240 VAC			
Width / Height	125mm x 90mm			
Length	647mm	1247mm	1547mm	2447mm
Power (W/m /ft)	28 W/pc	56 W/pc	64 W/pc	112 W/pc
Efficacy Up to	85lm/w	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off			





DIMENSIONS

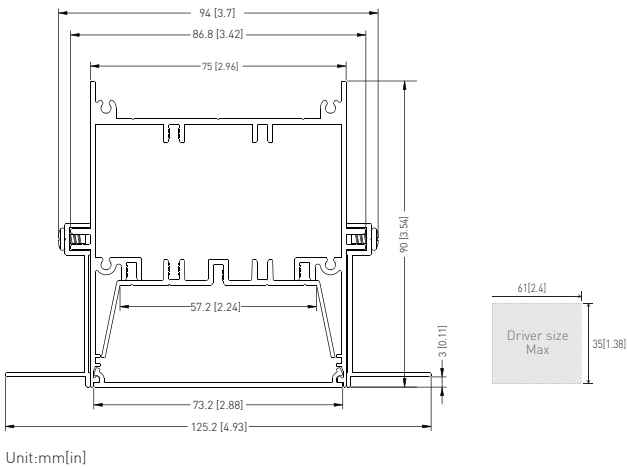

INSTALLATION



UGR
<19

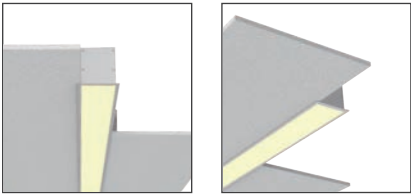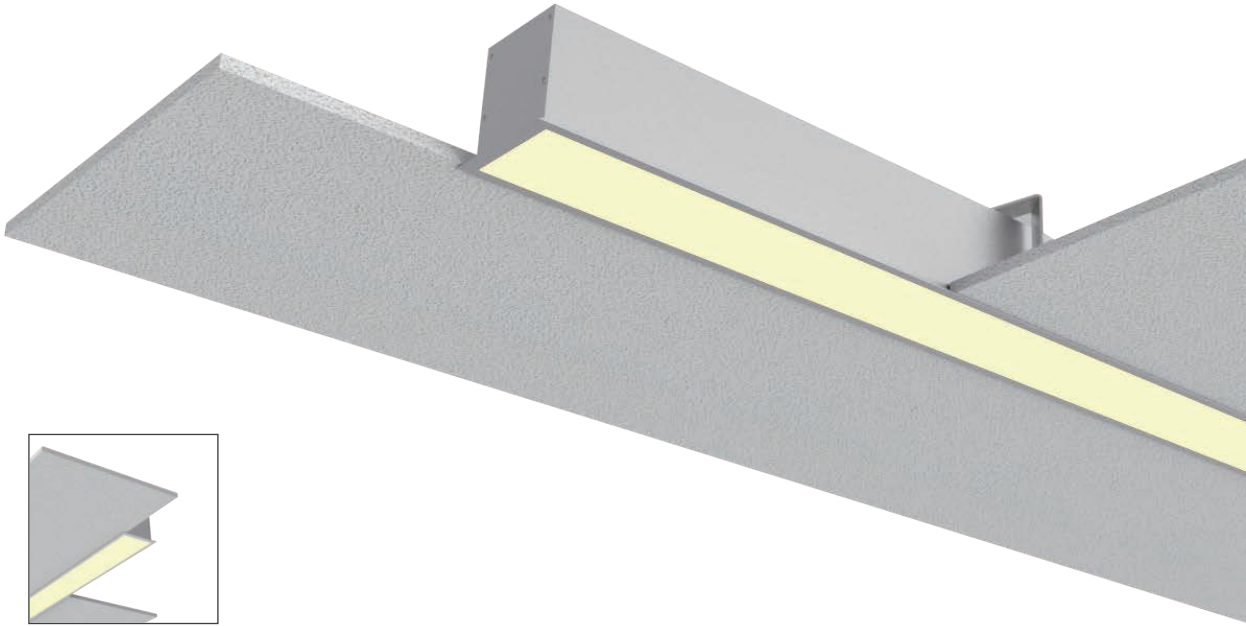


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U919057	W- White	U- UGR<19 Kit	2- 622mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	TR- Trimed Recessed Installation	22- IP22	D1- DALI D2- 0-10V D3- On/off
	B- Black	D- Diffuser	4- 1222mm		30- 3000K	90- 90+ CRI			
			5- 1522mm	35- 3500K	95- 95+ CRI				
			8- 2422mm			40- 4000K			
						50- 5000K			
S- Silver				60- 6000K					
					65- 6500K				


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATION

Voltage	220-240 VAC / 100V-240 VAC			
Width / Height	125mm x 90mm			
Length	647mm	1247mm	1547mm	2447mm
Power (W/m /ft)	28 W/pc	56 W/pc	64 W/pc	112 W/pc
Efficacy Up to	85lm/w	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off			




DIMENSIONS

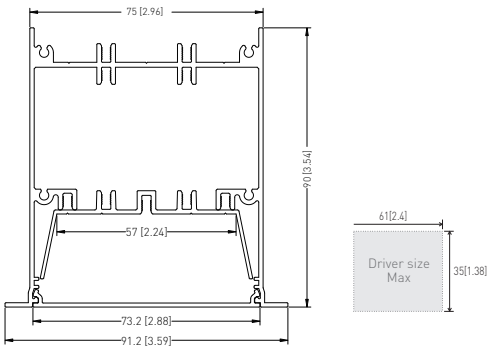

Unit:mm[in]

INSTALLATION



Trimed Recessed Installation

HILA SERIES

DIRECT&INDRECT IP44 LINEAR LIGHT


HALA is a engineering designed for wet places in IP44. It features direct and indirect lighting. Fixture features 95+, 90+ or 80+ LM80 LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V type, also controable options in DMX, PWM and 2.4G Static,Tunable white, RGBW solution available. Fixture lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available.

Finish


Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications

Indoor - Office, Educational Instituions, Conference Rooms
and many other workspaces.
Outdoor - IP44 wet places in open spaces, cooridor, washroom

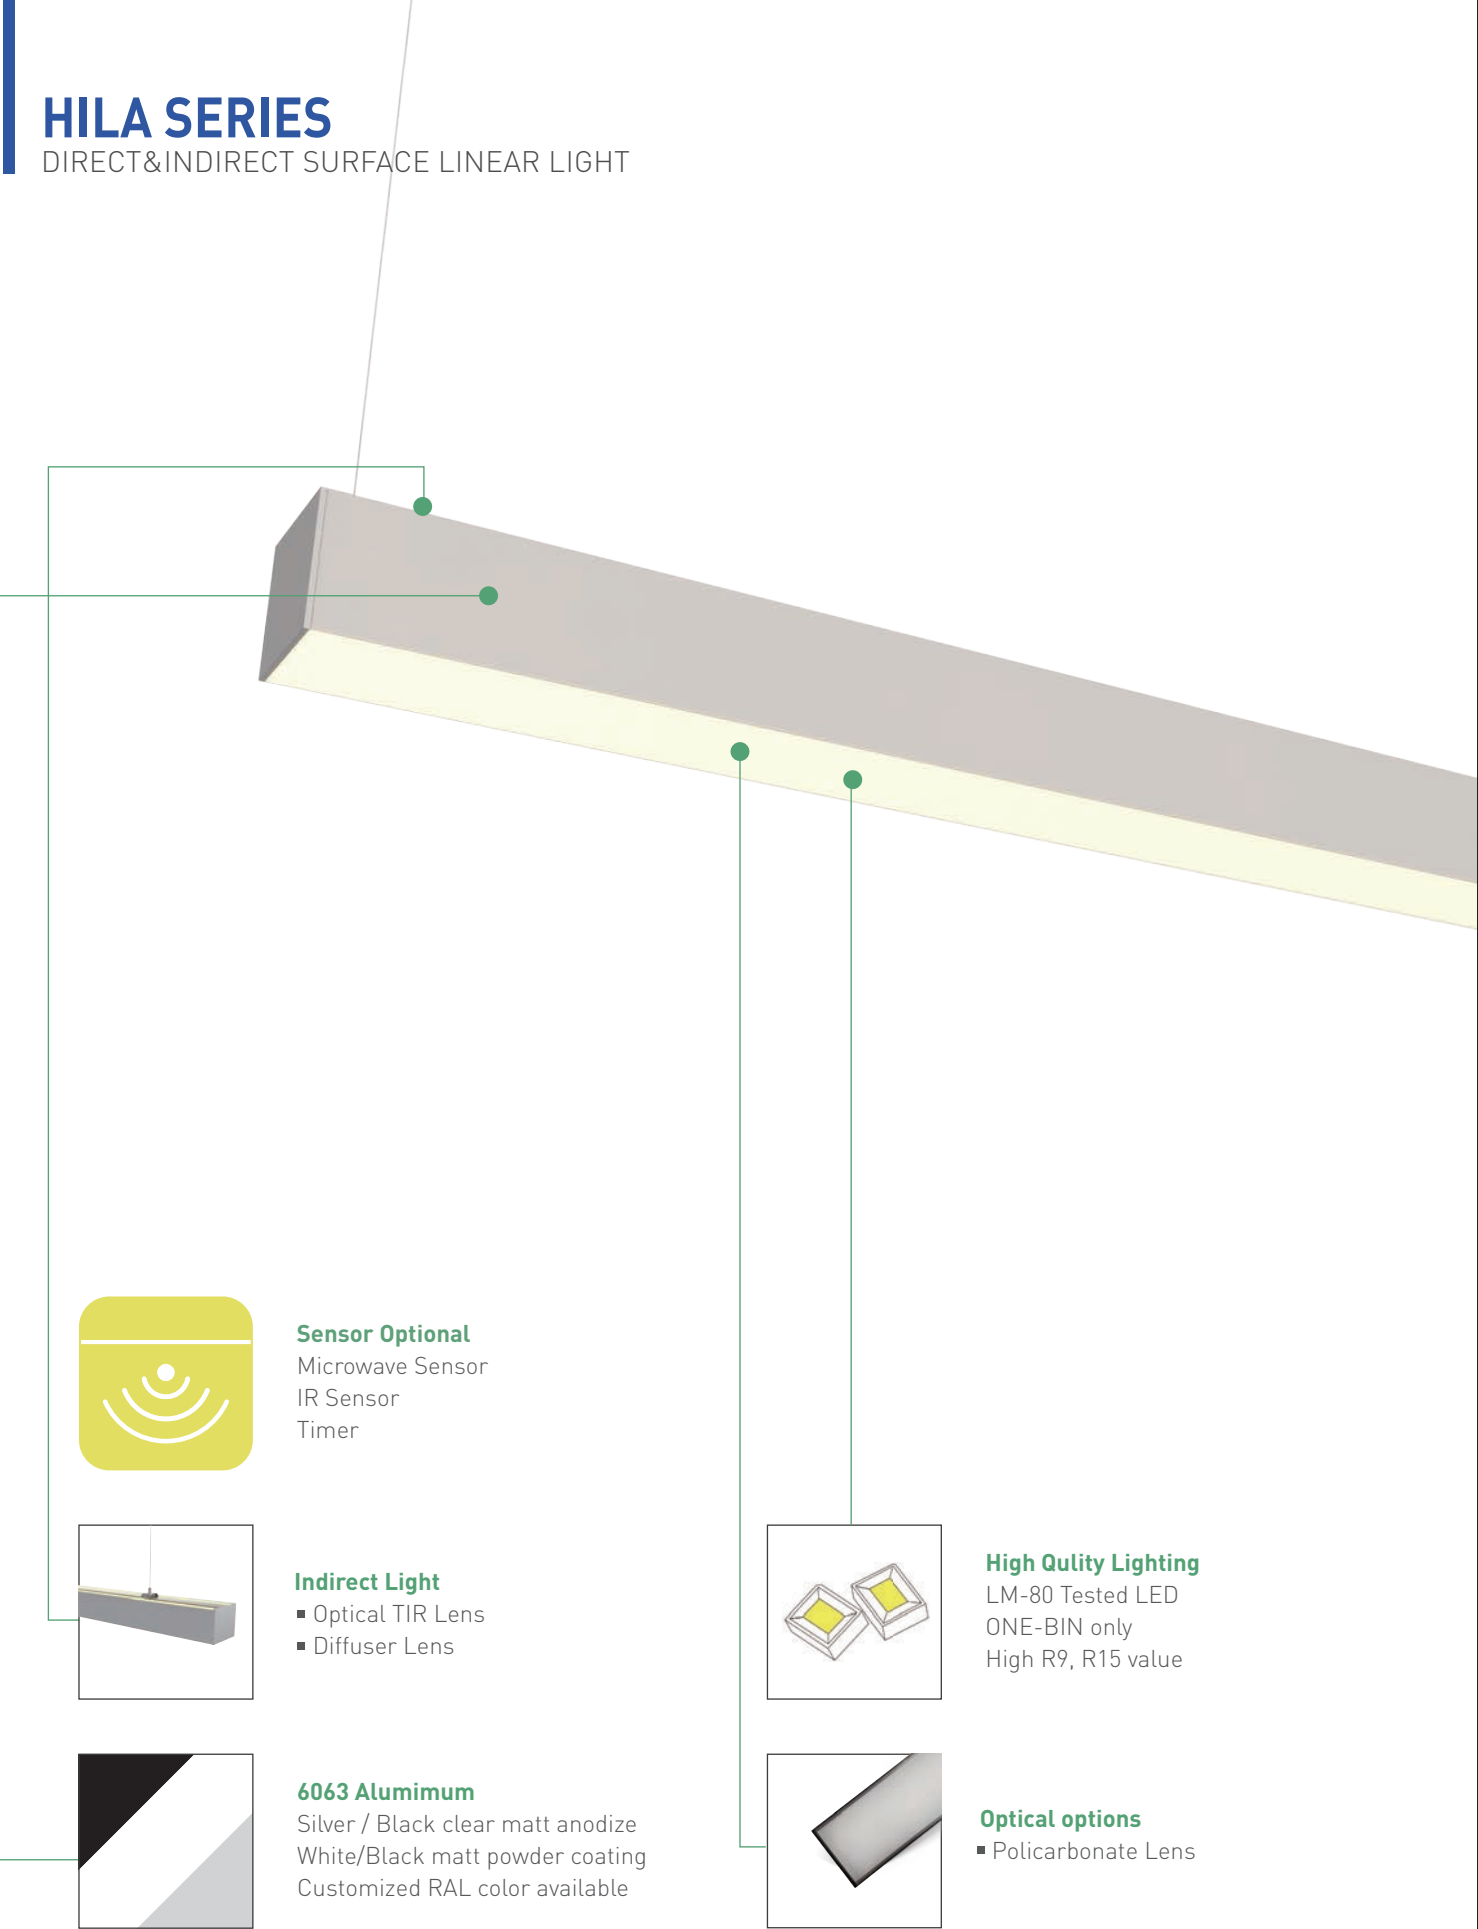


Sensor Optional
Microwave Sensor
IR Sensor
Timer




Indirect Light
■ Optical TIR Lens
■ Diffuser Lens



6063 Aluminum
Silver / Black clear matt anodize
White/Black matt powder coating
Customized RAL color available



High Quality Lighting
LM-80 Tested LED
ONE-BIN only
High R9, R15 value



Optical options
■ Polycarbonate Lens

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
H10096 Direct & Indirect Linear Light	W- White	D- Diffuser	2- 608mm	3- 3-Step MacAdam Ellipse	27- 2700K 30- 3000K	80- 80+ CRI	P- Aircraft cable pendant	22- IP22	D1- DALI
U10096 Direct Linear Light	B- Black	O- Optical TIR Lens on top lighting	4- 1208mm	5- 5-Step MacAdam Ellips	35- 3500K 40- 4000K	90- 90+ CRI	M- Ceiling Mounted		D2- 0-10V
	S- Silver		5- 1508mm		50- 5000K	95- 95+ CRI			D3- On/off
			8- 2408mm		60- 6000K 65- 6500K				

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


SPECIFICATION

Voltage	220-240 VAC / 100V-240 VAC			
Width / Height	100mm x 96mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	31 W/pc	62 W/pc	64 W/pc	124 W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			


LED CHIPS AND DRIVER OPTIONS



BEAM ANGLE

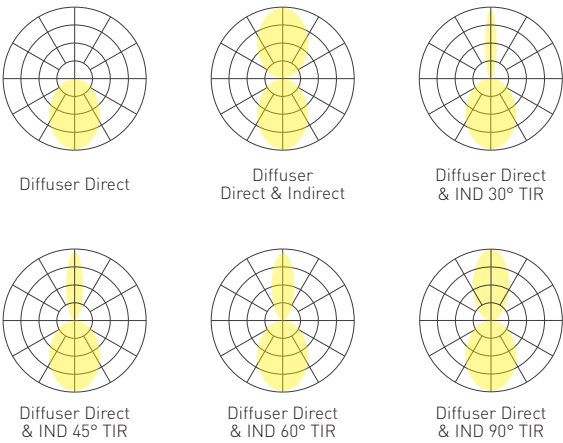

INSTALLATION

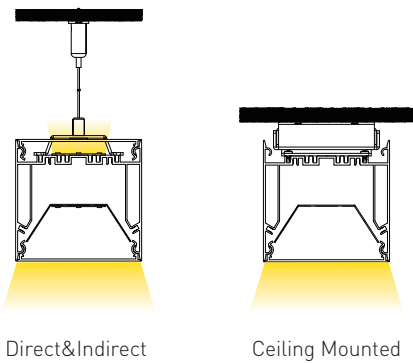

SPECIFICATIONS

Color Temperature		Lumen / Length			
U10096 RA 80	2700K	2260lm / 0.6m	4520lm / 1.2m	5686lm / 1.5m	9040lm / 2.4m
	3000K	2511lm / 0.6m	5022lm / 1.2m	6318lm / 1.5m	10044lm / 2.4m
	4000K	2790lm / 0.6m	5580lm / 1.2m	7020lm / 1.5m	11160lm / 2.4m
	5000K	2790lm / 0.6m	5580lm / 1.2m	7020lm / 1.5m	11160lm / 2.4m
	6500K	2790lm / 0.6m	5580lm / 1.2m	7020lm / 1.5m	11160lm / 2.4m
H10096 RA 80 (Direct: PC Diffuser, Indirect: PC Diffuser)	2700K	up	1381lm / 0.6m	2762lm / 1.2m	3475lm / 1.5m
		down	1130lm / 0.6m	2260lm / 1.2m	2843lm / 1.5m
	3000K	up	1535lm / 0.6m	3069lm / 1.2m	3861lm / 1.5m
		down	1256lm / 0.6m	2511lm / 1.2m	3159lm / 1.5m
	4000K	up	1705lm / 0.6m	3410lm / 1.2m	4290lm / 1.5m
		down	1395lm / 0.6m	2790lm / 1.2m	3510lm / 1.5m
	5000K	up	1705lm / 0.6m	3410lm / 1.2m	4290lm / 1.5m
		down	1395lm / 0.6m	2790lm / 1.2m	3510lm / 1.5m
	6500K	up	1705lm / 0.6m	3410lm / 1.2m	4290lm / 1.5m
		down	1395lm / 0.6m	2790lm / 1.2m	3510lm / 1.5m
H10096 RA 80 (Direct: PC Diffuser, Indirect: TIR Lens)	2700K	up	811lm / 0.6m	1705lm / 1.2m	2053lm / 1.5m
		down	1699lm / 0.6m	3390lm / 1.2m	4265lm / 1.5m
	3000K	up	901lm / 0.6m	1895lm / 1.2m	2282lm / 1.5m
		down	1887lm / 0.6m	3767lm / 1.2m	4739lm / 1.5m
	4000K	up	1001lm / 0.6m	2105lm / 1.2m	2535lm / 1.5m
		down	2097lm / 0.6m	4185lm / 1.2m	5265lm / 1.5m
	5000K	up	1001lm / 0.6m	2105lm / 1.2m	2535lm / 1.5m
		down	2097lm / 0.6m	4185lm / 1.2m	5265lm / 1.5m
	6500K	up	1001lm / 0.6m	2105lm / 1.2m	2535lm / 1.5m
		down	2097lm / 0.6m	4185lm / 1.2m	5265lm / 1.5m

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

U516833


SURFACE LINEAR LIGHT

U5168 Series is linear LED lighting fixture that features a Down lighting. It's mostly simulating the natural lighting enviroment. Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V,DMX, PWM type. Fixture lengths are available in 2ft,4ft,5ft and 8ft, andcustom lengths are available in 19.6ft.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications
Indoor - Commercial, Residential , Office, Educational Instituions, Conference Rooms and many other workspace

UGR
<19



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY ¹	COLOR TEMP ²	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5168	W White	U UGR<19 Kit	2- 608mm	3 3-Step MacAdam Ellipse	27-2700K	80 80+ CRI	P Aircraft cable pendant	22 IP22	D1- DALI D2- 0-10V D3- On/off
	B Black	D Diffuser	4- 1208mm	5 5-Step MacAdam Ellipses	30-3000K	90 90+ CRI			
	S Silver		5- 1508mm		35-3500K	95 95+ CRI			
			8- 2408mm		40-4000K				
					50-5000K				
					60-6000K				
					65-6500K				

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.



SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC			
Width / Height	W51mm x H65mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	15.6 W/pc	31.1 W/pc	37.8 W/pc	62 W/pc
Efficacy Up to	85lm/w	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off			


LED CHIPS AND DRIVER OPTIONS

NICHIA EPISTAR SAMSUNG
TRIDONIC OSRAM LIFUD


ANGULAR MODULE

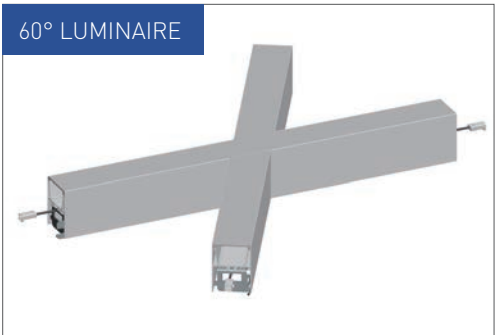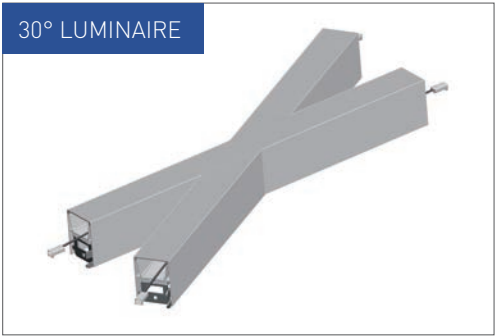

INSTALLATION & ACCESSORIES

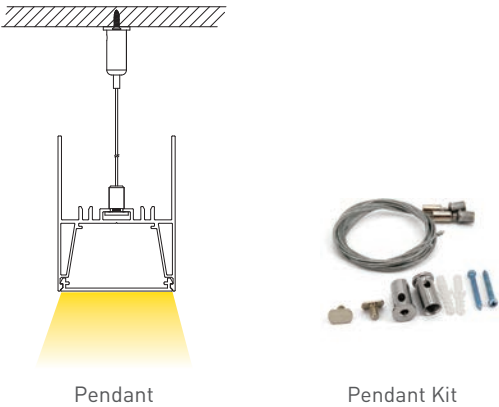

DIMENSION

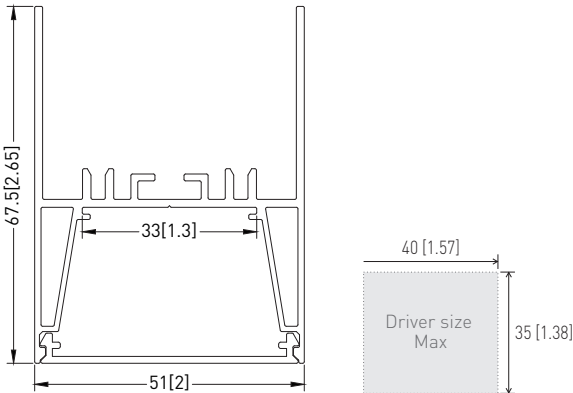

SPECIFICATIONS

Color Temperature		Lumen / Length			
RA 80	2700K	1204lm / 0.6m	2400lm / 1.2m	2917lm / 1.5m	4784lm / 2.4m
	3000K	1267lm / 0.6m	2526lm / 1.2m	3070lm / 1.5m	5036lm / 2.4m
	3500K	1334lm / 0.6m	2659lm / 1.2m	3232lm / 1.5m	5301lm / 2.4m
	4000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	5000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	6000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	6500K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
RA 90	2700K	963lm / 0.6m	1920lm / 1.2m	2333lm / 1.5m	3827lm / 2.4m
	3000K	1014lm / 0.6m	2021lm / 1.2m	2456lm / 1.5m	4029lm / 2.4m
	3500K	1067lm / 0.6m	2127lm / 1.2m	2586lm / 1.5m	4241lm / 2.4m
	4000K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
	5000K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
	5500K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
	6500K	1123lm / 0.6m	2239lm / 1.2m	2722lm / 1.5m	4464lm / 2.4m
RA 95	2700K	867lm / 0.6m	1728lm / 1.2m	2100lm / 1.5m	3445lm / 2.4m
	3000K	912lm / 0.6m	1819lm / 1.2m	2211lm / 1.5m	3626lm / 2.4m
	3500K	960lm / 0.6m	1915lm / 1.2m	2327lm / 1.5m	3817lm / 2.4m
	4000K	1010lm / 0.6m	2015lm / 1.2m	2449lm / 1.5m	4017lm / 2.4m
	6500K	1010lm / 0.6m	2015lm / 1.2m	2449lm / 1.5m	4017lm / 2.4m
SAMSUNG RA 80	3000K	1200lm / 0.6m	2393lm / 1.2m	2909lm / 1.5m	4771lm / 2.4m
	4000K	1263lm / 0.6m	2519lm / 1.2m	3061lm / 1.5m	5022lm / 2.4m
	6500K	1263lm / 0.6m	2519lm / 1.2m	3061lm / 1.5m	5022lm / 2.4m

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- 10% less on UGR<19 version.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.




U514128

SURFACE LINEAR LIGHT

U514128P / M / W is a linear LED lighting fixture that features direct lighting with External Driver. Low lighting glaring in tested UGR<16 performance. Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V, Triac type. Luminaries lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications
Indoor - Commercial Residential , Office, Educational Instituions, Conference Rooms and many other workspaces.

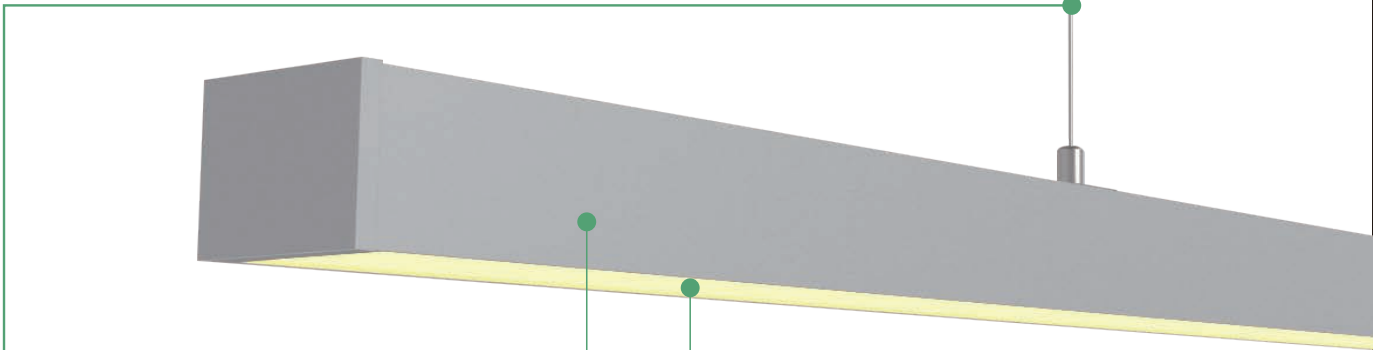


Mutiple Installation

- Sus-pendant
- Ceiling Mounted



Sensor Optional

- Microwave Sensor
- IR Sensor
- Timer



Optical options

- Various Beam angle Lens
- Anti-Glare Film, UGR<19



6063 Alumimum

- Silver / Black clear matt anodize
- White/Black matt powder coating
- Customized RAL color available

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U514128	W- White B- Black S- Silver	P- Prismatic Lens UGR<19 D- Diffuser	2- 611mm 4- 1211mm 5- 1511mm 8- 2411mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC			
Width / Height	W51mm x H41mm			
Length	611mm	1211mm	1511mm	2411mm
Power (W/m /ft)	13 W/pc	26 W/pc	32 W/pc	52 W/pc
Efficacy Up to	90lm/w	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off			

LED CHIPS AND DRIVER OPTIONS



INSTALLATION

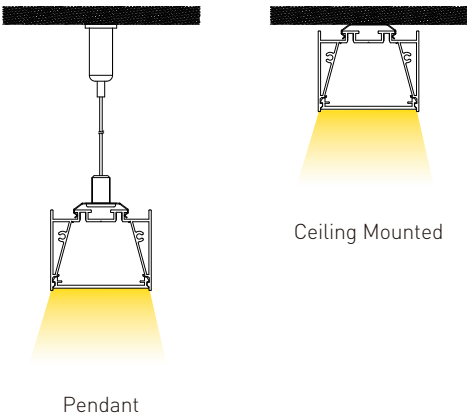


Aircraft Cable Pendant Kit Ceiling Mounted Kit

SPECIFICATIONS


Color Temperature		Lumen / Length			
RA 80	2700K	1003lm / 0.6m	2006lm / 1.2m	2469lm / 1.5m	4019lm / 2.4m
	3000K	1056lm / 0.6m	2112lm / 1.2m	2599lm / 1.5m	4321lm / 2.4m
	3500K	1112lm / 0.6m	2223lm / 1.2m	2736lm / 1.5m	4454lm / 2.4m
	4000K	1170lm / 0.6m	2340lm / 1.2m	2880lm / 1.5m	4688lm / 2.4m
	5000K	1170lm / 0.6m	2340lm / 1.2m	2880lm / 1.5m	4688lm / 2.4m
	6000K	1170lm / 0.6m	2340lm / 1.2m	2880lm / 1.5m	4688lm / 2.4m
	6500K	1170lm / 0.6m	2340lm / 1.2m	2880lm / 1.5m	4688lm / 2.4m
RA 90	2700K	803lm / 0.6m	1605lm / 1.2m	1975lm / 1.5m	3210lm / 2.4m
	3000K	845lm / 0.6m	1689lm / 1.2m	2079lm / 1.5m	3379lm / 2.4m
	3500K	889lm / 0.6m	1778lm / 1.2m	2189lm / 1.5m	3557lm / 2.4m
	4000K	936lm / 0.6m	1872lm / 1.2m	2304lm / 1.5m	3744lm / 2.4m
	5000K	936lm / 0.6m	1872lm / 1.2m	2304lm / 1.5m	3744lm / 2.4m
	5500K	936lm / 0.6m	1872lm / 1.2m	2304lm / 1.5m	3744lm / 2.4m
	6500K	936lm / 0.6m	1872lm / 1.2m	2304lm / 1.5m	3744lm / 2.4m
RA 95	2700K	722lm / 0.6m	1444lm / 1.2m	1777lm / 1.5m	2888lm / 2.4m
	3000K	760lm / 0.6m	1520lm / 1.2m	1871lm / 1.5m	3040lm / 2.4m
	3500K	780lm / 0.6m	1600lm / 1.2m	1969lm / 1.5m	3201lm / 2.4m
	4000K	842lm / 0.6m	1684lm / 1.2m	2073lm / 1.5m	3369lm / 2.4m
	6500K	842lm / 0.6m	1684lm / 1.2m	2073lm / 1.5m	3369lm / 2.4m
SAMSUNG RA 80	3000K	950lm / 0.6m	1949lm / 1.2m	2339lm / 1.5m	3801lm / 2.4m
	4000K	1053lm / 0.6m	2160lm / 1.2m	2592lm / 1.5m	4212lm / 2.4m
	6500K	1053lm / 0.6m	2160lm / 1.2m	2592lm / 1.5m	4212lm / 2.4m

- Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - 10% less on UGR<19 version.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.
 - LM-80, IES TM-30-15 testing report available for led.

DIMENSIONS



BEAM ANGLE




U674128R

TRIMED RECESSED LINEAR LIGHT

U674128R is a Trimmed Recessed linear LED lighting fixture that features direct lighting with External Driver. Low lighting glaring in tested UGR<16 performance. Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V, Triac type. Luminaries lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available in 19.6ft.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications
Indoor - Commercial Residential , Office, Educational Instituions, Conference Rooms and many other workspaces.



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U674128R	W- White	P- Prismatic Lens	2- 627mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	TR- Trimmed Recessed	22- IP22	D1- DALI
	B- Black	UGR<19	4- 1227mm	5- 5-Step MacAdam Ellips	30- 3000K	90- 90+ CRI			D2- 0-10V
		5- 1527mm	35- 3500K						
		8- 2427mm	40- 4000K						
		S- Silver	D- Diffuser		50- 5000K	95- 95+ CRI			D3- On/off
			60- 6000K						
				65- 6500K					

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC			
Width / Height	67mm x 41mm			
Length	627mm	1227mm	1527mm	2427mm
Power (W/m /ft)	13 W/pc	26 W/pc	32W/pc	52W/pc
Efficacy Up to	90lm/w	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off			

LED CHIPS AND DRIVER OPTIONS



SPECIFICATIONS

Color Temperature		Lumen / Length			
RA 80	2700K	1003lm / 0.6m	2006lm / 1.2m	2469lm / 1.5m	4013lm / 2.4m
	3000K	1056lm / 0.6m	2112lm / 1.2m	2599lm / 1.5m	4224lm / 2.4m
	3500K	1112lm / 0.6m	2223lm / 1.2m	2736lm / 1.5m	4446lm / 2.4m
	4000K	1170lm / 0.6m	2340lm / 1.2m	2880lm / 1.5m	4680lm / 2.4m
	5000K	1170lm / 0.6m	2340lm / 1.2m	2880lm / 1.5m	4680lm / 2.4m
	6000K	1170lm / 0.6m	2340lm / 1.2m	2880lm / 1.5m	4680lm / 2.4m
	6500K	1170lm / 0.6m	2340lm / 1.2m	2880lm / 1.5m	4680lm / 2.4m
RA 90	2700K	758lm / 0.6m	1605lm / 1.2m	1975lm / 1.5m	3210lm / 2.4m
	3000K	798lm / 0.6m	1689lm / 1.2m	2079lm / 1.5m	3379lm / 2.4m
	3500K	840lm / 0.6m	1778lm / 1.2m	2189lm / 1.5m	3557lm / 2.4m
	4000K	884lm / 0.6m	1872lm / 1.2m	2304lm / 1.5m	3744lm / 2.4m
	5000K	884lm / 0.6m	1872lm / 1.2m	2304lm / 1.5m	3744lm / 2.4m
	5500K	884lm / 0.6m	1872lm / 1.2m	2304lm / 1.5m	3744lm / 2.4m
	6500K	884lm / 0.6m	1872lm / 1.2m	2304lm / 1.5m	3744lm / 2.4m
RA 95	2700K	722lm / 0.6m	1444lm / 1.2m	1777lm / 1.5m	2888lm / 2.4m
	3000K	760lm / 0.6m	1520lm / 1.2m	1871lm / 1.5m	3041lm / 2.4m
	3500K	800lm / 0.6m	1600lm / 1.2m	1969lm / 1.5m	3201lm / 2.4m
	4000K	842lm / 0.6m	1684lm / 1.2m	2073lm / 1.5m	3369lm / 2.4m
	6500K	842lm / 0.6m	1684lm / 1.2m	2073lm / 1.5m	3369lm / 2.4m
SAMSUNG RA 80	3000K	950lm / 0.6m	1949lm / 1.2m	2339lm / 1.5m	3801lm / 2.4m
	4000K	1053lm / 0.6m	2160lm / 1.2m	2592lm / 1.5m	4212lm / 2.4m
	6500K	1053lm / 0.6m	2160lm / 1.2m	2592lm / 1.5m	4212lm / 2.4m

Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- 10% less on UGR<19 version.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

O30P

O30M3-468 DOUBLE SIDES RING LIGHT

O30M3-468 Double sides Ring light is built by Alu. extrusion fixture with Silicone lens. It's creating smooth and comfort lighting.

The light sourced are Osram LED in 80+ or 90+ Ra avaiable. Color temperature options from 2700K to 6500K, Dual white at WW+NW available. DMX dimmable available. Ring diameter available in Customized Multiple, Φ450mm, Φ600mm, Φ800mm.

Finish


Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications

Indoor - Resting Zone, Reception, etc.

O30P

DOUBLE SIDED RING LIGHT

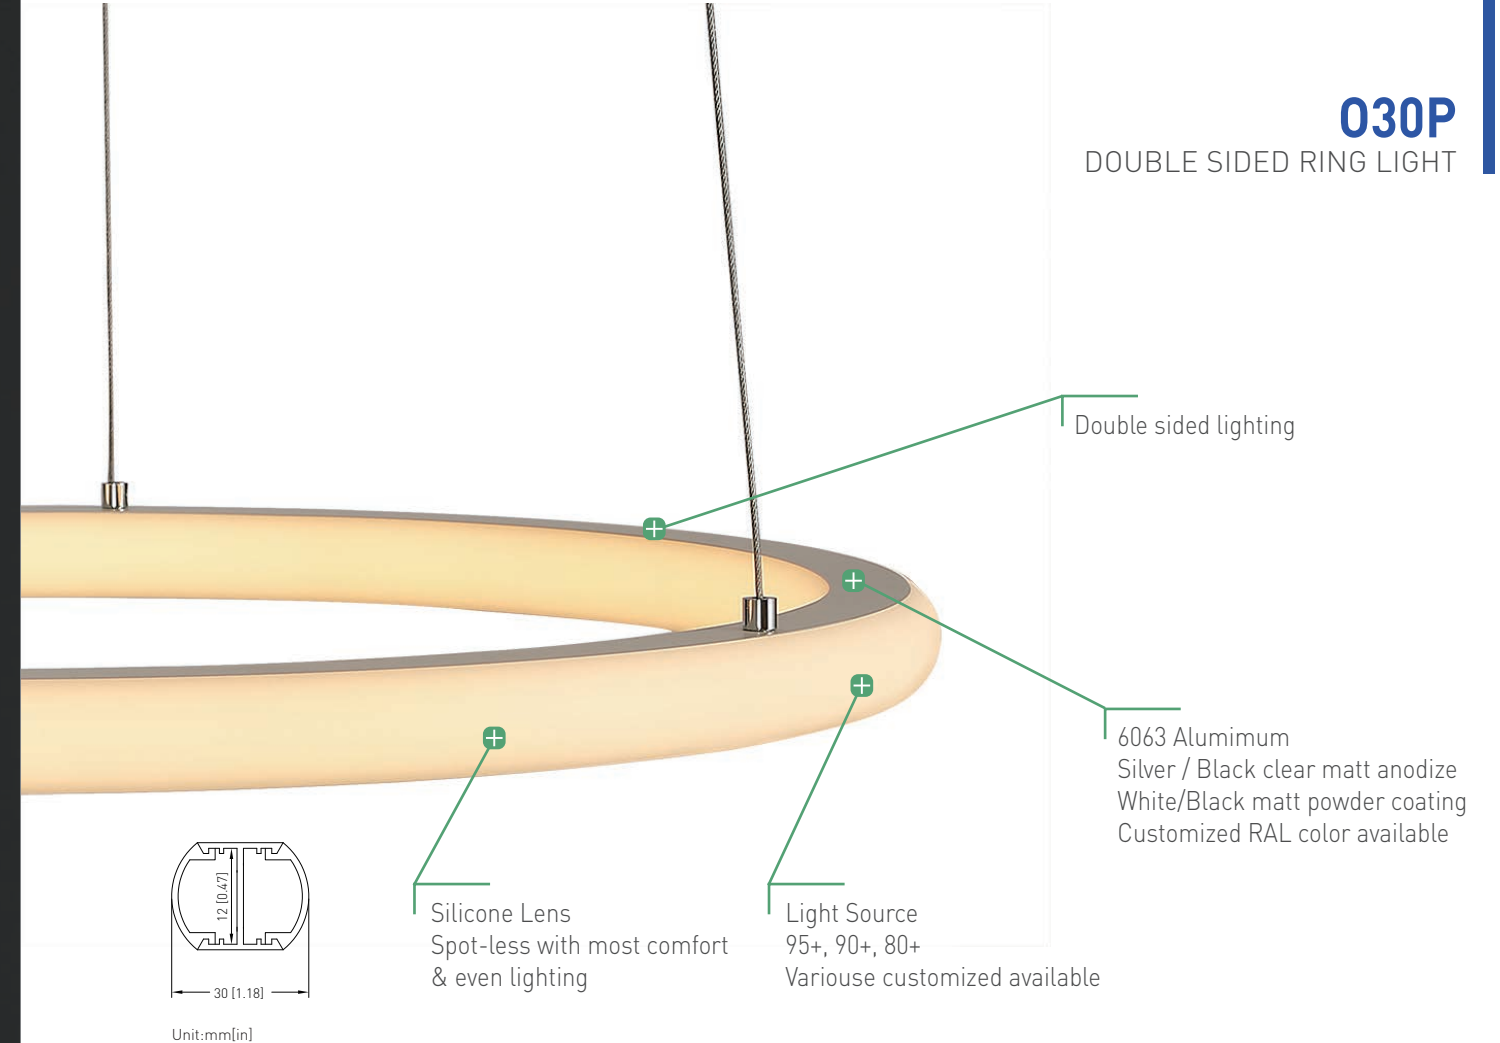

2700K	3500K	4000K	Setable White Available 1800K+6500K
-------	-------	-------	--


Constant Voltage Light Source, varieuse options please check our Light Strip catalog.

	Input Vol.	Power/pc	Lumen/pc	Dimming	Dimension (D)
O30M3-468	90-265 VAC	92W	5640 lm	DMX / Non-Dim	Φ450mm + Φ600mm + Φ800mm
O30M3-81012	90-265 VAC	142W	9656 lm	DMX / Non-Dim	Φ800mm + Φ1000mm + Φ1200mm
O30-4	90-265 VAC	25W	1530 lm	DMX / Non-Dim	Φ450mm
O30-6	90-265 VAC	35W	2330 lm	DMX / Non-Dim	Φ600mm
O30-8	90-265 VAC	40W	2500 lm	DMX / Non-Dim	Φ800mm
O30-10	90-265 VAC	50W	3423 lm	DMX / Non-Dim	Φ1000mm
O30-12	90-265 VAC	60W	4022 lm	DMX / Non-Dim	Φ1200mm

* Customize diameter available.

Note: The given data are typical values Due to tolerances of the production process and the electrical components,values for light output and electrical power can vary up to 10%.

-15% luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.

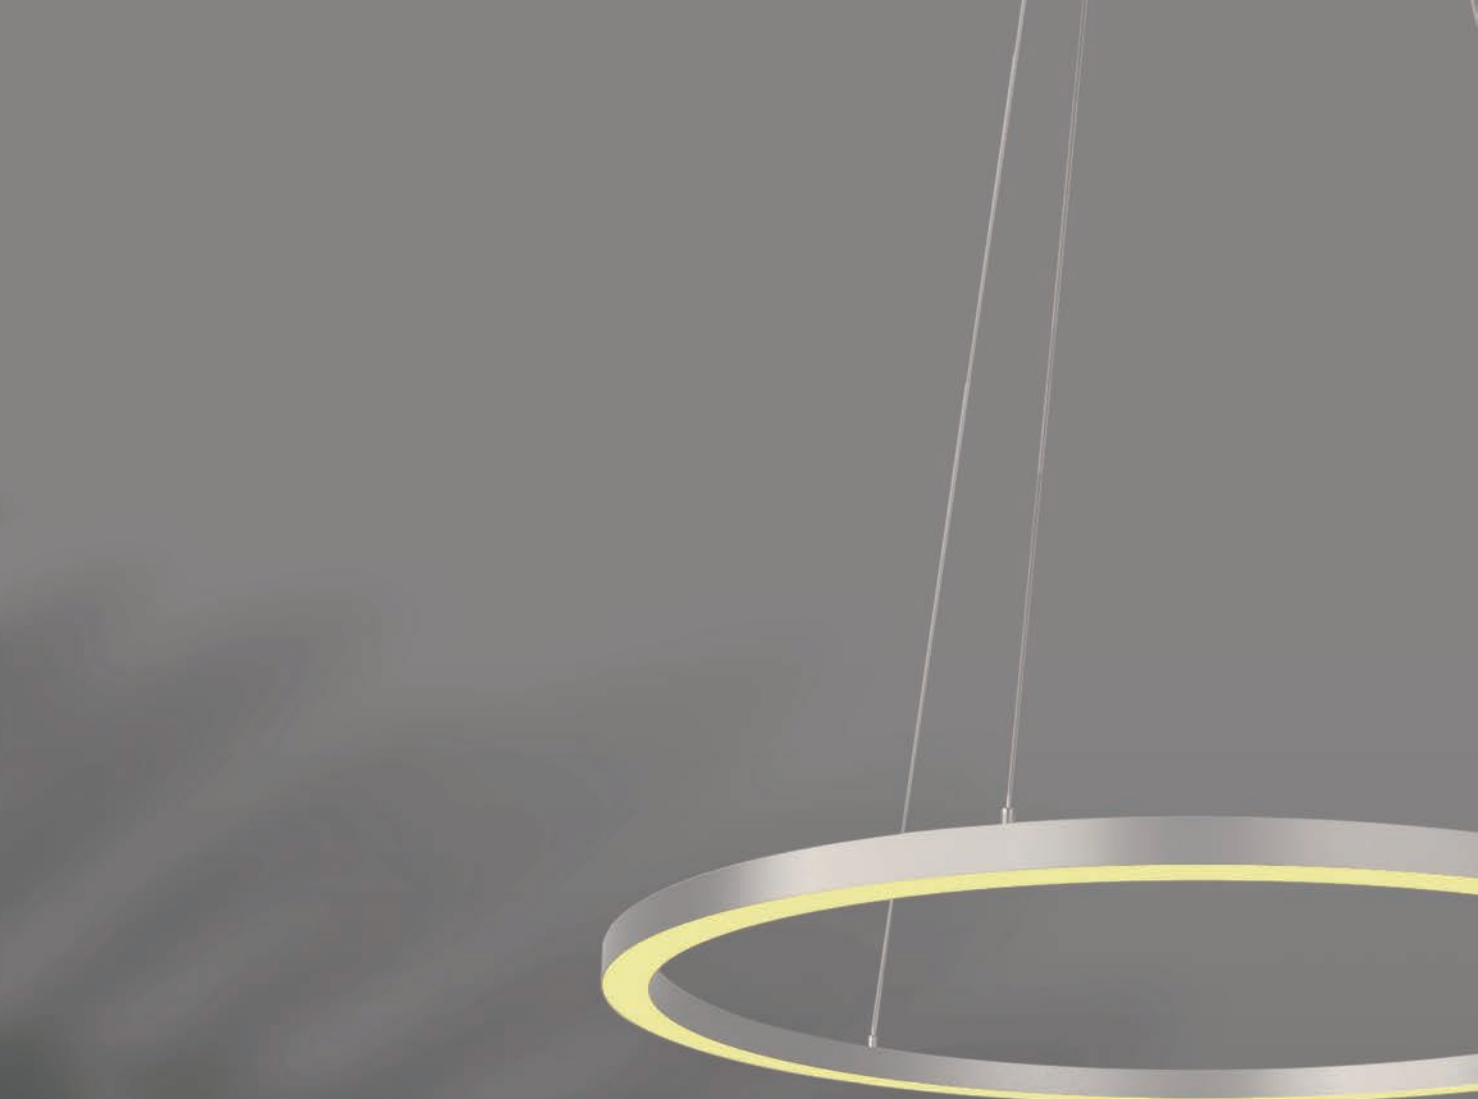

O20P

O20 RING LIGHT

O20 Ring light is built by Alu. extrusion fixture with Silicone lens. It's creating smooth and comfort lighting without spot.
It can be combined with Acoustic PET Panels for the Lighting + Sound Management system.
The light sourced are available up to 95+ Ra. Color temperature options from 2700K to 6500K, Dual white at WW+NW available. DMX dimmable available.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications
Indoor - Resting Zone, Reception, etc.

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
O20	W- White B- Black S- Silver	D- Diffuser	4- ϕ 450mm 6- ϕ 600mm 8- ϕ 800mm 10- ϕ 1000mm 12- ϕ 1200mm 15- ϕ 1500mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	30- 3000K 40- 4000K 60- 6000K	80- 80+ CRI 90- 90+ CRI	P- Pendant	22- IP22	D1- DALI D2- 0-10V D3- On/off


- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Osram Chips. For more options, pls. check with your executive sales.

SPECIFICATION

Model	O20-4	O20-6	O20-8	O20-10	O20-12	O20-15
Dimensions	ϕ 450×25mm	ϕ 600×25mm	ϕ 800×100mm	ϕ 1000×100mm	ϕ 1200×100mm	ϕ 1500×100mm
Wattage	25 W	35 W	40 W	50 W	60 W	72 W
Lumens	1532lm	2332lm	2515lm	3423lm	4022lm	4968lm
Voltage	90-265VAC					


3000K	4000K	6000K
-------	-------	-------

DIMENSIONS

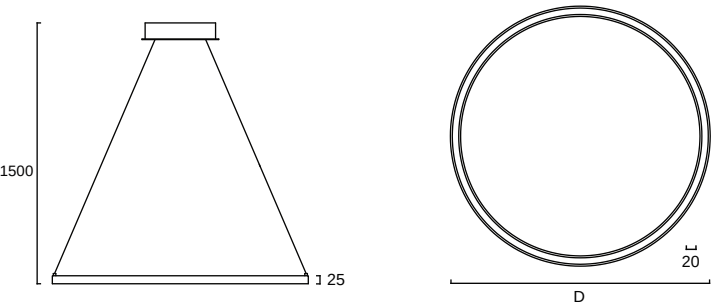

Unit: mm

O600610P
360DEG LINEAR LIGHT

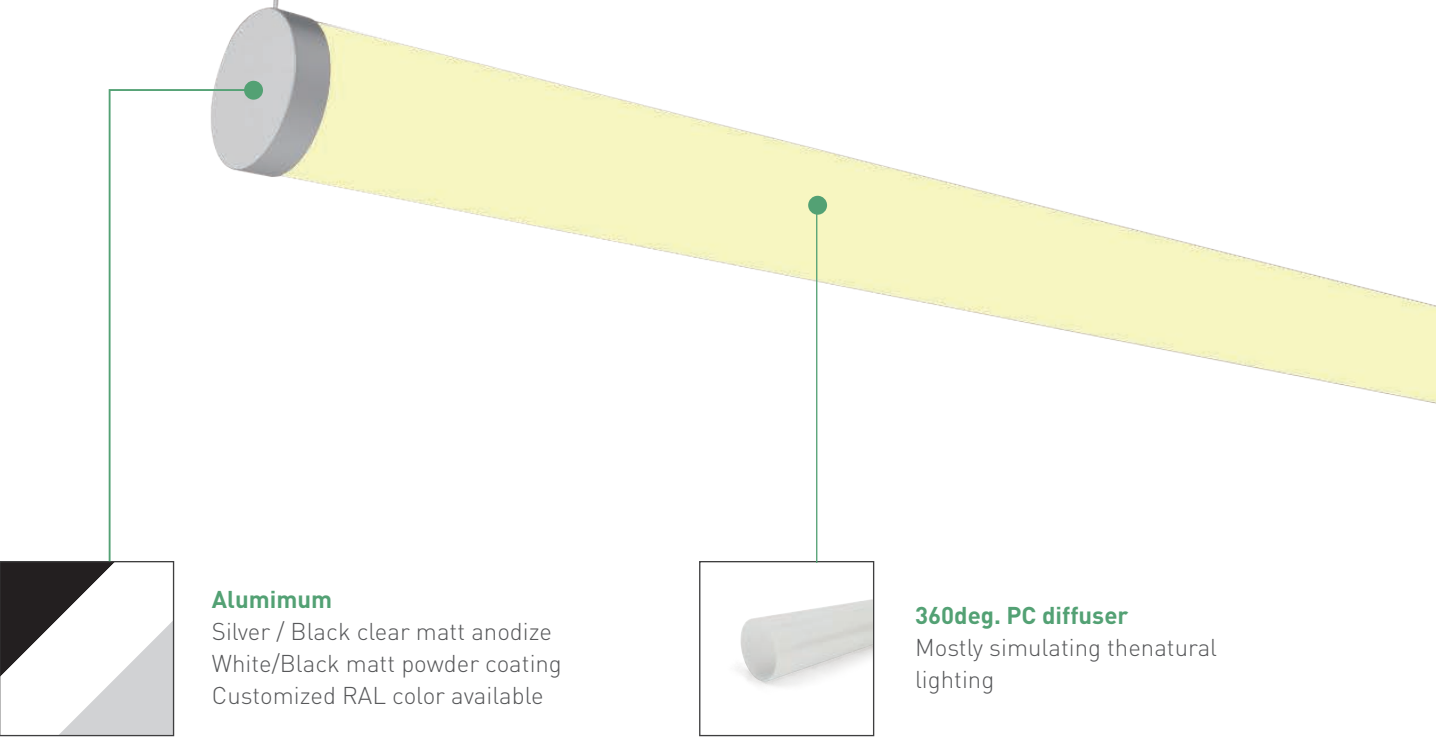

Alumimum
Silver / Black clear matt anodize
White/Black matt powder coating
Customized RAL color available



360deg. PC diffuser
Mostly simulating thenatural
lighting

O600610P
O600610P 360DEG ROUND PENDANT LINEAR LIGHT

O600610P is linear LED lighting fixture that features a 360° lighting. It's mostly simulating the natural lighting enviroment.
Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V, Triac type. Fixture lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available in 19.6ft.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color availableg

Applications
Indoor - Office, Educational Instiutiuons, Conference Rooms and many other workspaces.



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
O600610P	W- White	D- Diffuser	2- 630mm	3- 3-Step MacAdam Ellipse	27- 2700K	85- 85+ CRI	P- Vertical Pendant	22- IP22	D1- DALI
	B- Black		4- 1230mm		30- 3000K	90- 90+ CRI	HP- Horizontal Pendant		D2- 0-10V
	S- Silver		5- 1530mm		35- 3500K	95- 95+ CRI			D3- On/off
			6- 1830mm	40- 4000K					
				50- 5000K					
				60- 6000K					
				65- 6500K					

1. Blueview’s standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


SPECIFICATION

Voltage	220V-240VAC / 100V-240 VAC			
Width / Height	φ 63mm			
Length	630mm	1230mm	1530mm	1830mm
Power (W/m /ft)	13 W/pc	27 W/pc	33.5 W/pc	40 W/pc
Efficacy Up to	100lm/w	108lm/w	108lm/w	108lm/w
Control	Dali , 0-10V, on/off			

LED CHIPS AND DRIVER OPTIONS



INSTALLATION

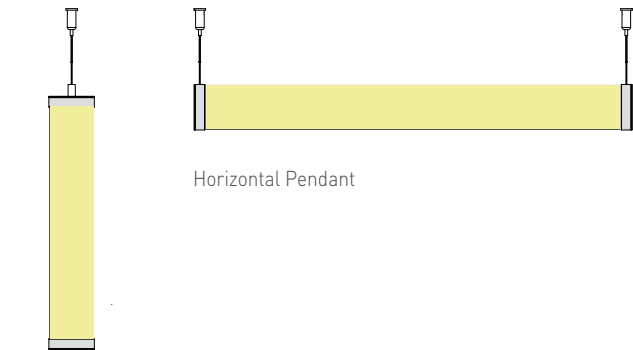

Vertical Cylinder

Horizontal Pendant



Aircraft Cable Pendant Kit


ACCESSORIES

SPECIFICATIONS

Color Temperature		Lumen / Length			
RA 80	2700K	1204lm / 0.6m	2500lm / 1.2m	2585lm / 1.5m	3704lm / 1.8m
	3000K	1267lm / 0.6m	2632lm / 1.2m	2721lm / 1.5m	3899lm / 1.8m
	3500K	1334lm / 0.6m	2770lm / 1.2m	2864lm / 1.5m	4104lm / 1.8m
	4000K	1404lm / 0.6m	2916lm / 1.2m	3015lm / 1.5m	4320lm / 1.8m
	5000K	1404lm / 0.6m	2916lm / 1.2m	3015lm / 1.5m	4320lm / 1.8m
	6000K	1404lm / 0.6m	2916lm / 1.2m	3015lm / 1.5m	4320lm / 1.8m
	6500K	1404lm / 0.6m	2916lm / 1.2m	3015lm / 1.5m	4320lm / 1.8m
RA 90	2700K	963lm / 0.6m	2000lm / 1.2m	2068lm / 1.5m	2963lm / 1.8m
	3000K	1014lm / 0.6m	2106lm / 1.2m	2177lm / 1.5m	3119lm / 1.8m
	3500K	1067lm / 0.6m	2216lm / 1.2m	2291lm / 1.5m	3283lm / 1.8m
	4000K	1123lm / 0.6m	2333lm / 1.2m	2412lm / 1.5m	3456lm / 1.8m
	5000K	1123lm / 0.6m	2333lm / 1.2m	2412lm / 1.5m	3456lm / 1.8m
	5500K	1123lm / 0.6m	2333lm / 1.2m	2412lm / 1.5m	3456lm / 1.8m
	6500K	1123lm / 0.6m	2333lm / 1.2m	2412lm / 1.5m	3456lm / 1.8m
RA 95	2700K	867lm / 0.6m	1800lm / 1.2m	1861lm / 1.5m	2666lm / 1.8m
	3000K	912lm / 0.6m	1895lm / 1.2m	1959lm / 1.5m	2807lm / 1.8m
	3500K	960lm / 0.6m	1995lm / 1.2m	2062lm / 1.5m	2955lm / 1.8m
	4000K	1011lm / 0.6m	2100lm / 1.2m	2171lm / 1.5m	3110lm / 1.8m
	6500K	1011lm / 0.6m	2100lm / 1.2m	2171lm / 1.5m	3110lm / 1.8m
SAMSUNG RA 80	3000K	1141lm / 0.6m	2368lm / 1.2m	2449lm / 1.5m	3509lm / 1.8m
	4000K	1264lm / 0.6m	2624lm / 1.2m	2714lm / 1.5m	3888lm / 1.8m
	6500K	1264lm / 0.6m	2624lm / 1.2m	2714lm / 1.5m	3888lm / 1.8m

Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

DIMENSIONS



Unit:mm[in]



O100P

O100 RING LIGHT


O100 Ring light is built by Alu. extrusion fixture with PMMA lens. Equiped Osram SMD LEDs in Warm White or Neutral White, with MeanWell Drivers for Non-Dim option. Uninterrupted lines of light for maximum uniformity and aesthetics. The light sourced are Osram LED in 80+ or 90+ Ra available. Color temperature options from 2700K to 6500K.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications
Indoor - Resting Zone, Reception, etc.

O100P

RING LIGHT

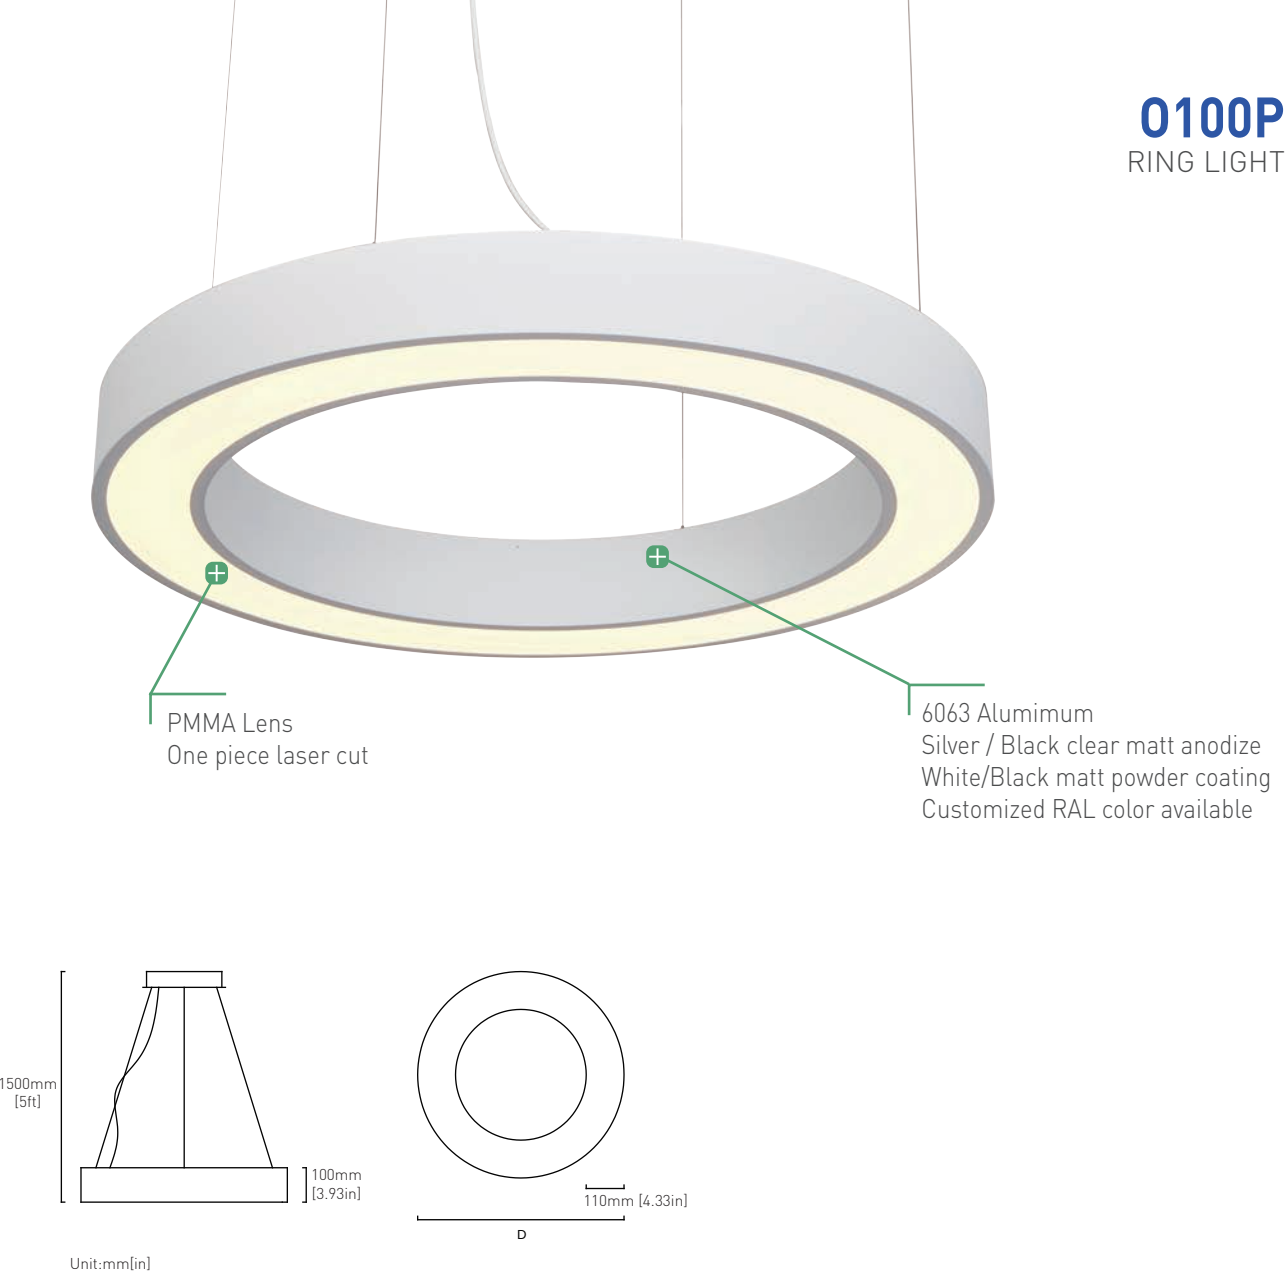

	2700K	3500K	4000K	Setable White Available 1800K+6500K		
	Input Vol.	Power/pc	Lumen/pc [Light W driver]	Dimming	Lens	Dimension (D x W x H)
O10045	90-265 VAC	30W	1500 lm	0-10V/ DALI / Non-Dim	PMMA 1pc	450 x 110 x 100mm
O10060	90-265 VAC	40W	2300 lm	0-10V/ DALI / Non-Dim	PMMA 1pc	600 x 110 x 100mm
O10075	90-265 VAC	60W	3150 lm	0-10V/ DALI / Non-Dim	PMMA 1pc	750 x 110 x 100mm
O10010	90-265 VAC	72W	4150 lm	0-10V/ DALI / Non-Dim	PMMA 1pc	900 x 110 x 100mm
O10012	90-265 VAC	92W	5050 lm	0-10V/ DALI / Non-Dim	PMMA 1pc	1000 x 110 x 100mm
O10015	90-265 VAC	120W	7200 lm	0-10V/ DALI / Non-Dim	PMMA 2pcs	1500 x 110 x 100mm
O10018	90-265 VAC	140W	8100 lm	0-10V/ DALI / Non-Dim	PMMA 2pcs	1800 x 110 x 100mm

Note: The given data are typical values Due to tolerances of the production process and the electrical components,values for light output and electrical power can vary up to 10%.
-15% luminous flux at DALI and 0/1-10V driver, and -10% Non-Dim driver.



S100P

S100 SQUARE LIGHT


S100 Square light is built by Alu. extrusion fixture with PMMA lens. Equiped Osram SMD LEDs in Warm White or Neutral White, with MeanWell Drivers for Non-Dim option. Uninterrupted lines of light for maximum uniformity and aesthetics. The light sourced are Osram LED in 80+ or 90+ Ra avaiable. Color temperature options from 2700K to 6500K.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications
Indoor - Resting Zone, Reception, etc.

S100P

SQUARE LIGHT

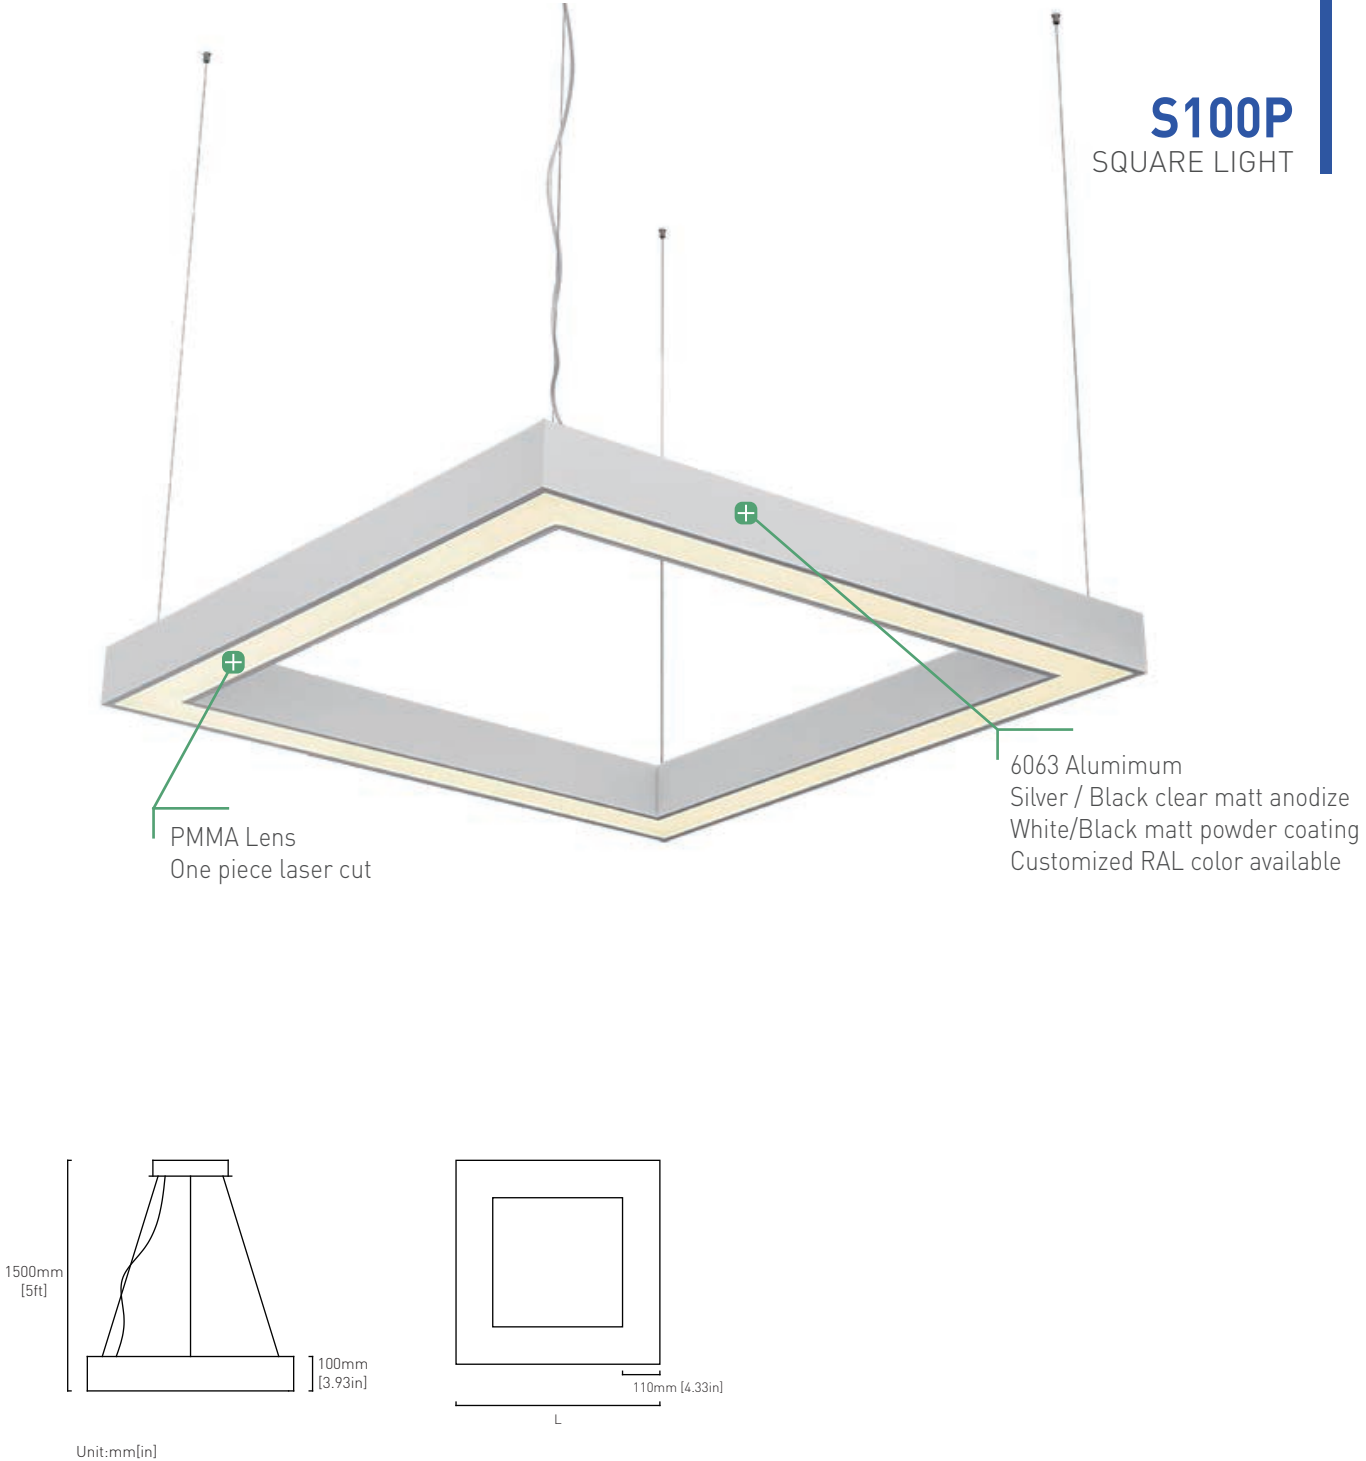

	2700K	3500K	4000K	Setable White Available 1800K+6500K		
	Input Vol.	Power/pc	Lumen/pc [Light W driver]	Dimming	Lens	Dimension (D x W x H)
S10085	90-265 VAC	72W	4032 lm	0-10V/ DALI / Non-Dim	PMMA 1pc	850 x 850 x 100mm
S10012	90-265 VAC	142W	7812 lm	0-10V/ DALI / Non-Dim	PMMA 2pcs	1200 x 1200 x 100mm

Note: The given data are typical values Due to tolerances of the production process and the electrical components,values for light output and electrical power can vary up to 10%.
-15% luminous flux at DALI and 0/1-10V driver, and -10% Non-Dim driver.