















Features

- High lumen~194lm per piece
- Low voltage-constant voltage 12 VDC system
- Wide viewing angle and helps eliminate wasted light
- Over molded design protects components from damage
- Pre-drilled holes and 3M mounting tape
- Contains no lead, mercury or glass

Application /

- 8-15mm signage lighting box
- 8-15mm large channel letters





Specifications


Part No.	BV-ST13-2W		
Input Vol.	12VDC		
Power/pc	2.1W		
Lumen/pc	189-194lm		
Led Type	SMD 3030		
CRI	≥80		
Max QTY/serie	20pcs		
Dimension (LxWxD)	52x35x7. 3mm		
Color Available	6500K,8000K		

Product Drawing

Unit:mm[in]



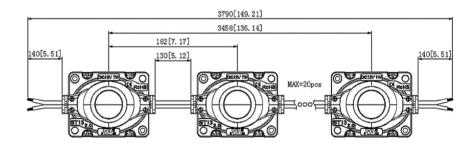



BV-ST13-2W


BLUEVIEW ELEC-OPTIC TECH CO.,LTD



Installation //

Thickness	Distance (x,y)	Qty/ m²	Illumination
10cm	12x12cm	64pcs	3820-4470lux
15cm	12x12cm	64pcs	2380-2940lux
18cm	12x12cm	64pcs	2120-2630lux


Luminous Intensity Distribution Diagram /

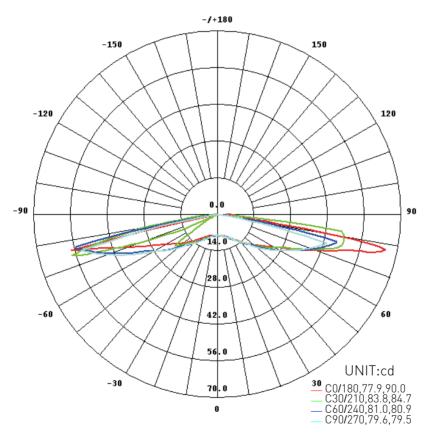


AVERAGE BEAM ANGLE(50%):164.4 DEG



Package



Wrap modules by wire ties and then put into anti-static bag with desiccant

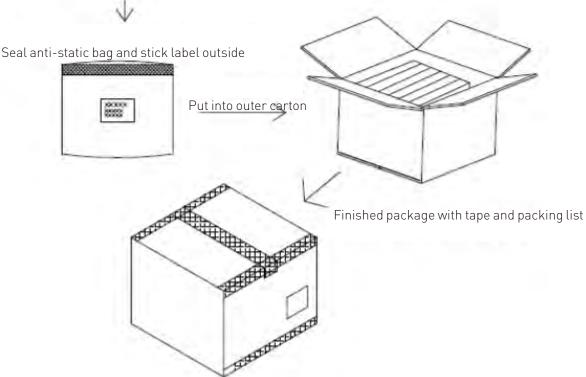

- 1. Outer carton dimension:570*375*285
- 2. 20pcs for one strings,4 strings(80pcs) in one anti-static bag
- 3. 20pcs of bags for one carton,1600pcs module for one carton
- 4. Net Weight per carton(NW):23.4(1 \pm 10%)kg
- 5. Gross Weight per carton(GW):24.7(1 \pm 10%)kg