

Features

Adopt integrated optical lens, exquisite appearance, super cost-effective;
Using ultrasonic waterproof technology;
A single module can be cut, easy to install;
Support customization;

Application

Suitable for advertising letters with depth greater than 4.5cm and different widths.

Installation

Fix by adhesive tape or screws



Specification

Model No.	Light Color	Color Temperature(K)	Beam Angle	Typical Luminous Flux value(lm/pcs)	Ra	Efficacy (lm/W)	Voltage (V DC)	Power (W/pcs)
PT9-3	W	2800-3200	165°	98	80+	98	12	1.0
		3800-4200		100		100		
		6000-6500		100		100		
		9000-11000		100		100		

Other Parameters


Model No.	Quantity (LED Qty/pc)	Product Size L*W*H(mm)	Standard Run (pcs)	Max Run(single feed) (pcs)	Working Temperature	Storage Temperature
PT9-3	3	52.8*15.7*9.6	50	50	-20~+60℃	-20~+70℃

NOTE:

1. Test environment temperature : 25±2℃.
2. Figures above are typical figures. Actual figures could be different with typical figures, and the data is subject to change without notice.
3. Different color temperature will make luminous flux different.
4. Power tolerance within ±10%.
5. The "Quantity"above means the LED quantity of single module

Profile Drawings


Unit:mm[inch]

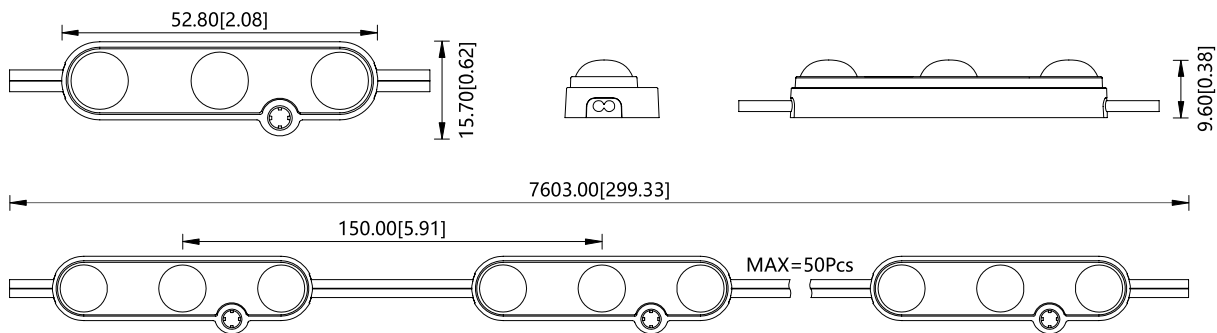


Note: For detail drawing, please consult sale rep.



Luminous Intensity Distribution Diagram

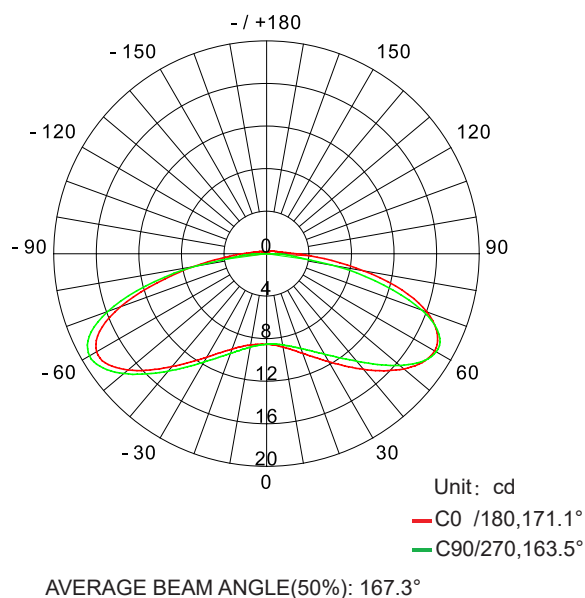


Average Illumination

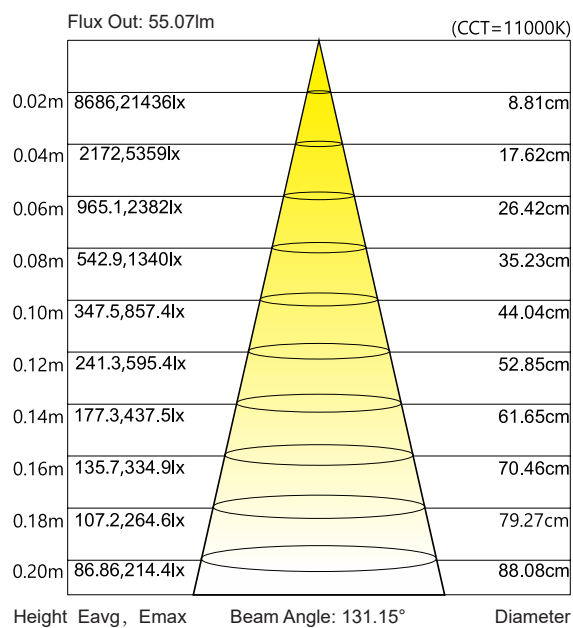


Note: the above data is tested with PT9-3 at 11000K. For other data, please consult sales rep.


packing




Prepare the desiccant and bind the product.




Put the product and desiccant into static shielding bag.




Seal and label the static shielding bag.




Put the static shielding bag side by side into carton box.



Seal the box.



Label the box;



Use packing belt to pack after adding the edge protectors.

Packaging information

Model No.	Product Size L*W*H(mm)	Carton Size(mm)	PCS/Bag	Bag/Carton Box	Net Weight(kg)	Gross Weight(kg)
PT9-3	52.8*15.7*9.6	390*390*325	100	20	12.48(1±10%)	13.85(1±10%)


Note:

Packing materials: static shielding bag and carton box.

The above quantity and weight are only for the illustrated packaging method. There will be differences in the quantity and weight with other packaging methods.


Installation

Connection Diagram

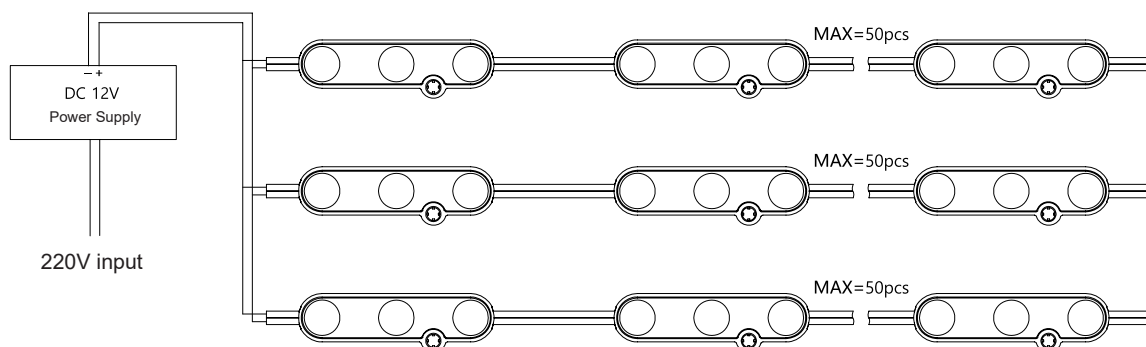



Irregular light box (Font logo, etc)



Test Data

PT9-3 / Single-row

Depth(H) cm	Illumination (lux)	Font width (W)	Spacing (ΔX)	Visual Effects
4.5	11250-13100	6cm	6cm	OK
6	3350-4000	11cm	12cm	
7	3050-3650	11cm	14cm	
8	2790-3200	11cm	14cm	
10	1570-1830	16cm	14cm	


PT9-3 / Double-row

Depth(H) cm	Illumination (lux)	Font width (W)	Spacing (ΔX)	Spacing (ΔY)	Visual Effects
4.5	/	/	/	/	OK
6	7050-7760	11cm	14cm	2.5	
7	6320-7100	11cm	14cm	2.5	
8	5500-6530	11cm	14cm	2.5	
10	3010-3450	16cm	14cm	4cm	


Note:

The above data are obtained when PT9-3 uses a white bottom material and a 3mm acrylic plate as the transparent material at the bottom of the lamp box;
For illuminance data of other depths or illuminance data of other models, please contact the salesperson for requirements
The above figure is only a schematic diagram. Please refer to the real object for detail


Accessories & Tools



LED power supply




Diagonal pliers



Connection terminal

Installation steps

Installation steps

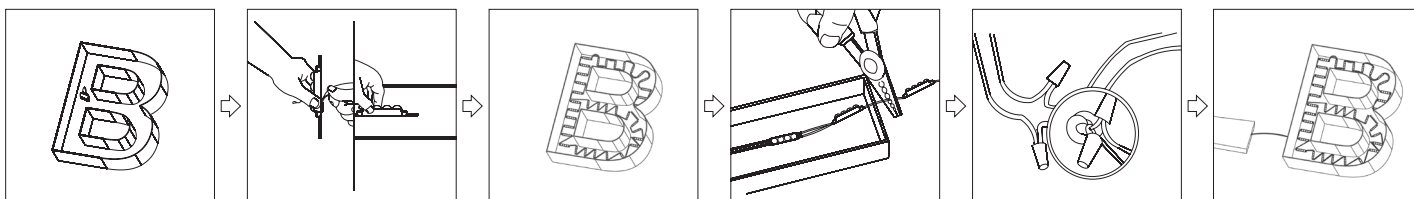



1. Clean the mounting surface.
2. Peel away the release paper on the back of led modules and stick them onto mounting surface.
3. Evenly arrange the led modules with appropriate space.
4. Cut the modules according to the requirements and treat the cut place with insulation and waterproof arrangement.
Note: Cut in the middle of the wire.
5. If the product needs to be connected, it is better to fix with connection ends.
Note: Treat the thread with insulation, waterproof, and anti-corrosion arrangement as it cannot pull out by hands.
6. Make sure the correct connection of positive and negative poles between led module and power supply.
Note: Treat the thread with insulation, waterproof, and anti-corrosion arrangement as it cannot pull out by hands.

Attentions before installation

- Before installation, check that the product parameters are consistent with the requirements (Seeing product specifications or product labels)
- Load voltage, current, power and power supply should be matched with the product.
- Follow the instructions of wiring diagram (first connect the load and then the power supply) to avoid short circuit.
- Make sure the correct connection of positive and negative poles between products and power supply. Otherwise, the light will not be on.
- Make sure the power cord firmly screwed into the terminal and it should not be pulled out by hands.
- The terminal should have insulation, waterproof and anti-corrosive treatment.
- After installing, the fabric light box must be covered with cloth within 48 hours and avoid long-term idle after installed.

Common Faults and Troubleshoot

Quick Guide		
Problems	Reasons	Solutions
All LEDs can not light on.	No electric supply.	Fix the short circuit problem.
	Automatic power protection from the open or short circuit in output of the power supply.	
	Wrong connection of power supply.	
LEDs can not light on partly.	Some switching mode power supplies are not powered.	Correctly connection.
	Power supply line error.	
	Mistaken wire connection of some of products	
Brightness of LED is inconsistent tor insufficient.	Power overloaded.	Replace with more powerful power.
	Power supply circuit excessive consumption.	Make sure the working voltage of the product within $\pm 5\%$ of standard voltage, or keep balance by circuit power consumption.
	Excessive quantities in series connection of the product	Reduce the quantities of the product in series connection to meet requirement.
LED flicker.	Connection point fault.	Remove bad connection point.
	Switching power supply failure.	Replace a new power supply.
	Wrong Installation or use of products	Please follow the instructions



Warning

- Do not disassemble or retrofit the light. Do not touch the surface of the light with a sharp object.
- Do not do live-line working during installation, especially for high voltage product.
- Do not use any organic chemical solvents.
- Use neutral glass adhesive to fix this product and it needs to be dried 24 hours in the open environment after operation.
- Treat the ends and the circuit connection points that are not connected to the main line with insulation, waterproof, and anti-corrosion in the installation.
- Use 18AWG (0.75mm² cross-sectional area) or thicker core wire to avoid adverse consequences caused by overheating, if the power cable need to lengthen.
- Make sure the input voltage meets the requirements and lines are connected correctly before lighting on.
- This product is for signage, and do not use as general lighting.
- Series connection within the max run.
- The length of the power cable between the power supply and the led strip should not exceed 2 meters. Otherwise, large circuit loss will lead to inconsistent brightness.
- Installation, maintenance and repair should be operated by a qualified technician.

Statements and Recycling

Statements:

- Repair should be operated by a qualified technician, if the external circuit or main line of this product is damaged.
- The parameters given in this manual are typical values and for reference only.
- All illustrations and drawings in this manual are for reference.
- This product is subject to change without notice.

Recycling:

- LED lighting products belongs to electronic products, please do recycling treatment according to the relevant WEEE directives.