



BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Add: No. 1000, Section 2, 2nd Konggang Road,
Fax: +86-28-8148 1258 Southwest Aviation Industrial Development Zone,
Web: www.blueviewled.com Shuangliu, Chengdu, Sichuan, China.610207

BVINSPIRATION LINEAR DIVISION

Mail: support@inspiration.com Add: No. 1 TianQin St., Wusha Industrial Zone,
Web: www.bvinspiration.com Henglan Town, ZhongShan, Guangdong, China

BLUEVIEW LINEAR LIGHT 2021-2022

BV Inspiration



LINEAR LIGHTING



**BETTER
LIGHT
BETTER
VIEW**



INTRODUCE

ABOUT US

BVInspiration is a brand extension of Blueview established in 2016 which specializes in commercial architectural luminaires. We deliver high-performance LED luminaires for offices, commercial, educational institution, recreational and hospitality spaces. We provide a range of innovative solutions to satisfy most of our client's ever-changing requirement of today's project including design and build-to-order custom lighting solutions. BVInspiration is the best in class for our forward-thinking capabilities and innovativeness. We work closely with our clients and stakeholders to develop products that are in trend to deliver functional and aesthetical advantages. All of our products are designed and engineered with the principles of captivating, ease of installation, usage and maintenance.

WHY BVINSPIRATION

Our product's engineering design was covered every link from material, production feasibility, transportation, inventory, to in field installation. We are in close contact with designers, suppliers, and assembly workers to build products that are realistic, superior in design, functionality, and flexible luminaire systems.

We provide more optical options with Direct lighting, Direct & Indirect Lighting, Asymmetric, Double Asymmetric lighting with PC/PMMA lens, TIR, Reflector, Louver. Beam angle from 15 ° to 110 °. More LED options in CRI95+, 90+ in around 10 CCT options from 1800K to 6500K, Dual White, Tunable white, Dim to Warm. More dimming methods 0-10V, DALI, DMX, Triac forward/Reverse Phase.

TOP5 REASONS TO CHOOSE BLUEVIEW LINEAR LIGHTING

#1

BEST-IN-CLASS SERVICES

- Customized spec support, private label service
- 24 hours response policy
- Solution offering with result-oriented
- Technical, Sales, Marketing team service

#2

EXPERIENCE YOU CAN TRUST

- Aiming to long-term partner relationship
- Focus on the advantage LED manufacturing technology
- Serving for High-end Market over since 2004, 972 employees
- Over than 55 million US Dollar annual sales

#3

CLASSIC ENGINEERING DESIGN

- Modular system offers more than million variations
- Blue light harzard less lighting source
- Min labor cost on installation & maintenance

#4

HIGH STANDARD QUALITY CONTROL

- TÜV Rheinland authorized laboratory
- Operations accredited to ISO 9001:2008
- 50% overseas sales in North America, all products meet all regulatory requirements including Title 24 and other unique standards
- Over than 20 process on reliability testing for one item

#5

ODM & OEM AVAILABLE

- 55 Engineers team
- Over than 50 R&D Patents
- Strong Supply Chain System



CONTENT

01	INTRODUCTION
03	TOP 5 TO CHOOSE BLUEVIEW LINEAR LIGHT
05	GRAZER SERIES
15	SLIM SERIES
54	LUZ SERIES
83	HONG DIRECT & INDIRECT SERIES
91	HILA IP44 / DIRECT & INDIRECT SERIES
95	U516833 PENDANT LINEAR LIGHT
99	U514128 EXTERNAL DRIVER PENDANT
103	U674128 EXTERNAL DRIVER RECESSED
106	U463330TR TRIMED RECESSED LINEAR LIGHT
110	O3030 RING LIGHT
112	O20 DIRECT RING
114	O60 360DEGREE

GRAZER SEREIS


BVG INTERIOR & OUTDOOR GRAZER LINEAR LIGHT

- Blueview's BVG Grazer Linear Lighting has Interior Grazer TIR lens type / BVG-T, Interior Extruded lens type / BVG-E, Interior Louver type / BVG-L & outdoor IP65 type / BVG-O.
- BVG-T and BVG-O are both engineering design with 12 optical lens options, it provides a narrow optic and clean light beam to highlight wall textures without shadow and hotspot. Featuring injected high-efficiency acrylic precision TIR lens, BVG delivers high-performance light evenly to graze the wall continuously in DC24V.
- BVG-T's optics provide from narrow 9 ° to flood 39 °x59 ° that enhance the wall textures from ceiling to floor.
- BVG can be installed by ceiling mounted bracket or Swivel bracket to satisfy different applications.

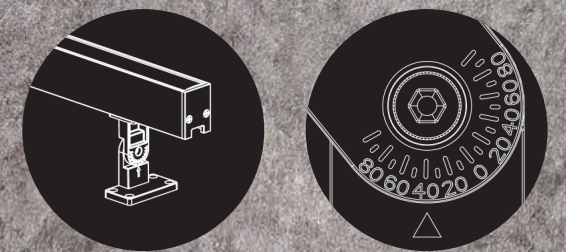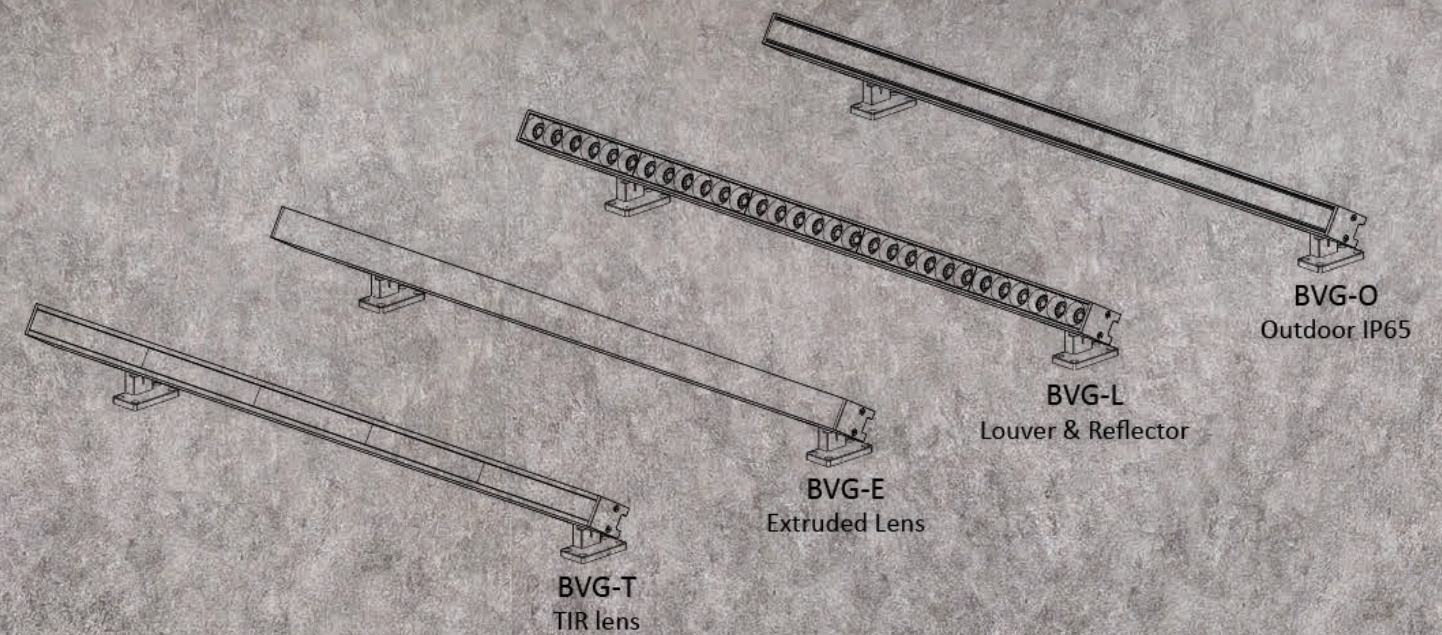


Die-casted Swivel bracket in -85° to 85° adjustable

LIGHTING DISTRIBUTION



ORDERING INFORMATION

LUMINAIRE	FINISH	BEAM ANGLE	POWER	COLOR QUALITY	COLOR TEMP	CRI	LENGTH	IP GRADE	DIMMING OPTOINS	
BVG-L	W- White	25- Spot 25°	15- 15W/m	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	12- 1207mm	22- IP22	D1- On/off	
	B- Black	50- Flood 50°		5- 5-Step MacAdam Ellips	30- 3000K	90- 90+ CRI	XX- Custom length 120mm increments.			
					35- 3500K	95- 95+ CRI				
					40- 4000K					
					50- 5000K					
	S- Silver				60- 6000K					
					65- 6500K					



LENS OPTIONS



INSTALL ACCESSORIES



Adjustable Swivel Mounting Bracket




Surface Mounted Bracket

SPECIFICATION


Luminiare	BVG-L
Input Voltage	24VDC
Power	15W/m
Lumen Efficacy Up to	1425lm/m [CRI 80+ 95lm/W]
CRI	80+,90+,95+
Finish	White / Black - Matt powder coated Silver - Anodized
Width / Height	W25 x H35mm
Weight	1.20kgs/m
Max Run	25m [8ft]
IP Grade	IP22
Control	On/off
Installation	Surface Mounted, Pendant / Swivel Brackets

LIGHTING DISTRIBUTION

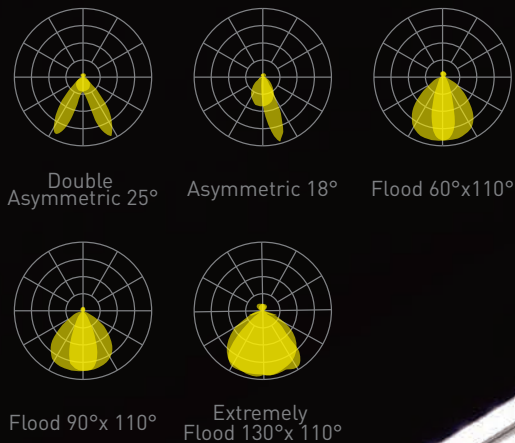

ORDERING INFORMATION

LUMINAIRE	FINISH	BEAM ANGLE	POWER	COLOR QUALITY	COLOR TEMP	CRI	LENGTH	IP GRADE	DIMMING OPTOINS
BVG-E	W- White	AS25 - Double Asymmetric 25°	14- 14.4W/m (Various LED tape light source optional)	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	12- 1207mm	22- IP22	D1- On/Off
	B- Black	AS18- Asymmetric 18°		5- 5-Step MacAdam Ellips	30- 3000K	90- 90+ CRI	XX- Custom length 100mm increments.		
	S- Silver	6011- Flood 60x110°			35- 3500K	95- 95+ CRI			
		9011- Flood 90x110°			40- 4000K				
		1311- Extremely flood 130x110°			50- 5000K				
					60- 6000K				
					65- 6500K				



SPECIFICATION

Luminiare	BVG-E
Input Voltage	24VDC
Power	14.4W/m (various LED tape light source optional)
Lumen Efficacy Up to	1650lm/m [CRI 80+ 110lm/W]
CRI	80+,90+,95+
Finish	White / Black - Matt powder coated Silver - Anodized
Width / Height	W25 x H35mm
Weight	1.22kgs/m
Length	Custom length 100mm increments.
Max Run	5m [16.5ft]
IP Grade	IP22
Control	On/off
Installation	Surface Mounted, Pendant / Swivel Brackets

INSTALL ACCESSORIES




Adjustable Swivel Mounting Bracket




Surface Mounted Bracket

LIGHTING DISTRIBUTION

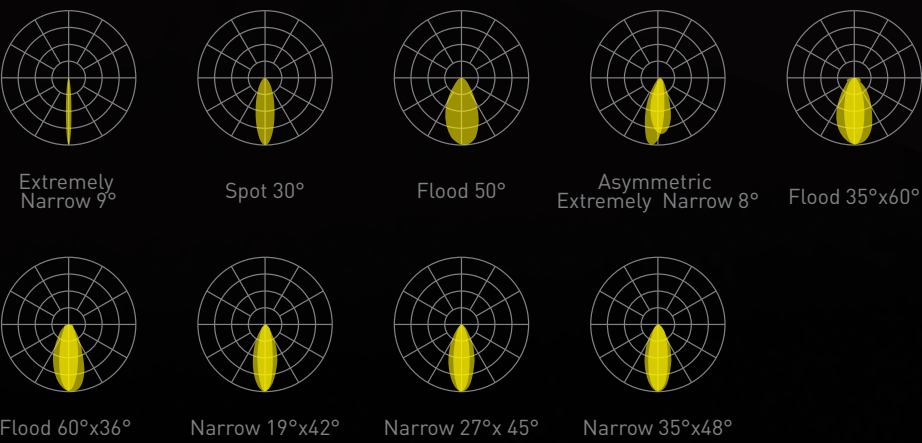

ORDERING INFORMATION

LUMINAIRE	FINISH	BEAM ANGLE	POWER	COLOR QUALITY	COLOR TEMP	CRI	LENGTH	IP GRADE	DIMMING OPTOINS
BVG-O	W- White	09- 9° Extremely Narrow	18- 18.75W/m	3- 3-Step MacAdam	27- 2700K	80- 80+ CRI	12- 1207mm	65- IP65	D1- On/Off
	B- Black	30- 30° Spot		Ellipse	30- 3000K	90- 90+ CRI	XX- Custom length 120mm increments		
	S- Silver	A508- 8° Asymmetric		5- 5-Step MacAdam Ellips	40- 4000K				
		3560- 35° x 60° Flood			50- 5000K				
		6036- 60° x 36° Flood							
		1942- 19° x 42° Narrow							
		2745- 27° x 45° Narrow							
		3548- 35° x 48° Narrow							



SPECIFICATION

Luminaire	BVG-O
Input Voltage	24VDC
Power	18.75W/m
Lumen Efficacy Up to	1780lm/m [CRI 80+ 100lm/W]
CRI	80+,90+,95+
Finish	White / Black - Matt powder coated Silver - Anodized
Width / Height	W30 x H36mm
Weight	1.9kgs/m
Length	1207mm (Custom length 120mm increments + 7mm endcaps.
Max Run	2.5m [8ft]
IP Grade	IP65
Control	On/off
Installation	Surface Mounted, Pendant / Swivel Brackets

INSTALL ACCESSORIES




Adjustable Swivel Mounting Bracket




Surface Mounted Bracket

LIGHTING DISTRIBUTION

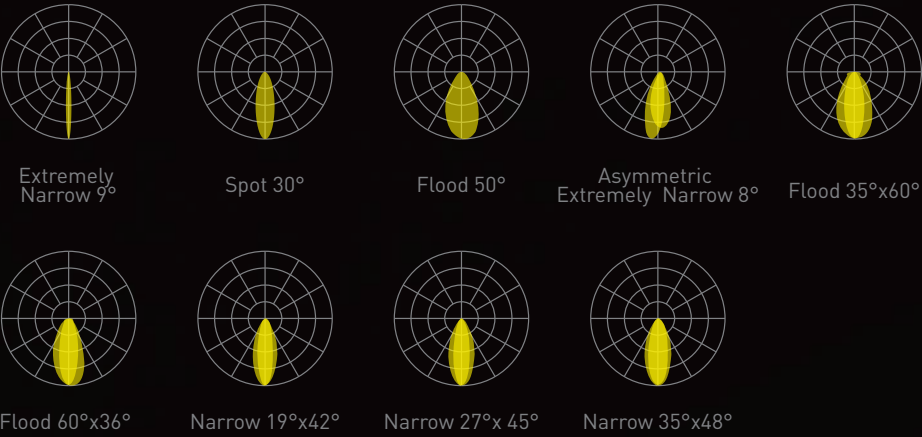

ORDERING INFORMATION

LUMINAIRE	FINISH	BEAM ANGLE	POWER	COLOR QUALITY	COLOR TEMP	CRI	LENGTH	IP GRADE	DIMMING OPTOINS
BVG-T	W White	09- 9° Extremely Narrow	18- 18.75W/m	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	12- 1207mm	22-IP22	D1- On/Off
		30- 30° Spot			30- 3000K				
	B Black	50- 50° Flood		5- 5-Step MacAdam Ellips	40- 4000K 50- 5000K	90- 90+ CRI	XX- Custom length 120mm increments		
	S Silver	AS08- 8° Asymmetric							
		3560- 35° x 60° Flood							
		6036- 60° x 36° Flood							
		1942- 19° x 42° Narrow							
		2745- 27° x 45° Narrow							
		3548- 35° x 48° Narrow							



SPECIFICATION

Luminaire	BVG-T
Input Voltage	24VDC
Power	18.75W/m
Lumen Efficacy Up to	2100lm/m [CRI 80+ 112lm/W]
CRI	80+,90+,95+
Finish	White / Black - Matt powder coated Silver - Anodized
Width / Height	W25 x H35mm
Weight	1.25kgs/m
Length	1207mm.Custom length 120mm increments.
Max Run	2.5m [8ft]
IP Grade	IP22
Control	On/off
Installation	Surface Mounted, Pendant / Swivel Brackets

INSTALL ACCESSORIES



Adjustable Swivel Mounting Bracket



Surface Mounted Bracket

SLIM SEREIS

SLIM SERIES PENDANT LINEAR LIGHT

Slim Series P/M is a linear LED lighting fixture with internal drivers that features by various Optic options. It can be built hundres option depends on the lighting environment requires based on various optical options . The 15° / 30° / 45° / 50° / 50x50° / 35x75° louver or TRI lens plus the Wall washer louver are satisfying most of the application.

Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K.

Dimmable driver available in Dali, 0/1-10V type, also controable options in DMX, PWM and 2.4G Static, Tunable white, RGBW solution available.

The fixture is designed in multiple installation in Sus-pendant , Ceiling Mounted.

Fixture lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available in 19.6ft.

Finish

Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications

Indoor - Office, Educational Instituions, Conference Rooms and many other workspaces.

SLIM SERIES

SURFACE SILICONE & PC DIFFUSER LINEAR LIGHT



Die-casting Endcaps
Anti-light leaking design




Sensor Optional
Microwave Sensor
IR Sensor
Timer



6063 Aluminum
Silver / Black clear matt anodize
White/Black matt powder coating
Customized RAL color available



Mutiple Installation
▪ Sus-pendant
▪ Ceiling Mounted

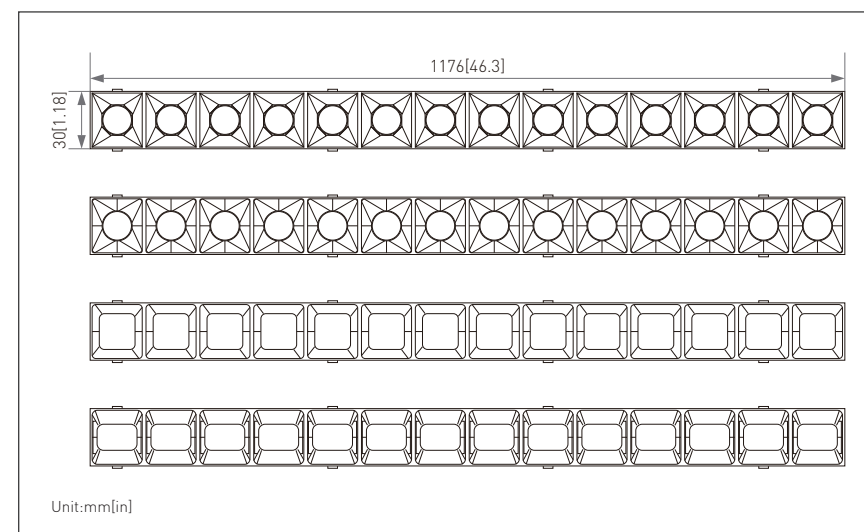

Various Optical Options

- TRI Lens in 50°, 50x50°, 35x75°
- Square, Round, Diamond Reflector
- 5in1 Reflector in 15°, 30°, 45°
- Wall Washer
- PC Diffuser


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White	S- Silicone	2- 608mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	P- Aircraft cable pendant	22- IP22	D1- DALI
	B- Black	D- Diffuser	4- 1208mm		30- 3000K	90- 90+ CRI			D2- 0-10V
	S- Silver		5- 1508mm	5- 5-Step MacAdam Ellips	35- 3500K	95- 95+ CRI	M- Ceiling Mounted		D3- On/off
			8- 2408mm		40- 4000K				
					50- 5000K				
					60- 6000K				
					65- 6500K				


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC			
Width / Height	W35mm x H73mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	11.5 W/pcs	23 W/pcs	27 W/pcs	46.5 W/pcs
Efficacy Up to	65lm/W [silicone lens]		80lm/W [PC diffuser]	
Control	Dali , 0-10V, on/off			



INSTALLATION

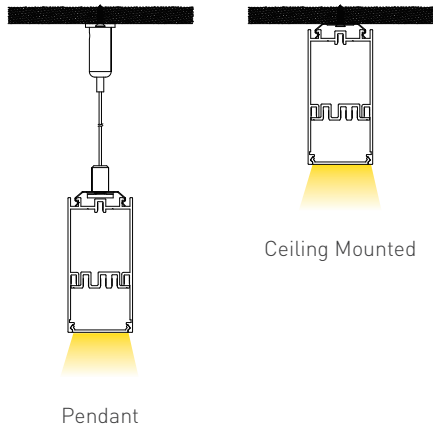

ACCESSORIES




SPECIFICATIONS

	CCT	LUMEN [Silicone, PC diffuser] / LENGTH			
RA 80	2700K	710lm, 874lm / 600mm	1420lm, 1748lm / 1200mm	1667lm, 2052lm / 1500mm	2871lm, 3534lm / 2400mm
	3000K	710lm, 874lm / 600mm	1420lm, 1748lm / 1200mm	1667lm, 2052lm / 1500mm	2871lm, 3534lm / 2400mm
	3500K	710lm, 874lm / 600mm	1420lm, 1748lm / 1200mm	1667lm, 2052lm / 1500mm	2871lm, 3534lm / 2400mm
	4000K	748lm, 920lm / 600mm	1495lm, 1840lm / 1200mm	1755lm, 2160lm / 1500mm	3023lm, 3720lm / 2400mm
	5000K	748lm, 920lm / 600mm	1495lm, 1840lm / 1200mm	1755lm, 2160lm / 1500mm	3023lm, 3720lm / 2400mm
	6000K	748lm, 920lm / 600mm	1495lm, 1840lm / 1200mm	1755lm, 2160lm / 1500mm	3023lm, 3720lm / 2400mm
RA 90	6500K	748lm, 920lm / 600mm	1495lm, 1840lm / 1200mm	1755lm, 2160lm / 1500mm	3023lm, 3720lm / 2400mm
	2700K	7640lm, 87lm / 600mm	1278lm, 1573lm / 1200mm	1501lm, 1847lm / 1500mm	2585lm, 3180lm / 2400mm
	3000K	640lm, 787lm / 600mm	1278lm, 1573lm / 1200mm	1501lm, 1847lm / 1500mm	2585lm, 3180lm / 2400mm
	3500K	640lm, 787lm / 600mm	1278lm, 1573lm / 1200mm	1501lm, 1847lm / 1500mm	2585lm, 3180lm / 2400mm
	4000K	673lm, 828lm / 600mm	1346lm, 1656lm / 1200mm	1580lm, 1944lm / 1500mm	2721lm, 3348lm / 2400mm
	5000K	673lm, 828lm / 600mm	1346lm, 1656lm / 1200mm	1580lm, 1944lm / 1500mm	2721lm, 3348lm / 2400mm
RA 95	5500K	673lm, 828lm / 600mm	1346lm, 1656lm / 1200mm	1580lm, 1944lm / 1500mm	2721lm, 3348lm / 2400mm
	6500K	673lm, 828lm / 600mm	1346lm, 1656lm / 1200mm	1580lm, 1944lm / 1500mm	2721lm, 3348lm / 2400mm
	2700K	575lm,708lm / 600mm	1151lm, 1416lm / 1200mm	1351lm, 1662lm / 1500mm	2326lm, 2863lm / 2400mm
	3000K	575lm,708lm / 600mm	1151lm, 1416lm / 1200mm	1351lm, 1662lm / 1500mm	2326lm, 2863lm / 2400mm
	3500K	575lm,708lm / 600mm	1151lm, 1416lm / 1200mm	1351lm, 1662lm / 1500mm	2326lm, 2863lm / 2400mm
	4000K	606lm,745lm / 600mm	1211lm, 1490lm / 1200mm	1422lm, 1749lm / 1500mm	2449lm, 3013lm / 2400mm
	6500K	606lm,745lm / 600mm	1211lm, 1490lm / 1200mm	1422lm, 1749lm / 1500mm	2449lm, 3013lm / 2400mm

Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

DIMENSIONS

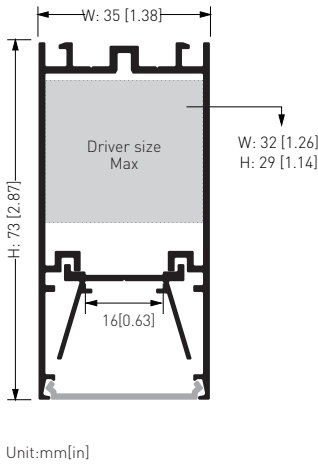


LED CHIPS & DRIVER OPTIONS



SLIM SERIES

SURFACE WALL WASHER LINEAR LIGHT

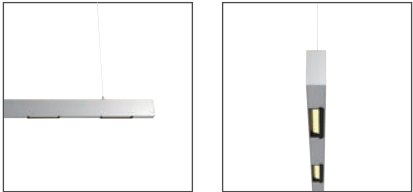

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White B- Black S- Silver	W- Wall Washer Kit	4- 1208mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam

2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.

3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES

SURFACE WALL WASHER LINEAR LIGHT



SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W35mm x H73mm	
Length	1208mm with 4sets WW Kit	132.5mm
Power (W/m /ft)	21W/pc	5.5 W/pc
Efficacy Up to	70lm/w	70lm/w
Control	Dali , 0-10V, on/off	

SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1397lm / 1200mm	1470lm / 1200mm	1470lm / 1200mm	1470lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1257lm / 1200mm	1323lm / 1200mm	1323lm / 1200mm	1323lm / 1200mm


- Note:
- The given data are typical values in 4sets wall washer kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.

- Above data based on Non-Dimmable for all luminaires.


- More customized LED and CCT available.

DIMENSIONS



Unit:mm[in]

BEAM ANGLE

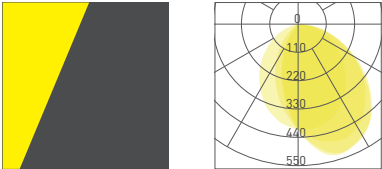

LED CHIPS & DRIVER OPTIONS



UGR
<16



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White B- Black S- Silver	15- 15Deg. Reflector Louver 30- 30Deg. Reflector Louver 45- 45Deg. Reflector Louver	4- 1208mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W35mm x H73mm	
Length	1208mm with 4sets Reflector Kit	132.5mm
Power (W/m /ft)	21 W/pc	5.5 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1616lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm

- Note:
- The given data are typical values in 30deg Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

DIMENSIONS

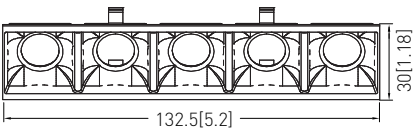



Unit:mm[in]

LED CHIPS & DRIVER OPTIONS



BEAM ANGLE

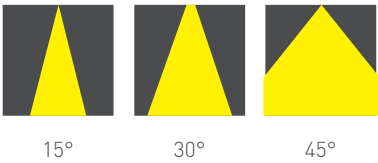

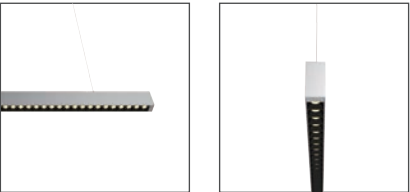

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White B- Black S- Silver	T50R- Round in Square 50° TIR Lens in Square Louver	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off



SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1995lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm

Note:

- The given data are typical values in 50deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.


BEAM ANGLE



LED CHIPS & DRIVER OPTIONS





DIMENSIONS



Unit:mm[in]

UGR
<16

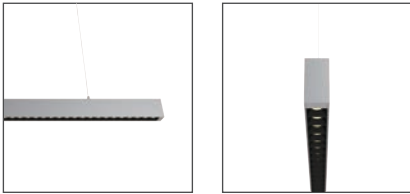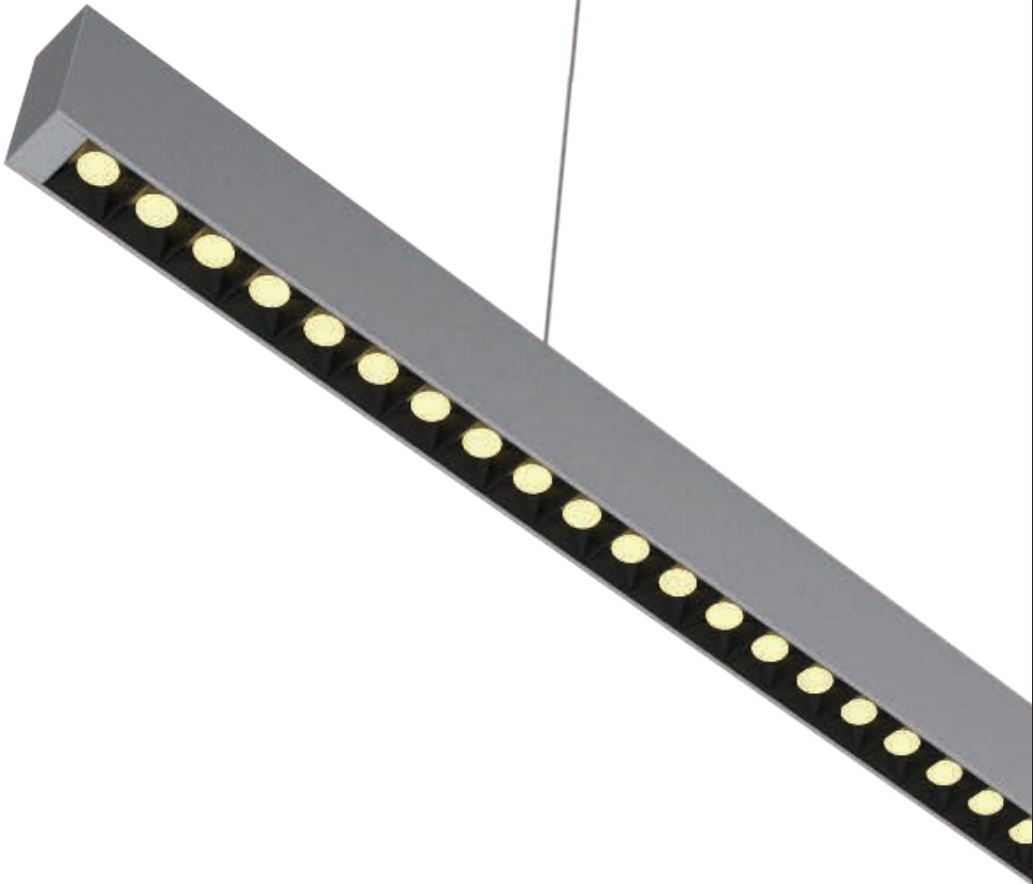


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White B- Black S- Silver	T50D- Round in Diamond 50° TIR Lens in Diamond Louver	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off

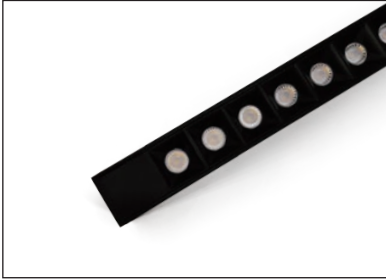


SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1995lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm

- Note:
- The given data are typical values in 50deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.


BEAM ANGLE





LED CHIPS & DRIVER OPTIONS



DIMENSIONS

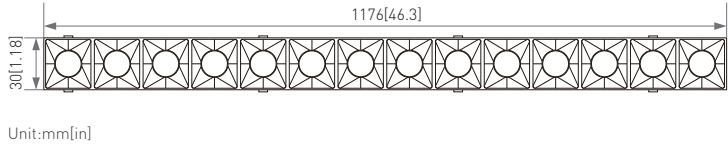

UGR
<16

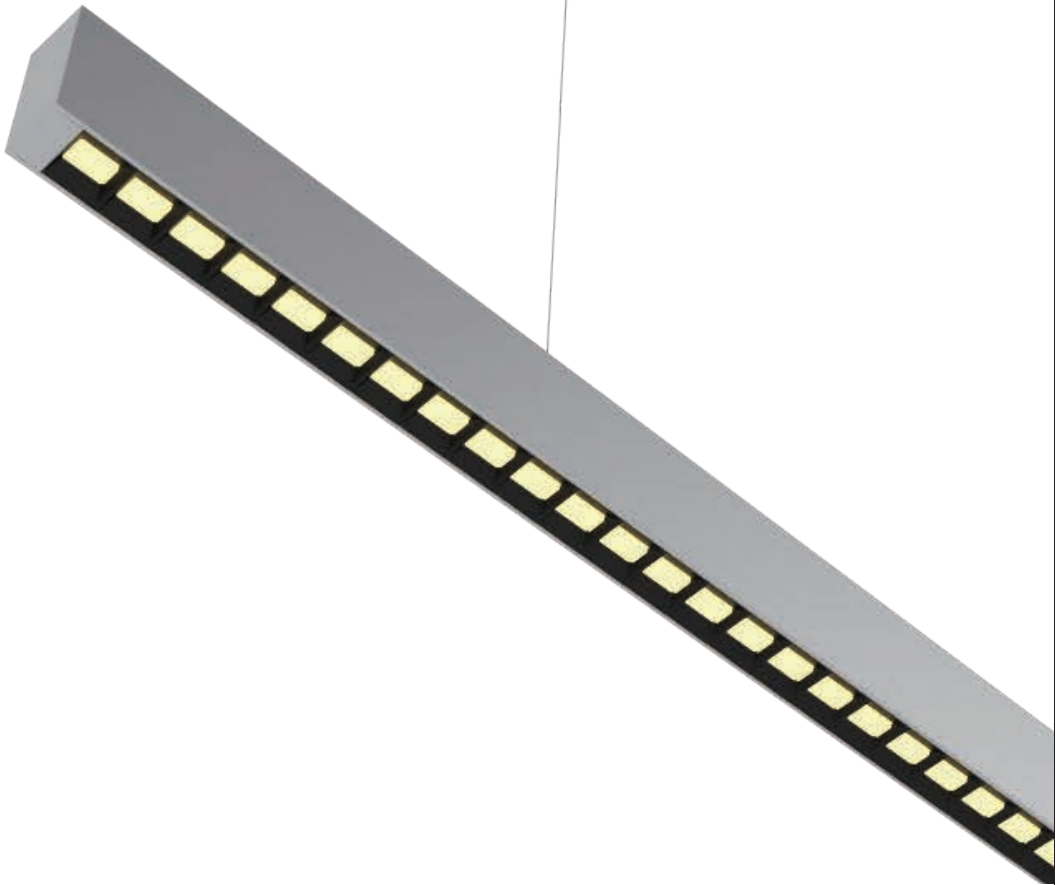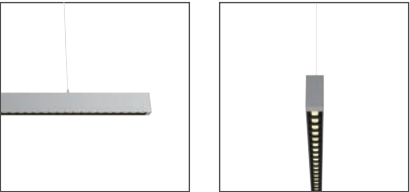


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White B- Black S- Silver	T3575- 35° x 75° TIR Lens in Rectangle Louver	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off

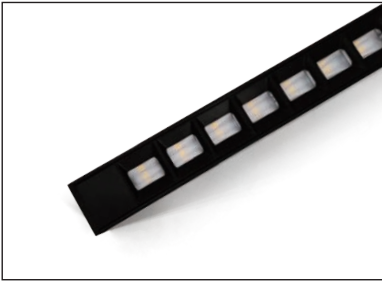


SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1995lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm

Note:
- The given data are typical values in 35*75 deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

BEAM ANGLE




35 x75°

LED CHIPS & DRIVER OPTIONS

NICHIA **EPISTAR** **SAMSUNG**
TRIDONIC **OSRAM** **LIFUD**



DIMENSIONS



Unit:mm[in]

SLIM SERIES
SURFACE LOUVER LINEAR LIGHT

UGR
<16

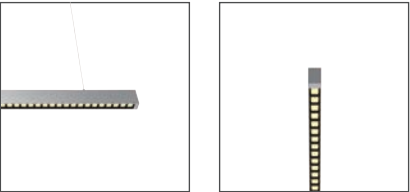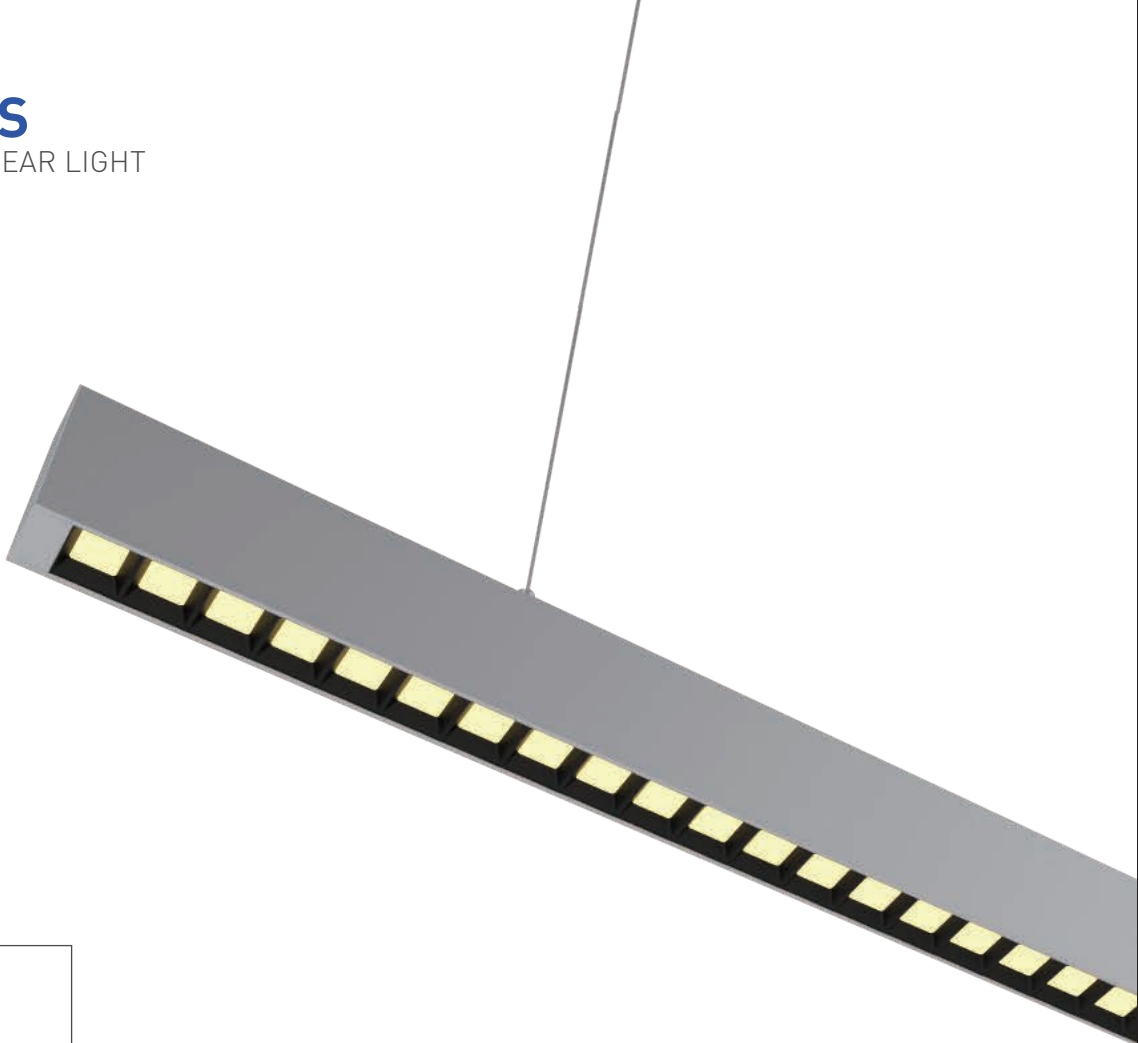

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White B- Black S- Silver	T5050- 50° x 50° TIR Lens in Square Louver	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES
SURFACE LOUVER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1995lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm

- Note:
- The given data are typical values in 50°50 deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.


BEAM ANGLE





LED CHIPS & DRIVER OPTIONS

NICHIA EPISTAR SAMSUNG
TRIDONIC OSRAM LIFUD

DIMENSIONS

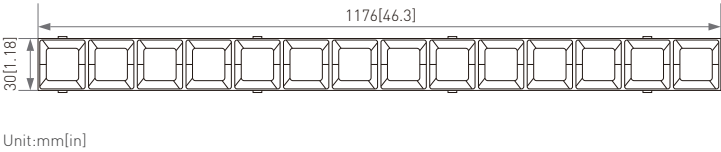

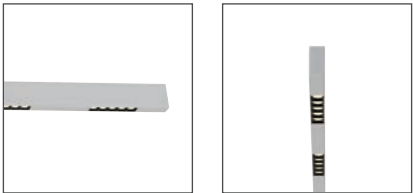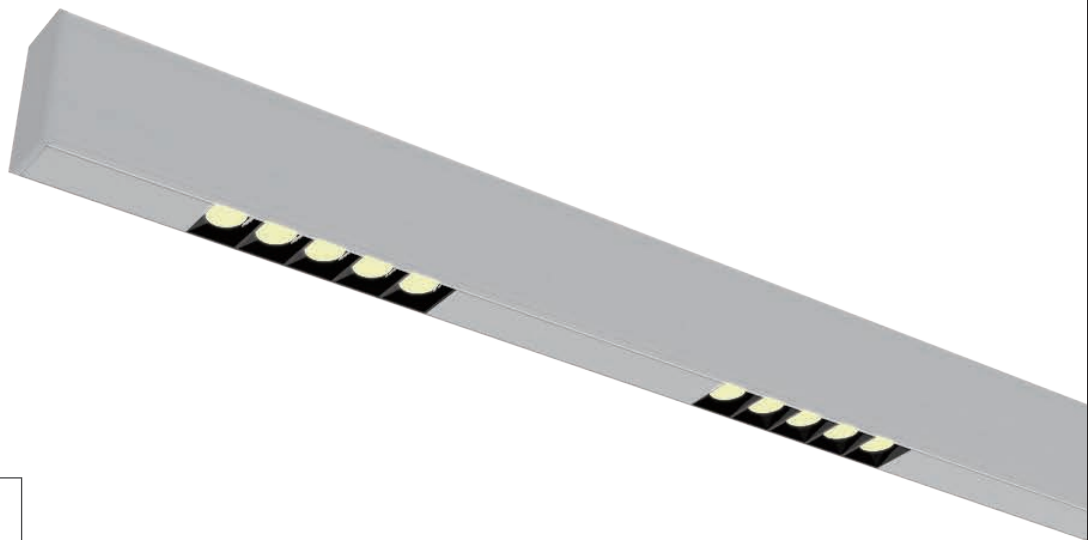

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White	12- 12Deg.	4- 1208mm	3- 3-Step MacAdam Ellipse	30- 3000K	80- 80+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI
	B- Black	24- 24Deg.	8- 2408mm		40- 4000K	90- 90+ CRI			D2- 0-10V
		38- 38Deg.	Fixed length only		50- 5000K				D3- On/off
		5050- 50×50Deg.			65- 6500K				
		7070- 70×70Deg.							
		3570- 35×70Deg.							
9090- 90×90Deg.									

1. Blueview’s standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia’s CRI 90+ option’s is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm with 4sets Reflector Kit	132.5mm
Power (W/m /ft)	21 W/pc	5.5 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1616lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm

- Note:
- The given data are typical values in 5in1 Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.


DIMENSIONS


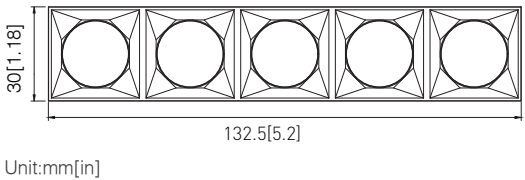


LED CHIPS & DRIVER OPTIONS



BEAM ANGLE

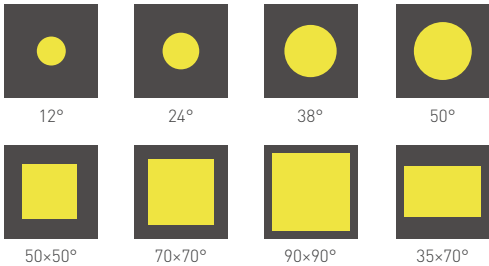

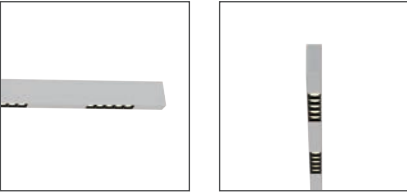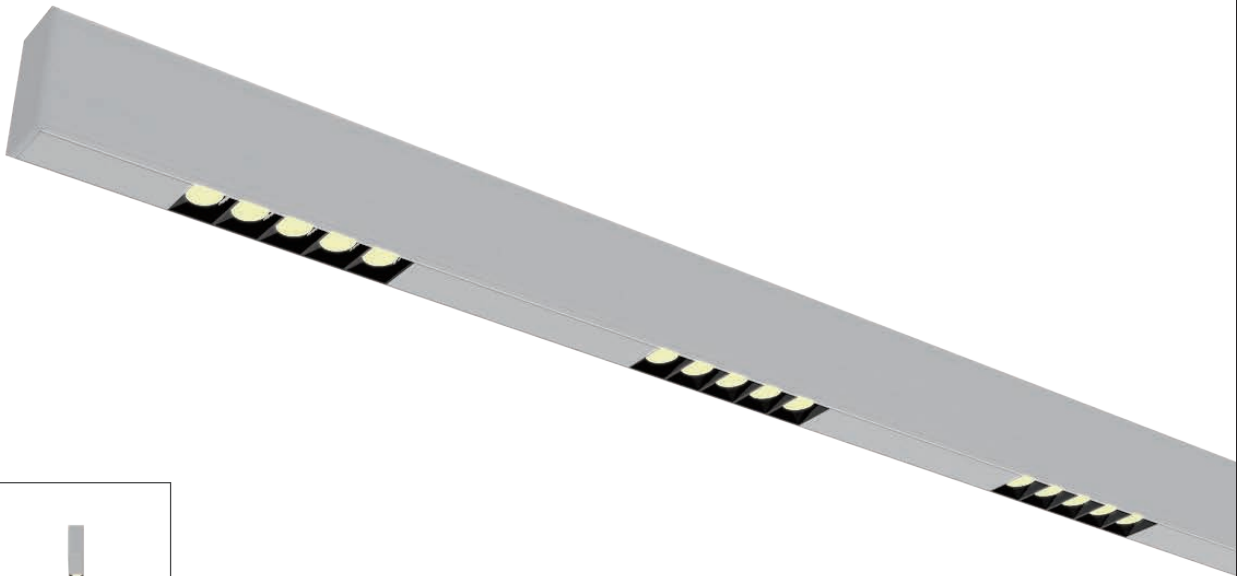

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U357228	W- White B- Black S- Silver	24- 24Deg. 38- 38Deg.	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm with 4sets Reflector Kit	132.5mm
Power (W/m /ft)	21 W/pc	5.5 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS


NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1616lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm

- Note:
- The given data are typical values in 5in1 Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

BEAM ANGLE

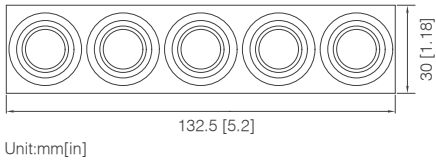

DIMENSIONS





LED CHIPS & DRIVER OPTIONS



SLIM SERIES

TRIMED RECESSED SILICONE & PC DIFFUSER LINEAR LIGHT

BEAM ANGLE

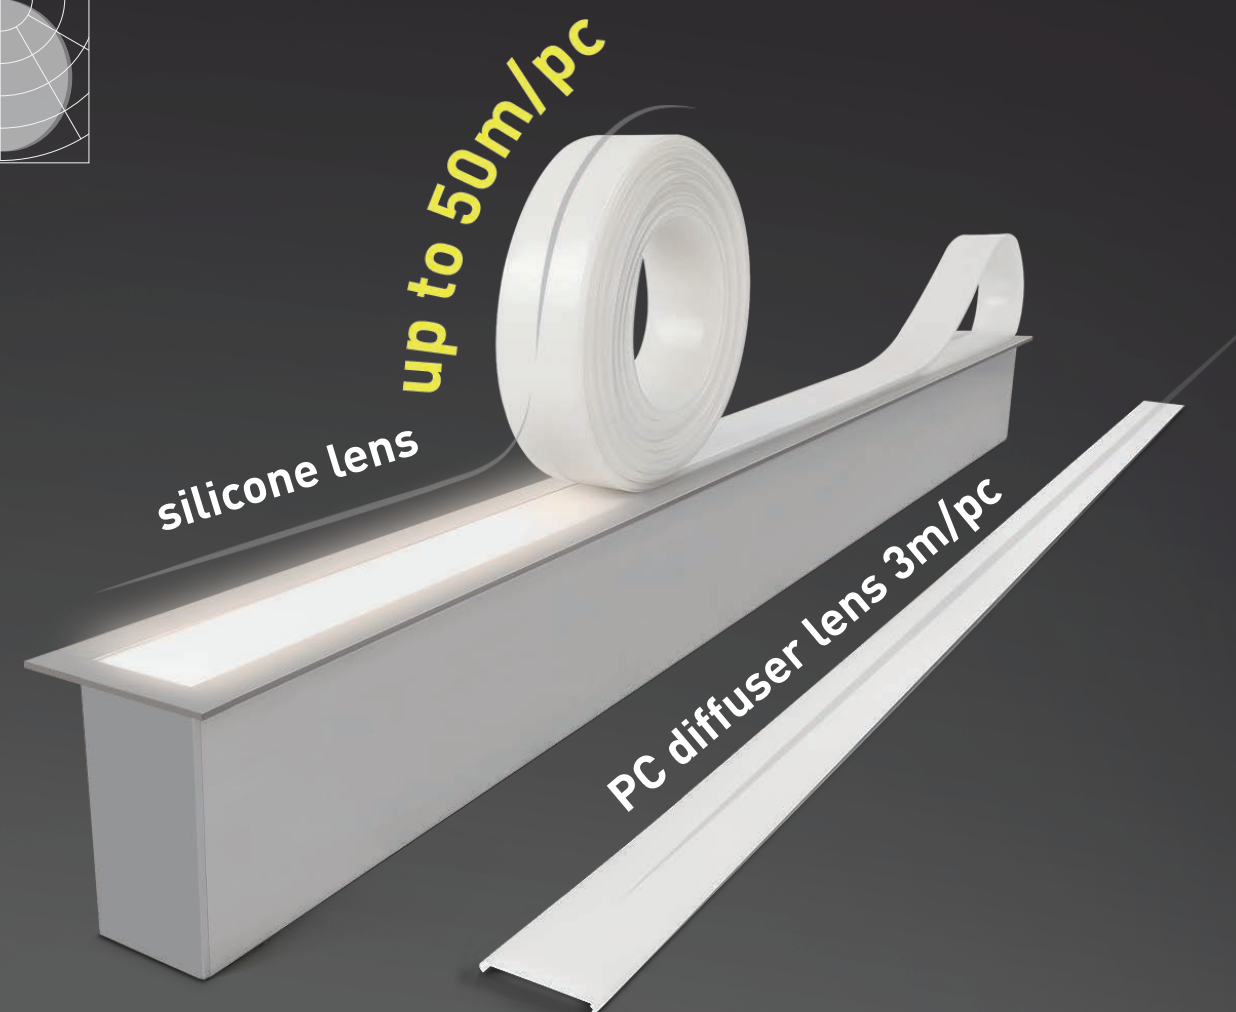

SLIM SERIES

TRIMED RECESSED SILICONE & PC DIFFUSER LINEAR LIGHT

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U557316	W- White B- Black S- Silver	S- Silicone D- Diffuser	2- 608mm 4- 1208mm 5- 1508mm 8- 2408mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI	TDR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam

2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC			
Width / Height	W35mm x H73mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	11.5 W/pc	23 W/pc	27 W/pc	46.5 W/pc
Efficacy Up to	65lm/W [silicone lens]		80lm/W [PC diffuser]	
Control	Dali , 0-10V, on/off			

LED CHIPS & DRIVER OPTIONS


NICHIA **EPISTAR** **SAMSUNG**
TRIDONIC **OSRAM** **Lifud**

DIMENSIONS

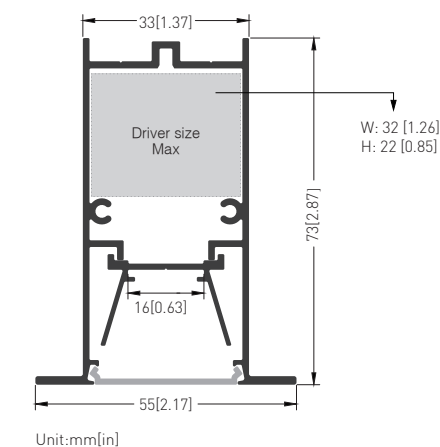

Unit:mm[in]

INSTALLATION & ACCESSORIE

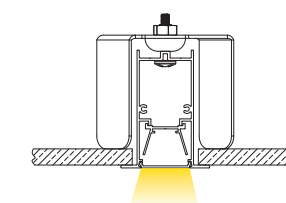

Trimmed Recessed



Recessed Bracket

SPECIFICATIONS

	CCT	LUMEN [Silicone, PC diffuser] / LENGTH			
RA 80	2700K	710lm, 874lm / 600mm	1420lm, 1748lm / 1200mm	1667lm, 2052lm / 1500mm	2871lm, 3534lm / 2400mm
	3000K	710lm, 874lm / 600mm	1420lm, 1748lm / 1200mm	1667lm, 2052lm / 1500mm	2871lm, 3534lm / 2400mm
	3500K	710lm, 874lm / 600mm	1420lm, 1748lm / 1200mm	1667lm, 2052lm / 1500mm	2871lm, 3534lm / 2400mm
	4000K	748lm, 920lm / 600mm	1495lm, 1840lm / 1200mm	1755lm, 2160lm / 1500mm	3023lm, 3720lm / 2400mm
	5000K	748lm, 920lm / 600mm	1495lm, 1840lm / 1200mm	1755lm, 2160lm / 1500mm	3023lm, 3720lm / 2400mm
	6000K	748lm, 920lm / 600mm	1495lm, 1840lm / 1200mm	1755lm, 2160lm / 1500mm	3023lm, 3720lm / 2400mm
	6500K	748lm, 920lm / 600mm	1495lm, 1840lm / 1200mm	1755lm, 2160lm / 1500mm	3023lm, 3720lm / 2400mm
RA 90	2700K	7640lm, 87lm / 600mm	1278lm, 1573lm / 1200mm	1501lm, 1847lm / 1500mm	2585lm, 3180lm / 2400mm
	3000K	640lm, 787lm / 600mm	1278lm, 1573lm / 1200mm	1501lm, 1847lm / 1500mm	2585lm, 3180lm / 2400mm
	3500K	640lm, 787lm / 600mm	1278lm, 1573lm / 1200mm	1501lm, 1847lm / 1500mm	2585lm, 3180lm / 2400mm
	4000K	673lm, 828lm / 600mm	1346lm, 1656lm / 1200mm	1580lm, 1944lm / 1500mm	2721lm, 3348lm / 2400mm
	5000K	673lm, 828lm / 600mm	1346lm, 1656lm / 1200mm	1580lm, 1944lm / 1500mm	2721lm, 3348lm / 2400mm
	5500K	673lm, 828lm / 600mm	1346lm, 1656lm / 1200mm	1580lm, 1944lm / 1500mm	2721lm, 3348lm / 2400mm
	6500K	673lm, 828lm / 600mm	1346lm, 1656lm / 1200mm	1580lm, 1944lm / 1500mm	2721lm, 3348lm / 2400mm
RA 95	2700K	575lm,708lm / 600mm	1151lm, 1416lm / 1200mm	1351lm, 1662lm / 1500mm	2326lm, 2863lm / 2400mm
	3000K	575lm,708lm / 600mm	1151lm, 1416lm / 1200mm	1351lm, 1662lm / 1500mm	2326lm, 2863lm / 2400mm
	3500K	575lm,708lm / 600mm	1151lm, 1416lm / 1200mm	1351lm, 1662lm / 1500mm	2326lm, 2863lm / 2400mm
	4000K	606lm,745lm / 600mm	1211lm, 1490lm / 1200mm	1422lm, 1749lm / 1500mm	2449lm, 3013lm / 2400mm
	6500K	606lm,745lm / 600mm	1211lm, 1490lm / 1200mm	1422lm, 1749lm / 1500mm	2449lm, 3013lm / 2400mm

- Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.
 - LM-80, IES TM-30-15 testing report available for led.



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U557316	W- White B- Black S- Silver	W- Wall Washer Kit	4- 1208mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TDR- Trimed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES

TRIMED RECESSED WALL WASHER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W35mm x H73mm	
Length	1208mm with 4sets WW Kit	132.5mm
Power (W/m /ft)	21W/pc	5.5 W/pc
Efficacy Up to	70lm/w	70lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1397lm / 1200mm	1470lm / 1200mm	1470lm / 1200mm	1470lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1257lm / 1200mm	1323lm / 1200mm	1323lm / 1200mm	1323lm / 1200mm


- Note:**
- The given data are typical values in 4sets wall washer kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

DIMENSIONS



Unit:mm[in]

BEAM ANGLE

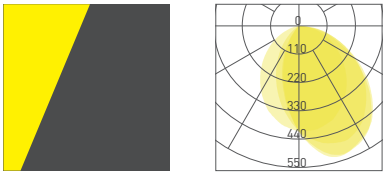



LED CHIPS & DRIVER OPTIONS



SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

UGR
<16

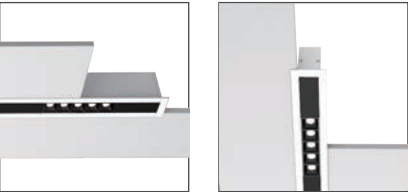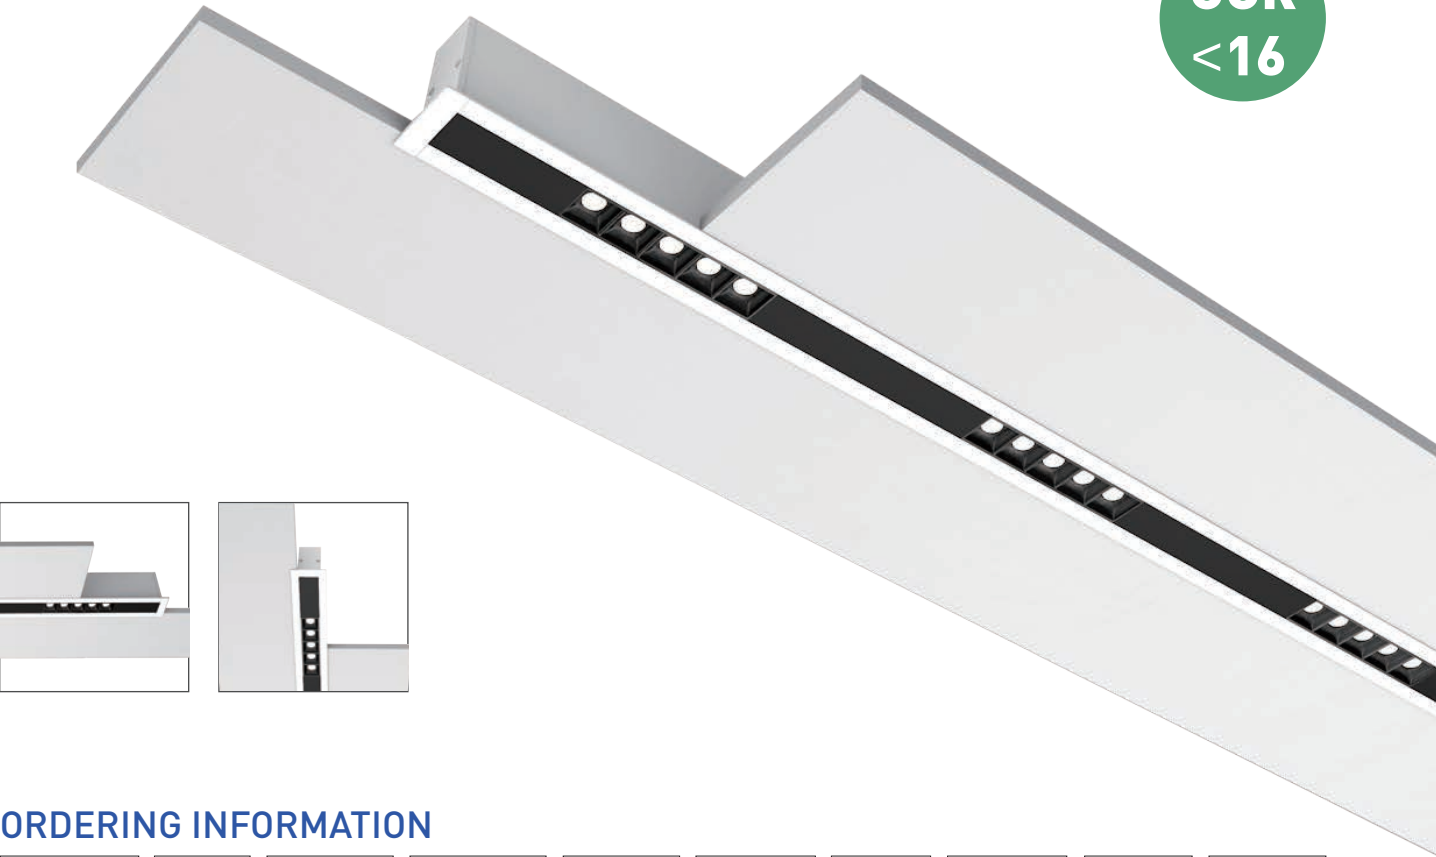

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U557316	W- White B- Black S- Silver	15- 15Deg. Reflector Louver 30- 30Deg. Reflector Louver 45- 45Deg. Reflector Louver	4- 1208mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TDR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W35mm x H73mm	
Length	1208mm with 4sets Reflector Kit	132.5mm
Power (W/m /ft)	21 W/pc	5.5 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1616lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm


- Note:**
- The given data are typical values in 30deg Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

DIMENSIONS



Unit:mm[in]

BEAM ANGLE

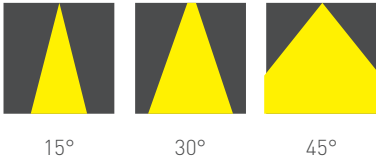


LED CHIPS & DRIVER OPTIONS



SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

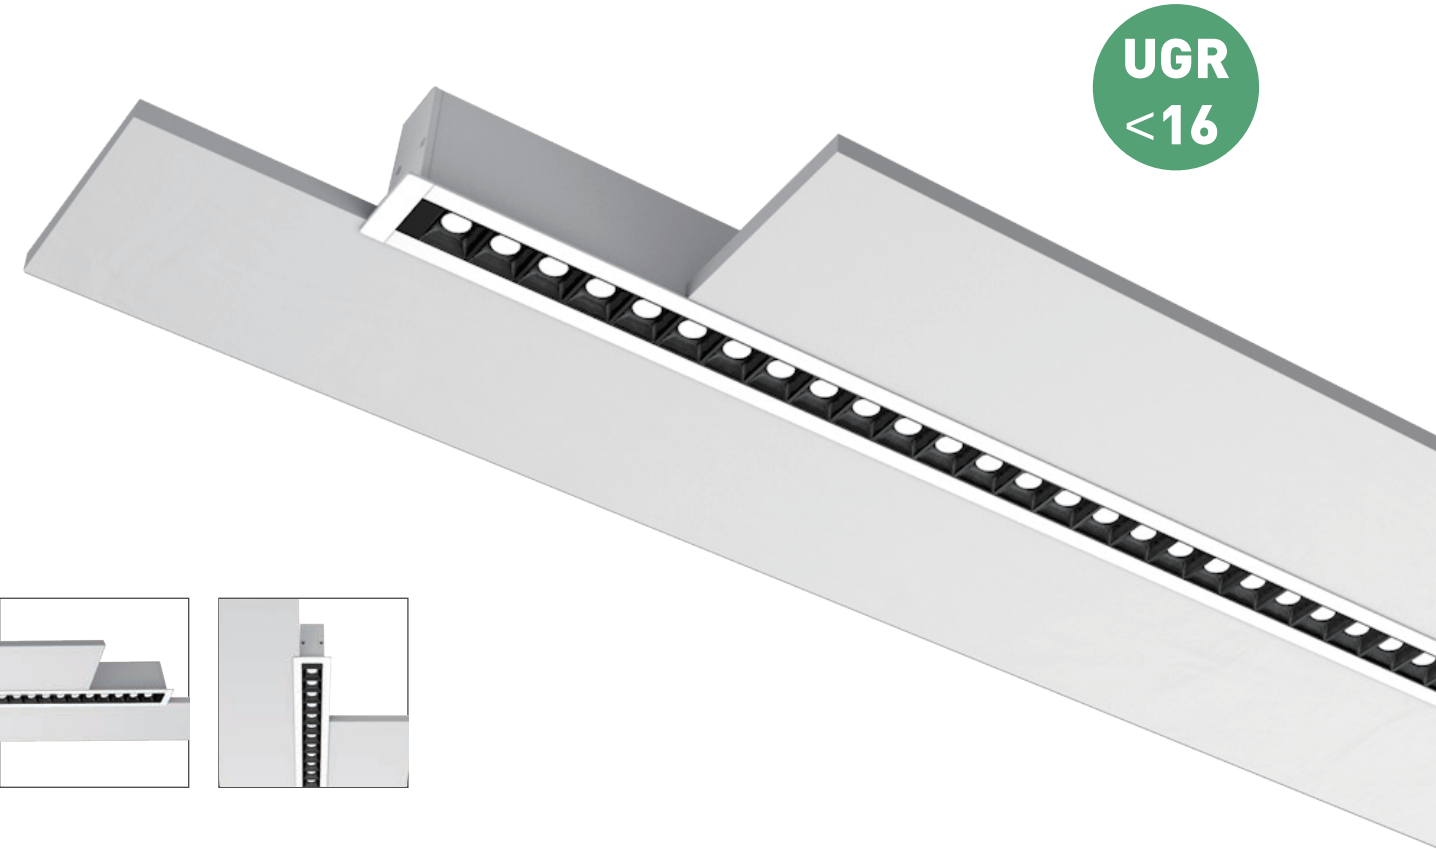

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U557316	W- White B- Black S- Silver	T50R- Round in Square 50° TIR Lens in Square Louver	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TDR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off



SPECIFICATIONS


NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1995lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm

- Note:
- The given data are typical values in 50deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

BEAM ANGLE



DIMENSIONS

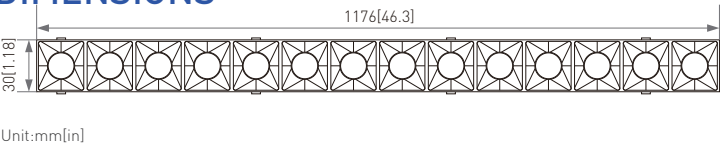


LED CHIPS & DRIVER OPTIONS



SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

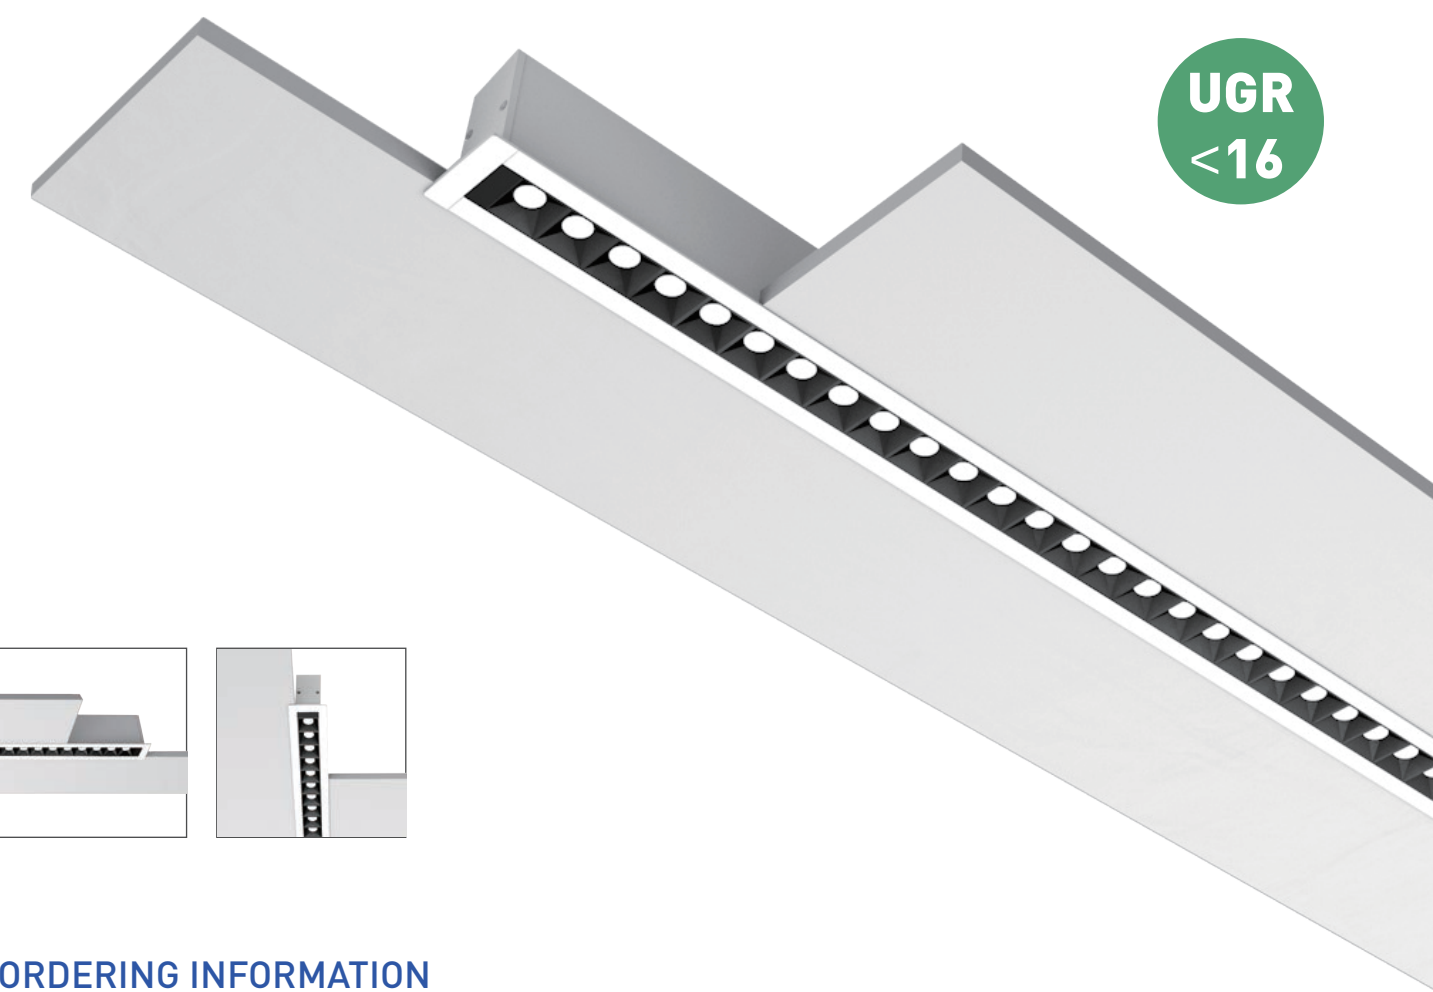

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U557316	W- White B- Black S- Silver	T50D- Round in Diamond 50° TIR Lens in Diamond Louver	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TDR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off

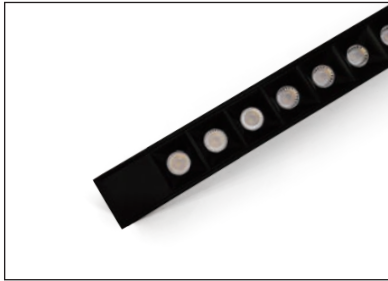

SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1995lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm


- Note:**
- The given data are typical values in 50deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

BEAM ANGLE



50°

DIMENSIONS



Unit:mm[in]



LED CHIPS & DRIVER OPTIONS

NICHIA **EPISTAR** **SAMSUNG**
TRIDONIC **OSRAM** **LIFUD**

SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

UGR
<16

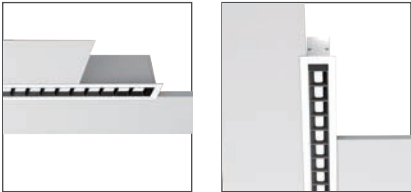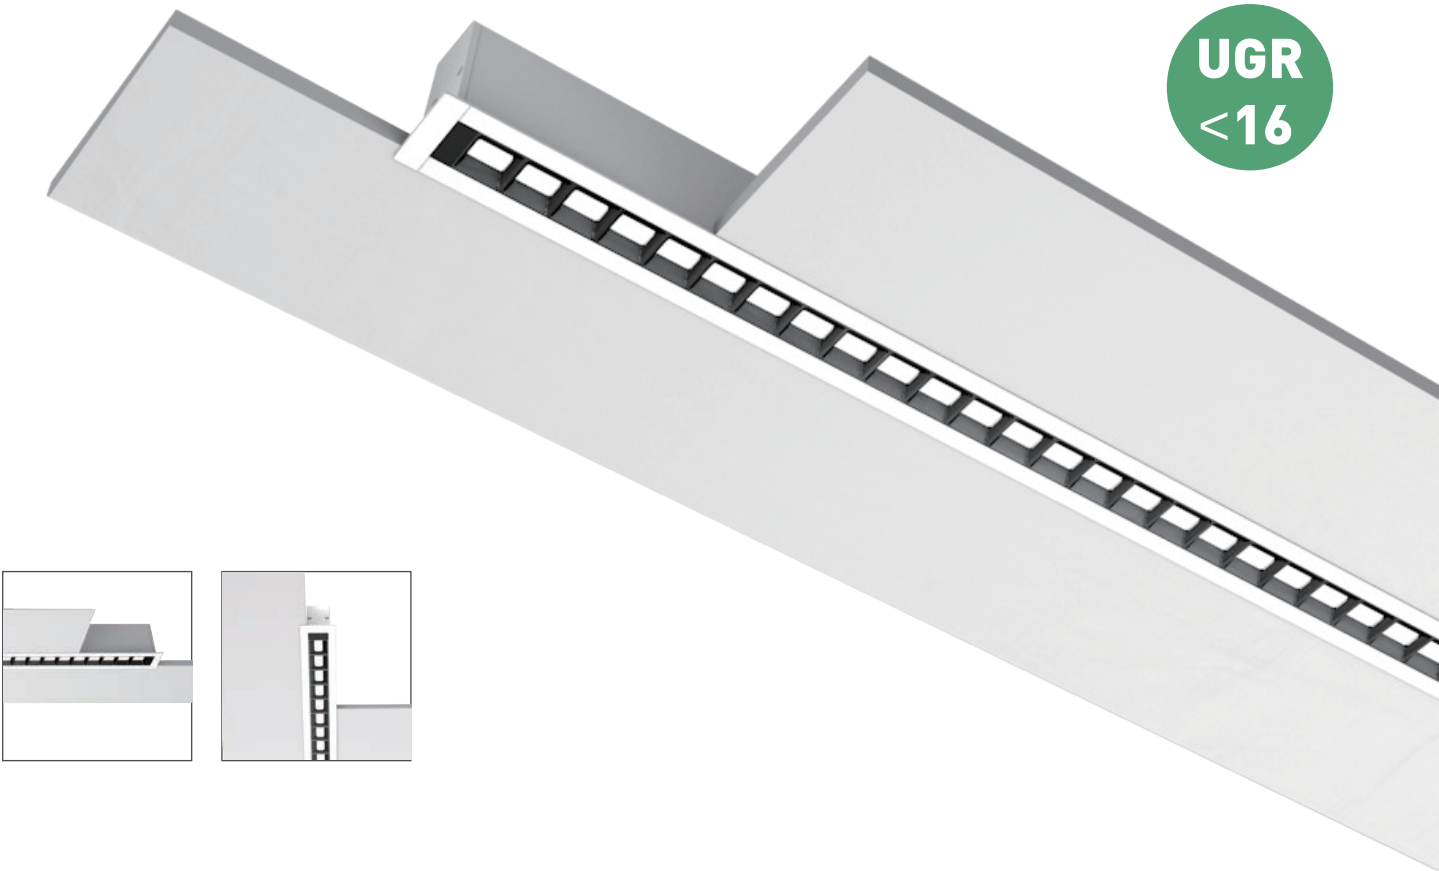

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U557316	W- White B- Black S- Silver	T3575- 35° x 75° TIR Lens in Rectangle Louver	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TDR- Trimed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm	2408mm
Power (W/m /ft)	21W/pc	42W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	Dali , 0-10V, on/off

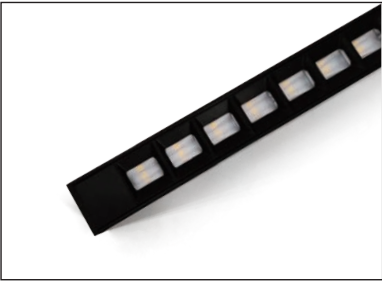


SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1995lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm	2100lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm


- Note:**
- The given data are typical values in 35*75 deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

BEAM ANGLE



35 x75°

DIMENSIONS




Unit:mm[in]

LED CHIPS & DRIVER OPTIONS



SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

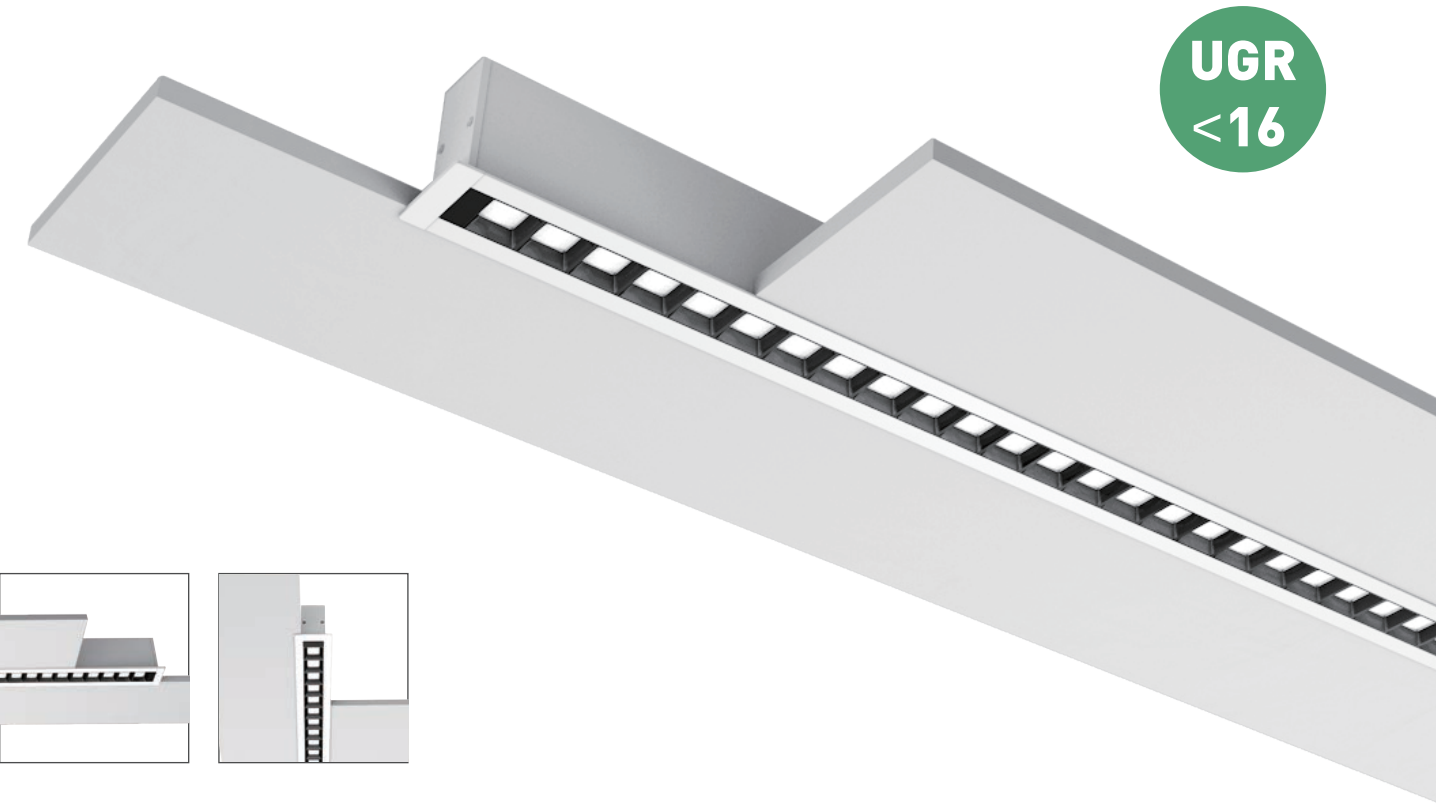

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U557316	W- White B- Black S- Silver	T5050- 50° x 50° TIR Lens in Square Louver	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TDR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES
TRIMED RECESSED LOUVER LINEAR LIGHT

SPECIFICATIONS

Table with 3 columns: Specification, 1208mm, 2408mm. Rows include Voltage, Width / Height, Length, Power, Efficacy, and Control.




SPECIFICATIONS

Table with 5 columns: Specification, 3000K, 4000K, 5000K, 6500K. Rows include Nichia RA 80 and Nichia RA 90 with Color Temperature and Lumen / Length.

- Note:
- The given data are typical values in 50*50 deg TRI Lens+Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.


BEAM ANGLE

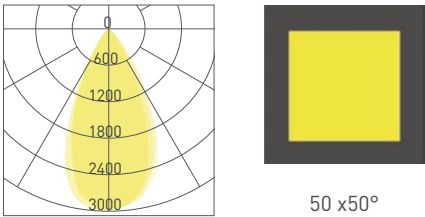

LED CHIPS & DRIVER OPTIONS




DIMENSIONS



Unit:mm[in]

SLIM SERIES
TRIMED RECESSED LOUVER LINEAR LIGHT

UGR
<16

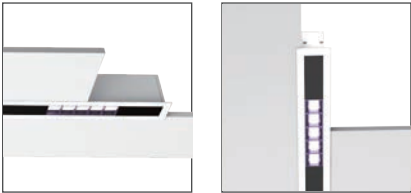

ORDERING INFORMATION

Table with 10 columns: LUMINAIRE, FINISH, LENS, LENGTH, COLOR QUALITY, COLOR TEMP, CRI, INSTALL ACCS., IP GRADE, CONTROL OPTOINS. Row 1: U557316, W-White, B-Black, S-Silver, 12-12Deg to 90x90Deg, 3-Step MacAdam Ellipse, 30-3000K to 65-6500K, 80-80+ CRI to 90-90+ CRI, TDR-Trimmed Recessed, 22-IP22, D1-DALI to D3-On/off.

- 1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm with 4sets Reflector Kit	132.5mm
Power (W/m /ft)	21 W/pc	5.5 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1616lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm


- Note:**
- The given data are typical values in 5in1 Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

DIMENSIONS

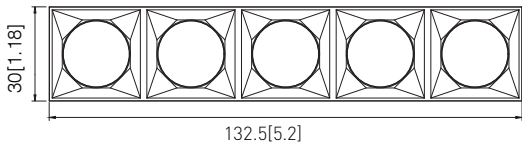

Unit:mm[in]

BEAM ANGLE

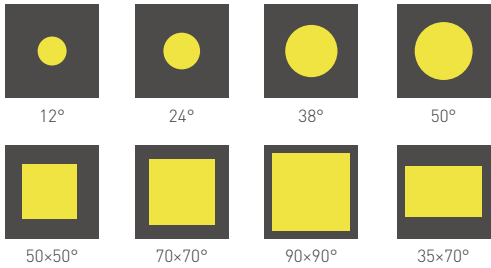



LED CHIPS & DRIVER OPTIONS



SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

UGR
<16

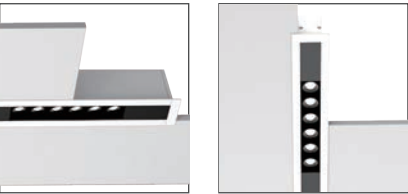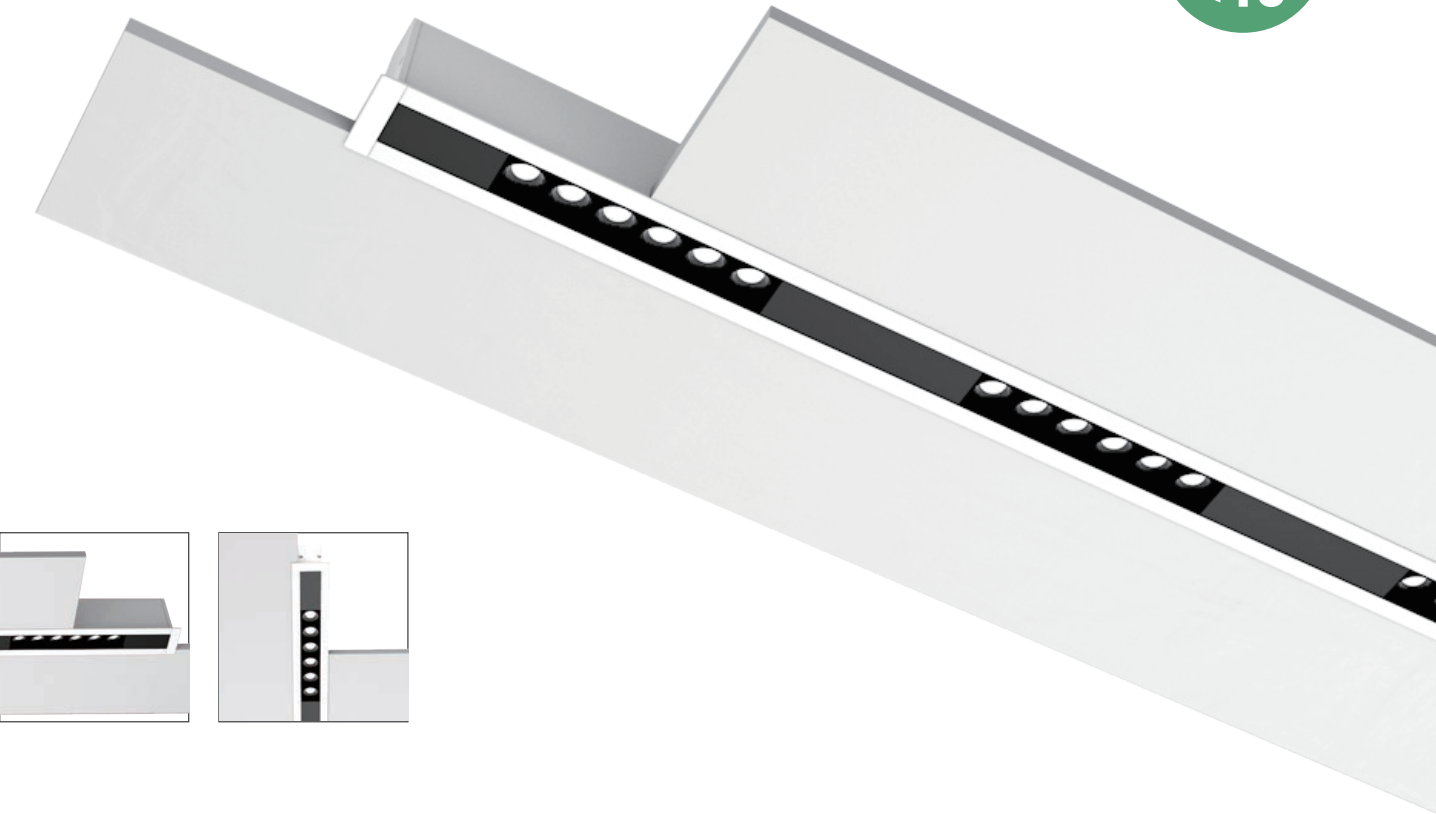

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U557316	W- White B- Black S- Silver	24- 24Deg. 38- 38Deg.	4- 1208mm 8- 2408mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TDR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SLIM SERIES

TRIMED RECESSED LOUVER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	
Width / Height	W35mm x H73mm	
Length	1208mm with 4sets Reflector Kit	132.5mm
Power (W/m /ft)	21 W/pc	5.5 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1796lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm	1890lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1616lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm	1701lm / 1200mm

- Note:**
- The given data are typical values in 5in1 Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

BEAM ANGLE



Unit:mm[in]

DIMENSIONS



24°

38°

LED CHIPS & DRIVER OPTIONS



LUZ SERIES

LINEAR LIGHT

LUZ P/M/W is a linear LED lighting fixture that features by variouse Optic options. It can be built hundres option depends on the lighting environment requires based on various optical options . The 15° / 30° / 45° louver plus the Wall washer louver are satisfying most of the application. Fixture features 80+, 90+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V type, also controable options in DMX, PWM and 2.4G Static, Tunable white, RGBW solution available. The fixture is designed in multiple installation in Sus-pendant , Wall / Ceiling Mounted , Trim-less or Trimed Recessed. Fixture lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available in 19.6ft.

Finish

Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications

Indoor - Commercial, Residential , Office, Educational Instituions, Conference Rooms and many other workspace

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U508533	W- White B- Black S- Silver	A- Anti-Glare Film P- Prismatic Lens D- Diffuser	2- 608mm 4- 1208mm 5- 1508mm 8- 2408mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC			
Width / Height	W50mm x H85mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	15.6 W/pc	31.1 W/pc	37.8 W/pc	62 W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			


LED CHIPS & DRIVER OPTIONS

NICHIA **EPISTAR** **SAMSUNG**
TRIDONIC **OSRAM** **LIFUD**

INSTALLATIONS

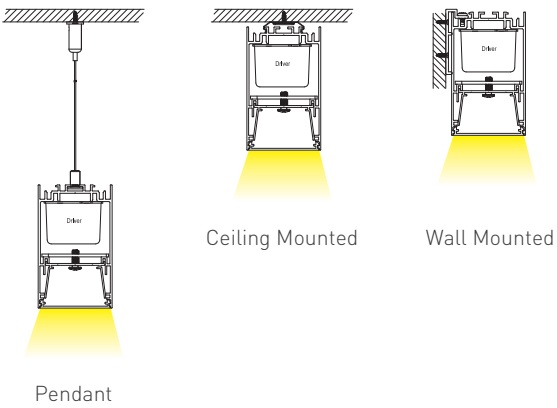

ACCESSORIES

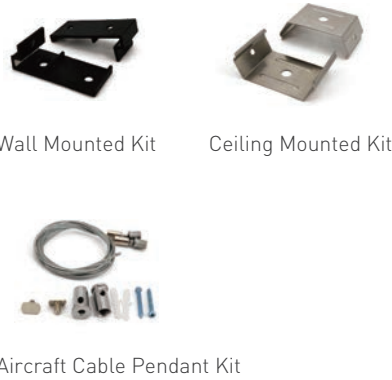



Mutiple Installation

- Sus-pendant
- Wall Mounted
- Ceiling Mounted



Die-casting Endcaps

Anti-light leaking design



Optical options

- Various Beam angle Lens
- Anti-Glare Film
- Prismatic Lens



Sensor Optional

Microwave Sensor
IR Sensor
Timer



6063 Alumimum


Silver / Black clear matt anodize
White/Black matt powder coating
Customized RAL color available

SPECIFICATIONS

	COLOR TEMPERAYURE	LUMEN / LENGTH			
RA 80	2700K	1482lm / 600mm	2955lm / 1200mm	3591lm / 1500mm	5890lm / 2400mm
	3000K	1482lm / 600mm	2955lm / 1200mm	3591lm / 1500mm	5890lm / 2400mm
	3500K	1482lm / 600mm	2955lm / 1200mm	3591lm / 1500mm	5890lm / 2400mm
	4000K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
	5000K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
	6000K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
	6500K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
RA 90	2700K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm	5301lm / 2400mm
	3000K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm	5301lm / 2400mm
	3500K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm	5301lm / 2400mm
	4000K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
	5000K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
	5500K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
	6500K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
RA 95	2700K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm	4771lm / 2400mm
	3000K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm	4771lm / 2400mm
	3500K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm	4771lm / 2400mm
	4000K	1264lm / 600mm	2519lm / 1200mm	3062lm / 1500mm	5022lm / 2400mm
	6500K	1264lm / 600mm	2519lm / 1200mm	3062lm / 1500mm	5022lm / 2400mm



- Note:**
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.
 - LM-80, IES TM-30-15 testing report available for led.

DIMENSIONS

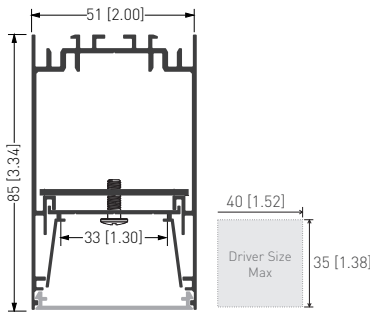

Unit:mm[in]

BEAM ANGLE

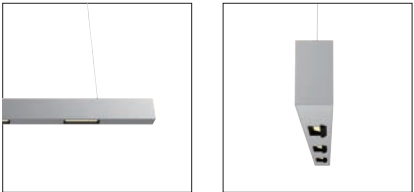

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U508533	W- White B- Black S- Silver	WW- Wall Washer Kit	4- 1208mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3. Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES

WALL WASHER SURFACE LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W50mm x H85mm	
Length	1208mm with 4sets WW Kit	132.5mm
Power (W/m /ft)	23 W/pc	5W/set
Efficacy Up to	70lm/w	70lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS


NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1530lm / 1200mm	1610lm / 1200mm	1610lm / 1200mm	1610lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1377lm / 1200mm	1449lm / 1200mm	1449lm / 1200mm	1449lm / 1200mm

- Note:**
- The given data are typical values in 4sets wall washer kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

DIMENSIONS

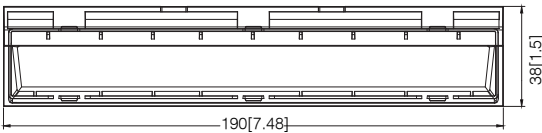

BEAM ANGLE

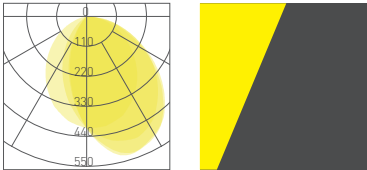

LED CHIPS & DRIVER OPTIONS



LUZ SERIES

PANDANT LINEAR LIGHT

UGR
<16



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U508533	W- White B- Black S- Silver	12- 12Deg. 24- 24Deg. 38- 38Deg. 50- 50Deg. 5050- 50×50Deg. 7070- 70×70Deg. 3570- 35×70Deg. 9090- 90×90Deg.	4- 1208mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES
PANDANT LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W50mm x H85mm	
Length	1208mm W 3sets louver reflector Kit	190mm
Power (W/m /ft)	30 W/pc	10 W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	2850lm / 1200mm	3000lm / 1200mm	3000lm / 1200mm	3000lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	2565lm / 1200mm	2700lm / 1200mm	2700lm / 1200mm	2700lm / 1200mm

Note:


- The given data are typical values in 3sets 38Deg. Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

DIMENSIONS

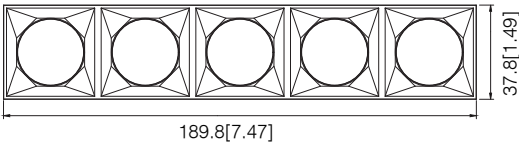

Unit:mm[in]

BEAM ANGLE

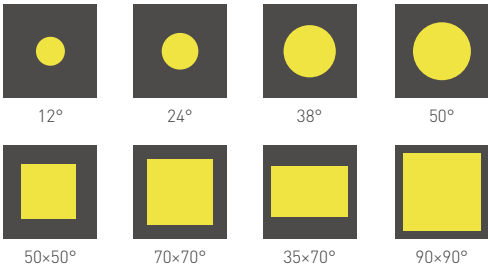

LED CHIPS & DRIVER OPTIONS





ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5085L	W- White B- Black S- Silver	60- 60Deg. PMMA Lens	4- 1182mm	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES
PANDANT LINEAR LIGHT

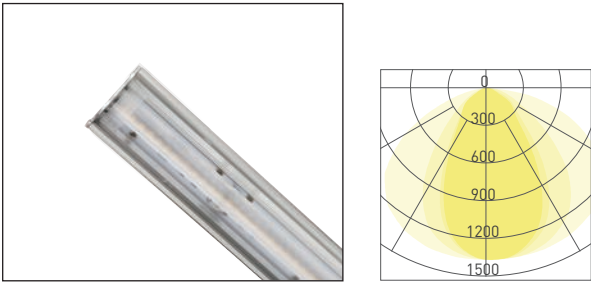

LUZ SERIES
PANDANT LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC
Width / Height	W50mm x H85mm
Length	1182mm
Power (W/m /ft)	26 W/pc
Efficacy Up to	110lm/w
Control	Dali , 0-10V, on/off

LED CHIPS & DRIVER OPTIONS




SPECIFICATIONS


RA 80	2700K	3000K	3500K	4000K	5000K	6500K
	2717lm / 1200mm	2717lm / 1200mm	2717lm / 1200mm	2860lm / 1200mm	2860lm / 1200mm	2860lm / 1200mm
RA 90	2700K	3000K	3500K	4000K	5000K	6500K
	2446lm / 1200mm	2446lm / 1200mm	2446lm / 1200mm	2574lm / 1200mm	2574lm / 1200mm	2574lm / 1200mm
RA 95	2700K	3000K	3500K	4000K	5000K	6500K
	2202lm / 1200mm	2202lm / 1200mm	2202lm / 1200mm	2317lm / 1200mm	2317lm / 1200mm	2317lm / 1200mm

- Note:**
- The given data are typical values in 4000K CRI80+. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.




DIMENSIONS

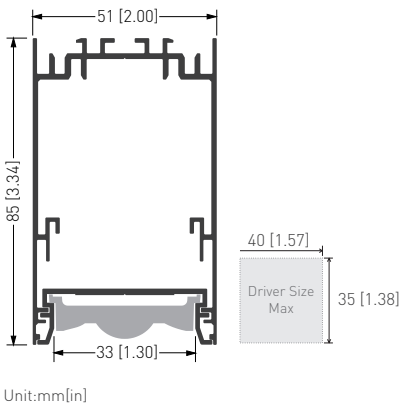

INSTALLATION

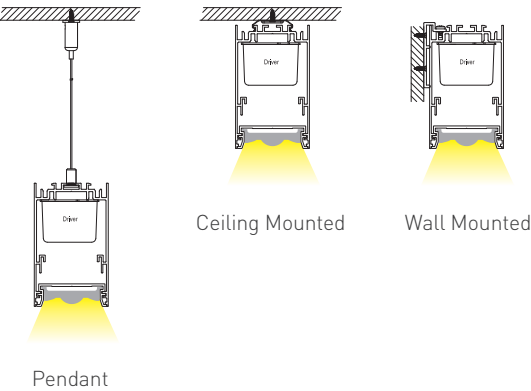

LUZ SERIES
PANDANT LINEAR LIGHT

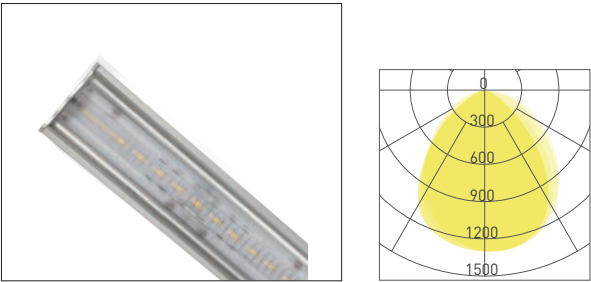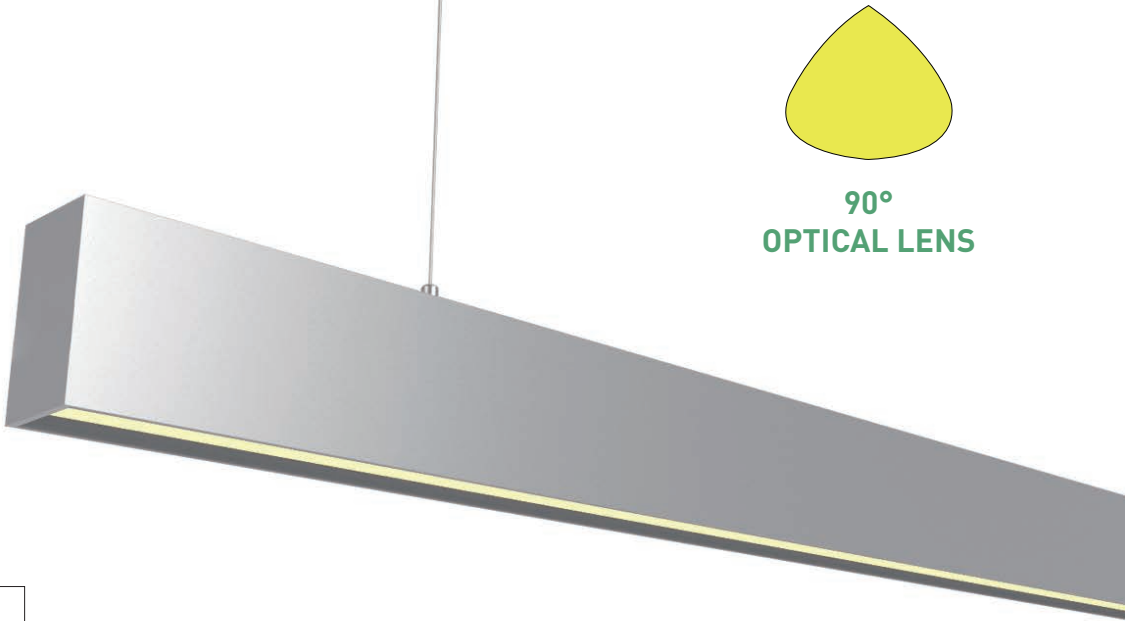

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5085L	W- White B- Black S- Silver	90- 90Deg. PMMA Lens	4- 1182mm	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES
PANDANT LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC
Width / Height	W50mm x H85mm
Length	1182mm
Power (W/m /ft)	26 W/pc
Efficacy Up to	110lm/w
Control	Dali , 0-10V, on/off

LED CHIPS & DRIVER OPTIONS




SPECIFICATIONS


RA 80	2700K	3000K	3500K	4000K	5000K	6500K
	2717lm / 1200mm	2717lm / 1200mm	2717lm / 1200mm	2860lm / 1200mm	2860lm / 1200mm	2860lm / 1200mm
RA 90	2700K	3000K	3500K	4000K	5000K	6500K
	2446lm / 1200mm	2446lm / 1200mm	2446lm / 1200mm	2574lm / 1200mm	2574lm / 1200mm	2574lm / 1200mm
RA 95	2700K	3000K	3500K	4000K	5000K	6500K
	2202lm / 1200mm	2202lm / 1200mm	2202lm / 1200mm	2317lm / 1200mm	2317lm / 1200mm	2317lm / 1200mm

- Note:**
- The given data are typical values in 4000K CRI80+. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.


DIMENSIONS

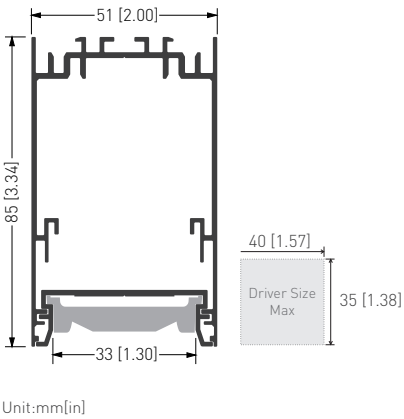


INSTALLATION

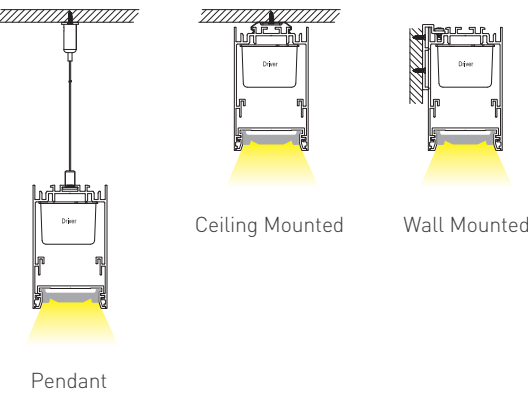

LUZ SERIES
PANDANT LINEAR LIGHT



BATWING
OPTICAL LENS

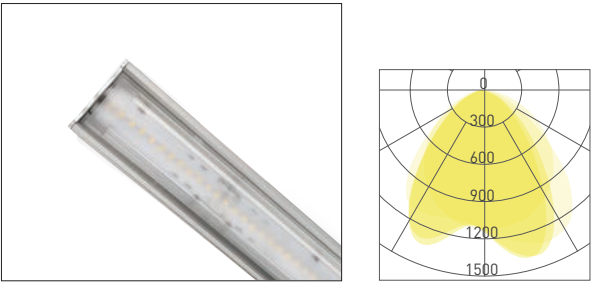

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5085L	W- White B- Black S- Silver	BA- Batwing PMMA Lens	4- 1182mm	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES
PANDANT LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC
Width / Height	W50mm x H85mm
Length	1182mm
Power (W/m /ft)	26 W/pc
Efficacy Up to	110lm/w
Control	Dali , 0-10V, on/off

LED CHIPS & DRIVER OPTIONS




SPECIFICATIONS


RA 80	2700K	3000K	3500K	4000K	5000K	6500K
	2717lm / 1200mm	2717lm / 1200mm	2717lm / 1200mm	2860lm / 1200mm	2860lm / 1200mm	2860lm / 1200mm
RA 90	2700K	3000K	3500K	4000K	5000K	6500K
	2446lm / 1200mm	2446lm / 1200mm	2446lm / 1200mm	2574lm / 1200mm	2574lm / 1200mm	2574lm / 1200mm
RA 95	2700K	3000K	3500K	4000K	5000K	6500K
	2202lm / 1200mm	2202lm / 1200mm	2202lm / 1200mm	2317lm / 1200mm	2317lm / 1200mm	2317lm / 1200mm

- Note:**
- The given data are typical values in 4000K CRI80+. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.


DIMENSIONS

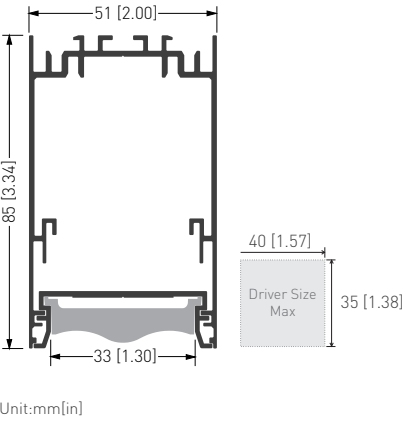


INSTALLATION

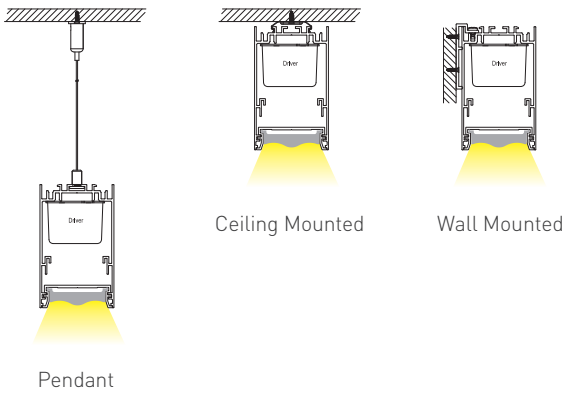

LUZ SERIES
PANDANT LINEAR LIGHT



ASYMMETRIC
OPTICAL LENS

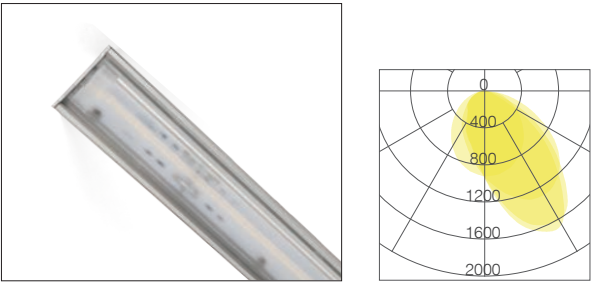

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5085L	W- White B- Black S- Silver	AS- Asymmetric PMMA Lens	4- 1182mm	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	P- Aircraft cable pendant W- Wall Mounted M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3. Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES
PANDANT LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC
Width / Height	W50mm x H85mm
Length	1182mm
Power (W/m /ft)	26 W/pc
Efficacy Up to	110lm/w
Control	Dali , 0-10V, on/off

LED CHIPS & DRIVER OPTIONS




SPECIFICATIONS


RA 80	2700K	3000K	3500K	4000K	5000K	6500K
	2717lm / 1200mm	2717lm / 1200mm	2717lm / 1200mm	2860lm / 1200mm	2860lm / 1200mm	2860lm / 1200mm
RA 90	2700K	3000K	3500K	4000K	5000K	6500K
	2446lm / 1200mm	2446lm / 1200mm	2446lm / 1200mm	2574lm / 1200mm	2574lm / 1200mm	2574lm / 1200mm
RA 95	2700K	3000K	3500K	4000K	5000K	6500K
	2202lm / 1200mm	2202lm / 1200mm	2202lm / 1200mm	2317lm / 1200mm	2317lm / 1200mm	2317lm / 1200mm

- Note:**
- The given data are typical values in 4000K CRI80+. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.


DIMENSIONS

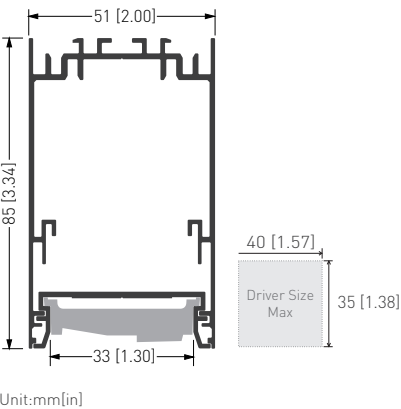

INSTALLATION

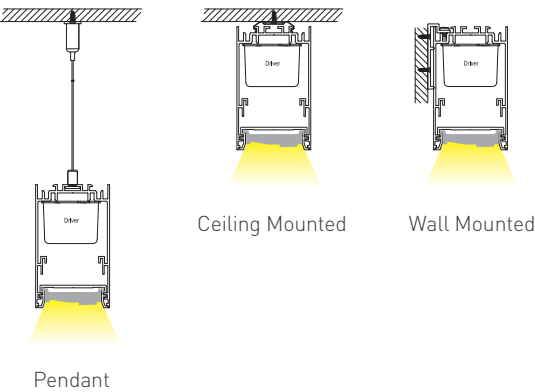

LUZ SERIES
TRIMLESS RECESSED LINEAR LIGHT

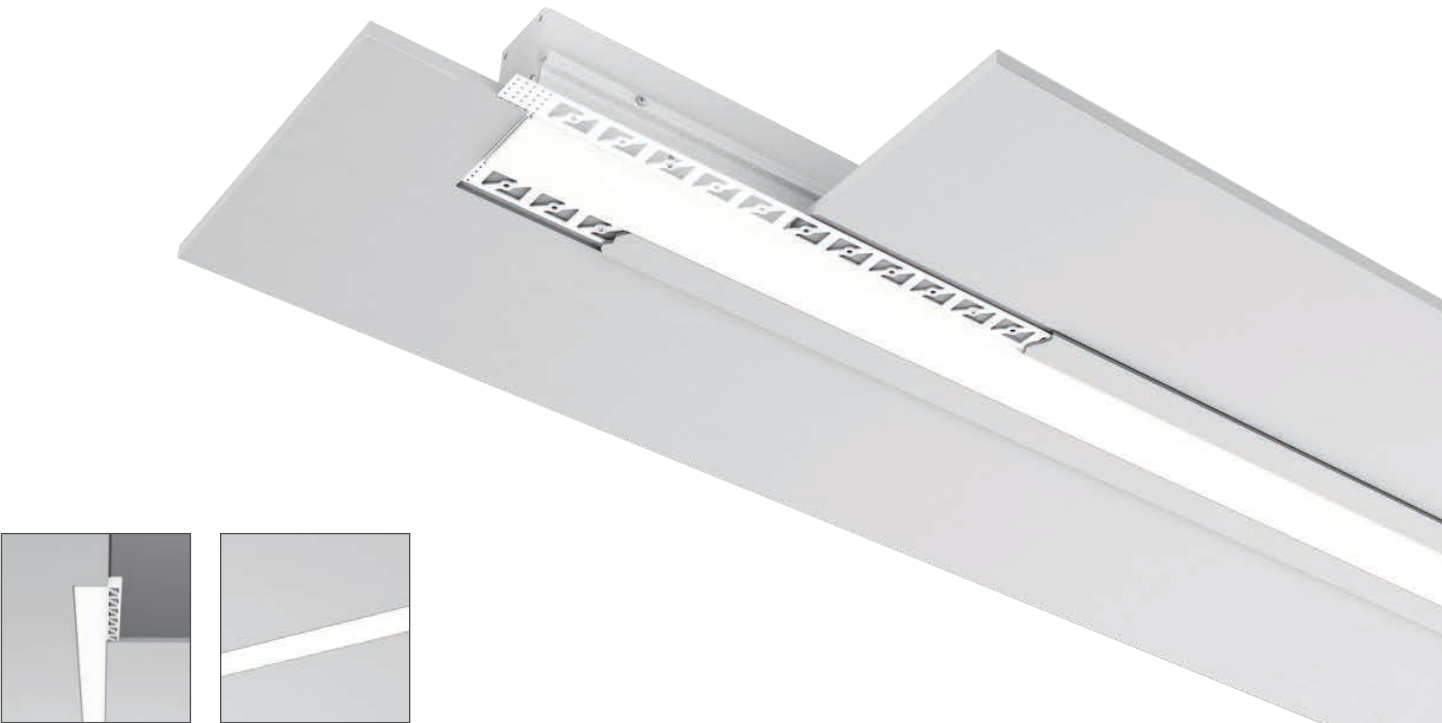

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U1008533	W- White B- Black S- Silver	A- Anti-Glare Film P- Prismatic Lens D- Diffuser	2- 647mm 4- 1247mm 5- 1547mm 8- 2447mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI	TLR- Trim-Less Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

LUZ SERIES


TRIMLESS RECESSED LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC			
Width / Height	W100mm x H85mm With Mud-flange			
Length	647mm	1247mm	1547mm	2447mm
Power (W/m /ft)	15.6 W/pc	31.1 W/pc	37.8 W/pc	62 W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			




INSTALLATION




Trim-Less Recessed

LED CHIPS & DRIVER OPTIONS

DIMENSIONS

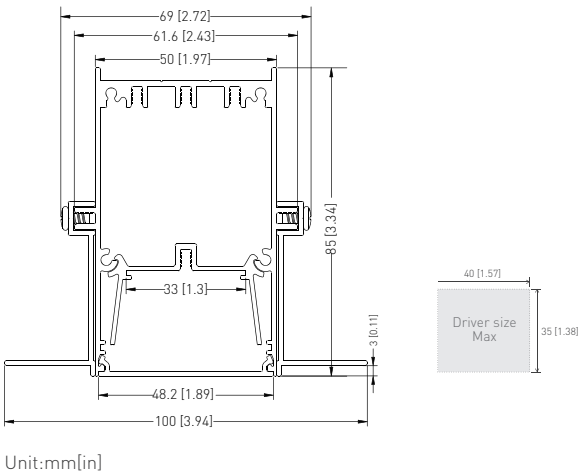


BEAM ANGLE



LUZ SERIES

TRIMLESS RECESSED WALL WASHER LINEAR LIGHT

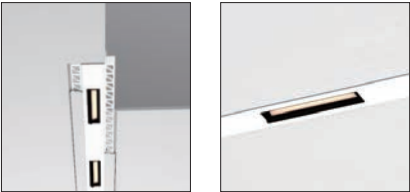

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U1008533	W- White B- Black S- Silver	WW- Wall Washer Kit	4- 1247mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TLR- Trim-Less Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam

2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.


3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES

TRIMLESS RECESSED WALL WASHER LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W100mm x H85mm with mudflange	
Length	1247mm with 4sets WW Kit	132.5mm
Power (W/m /ft)	23 W/pc	5.5W/pc
Efficacy Up to	70lm/w	70lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS


NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1530lm / 1200mm	1610lm / 1200mm	1610lm / 1200mm	1610lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1377lm / 1200mm	1449lm / 1200mm	1449lm / 1200mm	1449lm / 1200mm

- Note:**
- The given data are typical values in 4sets wall washer kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

DIMENSIONS

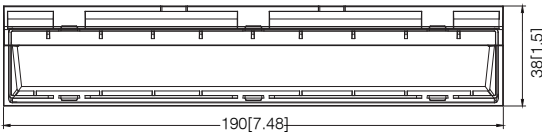

BEAM ANGLE

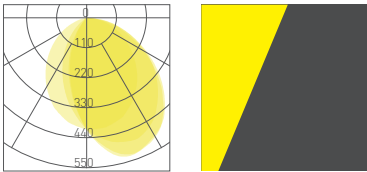

LED CHIPS & DRIVER OPTIONS



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U1008533	W- White B- Black S- Silver	12- 12Deg. 24- 24Deg. 38- 38Deg. 50- 50Deg. 5050- 50×50Deg. 7070- 70×70Deg. 3570- 35×70Deg. 9090- 90×90Deg.	4- 1247mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TLR- Trim-Less Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

LUZ SERIES

TRIMLESS RECESSED LINEAR LIGHT

UGR
<16




LUZ SERIES

TRIMLESS RECESSED LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC	29-34 VDC Constant Current
Width / Height	W100mm x W85mm with mudflange	
Length	1247mm W 4sets louver reflector Kit	132.5mm
Power (W/m /ft)	23 W/pc	5.5 W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	

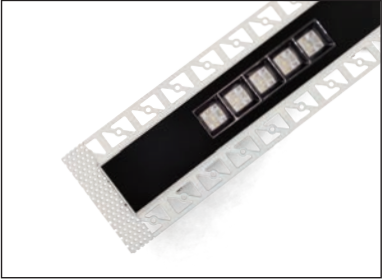


SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1717lm / 1200mm	1902lm / 1200mm	1902lm / 1200mm	1902lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1200mm	1680lm / 1200mm	1680lm / 1200mm	1680lm / 1200mm


- Note:**
- The given data are typical values in 4sets 50Deg. Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.

DIMENSIONS





Unit:mm[in]

BEAM ANGLE

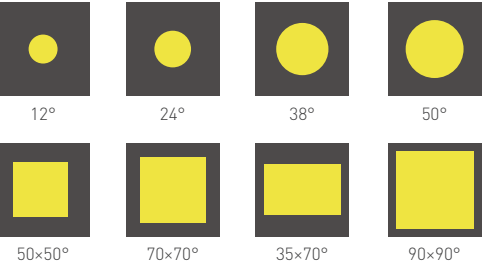

LUZ SERIES

TRIMED RECESSED LINEAR LIGHT

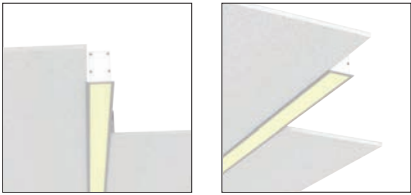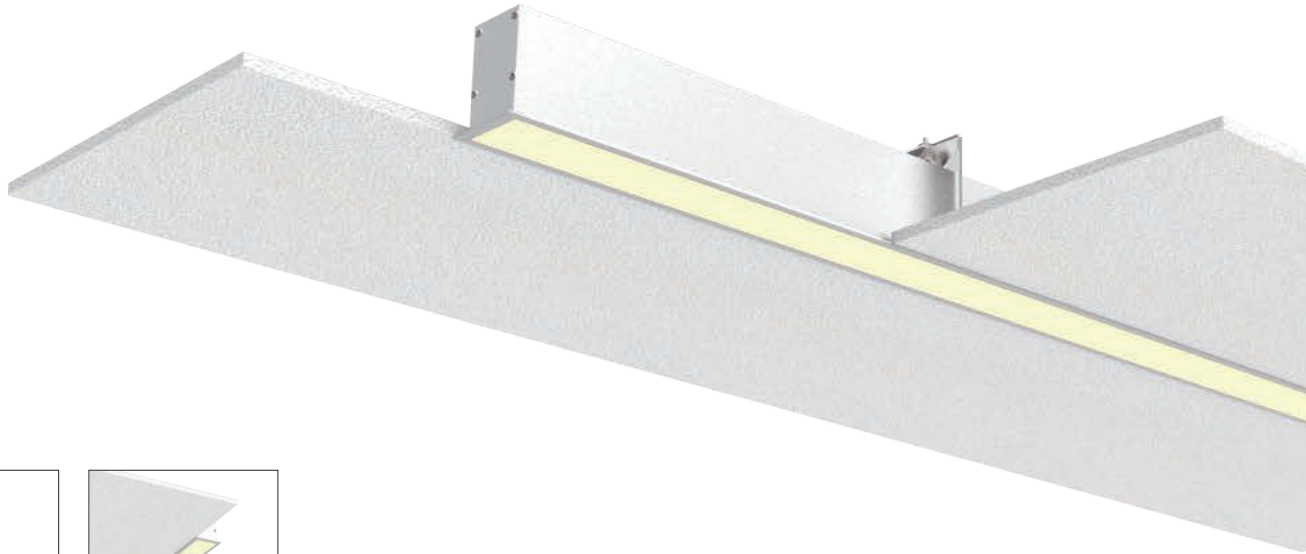

ORDERING INFORMATION


LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U708533	W- White	A- Anti-Glare Film	2- 608mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	TR- Trimed Recessed	22- IP22	D1- DALI
	B- Black	P- Prismatic Lens	4- 1208mm	5- 5-Step MacAdam Ellips	30- 3000K	90- 90+ CRI			D2- 0-10V
	S- Silver	D- Diffuser	5- 1508mm		35- 3500K	95- 95+ CRI			D3- On/off
			8- 2408mm		40- 4000K				
					50- 5000K				
					60- 6000K				
			65- 6500K						

1. Blueview’s standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATIONS


Voltage	220V-240 VAC / 110-240VAC			
Width / Height	W70mm x H85mm			
Length	622mm	1222mm	1522mm	2422mm
Power (W/m /ft)	15.6 W/pc	31.1 W/pc	37.8 W/pc	62 W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			

DIMENSIONS

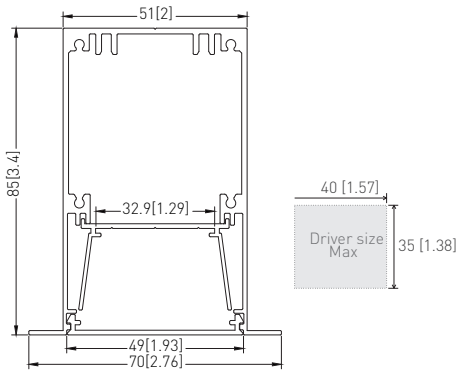


Unit:mm[in]

BEAM ANGLE



INSTALLATION




SPECIFICATIONS

COLOR TEMPERAYURE		LUMEN / LENGTH			
RA 80	2700K	1482lm / 600mm	2955lm / 1200mm	3591lm / 1500mm	5890lm / 2400mm
	3000K	1482lm / 600mm	2955lm / 1200mm	3591lm / 1500mm	5890lm / 2400mm
	3500K	1482lm / 600mm	2955lm / 1200mm	3591lm / 1500mm	5890lm / 2400mm
	4000K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
	5000K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
	6000K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
RA 90	2700K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm	5301lm / 2400mm
	3000K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm	5301lm / 2400mm
	3500K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm	5301lm / 2400mm
	4000K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
	5000K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
	5500K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
RA 95	2700K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm	4771lm / 2400mm
	3000K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm	4771lm / 2400mm
	3500K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm	4771lm / 2400mm
	4000K	1264lm / 600mm	2519lm / 1200mm	3062lm / 1500mm	5022lm / 2400mm
	6500K	1264lm / 600mm	2519lm / 1200mm	3062lm / 1500mm	5022lm / 2400mm

Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

LED CHIPS & DRIVER OPTIONS



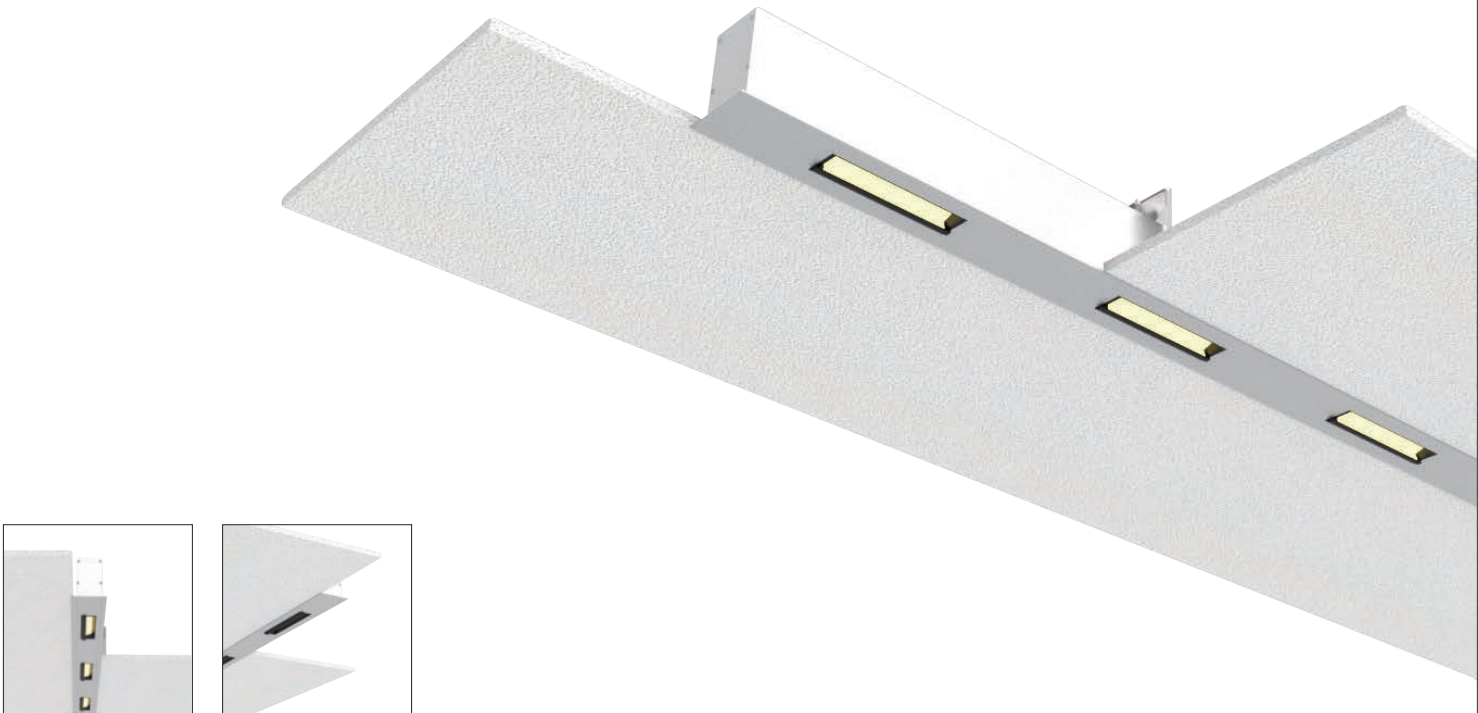

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U708533	W- White B- Black S- Silver	WW- Wall Washer Kit	4- 1247mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.



SPECIFICATIONS


Voltage	220V-240 VAC / 110-240VAC	29-34 VDC Constant Current
Width / Height	W70mm x W85mm with trim	
Length	1222mm with 4sets WW Kit	132.5mm
Power (W/m /ft)	23 W/pc	5.5 W/pc
Efficacy Up to	70lm/w	70lm/w
Control	Dali , 0-10V, on/off	

SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1530lm / 1200mm	1610lm / 1200mm	1610lm / 1200mm	1610lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1377lm / 1200mm	1449lm / 1200mm	1449lm / 1200mm	1449lm / 1200mm

- Note:
- The given data are typical values in 4sets wall washer kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.


DIMENSIONS


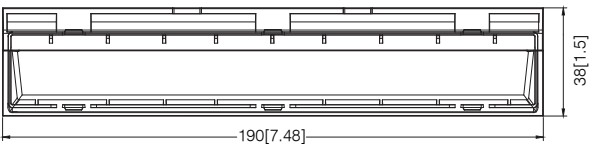


LED CHIPS & DRIVER OPTIONS



BEAM ANGLE

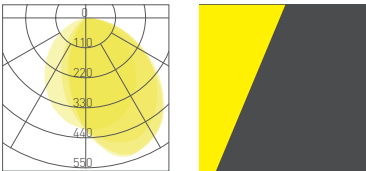

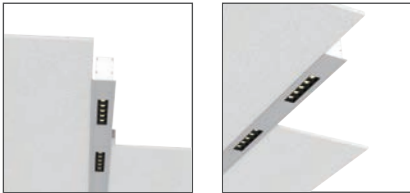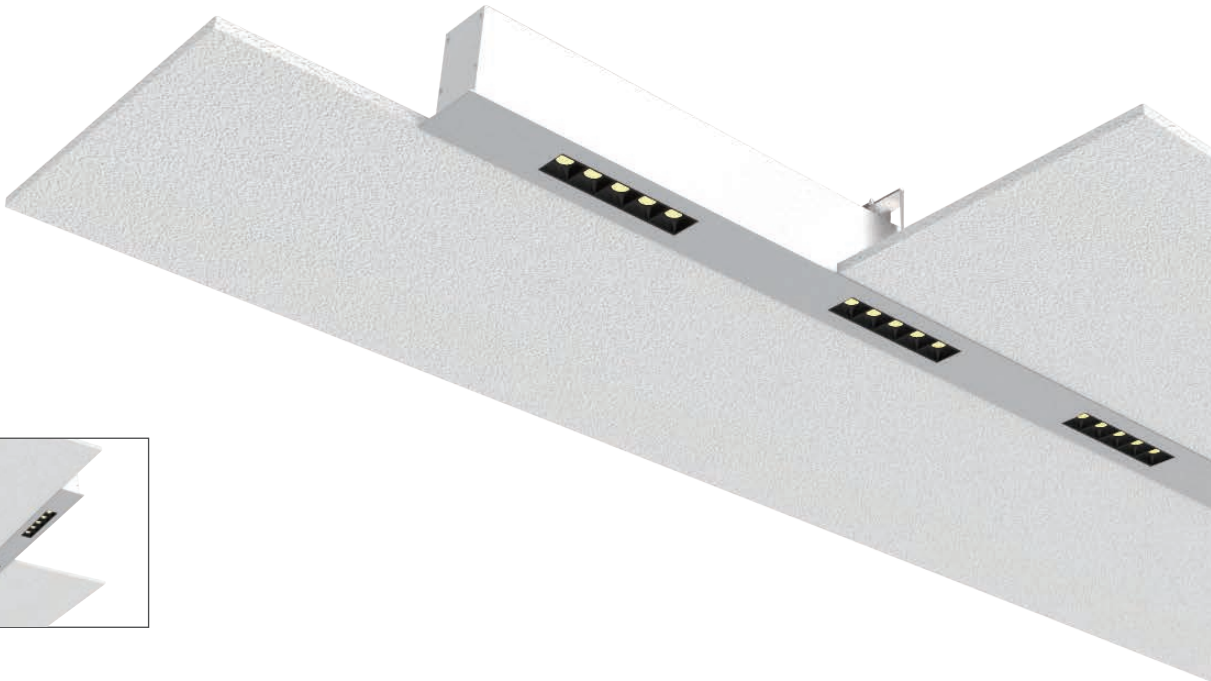

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U708533	W- White B- Black S- Silver	12- 12Deg. 24- 24Deg. 38- 38Deg. 50- 50Deg. 5050- 50×50Deg. 7070- 70×70Deg. 3570- 35×70Deg. 9090- 90×90Deg.	4- 1247mm CM- Customized	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI	TR- Trimed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview’s standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
3: Nichia’s CRI 90+ option’s is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC	29-34 VDC Constant Current
Width / Height	W70mm x W85mm with trim	
Length	1222mm with 4sets Reflector Kit	132.5mm
Power (W/m /ft)	23 W/pc	5.5 W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	




SPECIFICATIONS

NICHIA RA 80	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1717lm / 1200mm	1902lm / 1200mm	1902lm / 1200mm	1902lm / 1200mm
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1200mm	1680lm / 1200mm	1680lm / 1200mm	1680lm / 1200mm

Note:
- The given data are typical values in 4sets 50Deg. Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

DIMENSIONS

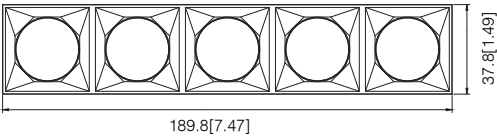


Unit:mm[in]

LED CHIPS & DRIVER OPTIONS



BEAM ANGLE

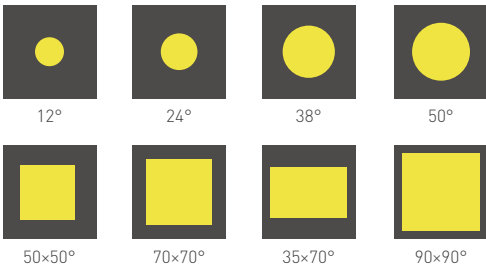



HONG SERIES

DIRECT&INDIRECT PENDANT LINEAR LIGHT

HONG P / M / W Direct&Indirect is a linear LED lighting fixture that features direct and indirect lighting. Fixture features 95+, 90+ or 80+ LM80 LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V type, also controllable options in DMX, PWM and 2.4G Static, Tunable white, RGBW solution available. The fixture is designed in multiple installation in Sus-pendant, Wall / Ceiling Mounted / Trimless / Trimmed Recessed. Fixture lengths are available in 2ft, 4ft, 5ft and 8ft, and custom lengths are available in 19.6ft.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications
Indoor - Office, Commercial, Educational Institutions, Conference Rooms and many other workspaces.

HONG SERIES

DIRECT&INDIRECT SURFACE LINEAR LIGHT




Multiple Installation

- Pendant
- Wall Mounted
- Ceiling Mounted




Die-casting Endcaps

Anti-light leaking design



Indirect Light

- Clear Lens
- Diffuser Lens




Optical options

- Anti-Glare Film



Sensor Optional

Microwave Sensor
IR Sensor
Timer



High Quality Lighting

LM-80 Tested LED
ONE-BIN only
High R9, R15 value



Most comparable driver space

up to W2.4 x H1.38in



6063 Aluminum

Silver / Black clear matt anodize
White/Black matt powder coating
Customized RAL color available


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
H7590 Direct & Indirect Linear Light	W- White	A- Anti-Glare Film	2- 608mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	P- Aircraft cable pendant	22- IP22	D1- DALI
U7590 Direct Linear Light	B- Black	D- Diffuser	4- 1208mm		30- 3000K	90- 90+ CRI			D2- 0-10V
	S- Silver		5- 1508mm	5- 5-Step MacAdam Ellips	35- 3500K	95- 95+ CRI	W- Wall Mounted		D3- On/off
			8- 2408mm		40- 4000K		M- Ceiling Mounted		
					50- 5000K				
					60- 6000K				
					65- 6500K				


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATION

Voltage	220-240 VAC / 100V-240 VAC			
Width / Height	75mm x 90mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	28 W/pc	56 W/pc	64 W/pc	112 W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			




Direct & Indirect




Direct


INSTALLATION




Direct & Indirect
Pendant




Direct Pendant



Ceiling Mounted



Direct
Wall Mounted



Direct & Indirect
Wall Mounted

ACCESSORIES



Wall Mounted Kit



Ceiling Mounted Kit




Pendant Kit

SPECIFICATIONS


	COLOR TEMPERAYURE		LUMEN / LENGTH		
RA 80	2700K	2660lm / 600mm	5320lm / 1200mm	6080lm / 1500mm	10640lm / 2400mm
	3000K	2660lm / 600mm	5320lm / 1200mm	6080lm / 1500mm	10640lm / 2400mm
	3500K	2660lm / 600mm	5320lm / 1200mm	6080lm / 1500mm	10640lm / 2400mm
	4000K	2800lm / 600mm	5600lm / 1200mm	6400lm / 1500mm	11200lm / 2400mm
	5000K	2800lm / 600mm	5600lm / 1200mm	6400lm / 1500mm	11200lm / 2400mm
	6000K	2800lm / 600mm	5600lm / 1200mm	6400lm / 1500mm	11200lm / 2400mm
RA 90	2700K	2394lm / 600mm	4788lm / 1200mm	5472lm / 1500mm	9576lm / 2400mm
	3000K	2394lm / 600mm	4788lm / 1200mm	5472lm / 1500mm	9576lm / 2400mm
	3500K	2394lm / 600mm	4788lm / 1200mm	5472lm / 1500mm	9576lm / 2400mm
	4000K	2520lm / 600mm	5040lm / 1200mm	5760lm / 1500mm	10080lm / 2400mm
	5000K	2520lm / 600mm	5040lm / 1200mm	5760lm / 1500mm	10080lm / 2400mm
	5500K	2520lm / 600mm	5040lm / 1200mm	5760lm / 1500mm	10080lm / 2400mm
RA 95	2700K	2155lm / 600mm	4309lm / 1200mm	4925lm / 1500mm	8618lm / 2400mm
	3000K	2155lm / 600mm	4309lm / 1200mm	4925lm / 1500mm	8618lm / 2400mm
	3500K	2155lm / 600mm	4309lm / 1200mm	4925lm / 1500mm	8618lm / 2400mm
	4000K	2268lm / 600mm	4536lm / 1200mm	5184lm / 1500mm	9072lm / 2400mm

- Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

DIMENSIONS




Unit:mm[in]



LED CHIPS & DRIVER OPTIONS



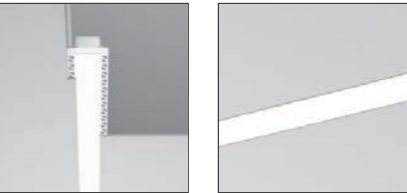


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U1259057	W- White B- Black S- Silver	A- Anti-Glare Film D- Diffuser	2- 647mm 4- 1247mm 5- 1547mm 8- 2447mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI	TLR- Trimless Recessed Installation	22- IP22	D1- DALI D2- 0-10V D3- On/off


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATION


Voltage	220-240 VAC / 100V-240 VAC			
Width / Height	125mm x 90mm			
Length	647mm	1247mm	1547mm	2447mm
Power (W/m /ft)	28 W/pc	56 W/pc	64 W/pc	112 W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			



DIMENSIONS

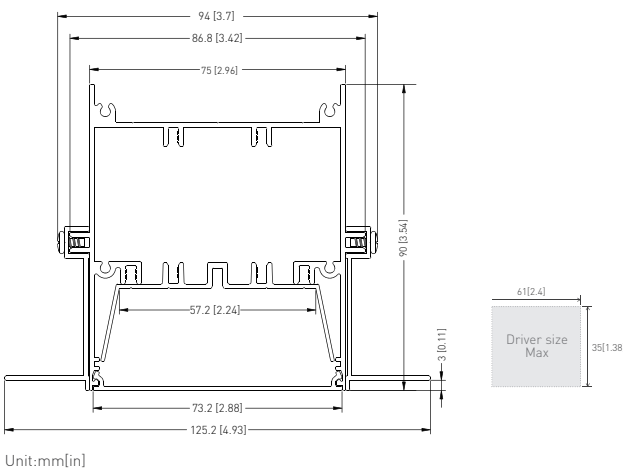

INSTALLATION



Trim-Less Recessed


ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U919057	W- White B- Black S- Silver	A- Anti-Glare Film D- Diffuser	2- 622mm 4- 1222mm 5- 1522mm 8- 2422mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI	TR- Trimmed Recessed Installation	22- IP22	D1- DALI D2- 0-10V D3- On/off


1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATION

Voltage	220-240 VAC / 100V-240 VAC			
Width / Height	125mm x 90mm			
Length	647mm	1247mm	1547mm	2447mm
Power (W/m /ft)	28 W/pc	56 W/pc	64 W/pc	112 W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			




DIMENSIONS

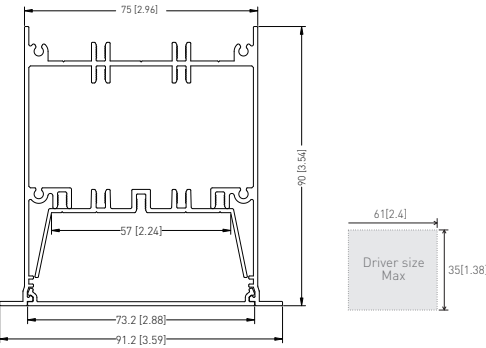

Unit:mm[in]

INSTALLATION



Trimmed Recessed

HILA SERIES

DIRECT&INDIRECT SURFACE LINEAR LIGHT



HILA SERIES

DIRECT&INDRECT LINEAR LIGHT

HILA is engineering design by Direct & indirect lighting, and this is becoming increasingly popular, in commercial architecture projects or offices. With indirect lighting, the source of light is hidden and the light spreads through the room via reflection on the ceiling, wall, and floor, it's much eliminating glaring and shadows. Indirect lighting provides a pleasant lighting environment and allows you to frame the room with light. Creating shadow-free lighting gives rise to an extra sense of spaciousness. Fixture features 95+, 90+ or 80+ LM80 LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V type, also controable options in DMX, PWM and 2.4G Static,Tunable white, RGBW solution available. Fixture lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available.

Finish


Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications


Indoor - Office, Educational Instituions, Conference Rooms
and many other workspaces.

HILA SERIES

DIRECT&INDIRECT SURFACE LINEAR LIGHT

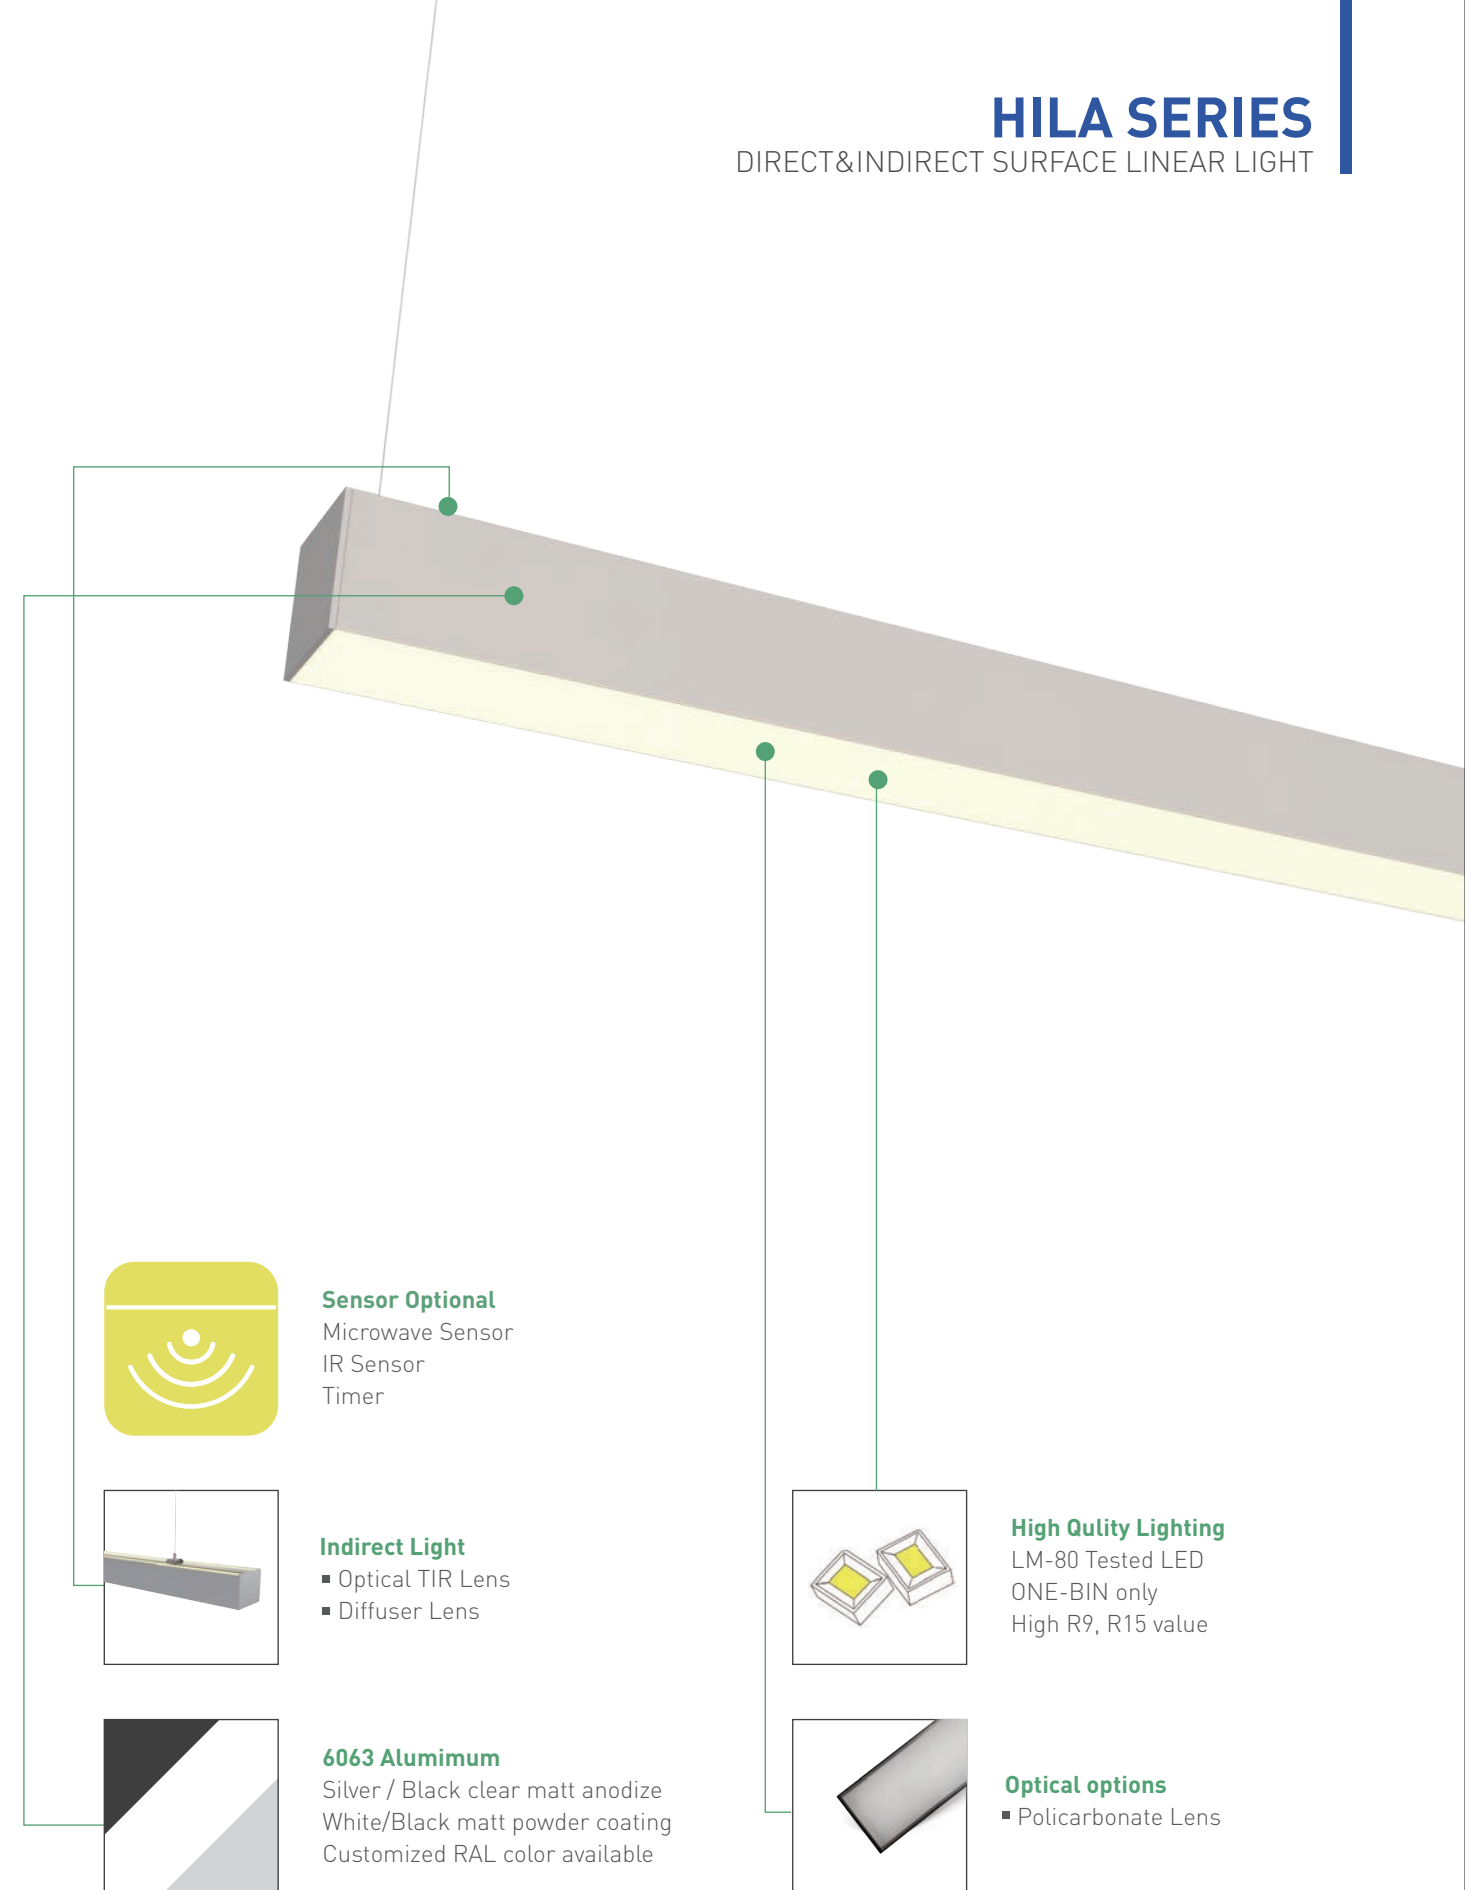


Sensor Optional
Microwave Sensor
IR Sensor
Timer




Indirect Light
■ Optical TIR Lens
■ Diffuser Lens



6063 Aluminum
Silver / Black clear matt anodize
White/Black matt powder coating
Customized RAL color available



High Qulity Lighting
LM-80 Tested LED
ONE-BIN only
High R9, R15 value



Optical options
■ Polycarbonate Lens

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
H10096 Direct & Indirect Linear Light	W- White	D- Diffuser	2- 608mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	P- Aircraft cable pendant	22- IP22	D1- DALI
U10096 Direct Linear Light	B- Black	O- Optical TIR Lens on top lighting	4- 1208mm	5- 5-Step MacAdam Ellips	30- 3000K	90- 90+ CRI	M- Ceiling Mounted		D2- 0-10V
	S- Silver		5- 1508mm		35- 3500K	95- 95+ CRI			D3- On/off
			8- 2408mm		40- 4000K				
					50- 5000K				
					60- 6000K				
					65- 6500K				


1. Blueview’s standard is 3-Step MacAdam

2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATION

Voltage	220-240 VAC / 100V-240 VAC			
Width / Height	100mm x 96mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	31 W/pc	62 W/pc	64 W/pc	124 W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			


BEAM ANGLE

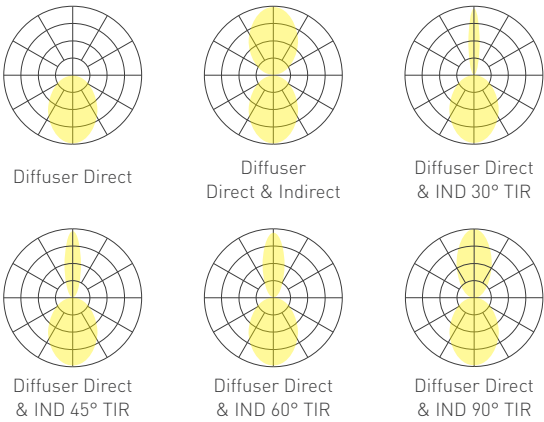

LED CHIPS & DRIVER OPTIONS



INSTALLATION

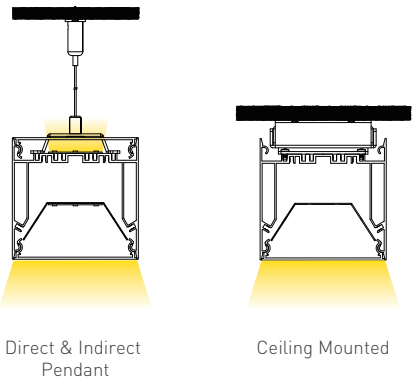

SPECIFICATIONS

COLOUR TEMPERATURE			LUMEN / LENGTH			
U10096 RA 80	2700K	down	2945lm / 600mm	5890lm / 1200m	6080lm / 1500mm	11780lm / 2400mm
	3000K	down	2945lm / 600mm	5890lm / 1200m	6080lm / 1500mm	11780lm / 2400mm
	4000K	down	3100lm / 600mm	6200lm / 1200m	6400lm / 1500mm	12400lm / 2400mm
	5000K	down	3100lm / 600mm	6200lm / 1200m	6400lm / 1500mm	12400lm / 2400mm
	6500K	down	3100lm / 600mm	6200lm / 1200m	6400lm / 1500mm	12400lm / 2400mm
H10096 RA 80 Indirect: Diffuser Direct: Diffuser	2700K	up	1473lm / 600mm	2945lm / 1200m	3040lm / 1500mm	5890lm / 2400mm
		down	1473lm / 600mm	2945lm / 1200m	3040lm / 1500mm	5890lm / 2400mm
	3000K	up	1473lm / 600mm	2945lm / 1200m	3040lm / 1500mm	5890lm / 2400mm
		down	1473lm / 600mm	2945lm / 1200m	3040lm / 1500mm	5890lm / 2400mm
	4000K	up	1550lm / 600mm	3100lm / 1200m	3200lm / 1500mm	6200lm / 2400mm
		down	1550lm / 600mm	3100lm / 1200m	3200lm / 1500mm	6200lm / 2400mm
	5000K	up	1550lm / 600mm	3100lm / 1200m	3200lm / 1500mm	6200lm / 2400mm
		down	1550lm / 600mm	3100lm / 1200m	3200lm / 1500mm	6200lm / 2400mm
	6500K	up	1550lm / 600mm	3100lm / 1200m	3200lm / 1500mm	6200lm / 2400mm
		down	1550lm / 600mm	3100lm / 1200m	3200lm / 1500mm	6200lm / 2400mm
H10096 RA 80 Indirect: TIR Lens Direct: Diffuser	2700K	up	811lm / 600mm	1705lm / 1200m	2053lm / 1500mm	3264lm / 2400mm
		down	1699lm / 600mm	3390lm / 1200m	4265lm / 1500mm	6780lm / 2400mm
	3000K	up	901lm / 600mm	1895lm / 1200m	2282lm / 1500mm	3627lm / 2400mm
		down	1887lm / 600mm	3767lm / 1200m	4739lm / 1500mm	7533lm / 2400mm
	4000K	up	1001lm / 600mm	2105lm / 1200m	2535lm / 1500mm	4030lm / 2400mm
		down	2097lm / 600mm	4185lm / 1200m	5265lm / 1500mm	8370lm / 2400mm
	5000K	up	1001lm / 600mm	2105lm / 1200m	2535lm / 1500mm	4030lm / 2400mm
		down	2097lm / 600mm	4185lm / 1200m	5265lm / 1500mm	8370lm / 2400mm
	6500K	up	1001lm / 600mm	2105lm / 1200m	2535lm / 1500mm	4030lm / 2400mm
		down	2097lm / 600mm	4185lm / 1200m	5265lm / 1500mm	8370lm / 2400mm

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.

- Above data based on Non-Dimmable for all luminaires.

- More customized LED and CCT available.

- LM-80, IES TM-30-15 testing report available for led.

U516833

SURFACE LINEAR LIGHT

U5168 Series is linear LED lighting fixture that features a Down lighting. It's mostly simulating the natural lighting enviroment. Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V,DMX, PWM type. Fixture lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available in 19.6ft.

Finish


Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications

Indoor - Commercial, Residential , Office, Educational Instituions, Conference Rooms and many other workspace

U516833


SURFACE LINEAR LIGHT




BEAM ANGLE

ANGULAR MODULE

30° LUMINAIRE

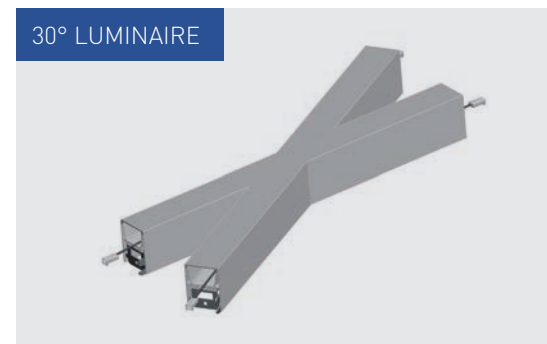

60° LUMINAIRE

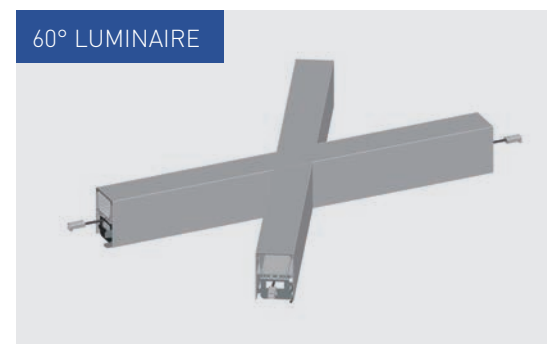

SPLICING



ORDERING INFORMATION


LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U516833	W- White B- Black S- Silver	A- Anti-Glare Film P- Prismatic Lens D- Diffuser	2- 608mm 4- 1208mm 5- 1508mm 8- 2408mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27-2700K 30-3000K 35-3500K 40-4000K 50-5000K 60-6000K 65-6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview’s standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC			
Width / Height	W51mm x H65mm			
Length	608mm	1208mm	1508mm	2408mm
Power (W/m /ft)	15.6 W/pc	31.1 W/pc	37.8 W/pc	62 W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			

DIMENSION

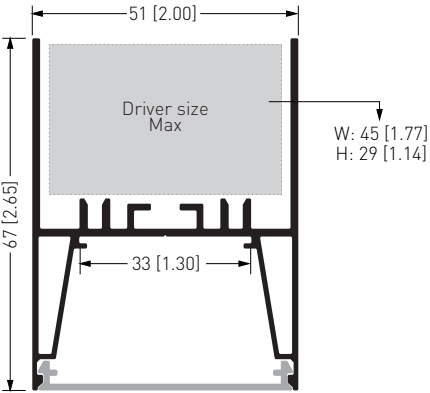


Unit:mm[in]

LED CHIPS & DRIVER OPTIONS



INSTALLATION & ACCESSORIES

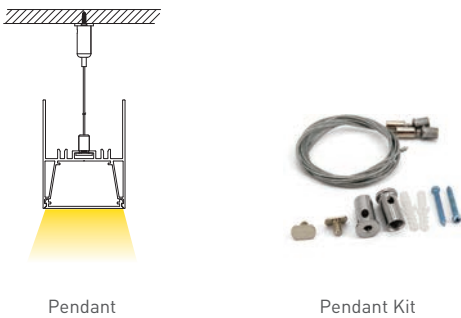

SPECIFICATIONS

COLOR TEMPERAYURE		LUMEN / LENGTH			
RA 80	2700K	1482lm / 600mm	2955lm / 1200mm	3591lm / 1500mm	5890lm / 2400mm
	3000K	1482lm / 600mm	2955lm / 1200mm	3591lm / 1500mm	5890lm / 2400mm
	3500K	1482lm / 600mm	2955lm / 1200mm	3591lm / 1500mm	5890lm / 2400mm
	4000K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
	5000K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
	6000K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
	6500K	1560lm / 600mm	3110lm / 1200mm	3780lm / 1500mm	6200lm / 2400mm
RA 90	2700K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm	5301lm / 2400mm
	3000K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm	5301lm / 2400mm
	3500K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm	5301lm / 2400mm
	4000K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
	5000K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
	5500K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
	6500K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm	5580lm / 2400mm
RA 95	2700K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm	4771lm / 2400mm
	3000K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm	4771lm / 2400mm
	3500K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm	4771lm / 2400mm
	4000K	1264lm / 600mm	2519lm / 1200mm	3062lm / 1500mm	5022lm / 2400mm
	6500K	1264lm / 600mm	2519lm / 1200mm	3062lm / 1500mm	5022lm / 2400mm

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

U514128

SURFACE LINEAR LIGHT


U514128P / M / W is a linear LED lighting fixture that features direct lighting with External Driver. Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V, Triac type. Luminaries lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available.

Finish

Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications

Indoor - Commercial Residential , Office, Educational Institutions, Conference Rooms and many other workspaces.




Mutiple Installation

- Sus-pendant
- Ceiling Mounted



Sensor Optional

Microwave Sensor
IR Sensor
Timer



Optical options

- Various Beam angle Lens
- Anti-Glare Film



6063 Alumimum

Silver / Black clear matt anodize
White/Black matt powder coating
Customized RAL color available

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U514128	W- White B- Black S- Silver	P- Prismatic Lens D- Diffuser	2- 611mm 4- 1211mm 5- 1511mm 8- 2411mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellipse	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI	P- Aircraft cable pendant M- Ceiling Mounted	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC			
Width / Height	W51mm x H41mm			
Length	611mm	1211mm	1511mm	2411mm
Power (W/m /ft)	13 W/pc	26 W/pc	32 W/pc	52 W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			

LED CHIPS & DRIVER OPTIONS



INSTALLATION

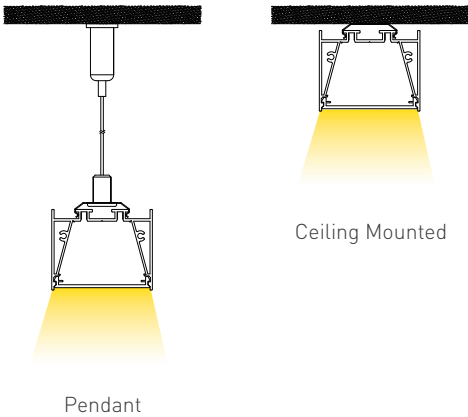

ACCESSORIES




SPECIFICATIONS

COLOR TEMPERAYURE		LUMEN / LENGTH			
RA 80	2700K	1235lm / 600mm	2470lm / 1200mm	3040lm / 1500mm	4940lm / 2400mm
	3000K	1235lm / 600mm	2470lm / 1200mm	3040lm / 1500mm	4940lm / 2400mm
	3500K	1235lm / 600mm	2470lm / 1200mm	3040lm / 1500mm	4940lm / 2400mm
	4000K	1300lm / 600mm	2600lm / 1200mm	3200lm / 1500mm	5200lm / 2400mm
	5000K	1300lm / 600mm	2600lm / 1200mm	3200lm / 1500mm	5200lm / 2400mm
	6000K	1300lm / 600mm	2600lm / 1200mm	3200lm / 1500mm	5200lm / 2400mm
RA 90	2700K	1112lm / 600mm	2223lm / 1200mm	2736lm / 1500mm	4446lm / 2400mm
	3000K	1112lm / 600mm	2223lm / 1200mm	2736lm / 1500mm	4446lm / 2400mm
	3500K	1112lm / 600mm	2223lm / 1200mm	2736lm / 1500mm	4446lm / 2400mm
	4000K	1170lm / 600mm	2340lm / 1200mm	2880lm / 1500mm	4680lm / 2400mm
	5000K	1170lm / 600mm	2340lm / 1200mm	2880lm / 1500mm	4680lm / 2400mm
	5500K	1170lm / 600mm	2340lm / 1200mm	2880lm / 1500mm	4680lm / 2400mm
RA 95	6500K	1170lm / 600mm	2340lm / 1200mm	2880lm / 1500mm	4680lm / 2400mm
	2700K	1000lm / 600mm	2001lm / 1200mm	2462lm / 1500mm	4001lm / 2400mm
	3000K	1000lm / 600mm	2001lm / 1200mm	2462lm / 1500mm	4001lm / 2400mm
	3500K	1000lm / 600mm	2001lm / 1200mm	2462lm / 1500mm	4001lm / 2400mm
	4000K	1053lm / 600mm	2106lm / 1200mm	2592lm / 1500mm	4212lm / 2400mm


Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

DIMENSIONS

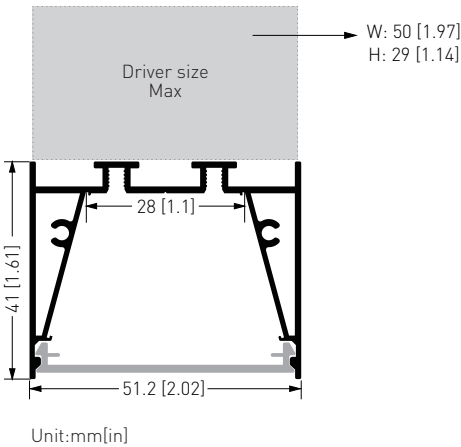

BEAM ANGLE





U674128R

TRIMED RECESSED LINEAR LIGHT


U674128R is a Trimmed Recessed linear LED lighting fixture that features direct lighting with External Driver. Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V, Triac type. Luminaries lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available in 19.6ft.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications
Indoor - Commercial Residential , Office, Educational Instituions, Conference Rooms and many other workspaces.

U674128R

TRIMED RECESSED LINEAR LIGHT

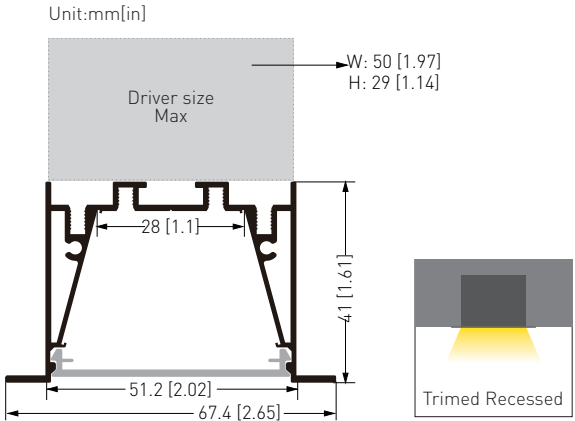

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U674128R	W- White B- Black S- Silver	P- Prismetic Lens D- Diffuser	2- 627mm 4- 1227mm 5- 1527mm 8- 2427mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI	TR- Trimmed Recessed	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

U674128R

TRIMED RECESSED LINEAR LIGHT

SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC			
Width / Height	67mm x 41mm			
Length	627mm	1227mm	1527mm	2427mm
Power (W/m /ft)	13 W/pc	26 W/pc	32W/pc	52W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			

LED CHIPS & DRIVER OPTIONS



SPECIFICATIONS

COLOR TEMPERAYURE		LUMEN / LENGTH			
RA 80	2700K	1235lm / 600mm	2470lm / 1200mm	3040lm / 1500mm	4940lm / 2400mm
	3000K	1235lm / 600mm	2470lm / 1200mm	3040lm / 1500mm	4940lm / 2400mm
	3500K	1235lm / 600mm	2470lm / 1200mm	3040lm / 1500mm	4940lm / 2400mm
	4000K	1300lm / 600mm	2600lm / 1200mm	3200lm / 1500mm	5200lm / 2400mm
	5000K	1300lm / 600mm	2600lm / 1200mm	3200lm / 1500mm	5200lm / 2400mm
	6000K	1300lm / 600mm	2600lm / 1200mm	3200lm / 1500mm	5200lm / 2400mm
	6500K	1300lm / 600mm	2600lm / 1200mm	3200lm / 1500mm	5200lm / 2400mm
RA 90	2700K	1112lm / 600mm	2223lm / 1200mm	2736lm / 1500mm	4446lm / 2400mm
	3000K	1112lm / 600mm	2223lm / 1200mm	2736lm / 1500mm	4446lm / 2400mm
	3500K	1112lm / 600mm	2223lm / 1200mm	2736lm / 1500mm	4446lm / 2400mm
	4000K	1170lm / 600mm	2340lm / 1200mm	2880lm / 1500mm	4680lm / 2400mm
	5000K	1170lm / 600mm	2340lm / 1200mm	2880lm / 1500mm	4680lm / 2400mm
	5500K	1170lm / 600mm	2340lm / 1200mm	2880lm / 1500mm	4680lm / 2400mm
	6500K	1170lm / 600mm	2340lm / 1200mm	2880lm / 1500mm	4680lm / 2400mm
RA 95	2700K	1000lm / 600mm	2001lm / 1200mm	2462lm / 1500mm	4001lm / 2400mm
	3000K	1000lm / 600mm	2001lm / 1200mm	2462lm / 1500mm	4001lm / 2400mm
	3500K	1000lm / 600mm	2001lm / 1200mm	2462lm / 1500mm	4001lm / 2400mm
	4000K	1053lm / 600mm	2106lm / 1200mm	2592lm / 1500mm	4212lm / 2400mm
	6500K	1053lm / 600mm	2106lm / 1200mm	2592lm / 1500mm	4212lm / 2400mm

- Note:**
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.
 - LM-80, IES TM-30-15 testing report available for led.

U463330TR

TRIMED RECESSED LINEAR LIGHT



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U463330TR	W- White	D- Diffuser	2- 546mm	3- 3-Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	TR- Trimed Recessed	22- IP22	D1- DALI
	B- Black	W- Wall Washer Kit	4- 1206mm		30- 3000K	90- 90+ CRI			D2- 0-10V
	S- Silver	RL- Reflector Louver	5- 1602mm	5- 5-Step MacAdam Ellips	40- 4000K	95- 95+ CRI			D3- On/off
		TL- TIR Lens	8- 2394mm		65- 6500K				

1. Blueview’s standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC			
Width / Height	46mm x 33mm			
Length	546mm	1206mm	1602mm	2394mm
Power (W/m /ft)	11.5 W/pc	25 W/pc	33W/pc	50W/pc
Efficacy Up to	100lm/w	100lm/w	100lm/w	100lm/w
Control	Dali , 0-10V, on/off			

LED CHIPS & DRIVER OPTIONS



OPTICAL OPTIONS

REFLECTOR LOUVER

15° 30° 45°

Unit:mm[in]

WALL WASHER

Unit:mm[in]

TIR LENS

35° x 75° 50° x 50°

Square 50° Diamond 50°

Unit:mm[in]


REFLECTOR LOUVER

Unit:mm[in]


12° 24° 38° 50°

50×50° 70×70° 90×90° 35×70°

DIMENSIONS

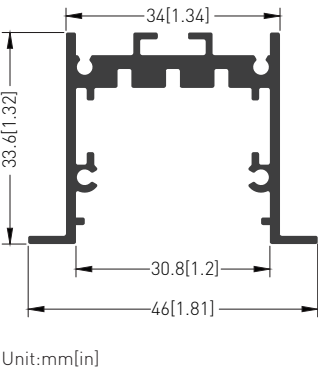

ACCESSORIES & INSTALLATION

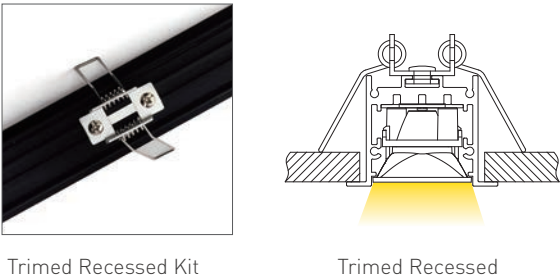


U463330TR

TRIMED RECESSED LINEAR LIGHT

SPECIFICATIONS

COLOR TEMPERAYURE		LUMEN / LENGHT			
RA 80	2700K	1093lm / 550mm	2375lm / 1200mm	3135lm / 1600mm	4750lm / 2400mm
	3000K	1093lm / 550mm	2375lm / 1200mm	3135lm / 1600mm	4750lm / 2400mm
	3500K	1093lm / 550mm	2375lm / 1200mm	3135lm / 1600mm	4750lm / 2400mm
	4000K	1150lm / 550mm	2500lm / 1200mm	3300lm / 1600mm	5000lm / 2400mm
RA 90	2700K	983lm / 550mm	2138lm / 1200mm	2822lm / 1600mm	4275lm / 2400mm
	3000K	983lm / 550mm	2138lm / 1200mm	2822lm / 1600mm	4275lm / 2400mm
	3500K	983lm / 550mm	2138lm / 1200mm	2822lm / 1600mm	4275lm / 2400mm
	4000K	1035lm / 550mm	2250lm / 1200mm	2970lm / 1600mm	4500lm / 2400mm

- Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light out put and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.
 - LM-80, IES TM-30-15 testing report available for led.



Unit:mm[in]



O30D

O30D RING LIGHT

O30D Ring light is built by Alu. extrusion fixture with Silicone lens. It's creating smooth and comfort lighting without spot.

The light sourced are available up to 95+ Ra. Color temperature options from 2700K to 6500K, Dual white at WW+NW available. DMX dimmable available.

Ring diameter available in Φ600mm, Φ900mm, Φ1000mm and customized size.

- Finish
- Aluminum clear matt anodized
 - White / Black powder coating
 - Customized RAL color available

Applications

Indoor - Resting Zone, Reception, etc.

O30D
RING LIGHT

ORDERING INFORMATION



LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
O30D	W- White	S- Silicone	6- ϕ600mm	3- 3 Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	P- Pendant	22- IP22	D1- DALI
	B- Black		9- ϕ900mm		30- 3000K	90- 90+ CRI			D2- 0-10V
	S- Silver		12- ϕ1200mm		35- 3500K	95- 95+ CRI			D3- On/off
				40- 4000K					
				50- 5000K					
				60- 6000K					
					65- 6500K				

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


SPECIFICATION

Voltage	220V-240VAC / 100V-240 VAC		
Width / Height	30 × 30mm		
Diameter	ϕ600mm	ϕ900mm	ϕ1200mm
Power (W/m /ft)	35W/pc	50 W/pc	75 W/pc
Efficacy Up to	80lm/w	80lm/w	80lm/w
Control	Dali , 0-10V, on/off		

DIMENSIONS

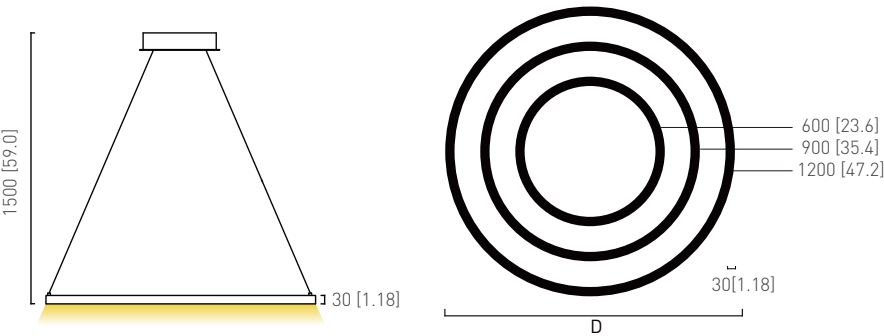

Unit:mm[in]

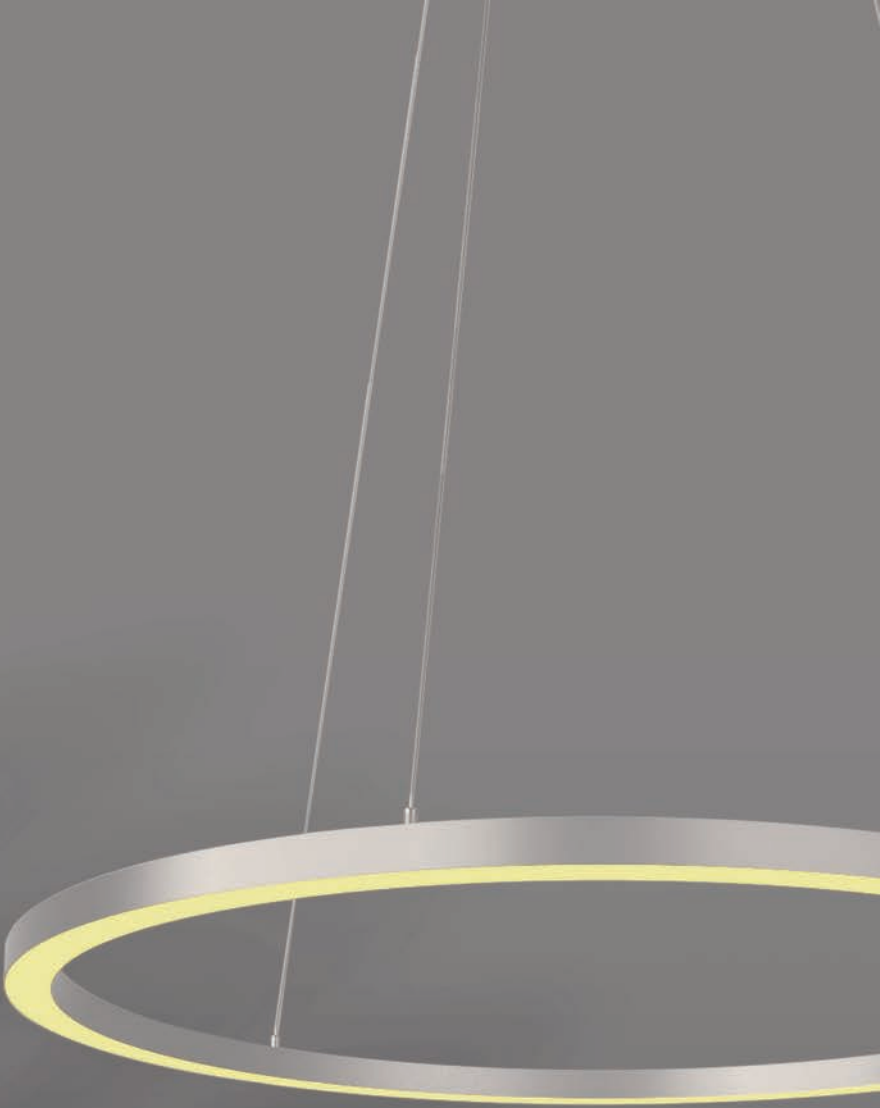

O20D
O20D RING LIGHT

O20D Ring light is built by Alu. extrusion fixture with Silicone lens. It's creating smooth and comfort lighting without spot.
It can be combined with Acoustic PET Panels for the Lighting + Sound Management system.
The light sourced are available up to 95+ Ra. Color temperature options from 2700K to 6500K, Dual white at WW+NW available. DMX dimmable available.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color available

Applications
Indoor - Resting Zone, Reception, etc.

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
O20D	W- White	S- Silicone	6- ϕ600mm	3- 3 Step MacAdam Ellipse	27- 2700K	80- 80+ CRI	P- Pendant	22- IP22	D1- DALI
	B- Black		9- ϕ900mm		30- 3000K	90- 90+ CRI			D2- 0-10V
	S- Silver		12- ϕ1200mm		35- 3500K	95- 95+ CRI			D3- On/off
				5- 5 Step MacAdam Ellips	40- 4000K				
					50- 5000K				
					60- 6000K				
					65- 6500K				

1. Blueview’s standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


SPECIFICATION

Voltage	220V-240VAC / 100V-240 VAC		
Width / Height	20 × 20mm		
Diameter	ϕ600mm	ϕ900mm	ϕ1200mm
Power (W/m /ft)	25W/pc	35 W/pc	70 W/pc
Efficacy Up to	80lm/w	80lm/w	80lm/w
Control	Dali , 0-10V, on/off		

LED CHIPS & DRIVER OPTIONS



DIMENSIONS

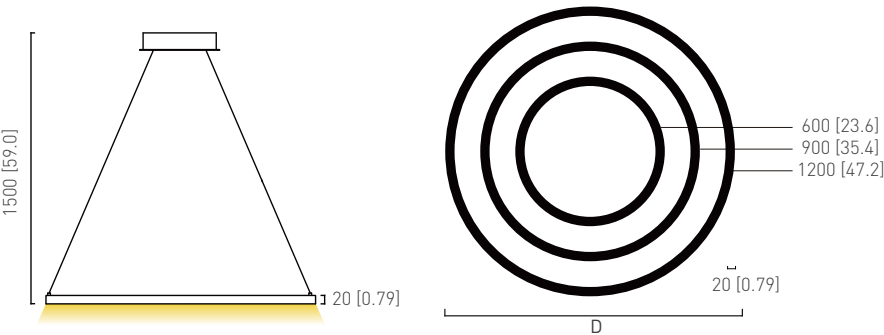

O600610P


O600610P 360DEG ROUND PENDANT LINEAR LIGHT

O600610P is linear LED lighting fixture that features a 360° lighting. It’s mostly simulating the natural lighting enviroment.
Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V, Triac type. Fixture lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available in 19.6ft.

Finish
Aluminum clear matt anodized
White / Black powder coating
Customized RAL color availableg

Applications
Indoor - Office, Educational Institiutions, Conference Rooms and many other workspaces.

O600610P
360DEG LINEAR LIGHT

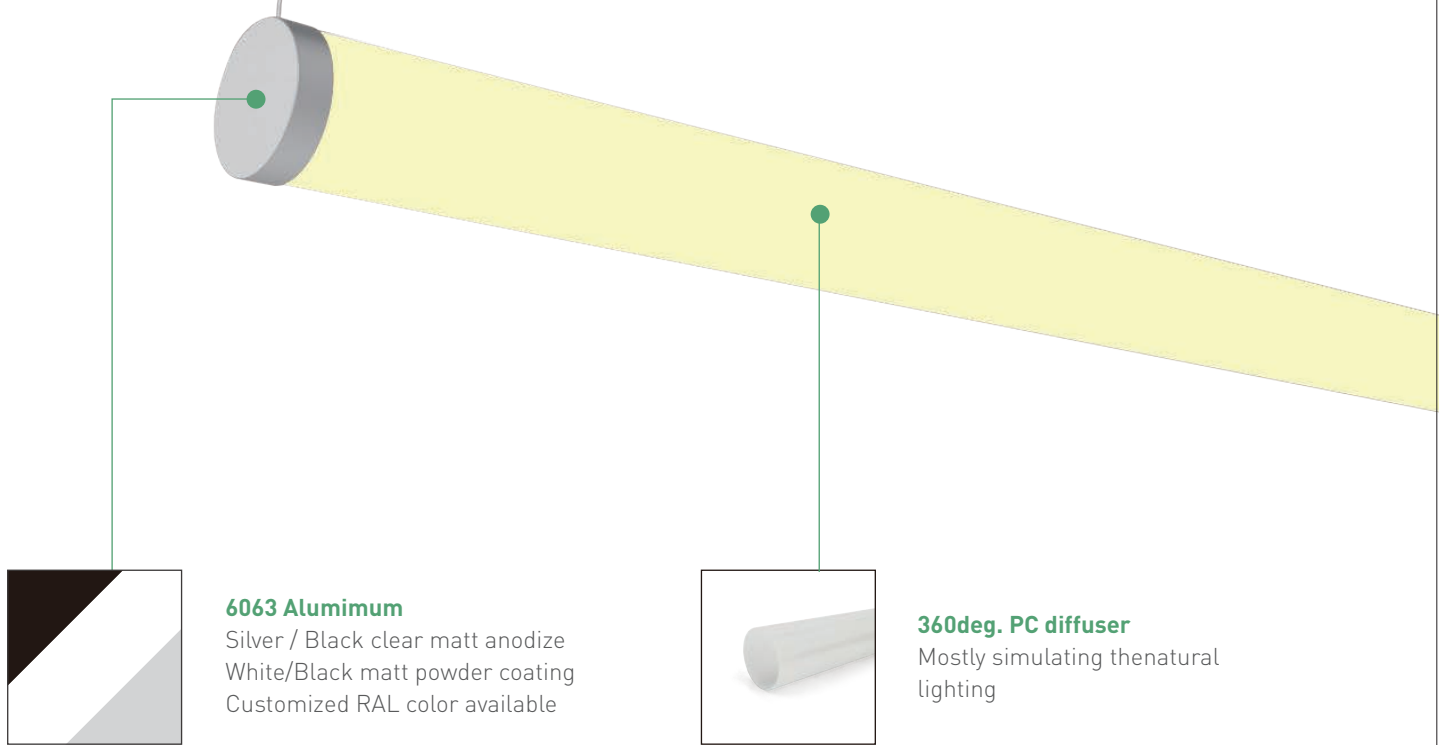

O600610P
360DEG LINEAR LIGHT

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
O600610P	W- White B- Black S- Silver	D- Diffuser	2- 630mm 4- 1230mm 5- 1530mm 6- 1830mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	85- 85+ CRI 90- 90+ CRI 95- 95+ CRI	P- Vertical Pendant HP- Horizontal Pendant	22- IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


SPECIFICATION

Voltage	220V-240VAC / 100V-240 VAC			
Width / Height	φ 63mm			
Length	630mm	1230mm	1530mm	1830mm
Power (W/m /ft)	13 W/pc	27 W/pc	33.5 W/pc	40 W/pc
Efficacy Up to	100lm/w	108lm/w	108lm/w	108lm/w
Control	Dali , 0-10V, on/off			

LED CHIPS & DRIVER OPTIONS



INSTALLATION

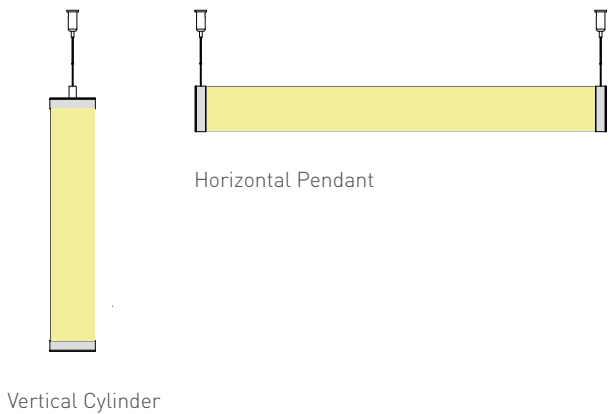

ACCESSORIES



SPECIFICATIONS

COLOR TEMPERAYURE		LUMEN / LENGTH			
RA 80	2700K	1235lm / 600mm	2770lm / 1200mm	2864lm / 1500mm	4104lm / 1800mm
	3000K	1235lm / 600mm	2770lm / 1200mm	2864lm / 1500mm	4104lm / 1800mm
	3500K	1235lm / 600mm	2770lm / 1200mm	2864lm / 1500mm	4104lm / 1800mm
	4000K	1300lm / 600mm	2916lm / 1200mm	3015lm / 1500mm	4320lm / 1800mm
	5000K	1300lm / 600mm	2916lm / 1200mm	3015lm / 1500mm	4320lm / 1800mm
	6000K	1300lm / 600mm	2916lm / 1200mm	3015lm / 1500mm	4320lm / 1800mm
	6500K	1300lm / 600mm	2916lm / 1200mm	3015lm / 1500mm	4320lm / 1800mm
RA 90	2700K	1112lm / 600mm	2216lm / 1200mm	2291lm / 1500mm	3283lm / 1800mm
	3000K	1112lm / 600mm	2216lm / 1200mm	2291lm / 1500mm	3283lm / 1800mm
	3500K	1112lm / 600mm	2216lm / 1200mm	2291lm / 1500mm	3283lm / 1800mm
	4000K	1170lm / 600mm	2333lm / 1200mm	2412lm / 1500mm	3456lm / 1800mm
	5000K	1170lm / 600mm	2333lm / 1200mm	2412lm / 1500mm	3456lm / 1800mm
	5500K	1170lm / 600mm	2333lm / 1200mm	2412lm / 1500mm	3456lm / 1800mm
	6500K	1170lm / 600mm	2333lm / 1200mm	2412lm / 1500mm	3456lm / 1800mm
RA 95	2700K	1000lm / 600mm	1995lm / 1200mm	2062lm / 1500mm	2955lm / 1800mm
	3000K	1000lm / 600mm	1995lm / 1200mm	2062lm / 1500mm	2955lm / 1800mm
	3500K	1000lm / 600mm	1995lm / 1200mm	2062lm / 1500mm	2955lm / 1800mm
	4000K	1053lm / 600mm	2100lm / 1200mm	2171lm / 1500mm	3110lm / 1800mm
	6500K	1053lm / 600mm	2100lm / 1200mm	2171lm / 1500mm	3110lm / 1800mm

- Note:
- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light out put and electrical power can vary up to 10%.
 - 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
 - Above data based on Non-Dimmable for all luminaires.
 - More customized LED and CCT available.
 - LM-80, IES TM-30-15 testing report available for led.

DIMENSIONS

