





Version: **A1.1**

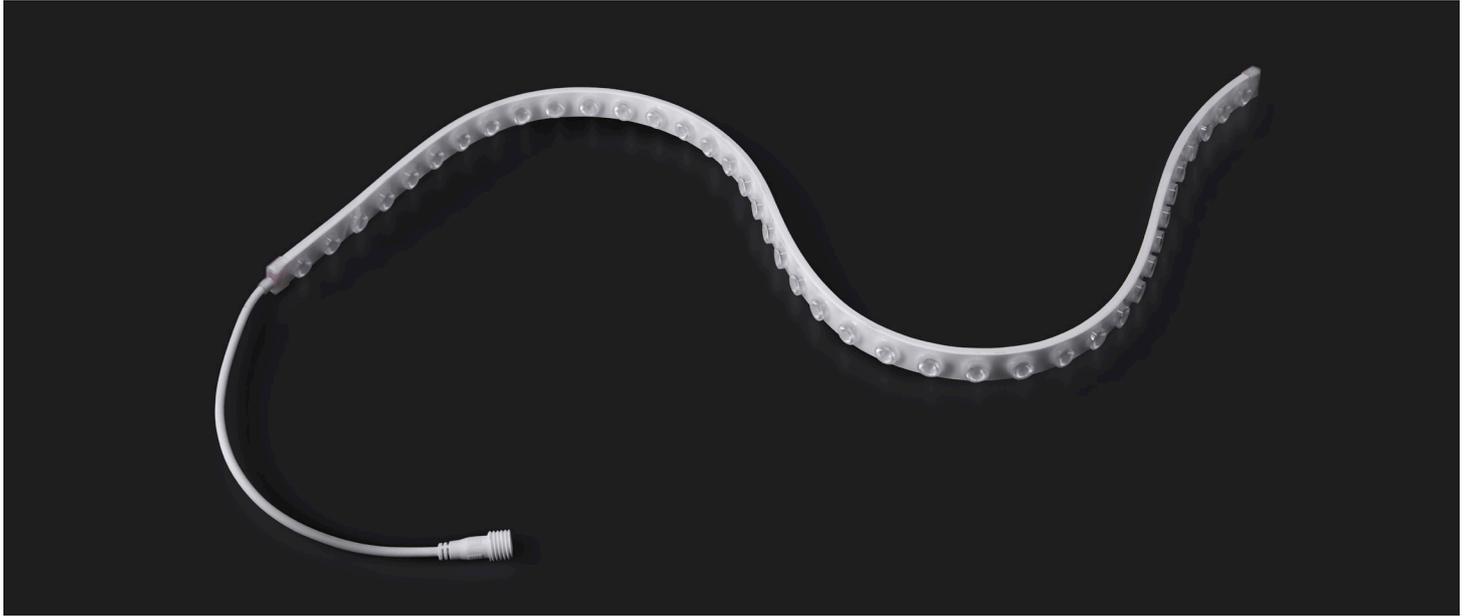

Features

- Every 2 LEDs have a cutting position
- Good attenuation performance, long service life
- Bending diameter: 300mm
- Reach distance: 2.5m
- Warranty: 3 years outdoors, 5 years indoors
- Good flexibility, can be properly bent
- Multi specifications, support customization

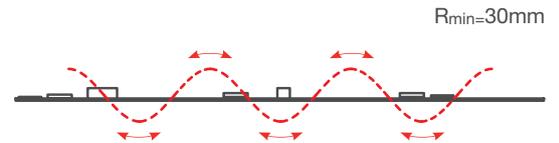

Application

- Can be used for indoor / outdoor decoration and other special occasions

Installation

- Screws, clips or adhesive tape

Optical & Electrical Parameters

| Model No. | Voltage | Ra | CCT | LM/m | LM/W | W/m |
|--------------|---------|-----|----------|------|------|------|
| FO2835-40-24 | 24V DC | >80 | ■ 2700K | 1410 | 98 | 14.4 |
| | | | ■ 3000K | 1440 | 100 | |
| | | | ■ 4000K | 1510 | 105 | |
| | | | □ 6500 K | 1440 | 100 | |

Other Parameters

| Model No. | LED QTY (pcs/m) | No Brightness Difference MAX | Min Cuttable Length | TA | Storage Temperature |
|--------------|-----------------|------------------------------|---------------------|------------|---------------------|
| FO2835-40-24 | 40 | 7.0m | 50.0mm | -20~+60 °C | -20~+70 °C |

NOTE:

- The above data was measured under standard conditions and actual data may be different. We would update data without further notice.
- The luminous flux was tested while the corresponding-color products were lightened.
- UL max run refers to operating length at UL class II @100W.24V.
- Luminous flux values were measured accordance to IES LM-80-08. LED chips with tolerance range of +/- 10%.
- Each maximum-run requires a dedicated power feed from the driver. Do not exceed the recommended maximum run length. Max run may exceed Class 2 limits.
- Actual wattage may be different from the calculated wattage due to voltage drop while using.
- Actual efficacy value is determined by the specific LED driver (power supply). An estimated efficacy value can be calculated as follows: Luminous intensity divided by average power consumption.
- Do not install products in the conditions that exceed the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, luminous intensity output, and/or adversely impact color consistency.
- Operating temperature was measured under the minimum and maximum ambient temperature environment.
- Cutting segments are marked on the profiles below.
- If the product power is greater than 15W, auxiliary heat dissipation appliances must be added.
- If the product power is greater than 14.4W/m, auxiliary heat dissipation appliances must be added.

Performance


- LED chip data measured in accordance to IES LM-80-08.
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Blueview 's TUV Innovation Lab.

Compliance & Regulatory Approvals

| | | |
|--|-----------|--|
| | CE LVD | Standard: EN 60598-2-21: 2015; EN 60598-1: 2015; EN 62471: 2008; EN 62493:2015; EN 62031: 2015+A1: 2013+A2: 2015 |
| | CE EMC | Standard: EN IEC 55015: 2019; EN IEC 61000-3-2: 2019; EN 61000-3-3:2013+A1: 2019;EN 61547: 2009 |
| | CB | Standard: IEC 62031:2018 |
| | UL LISTED | Standard: UL 2108 E354137-Low-voltage Lighting Systems, Power Units, Luminaires and Fittings |
| | RoHS | Standard: IEC62321 |

Profile Drawings

Unit: mm [inch]


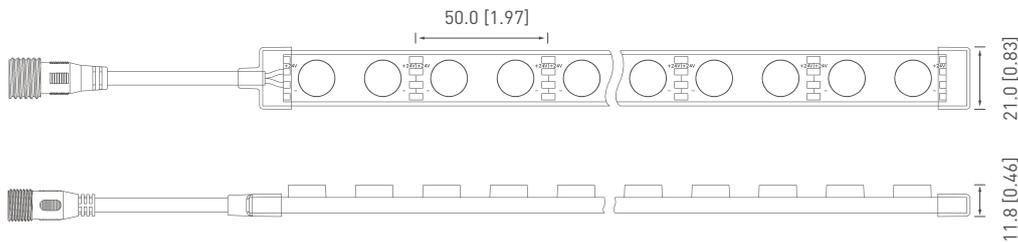


Note:

- For LED quantity less than 160leds/m with standard power, we recommend to use 20AWG parallel wire/sheathed cable with wire length less than 20cm, user need to reduce the max run when the wire length more than 20cm.
- For LED quantity more than 160leds/m with standard power, we recommend to use 18AWG parallel wire/sheathed cable in single feed, or 20AWG parallel wire or sheathed cable in both ends with wire length less than 20cm. Users need to reduce the max run properly when the wire length more than 20cm.
- Above conditions are only applicable to products with the PCB width of 10mm or more, for other width needs to be evaluated separately.

Luminous Intensity Distribution Diagram

Average Illumination

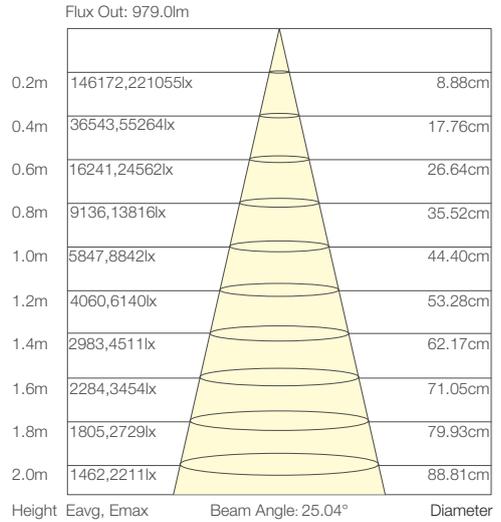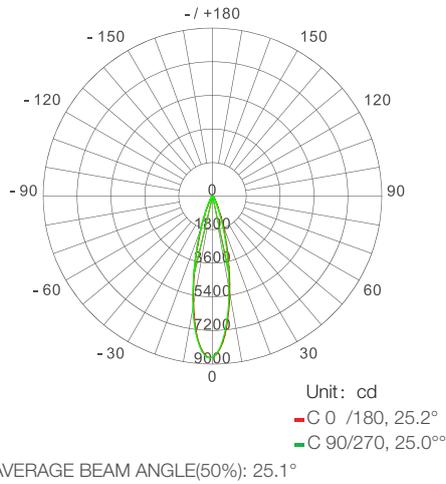

Note: above data tested with FO2835-40-24-30°, for other data, please consult sales rep.


Reliability test

| Project | Reference standards | Category | Test conditions | Outcome |
|--------------------|---------------------|----------------------------------|---|---------|
| Environmental test | Blueview standard | PTC test | Test temperature -40°C to 60°C, cycle every 2h (temperature holding time 15min, heating and cooling time 45min) | Pass |
| | | High temperature and heat test | TH = 60°C, RH=90%, continuous cycle lighting | |
| | | High temperature resistance test | TH=60°C, continuous power on | |
| | | Room temperature aging test | TH=25°C, continuous power on | |
| | | Salt spray corrosion test | Salt solution 5% concentration, simulating TH=35°C working environment | |
| | | UV test | TH=60°C, UVB: 280nm~315nm | |
| | | Rain test | exposed to rain for 12 hours every day, and shifting the switch every hour | |
| Other testing | Blueview standard | Flame retardant test | Placed the sample vertically in the needle flame tester, the flame lasted for 10s and then observe the self-extinguishing time of the sample. | Pass |
| | | Twisting test | Rated voltage lit, forward and reverse rotation 360 degrees each, a total of 10 times | Pass |
| | | Waterproof test | Underwater, depth 1m/30min | IP67 |


Recommended power supply upon working length

| FO2835-40-24 | | | | | |
|------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Operating Length (m) | 1.0 | 2.0 | 3.0 | 4.0 | 5.0 |
| Total Power (W) | 14.40 | 48.48 | 71.76 | 94.08 | 116.4 |
| Head-to-tail Voltage Drop Rate (%) | 0.63 | 1.54 | 2.58 | 3.96 | 5.21 |
| Head-to-tail Current Drop Rate (%) | 1.60 | 3.40 | 6.10 | 8.60 | 11.50 |
| Single/Double feed | Single feed | Single feed | Single feed | Single feed | Single feed |

Packaging Information




Roll up the product




Wrap the product tightly with PE film and put it into a bag




Put the packed product into a box



Put the box into another bigger carton box



Label the box;



Use packing belt to pack.


Packaging information

| Model No. | Product Size L*W*H (mm) | Carton Size (mm) | Meter/Reel | Reel/Carton | Net Weight (kg) | Gross Weight (kg) |
|--------------|-------------------------|------------------|------------|-------------|-----------------|-------------------|
| FO2835-40-24 | 5000*21*11.8 | 390*390*325 | 5 | 10 | 8.65 (1±10%) | 12.50 (1±10%) |

NOTE:

- The above quantity and weight are only for the illustrated packaging method. There will be differences in the quantity and weight with other packaging methods.
- The gross weights of all above model are less than volume weight, the volume weight is 14.96kg.

Installation



LED power supply



Cutter



Screw




Electric drill




Clips


Installation Methods and Steps

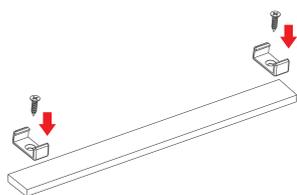

Fixed the mounting clips

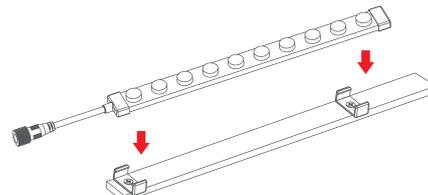


Press the light strip into the mounting clip



Finished

Wiring diagram

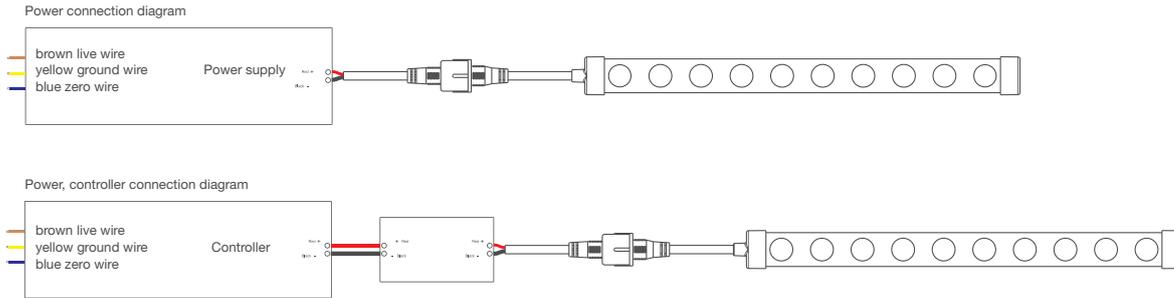

Note: double feed means additional power supply is required, more info, please contact sales rep

Attentions before installation

- Check whether the power line is screwed into the terminal firmly, and it is better not to pull it out by hand.
- Before installation, check that the product parameters are consistent with the requirements (Seeing product specifications or product labels)
- Load voltage, current, power and power supply should be matched with the product.
- Follow the instructions of wiring diagram (first connect the load and then the power supply) to avoid short circuit.
- Make sure the correct connection of positive and negative poles between products and power supply. Otherwise, the light will not be on.
- The wiring terminal must be provided with effective waterproof and anti-corrosion treatment.
- For non-waterproof strips, if the use length exceeds max run length, extra power supply is needed.
- For non-waterproof strips, if single lamp bead exceeds the regular current, please add auxiliary heat dissipation.

Common Faults and Troubleshoot

| Quick Guide | | |
|---|--|--|
| Problems | Reasons | Solutions |
| All LEDs can not light on. | No electric supply. | Fix the short circuit problem. |
| | Automatic power protection from the open or short circuit in output of the power supply. | |
| | Wrong connection of power supply. | |
| LEDs can not light on partly. | Some switching mode power supplies are not powered. | Correctly connection. |
| | Power supply line error. | |
| | Mistaken wire connection of some of products | |
| Brightness of LED is inconsistent tor insufficient. | Power overloaded. | Replace with more powerful power. |
| | Power supply circuit excessive consumption. | Make sure the working voltage of the product within $\pm 5\%$ of standard voltage, or keep balance by circuit power consumption. |
| | Excessive quantities in series connection of the product | Reduce the quantities of the product in series connection to meet requirement. |
| LED flicker. | Connection point fault. | Remove bad connection point. |
| | Switching power supply failure. | Replace a new power supply. |
| | Wrong Installation or use of products | Please follow the instructions |

Warning

- Do not disassemble or retrofit the light. Do not touch the surface of the light with a sharp object.
- Do not do live-line working during installation, especially for high voltage product.
- Do not use any organic chemical solvents.
- Use neutral glass adhesive to fix this product and it needs to be dried 4 hours in the open environment after operation.
- Treat the ends and the circuit connection points that are not connected to the main line with insulation, waterproof, and anti-corrosion in the installation.
- Use 18AWG (0.75mm² cross-sectional area) or thicker core wire to avoid adverse consequences caused by overheating, if the power cable need to lengthen.
- Make sure the input voltage meets the requirements and lines are connected correctly before lighting on.
- This product is for signage, and do not use as general lighting.
- Series connection within the max run.
- The length of the power cable between the power supply and the led strip should not exceed 2 meters. Otherwise, large circuit loss will lead to inconsistent brightness.
- Installation, maintenance and repair should be operated by a qualified technician.

Statements and Recycling

Statements:

- Repair should be operated by a qualified technician, if the external circuit or main line of this product is damaged.
- The parameters given in this manual are typical values and for reference only.
- All illustrations and drawings in this manual are for reference.
- This product is subject to change without notice.

Recycling:

- LED lighting products belongs to electronic products, please do recycling treatment according to the relevant WEEE directives.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011
 Fax: +86-28-8148 1258

Web.: www.blueviewled.com
 Email: sales@blueviewled.com

Add.: No. 1000, Section 2, Konggang 2nd Road, Shuangliu, Chengdu 610207, Sichuan, CHINA