

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Add: No. 1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Web: www.blueviewled.com Shuangliu, Chengdu, Sichuan, China.610207

BVINSPIRATION LINEAR DIVISION

Mail: support@inspiration.com Add: No. 1 TianQin St., Wusha Industrial Zone, Web: www.bvinspiration.com Henglan Town, ZhongShan, Guangdong, China



LINEAR LIGHTING

BLUEVIEW LINEAR LIGHT 2023

/ About us

BVInspiration is a brand extension of Blueview established in 2016 which specializes in commercial architectural luminaires. We deliver high-performance led luminaires for offices, commercial, educational institution, recreational and hospitality spaces. We provide a range of innovative solutions to satisfy most of our client's ever-changing requirement of today's project including design and build-to-order custom lighting solutions. BVInspiration is the best in class for our for ward-thinking capabilities and innovativeness. We work closely with our clients and stakeholders to develop products that are in trend to deliver functional and aesthetical advantages. All of our products are designed and engineered with the principles of captivating, ease of installation, usage and maintenance.

/Why BVInspiration

Our product's engineering design was covered every link from material, production feasibility, transportation, inventory, to in field installation. We are in close contact with designers, suppliers, and assembly workers to build products that are realistic, superior in design, functionality, and flexible luminaire systems.

We provide more optical options with direct lighting, direct & indirect lighting, asymmetric, double asymmetric lighting with PC/ PMMA lens, TIR lens, reflector, louver. Beam angle from 15° to 110°. More led options in CRI 95+, 90+ in around 10 CCT options from 1800k to 6500k, dual white, tunable white, dim to warm. More dimming methods 0-10V, DALI, DMX, triac forward/ reverse phase.

BVINSPIRATION INTRODUCE













Reasons to choose blueview linear lighting

BEST-IN-CLASS SERVICES

- Customized spec support, private label service
- 24 hours response policy
- Solution offering with result-oriented
- Technical, Sales, Marketing team service

EXPERIENCE YOU CAN TURST

- Aiming to long-term partner relationship
- Focus on the advantage LED manufacturing technology
- Serving for High-end Market over since 2004, 972 employees
- Over than 55 million US Dollar annual sales

CLASSIC ENGINEERING DESIGN

- Modular system offers more than million variations
- Blue light harzard less lighting source
- Min labor cost on installation & maintenance

HIGH STANDARD QUALITY CONTROL


- Min labor cost on installation & maintenance
- Operations accredited to ISO 9001:2008
- 50% overseas sales in North America, all products meet all regulatory requirements including Title 24 and other unique standards
- Over than 20 process on reliability testing for one item

ODM & OEM AVAILIABLE

- 55 Engineers team
- Over than 50 R&D Patents
- Strong Supply Chain System

CONTENT

- 01 INTRODUCTION
- 05 GRAZER BVG SERIES
- 13 SLIM SERIES
- 27 LUZ SERIES
- 38 HONG DIRECT & INDIRECT
- 43 HILA DIRECT & INDIRECT
- 47 ZOLI EXTERNAL DRIVER
- 58 OLI 360DEG. ROUND
- 61 RING LIGHT SERIES

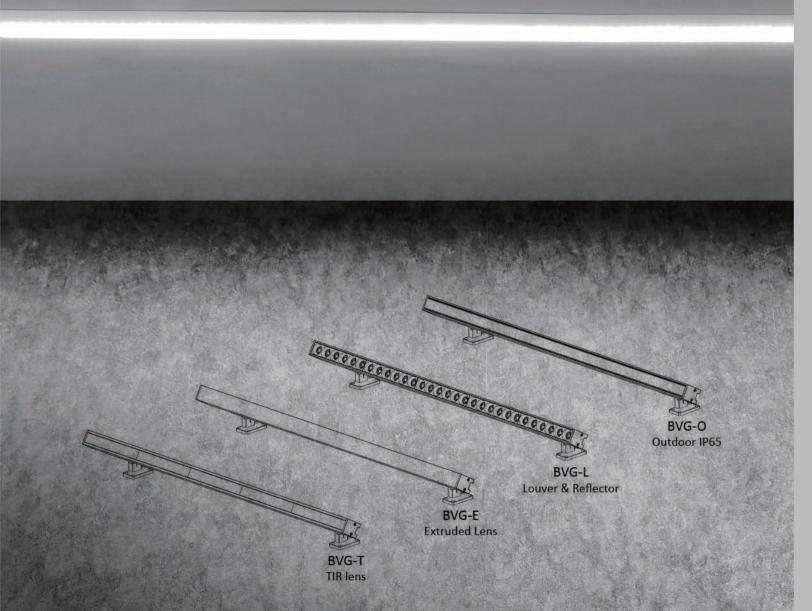

GRAZER-BVG Interior & Outdoor


Blueview's BVG GRAZER linear lighting has: BVG-O: outdoor IP65 type, BVG-T: interior grazer TIR lens type, BVG-L: louver lens, BVG-E: extruded lens. It's a family designed to highlight textures both subtle and bold, as well as everything in between. It's a great tool for creating eye-catching walls within a space.

GRAZER-BVG

BVG can be installed by surface mounting swivel bracket, which it can be satisfy in various different applications.

Easy operation by marked angle for alignment. Rotating angle from -80° to 80°

Installations

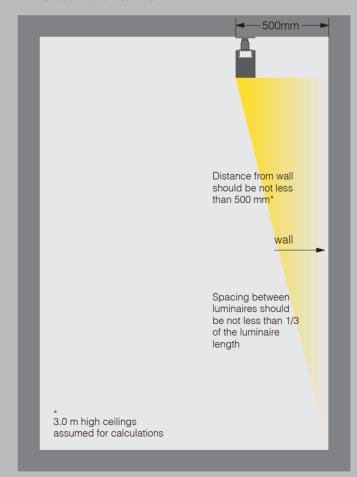

CEILING MOUNTED





SWIVEL BRACKET





-80°~80° adjustable

BVG-L LOUVER OPTICAL INTERIOR LINEAR LIGHT

GRAZER-BVG BVG-L LOUVER OPTICAL INTERIOR LINEAR LIGHT


BVG-L


Reflector louver

BVG-L is an interior grazer engineering design with louver and reflector optical kits, It's offering low UGR value which is less than 12. More color options in matt black, matt white, silver, golden, chrome plating of the louver.







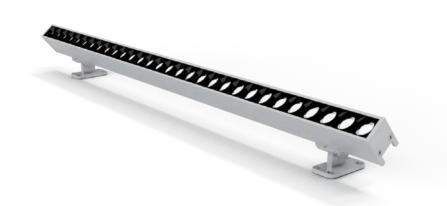

SPECIFICATIONS

Finish	Lens	Installations
	Reflector louver	Ceiling mounted , Swivel bracket
Width / Hight		Length Max
25mm × 35mm		2.4m, Customized
Efficacy up to		Power
90lm/W		15W/m
Color Quality		CRI
3-step MacAdam , 5-step MacAdam		80+, 90+
		Voltage
Color Temperature [T	Tunable White]	24VDC
2700K 3000K 3500K	4000K 5000K 6000K 6500K	Control
		On/off
		IP Grade
Optical Dimension		IP22
$\bigcirc(\bigcirc)\bigcirc(\bigcirc)$	19 10 10 10 10 10 10 10 10 10 10 10 10 10	LED Chips And Driver Options
114	[4.50]	NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD

^{1.} Blueview's standard is 3-Step MacAdam

^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.

GRAZER-BVG

BVG-E EXTRUDER LENS INTERIOR LINEAR LIGHT

GRAZER-BVG BVG-E EXTRUDER LENS INTERIOR LINEAR LIGHT

BVG-E

Extruded lens

BVG-E is an interior grazer engineering design with extruded PMMA lens. It's flexible in cutting in any length, it's able to match most of the light source in the market.

Beam angle










Extremely Flood 130°x 110°

Flood 90°x 110°



—25.5 [1.0] –



SPECIFICATIONS

Finish	Lens	Installations
	Extruded lens	Ceiling mounted , Swivel bracket
Width / Hight		Length Max
25mm × 35mm		5m , Custom length 100mm increments
Efficacy up to		Power
100lm/W		14.4W/pc
Color Quality		CRI
3-step MacAdam , 5-step MacAdam		80+,90+
		Voltage
Color Temperature [Tunable White]		24VDC
2700K 3000K 3500K 4000	OK 5000K 6000K 6500K	Control
		On/off
		IP Grade
Optical Dimension		IP22
,		LED Chips And Driver Options
	32.2 [1.26]	NICHIA , EPISTAR , SAMSUNG
		TRIDONIC, OSRAM, LIFUD
		I .

^{1.} Blueview's standard is 3-Step MacAdam

^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.

GRAZER-BVGBVG-0 OUTDOOR & BVG-T INTERIOR TIR LENS LINEAR LIGHT





SPECIFICATIONS

Finish	Lens Precision TIR lens	Installations Ceiling mounted , Swivel bracket
Width / Hight [BVG-O] 29mm×39mm , [BVG-T] 25mm×35mm		Length Max 1207mm , Custom length 120mm increments
Efficacy up to 100lm/W		Power 18.75W/pc
Color Quality 3-step MacAdam , 5-step Mac	Adam	CRI 80+, 90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 24VDC
		Control On/off
Optical Dimension Optical Dimension Optic		IP Grade
		LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
- 3. For more options, pls. check with your executive sales.


BVG-O BVG-T





Jnit:mm[ir


Beam angle

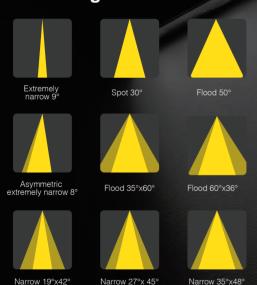

Precision TIR Lens

BVG-O and BVG-T are both engineering design with 12 optical lens options from Narrow 9° to flood 35°x 48°, it provides a narrow optical and clean light beam to highlight wall textures without shadow and hotspot. Featuring injected high-efficiency acrylic precision TIR (total internal reflection) lens. It enhancethe wall textures from ceiling to floor.



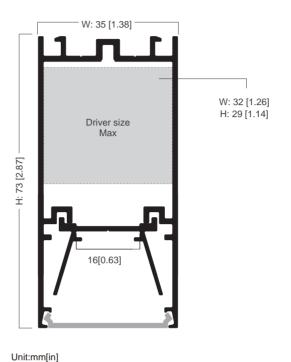

DIMENSIONS

U357216

Surface Installation (Pendant, Surface Mounted)









SLIM Surface & Trimed Recessed

Slim series is a linear LED lighting fixture, It can be built hundres option depends on the lighting environment requires based on various optical options. Optical options in PC, 15° / 30° / 45° / 50° / 50x50° / 35x75° louver or TIR lens plus the Wall washer are satisfying most of the application.

Driver size Max

W: 32 [1.26] H: 29 [1.14]

55[2.17]

U557316

Trimmed Recessed Installation





U3572/ U5573 CRYSTAL LOUVER LINEAR LIGHT

CRYSTAL LOUVER

5IN1 Crystal Louver creating UGR<19 comforting light. Available in 24°, 38° beam angles. Tunable white dimming from 1800k~6500k.












Tunable White 1800k~6500k

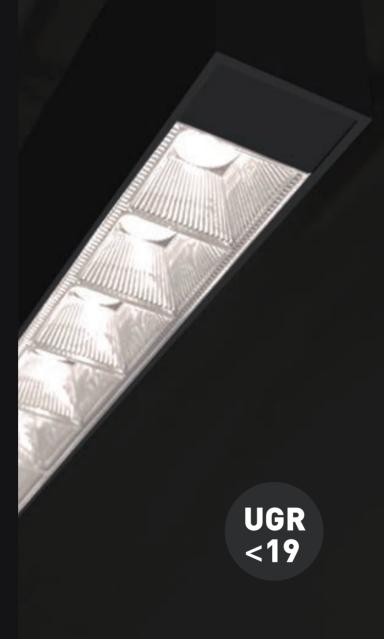



SPECIFICATION	S	
Finish	Lens	Installations
	Crystal louver	Pendant , Ceiling mounted , Trimed recessed
Width / Hight		Length
35mm×73mm , 55mm	×73mm	1200mm with 4sets crystal louver kit , Customized
Efficacy up to		Power
90lm/W		21W/pc
Color Quality		CRI
3-step MacAdam , 5-step MacAdam		80+,90+
		Voltage
Color Temperature [Tu	nable write j	220-240 VAC , 100-277 VAC
2700K 3000K 3500K	4000K 5000K 6000K 6500K	Control
		DALI, 0-10V, On/off
		IP Grade
Optical Dimension Recommendation		IP22
		LED Chips And Driver Options
		NICHIA , EPISTAR , SAMSUNG
102.0	[0.2]	TRIDONIC, OSRAM, LIFUD

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
- 3. For more options, pls. check with your executive sales.

SLIM OPTICAL

DIFFUSER & SILICONE



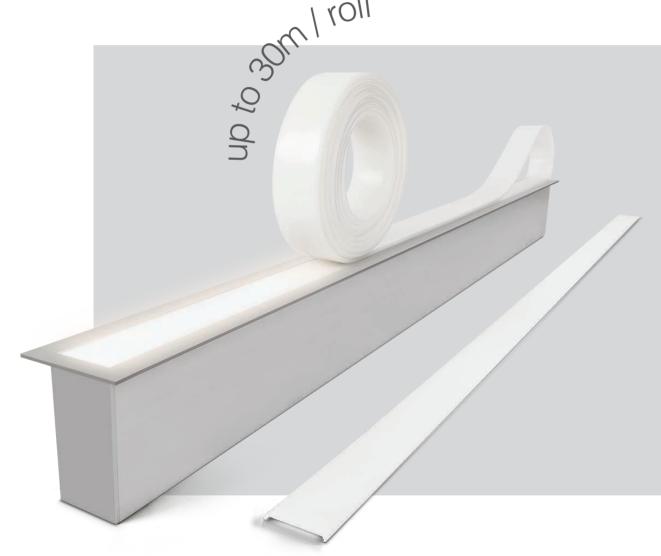


Silicone lens up to 30m/pc, Gapless joining for any length luminaires and applications.

SLIM SERIES
U3572/ U5573 SILICONE & PC DIFFUSER LINEAR LIGHT



SPECIFICATIONS			
Finish	Lens	Installations	
	Silicone , PC Diffuser	Pendant , Ceiling mounted , Trimed recessed	
Width / Hight		Length	
35mm×73mm , 55mm×73mm		1200mm , 1500mm , 2400mm	
Efficacy up to		Power	
70lm/W [silicone lens] , 90lm/V	N [pc diffuser]	23W/pc , 27W/pc , 46.5W/pc	
Color Quality		CRI	
3-step MacAdam , 5-step MacAdam		80+,90+	
		Voltage	
Color Temperature [Tunable Wi	nite]	220-240 VAC , 100-277 VAC	
2700K 3000K 3500K 4000K	5000K 6000K 6500K	Control	
		DALI, 0-10V, On/off	
		IP Grade	
Optical Dimension		IP22	
32.2 [1.26]	32.2 [1.26]	LED Chips And Driver Options	
		NICHIA , EPISTAR , SAMSUNG	
		TRIDONIC , OSRAM , LIFUD	

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
- 3. For more options, pls. check with your executive sales.

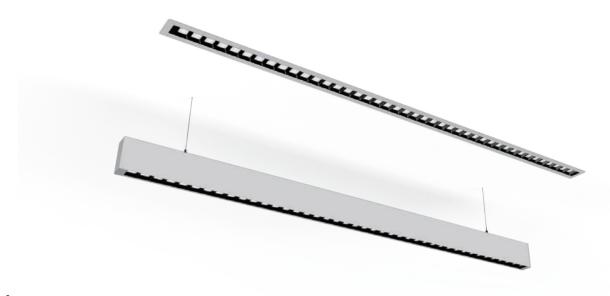

SPECIFICATIONS

Finish	Lens TRI Lens	Installations Pendant , Ceiling mounted , Trimed recessed
Width / Hight 35mm×73mm , 55mm×73mm		Length 1200mm , Customized
Efficacy up to 100lm/W		Power 21W/pc
Color Quality 3-step MacAdam , 5-step Mac	Adam	CRI 80+, 90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC , 100-277 VAC
		Control DALI , 0-10V , On/off
Optical Dimension 1176[46.3]		IP Grade
		LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD

^{1.} Blueview's standard is 3-Step MacAdam

SLIM OPTICAL **TIR LENS** Diamond 50°


^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.

U3572/ U5573 CONE LOUVER LINEAR LIGHT

CONE LOUVER



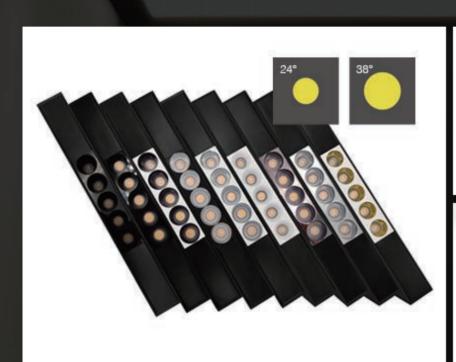





























5in1 flexible Cone louver set. Any length flexible as multiple of 132.5mm. Available in 24°,38° beam angles. Anti-glaring in General UGR<16, Hex louver UGR<8. Available Cone louver color in Matt Black, Matt White, Matt White+black, Matt White+Golden, Matt White+Chrome, Nickle, Chrome.



SPECIFICATIONS


Finish	Lens Cone louver	Installations Pendant , Ceiling mounted , Trimed recessed
Width / Hight 35mm×73mm, 55mm×73mm		Length 1200mm with 4sets cone louver kit, Customized
Efficacy up to 90lm/W		Power 21W/pc
Color Quality 3-step MacAdam , 5-step Mac	Adam	CRI 80+, 90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC , 100-277 VAC
		Control DALI , 0-10V , On/off
Optical Dimension		IP Grade
132.5 [5.2]	30 [1.18]	LED Chips And Driver Options NICHIA, EPISTAR, SAMSUNG TRIDONIC, OSRAM, LIFUD

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

3. For more options, pls. check with your executive sales.

U3572/ U5573 5in1 TIR LOUVER LINEAR LIGHT

5in1 flexible louver set. Any length flexible as multiple of 132.5mm. Available in 15°, 30°, 45°, Asymmetric wall washer beam angles. Anti-glaring in UGR<16.

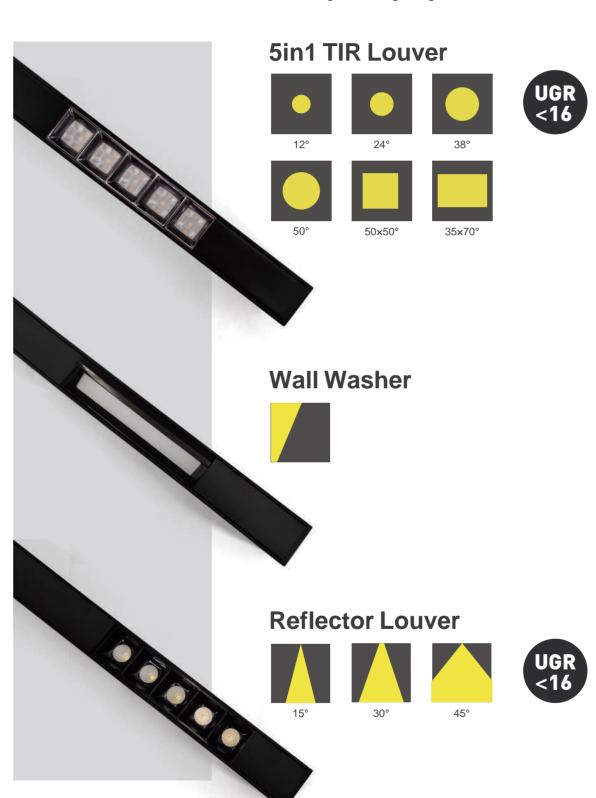



SPECIFICATIONS

0. 20. 10/(110110		
Finish	Lens	Installations
	5in1 TIR louver	Pendant , Ceiling mounted , Trimed recessed
Width / Hight		Length
35mm×73mm , 55mm×73mm		1200mm with 4sets TIR louver kit , Customized
Efficacy up to		Power
90lm/W		21W/pc
Color Quality		CRI
3-step MacAdam , 5-step MacAdam		80+,90+
		Voltage
Color Temperature [Tunable White]		220-240 VAC , 100-277 VAC
2700K 3000K 3500K 4000K 5000I	K 6000K 6500K	Control
		DALI , 0-10V , On/off
Outlied Discounting		IP Grade
Optical Dimension		IP22
	30[1.18]	LED Chips And Driver Options
132.5 [5.2]		NICHIA , EPISTAR , SAMSUNG
		TRIDONIC, OSRAM, LIFUD

^{1.} Blueview's standard is 3-Step MacAdam

^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.

U3572/ U5573 WALL WASHER LINEAR LIGHT




SPECIFICATIONS

	Lens Wall washer	Installations Pendant , Ceiling mounted , Trimed recessed
Width / Hight 35mm×73mm , 55mm×73mm		Length 1200mm with 4sets wall washer kit , Customized
Efficacy up to 70lm/W		Power 21W/pc
Color Quality 3-step MacAdam , 5-step MacAdan	n	CRI 80+,90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC , 100-277 VAC Control DALI , 0-10V , On/off
Optical Dimension		IP Grade
132.5 [5.2]	30 [1:18]	LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
- 3. For more options, pls. check with your executive sales.

SLIM SERIES

U3572/ U5573 REFLECTOR LOUVER LINEAR LIGHT

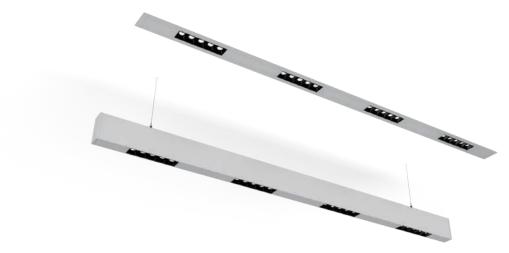

SPECIFICATIONS

or Edit Ida Hollo		
Finish	Lens Reflector louver	Installations Pendant , Ceiling mounted , Trimed recessed
Width / Hight 35mm×73mm , 55mm×73mm	I	Length 1200mm with 4sets reflector kit , Customized
Efficacy up to 90lm/W		Power 21W/pc
Color Quality 3-step MacAdam , 5-step Mac	:Adam	CRI 80+, 90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC , 100-277 VAC
		Control DALI , 0-10V , On/off
Optical Dimension		IP Grade
132.5 [5.2]	30 [1.18]	LED Chips And Driver Options NICHIA, EPISTAR, SAMSUNG TRIDONIC, OSRAM, LIFUD

^{1.} Blueview's standard is 3-Step MacAdam

^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips,

for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.



W: 40 [1.57] H: 35 [1.38] Driver size

DIMENSIONS

U508533


Surface Installation (Pendant, Surface Mounted, Wall Mounted)


Unit:mm[in]

U708533

-51 [2.00] -

Trimed Recessed Installation

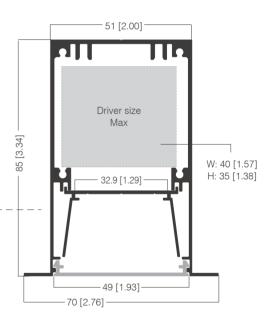

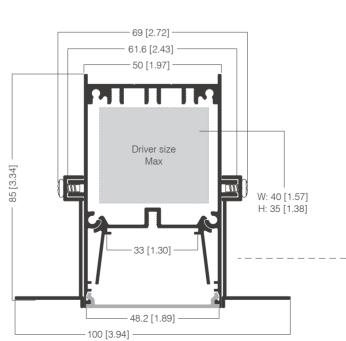


U1088533

Trimless Recessed Installation

LUZ Surface & Recessed Linear Light

MORE OPTICAL OPTIONS


- UGR <19 flush optical lens, PC lens, Anti glaring prismatic lens.
- 15° / 30° / 45° / 50° / 50x50° / 35x75° beam angle louver or TIR optical lens.
- Accurate injected lens in asymmetric, batwing, 60°, 90°.
- Wall washer.



Trimed Recessed



Trim-Less Recessed



Ceiling Mounted




Pendant



Wall Mounted

INSTALLATIONS

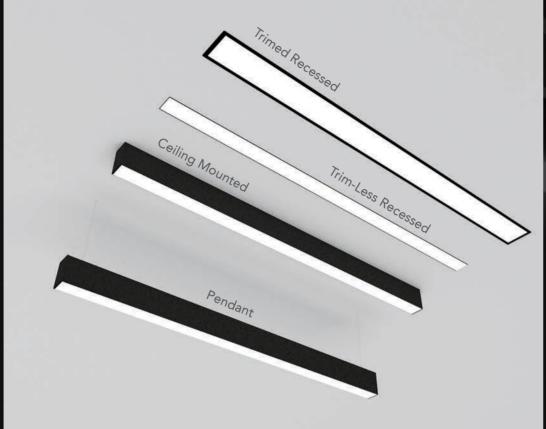




Diffuser




UGR<19 flush optical kit creating the most human friendly lighting.



Prismatic lens available for anti-glaring lighting requirements.

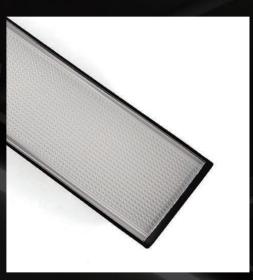

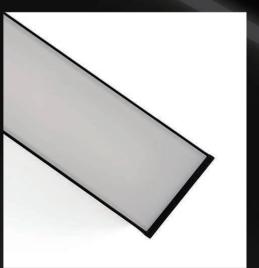

General PC lens with high transmission.

LUZ SERIES

U5085/ U7085/ U10085 DIFFUSER LINEAR LIGHT

SPECIFICA	TIONS	I
Finish	Lens	Installations
	Anti-glare film , Prismetic lens , Diffuser	Pendant , Ceiling mounted , Wall mounted Trimed recessed , Trimless recessed
Width / Hight		Length
51mm×85mm ,	, 70mm×85mm , 100mm×85mm	1200mm , 1500mm , 2400mm , Customized
Efficacy up to		Power
100lm/W		31.1W/pc , 37.8W/pc , 62W/pc
Color Quality		CRI
3-step MacAda	am , 5-step MacAdam	80+,90+
		Voltage
Color Temperate	ure [Tunable White]	220-240 VAC , 100-277 VAC
2700K 3000K	3500K 4000K 5000K 6000K 6500K	Control
		DALI, 0-10V, On/off
Optiacl Dimensi	ion	IP Grade
	\	IP22
	48.5[1.91]	LED Chips And Driver Options
		NICHIA , EPISTAR , SAMSUNG


TRIDONIC, OSRAM, LIFUD

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
- 3. For more options, pls. check with your executive sales.

5IN1 louver optical kit is flexible in any multiple lengths as W30=132.5mm, W38=L190mm. Available in various beam angles which is most satisfying for lighting environments. The anti-glaring performance is up to UGR<16.



Reflector Louver-38mm

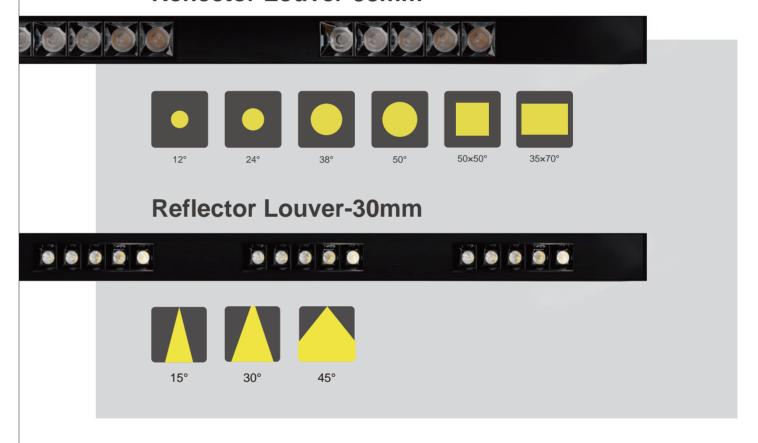


Wall Washer



LUZ SERIES

U5085/ U7085/ U10085 REFLECTOR LOUVER LINEAR LIGHT

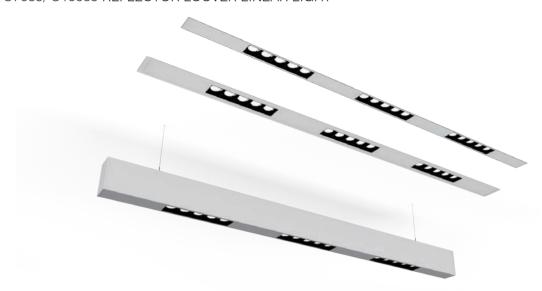

SPECIFICATIONS

	Reflector louver-38mm	Pendant , Ceiling mounted , Wall mounted Trimed recessed , Trimless recessed
Width / Hight		Length
51mm×85mm , 70mm×85mm	, 100mm×85mm	1200mm with 3sets reflector kit , Customized
Efficacy up to		Power
90lm/W		23W/pc
Color Quality		CRI
3-step MacAdam , 5-step MacAdam		80+ , 90+
		Voltage
Color Temperature [Tunable Wi	nite]	220-240 VAC , 100-277 VAC
2700K 3000K 3500K 4000K 5000K 6000K 6500K		Control
		DALI, 0-10V, On/off
		IP Grade
Optical Dimension		IP22
		LED Chips And Driver Options
190 [7.48]		NICHIA , EPISTAR , SAMSUNG

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
- 3. For more options, pls. check with your executive sales.

LUZ SERIES

U5085/ U7085/ U10085 REFLECTOR LOUVER LINEAR LIGHT



SPECIFICATIONS


SPECIFICATIONS		
Finish	Lens	Installations
	Reflector louver-30mm	Pendant , Ceiling mounted , Wall mounted Trimed recessed , Trimless recessed
Width / Hight		Length
51mm×85mm , 70mm×85r	nm , 100mm×85mm	1200mm with 4sets reflector kit , Customized
Efficacy up to		Power
90lm/W		23W/pc
Color Quality		CRI
3-step MacAdam , 5-step N	//acAdam	80+,90+
		Voltage
Color Temperature [Tunable	White]	220-240 VAC , 100-277 VAC
2700K 3000K 3500K 4000K 5000K 6000K 6500K		Control
		DALI, 0-10V, On/off
Optical Dimension		IP Grade
		IP22
		LED Chips And Driver Options
132.5 [5.2]	1	NICHIA , EPISTAR , SAMSUNG
		TRIDONIC, OSRAM, LIFUD

Blueview's standard is 3-Step MacAdam
 The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

3. For more options, pls. check with your executive sales.

LUZ SERIES

U5085/ U7085/ U10085 WALL WASHER LINEAR LIGHT

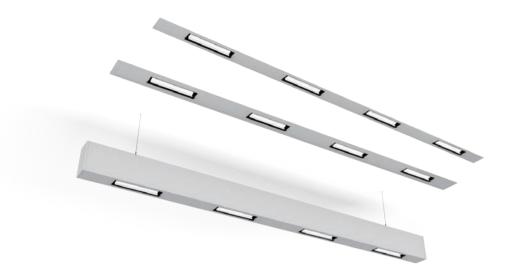

SPECIFICATIONS


Finish	Lens	Installations	
	Wall washer	Pendant , Ceiling mounted , Wall mounted Trimed recessed , Trimless recessed	
Width / Hight	,	Length	
51mm×85mm , 70mm×	85mm , 100mm×85mm	1200mm-with 4sets wall washer kit , Customized	
Efficacy up to		Power	
70lm/W		23W/pc	
Color Quality		CRI	
3-step MacAdam , 5-step MacAdam		80+ , 90+	
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC , 100-277 VAC	
		Control DALI , 0-10V , On/off	
Optical Dimension 190 [7.48]		IP Grade	
		LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD	

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Epistar Chips,
- for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. 3. For more options, pls. check with your executive sales.

LUZ OPTICAL


Accurate Injected Lens

Beam angle in Asymmetric, Batwing, 60°, 90°.

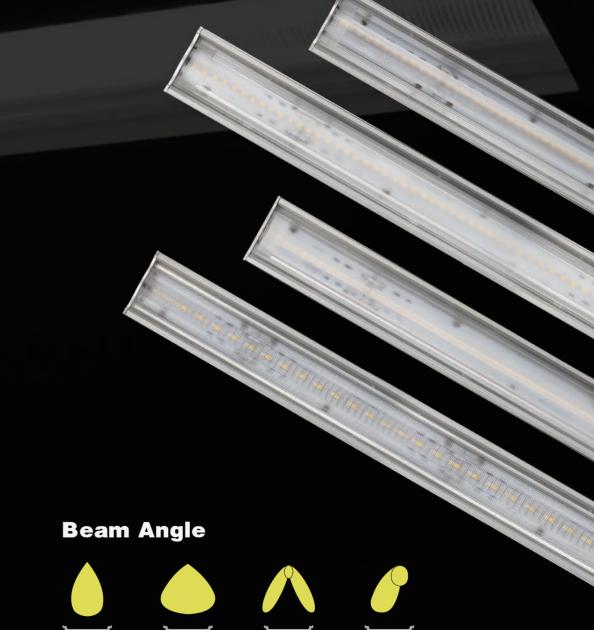

BATWING


ASYMMETRIC

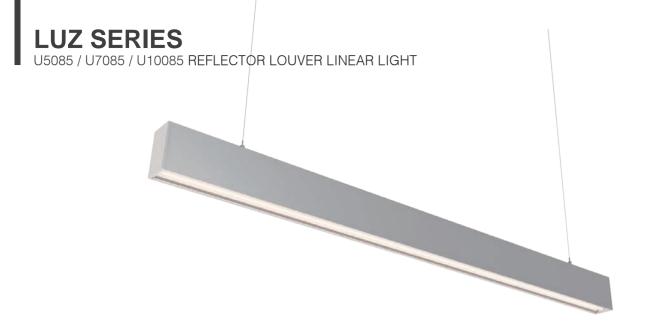

SPECIFICATIONS

Finish	Lens Accurate injected lens	Installations Pendant , Ceiling mounted , Wall mounted
Width / Hight 51mm×85mm		Length 1182mm
Efficacy up to 110lm/W		Power 26W/pc
Color Quality 3-step MacAdam , 5-step MacAdam		CRI 80+, 90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC , 100-277 VAC
		Control DALI, 0-10V, On/off
Optical Dimension		IP Grade
	39.5 [1.56] ====================================	LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD

^{1.} Blueview's standard is 3-Step MacAdam

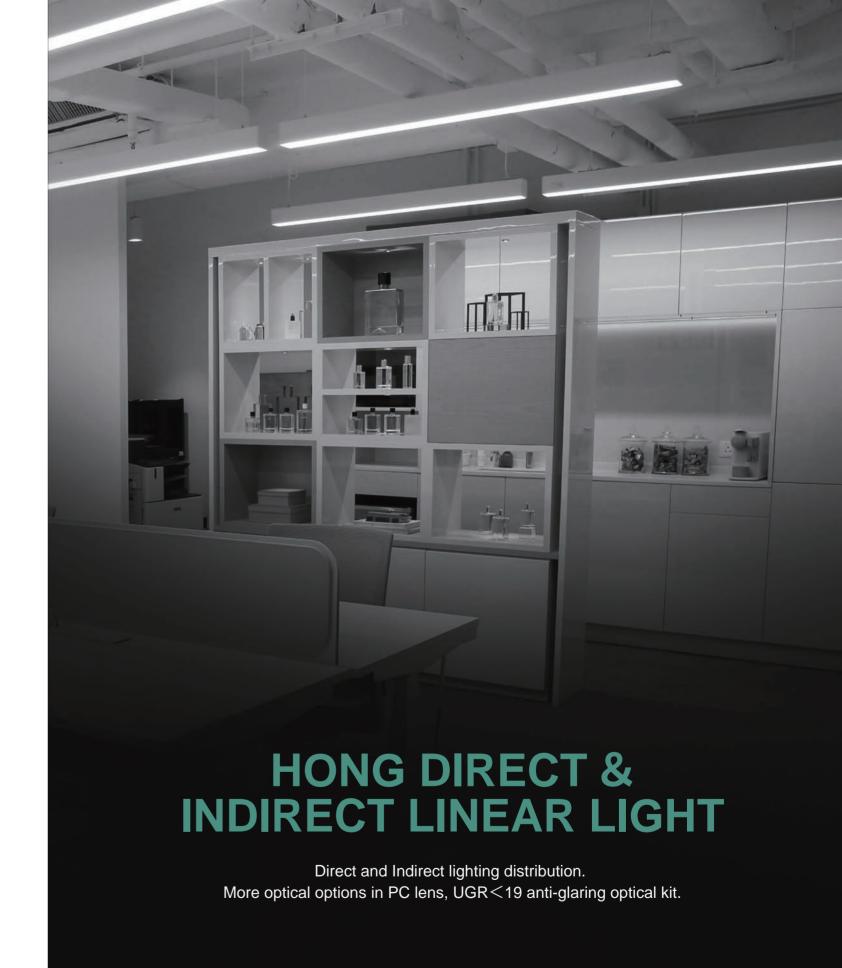

^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.

HONG SERIES H7090/ U9490/ U12590 INSTALLATIONS

Driver size Max W: 62 [2.44] H: 32 [1.26] Unit:mm[in]

DIMENSIONS

H/U759057

Surface Installation (Pendant, Surface Mounted, Wall Mounted)










Driver size Max W: 62 [2.44] H: 32 [1.26] - 94.2 [3.71]-

U949057

Trimed Recessed Installation





U1259057

Trimless Recessed Installation















HONG SERIES H7590/ U9490/ U12590 DIFFUSER LINEAR LIGHT

Diffuser

INDIRECT

General PC lens with high transmission

UGR

DIRECT

UGR<19 Flush Optical Kit Creatingthe most human friendly lighting or General PC lens with high transmission



SPECIFICATIONS

Finish	Lens	Installations
	Anti-glare film, Diffuser	Pendant , Ceiling mounted , Wall mounted
		Trimed recessed , Trimtless recessed
Width / Hight		Length
75mm×90mm	n, 94mm×90mm, 125mm×90mm	1200mm , 1500mm , 2400mm , Customized
Efficacy up to		Power
100lm/W		56W/pc , 64W/pc , 112W/pc
Color Quality		CRI
3-step MacAd	dam , 5-step MacAdam	80+ , 90+
		Voltage
Color Tempera	ature [Tunable White]	220-240 VAC , 100-277 VAC
2700K 3000K	3500K 4000K 5000K 6000K 6500K	Control
		DALI, 0-10V, On/off
Indirect Diffus	ser	IP Grade
29.5 [1.16]		IP22
Direct Diffuser		LED Chips And Driver Options
	73.2[2.88]	NICHIA , EPISTAR , SAMSUNG
	//	INICHIA . EFISTAR . SAIVISUNG

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls, check the list on following page.

 3. For more options, pls. check with your executive sales.

H10097 INDIRECT AND DIRECT LINEAR LIGHT

100 [3.94] 40 [1.57] Driver size Max W: 70 [2.76] H: 30 [1.18]

Unit:mm[in]

DIMENSIONS

H/U1009744

Surface Installation (Pendant, Ceiling Mounted)







HILA Direct & Indrect Linear Light

HILA is engineering design by direct & indirect lighting and this is becoming increasingly popular, in commercial architecture projects or offices. With indirect lighting, the source of light is hidden and the light spreads through the room via reflection on the ceiling, wall, and floor, it's much eliminating glaring and shadows. Indirect lighting provides a pleasant lighting environment and allows you to frame the room with light. Creating shadow-free lighting gives rise to an extra sense of spaciousness.





INDIRECT


Optical TIR Lens or General PC lens with high transmission

DIRECT

General PC lens with high transmission

HILA SERIES

H10097 INDIRECT AND DIRECT LINEAR LIGHT

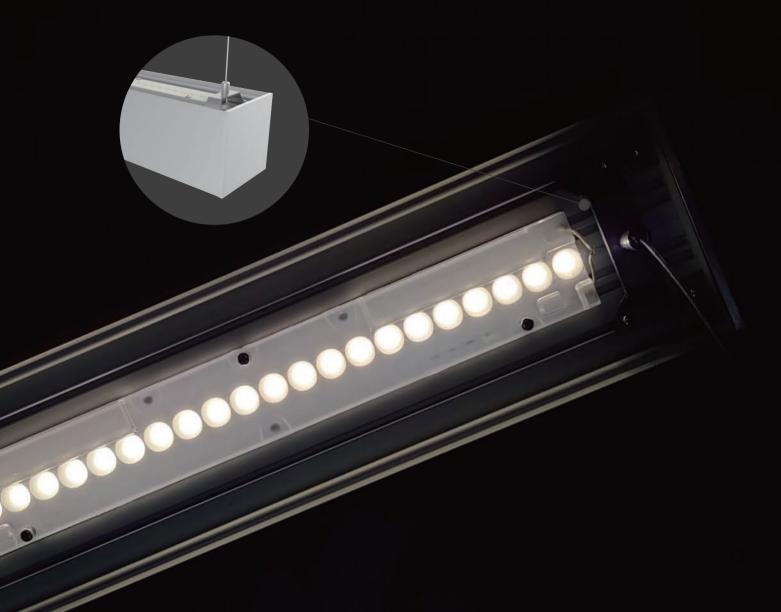

Beam angle











Diffuser & Diffuser & 30° TIR Diffuser & 45° TIR Diffuser & 60° TIR Diffuser & 90° TIR

HILA SERIES

H10097 INDIRECT AND DIRECT LINEAR LIGHT



SPECIFICATIONS


Finish	Lens	Installations
	Diffuser , TRI Lens [30°/45°/60°/90°]	Pendant , Ceiling mounted
Width / Hight		Length
100mm × 97m	nm	1200mm , 1500mm , 2400mm , Customized
Efficacy up to		Power
100lm/W		62W/pc , 64W/pc , 124W/pc
Color Quality		CRI
3-step MacAd	am , 5-step MacAdam	80+,90+
		Voltage
Color Tempera	ture [Tunable White]	220-240 VAC , 100-277 VAC
2700K 3000K 3500K 4000K 5000K 6000K 6500K		Control
		DALI , 0-10V , On/off
Indirect Angle	TRI	IP Grade
0000000	000000000000000000000000000000000000000	IP22
Direct Diffuser		
		LED Chips And Driver Options
	97.86 [3.85]	NICHIA, EPISTAR, SAMSUNG

Blueview's standard is 3-Step MacAdam
 The listed Color Temperature is only available in CRI80+ in Epistar Chips,

for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.



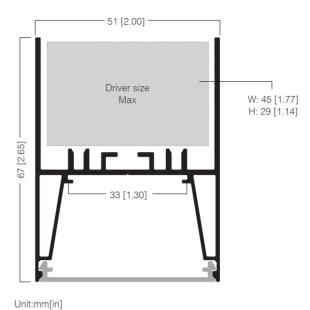

DIMENSIONS

U516833

Pendant Installation







ANGULAR MODULE

U5168 is offering multiple angular module options and the flexible joining solution in filed with less labor operations.



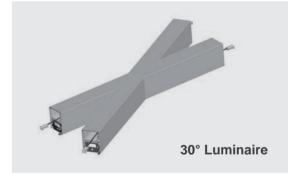

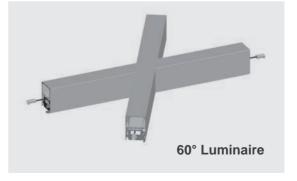




ZOLI External Driver Linear Light

Zoli series is linear LED lighting fixture that features a down lighting. It's offering the flexible joining solution in filed with less labor operations.

U5168/ U5141/ 5741 OPTICAL

Driver size W: 50 [1.97] Max H: 29 [1.14]



U514128

Surface Installation (Pendant, Surface Mounted)









Driver size W: 50 [1.97] H: 29 [1.14] 28 [1.1] 51.2 [2.02] 67.4 [2.65]

Unit:mm[in]

U674128

Trimmed Recessed Installation






Diffuser




UGR<19 flush optical kit creating the most human friendly lighting.



Prismatic lens available for anti-glaring lighting requirements.

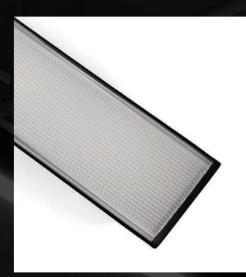


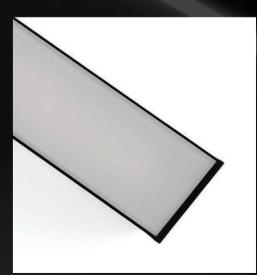

General PC lens with high transmission.

ZOLI SERIES

U5168 EXTERNAL DRIVER LINEAR LIGHT

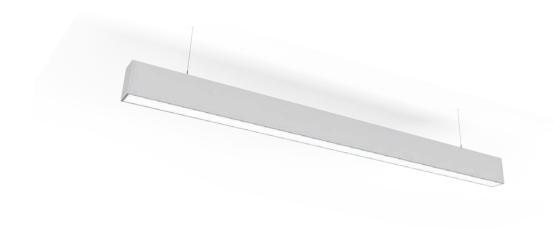

SPECIFICATIONS

Finish	Lens Anti-glare film , Prismetic lens , Diffuser	Installations Aircraft cable pendant
Width / Hight 51mm×68mm		Length 1200mm, 1500mm, 2400mm, Customized
Efficacy up to 100lm/W		Power 31.1W/pc , 37.8W/pc , 62W/pc
Color Quality 3-step MacAdam , 5-step MacAdam		CRI 80+,90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC , 100-277 VAC
		Control DALI , 0-10V , On/off
Optiacl Dimension 48.5[1.91] ± 5.7[0.22]		IP Grade
		LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD

- Blueview's standard is 3-Step MacAdam
 The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

 3. For more options, pls. check with your executive sales.

ZOLI SERIESU5141/ U6741 EXTERNAL DRIVER LINEAR LIGHT



SPECIFICATIONS

Finish	Lens Anti-glare film , Prismetic lens , Diffuser	Installations Aircraft cable pendant , Trimed recessed
Width / Hight 51mm×41mm, 67mm×41mm		Length 1200mm, 1500mm, 2400mm, Customized
Efficacy up to 100lm/W		Power 26W/pc , 32W/pc , 52W/pc
Color Quality 3-step MacAdam , 5-step MacAdam		CRI 80+,90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC , 100-277 VAC
		Control DALI , 0-10V , On/off
Optiacl Dimension 48.5[1.91] = 5.7[0.22]		IP Grade
		LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD

- Blueview's standard is 3-Step MacAdam
 The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

 3. For more options, pls. check with your executive sales.

ZOLI SERIES

U3537/ U4633 EXTERNAL DRIVER LINEAR LIGHT



31.2[1.23] 28[1.1] 35[1.37]

DIMENSIONS

U353728

Pendant Installation





34[1.34] -30.8[1.2] -46[1.81]

Unit:mm[in]


U463328


Trimmed Recessed Installation








/ MULTIPLE OPTICAL OPTIONS

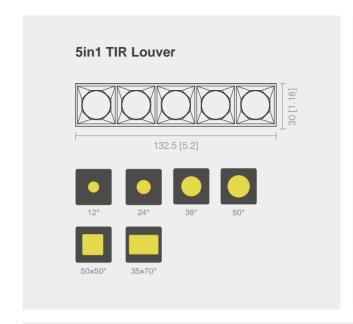


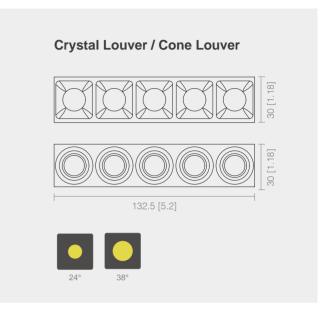

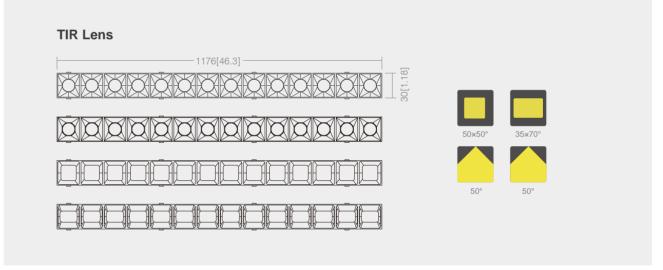

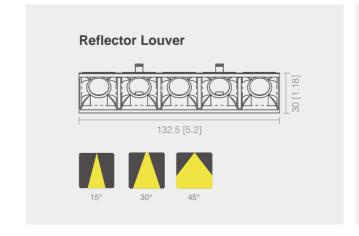

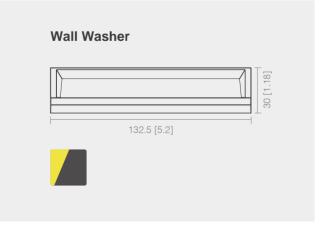

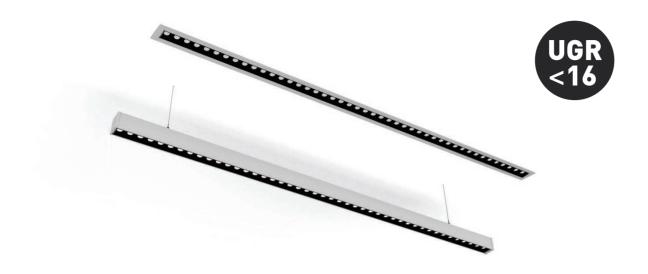

SPECIFICATIONS


Finish	Lens Multiple optical options	Installations Aircraft cable pendant , Trimed recessed
Width / Hight 35mm×37mm , 46mm×33mm		Length 1200mm, 1600mm, 2400mm, Customized
Efficacy up to 100lm/W		Power 25W/pc , 33W/pc , 50W/pc
Color Quality 3-step MacAdam , 5-step MacAdam		CRI 80+,90+
Color Tempera	ture [Tunable White]	Voltage 220-240 VAC , 100-277 VAC
2700K 3000K 3500K 4000K 5000K 6000K 6500K		Control DALI , 0-10V , On/off
LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD		IP Grade

^{1.} Blueview's standard is 3-Step MacAdam

DIMENSIONS

U212318

Ceiling Mounted

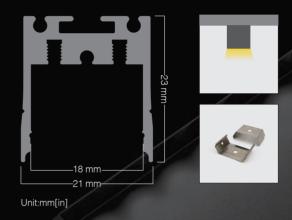

Optical

U212318 is an interior grazer engineering design with louver and reflector optical kits, It's offering low UGR value which is less than 12. More color options in matt black, matt white, silver, golden, chrome plating of the louver.

Beam angle





^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips,

for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.

ZOLI SERIES

U2123 EXTERNAL DRIVER LINEAR LIGHT



SPECIFICATIONS


Finish	Lens Reflector louver	Installations Ceiling mounted
Width / Hight 21mm×23mm		Length 1200mm with 10sets Reflector Kit , Customized
Efficacy up to 90lm/W		Power 21W/pc
Color Quality 3-step MacAdam , 5-step MacAdam		CRI 80+,90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC , 100-277 VAC
		Control DALI, 0-10V, On/off
Optiacl Dimension 114 [4.50]		IP Grade
		LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD

^{1.} Blueview's standard is 3-Step MacAdam



^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.

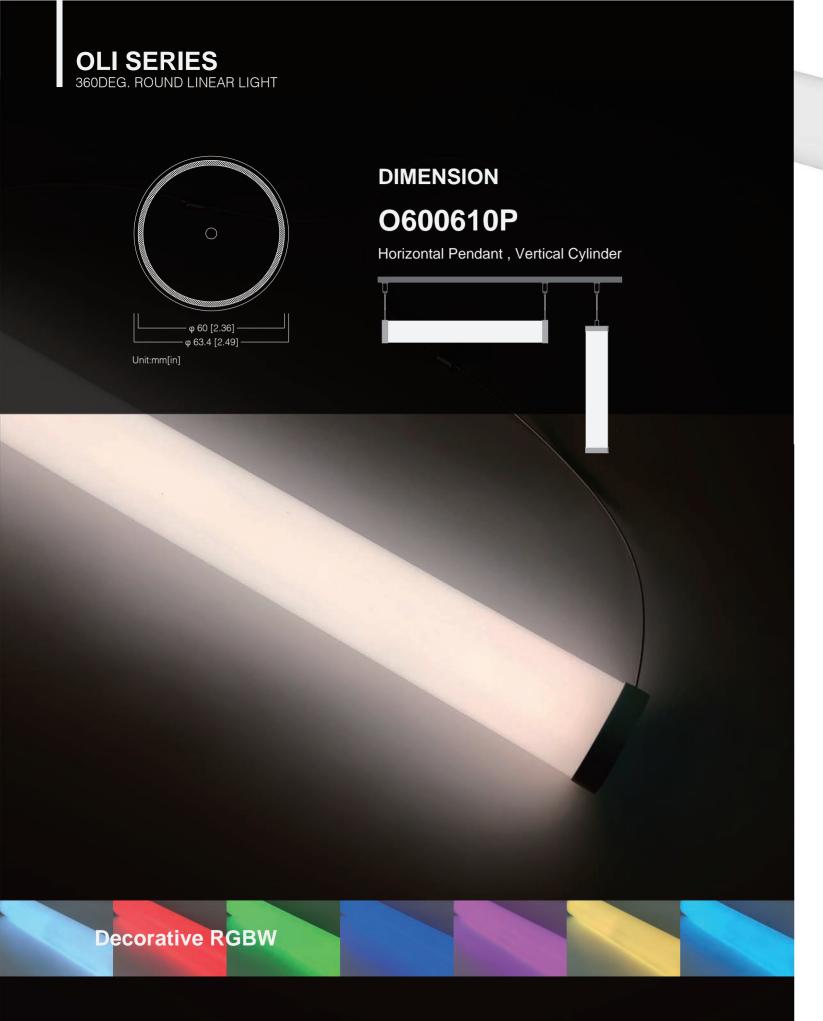



SPECIFICATIONS

360deg. PC Diffuser

Mostly simulating thenatural lighting

Finish	Lens 360° PC diffuser	Installations Horizontal pendant , Vertical cylinder
Diameter 63mm		Length 1230mm, 1530mm, 1830mm, Customized
Efficacy up to		Power 27W/pc , 33.5W/pc , 40W/pc
Color Quality 3-step MacAda	m , 5-step MacAdam	CRI 80+, 90+
Color Temperatu	re [Tunable White]	Voltage 220-240 VAC , 100-277 VAC
2700K 3000K 3	3500K 4000K 5000K 6000K 6500K	Control DALI, 0-10V, On/off
LED Chips And I NICHIA , EPIST TRIDONIC , OS	FAR , SAMSUNG	IP Grade

^{1.} Blueview's standard is 3-Step MacAdam

^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.


^{3.} For more options, pls. check with your executive sales.





RING SERIES O20D RING LIGHT

O20D

Pendant Installation





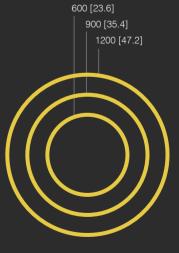

Unit:mm[in]

RING SERIES O20D RING LIGHT






SPECIFICATIONS

Finish	Lens Silicone	Installations pendant
Width / Hight 20mm×20mm		Diameter 600mm, 900mm, 1200mm, Customized
Efficacy up to 80lm/W		Power 25W/pc , 35W/pc , 70W/pc
Color Quality 3-step MacAda	m , 5-step MacAdam	CRI 80+, 90+
Color Temperatu	ure [Tunable White]	Voltage 220-240 VAC , 100-277 VAC
2700K 3000K 3	3500K 4000K 5000K 6000K 6500K	Control DALI, 0-10V, On/off
LED Chips And I NICHIA , EPIST TRIDONIC , OS	TAR , SAMSUNG	IP Grade

^{1.} Blueview's standard is 3-Step MacAdam

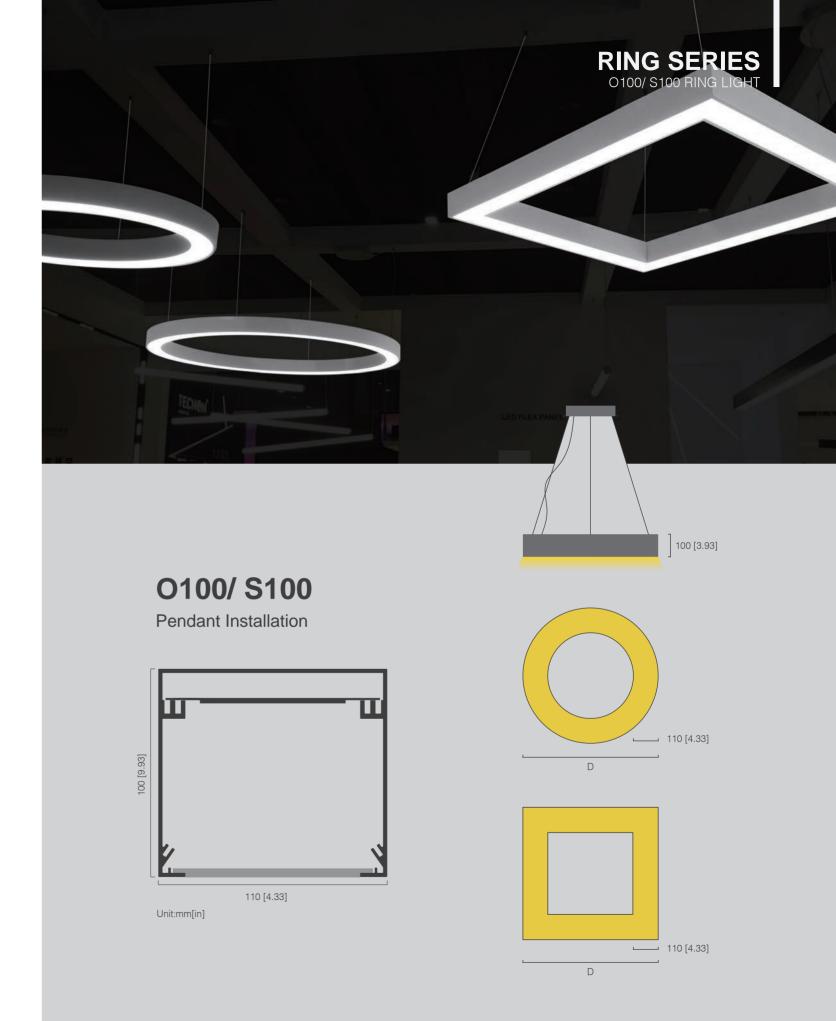

^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.





Finish	Lens Diffuser	Installations pendant
Width / Hight 110mm×100mm		Diameter 600mm, 900mm, 1200mm, Customized
Efficacy up to 60lm/W		Power 40W/pc , 72W/pc , 93W/pc
Color Quality 3-step MacAdam , 5-step N	1acAdam	CRI 80+, 90+
Color Temperature [Tunable	White]	Voltage 220-240 VAC , 100-277 VAC
2700K 3000K 3500K 4000k	K 5000K 6000K 6500K	Control DALI , 0-10V , On/off
LED Chips And Driver Option NICHIA, EPISTAR, SAMS TRIDONIC, OSRAM, LIFU	SUNG	IP Grade

^{1.} Blueview's standard is 3-Step MacAdam



SPECIFICATIONS

Finish	Lens Diffuser	Installations pendant
Width / Hight 110mm×100mm		Dimension (Wx W) 850mm×850mm, 1200mm×1200mm, Customized
Efficacy up to 60lm/W		Power 74W/pc , 142W/pc
Color Quality 3-step MacAdam , 5-step MacAdam		CRI 80+, 90+
Color Temperature [Tunable White]		Voltage 220-240 VAC , 100-277 VAC
2700K 3000K 3500K 4000K 5000K 6000K 6500K	00K 5000K 6000K 6500K	Control DALI , 0-10V , On/off
LED Chips And Driver Opti	ions	IP Grade
NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD		IP22

^{1.} Blueview's standard is 3-Step MacAdam

^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.


^{3.} For more options, pls. check with your executive sales.

^{2.} The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.

^{3.} For more options, pls. check with your executive sales.

RING SERIES

OLA-5075 RING LIGHT

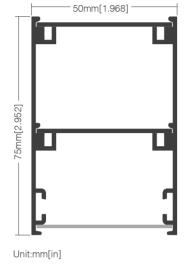


OLA-5075

Pendant Installation



OLA width options

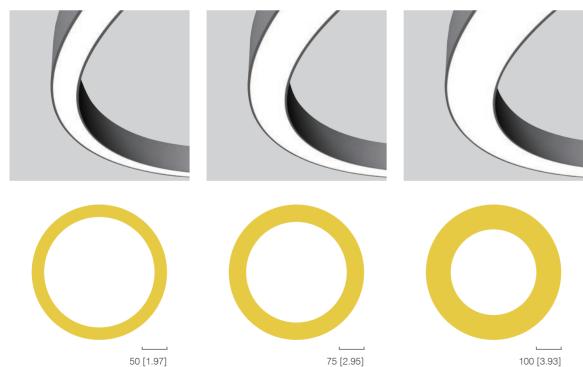

RING SERIES OLA-5075 RING LIGHT



SPECIFICATIONS


Finish	Lens	Installations
	Diffuser	pendant
Width / Hight		Dimension
50mm×75mm		600mm, 900mm, 1200mm, Customized
Efficacy up to		Power
60lm/W		38W/pc , 60W/pc , 72W/pc
Color Quality		CRI
3-step MacAdam , 5-step MacAdam		80+, 90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage
		220-240 VAC , 100-277 VAC
		Control
		DALI, 0-10V, On/off
LED Chips And Drive	er Options	IP Grade
NICHIA, EPISTAR, SAMSUNG		IP22
TRIDONIC, OSRAM, LIFUD		

^{1.} Blueview's standard is 3-Step MacAdam

The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
 For more options, pls. check with your executive sales.

O30D Bendable System

Most flexible on various bending shapes in luminaire's width 30mm. Satisfy on most applications.



- ► Continuous silicone lens
- ► Quick joiner
- ► Pendant, Surface mounted



General Shape [more to be continued]




General Shape [more to be continued]







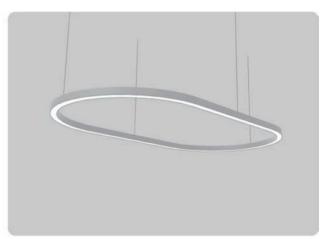





RING SERIES

O30D BENDABLE SYSTEM



/ SPECIFICATIONS

SE EGII IGATIONS		
inish	Lens Silicone	Installations Pendant
	Cincorto	rondant
Width / Hight		Diameter
30mm×30mm		600mm, 900mm, 1200mm, Customized
Efficacy up to		Power
60lm/W		35W/pc , 50W/pc , 75W/pc
Color Quality		CRI
3-step MacAdam , 5-step MacAdam		80+ , 90+
		Voltage
Color Tempera	ture [Tunable White]	220-240 VAC , 100-277 VAC
7700K 3000K 3500K 4000K 5000K 6000K 6500K		Control
		DALI, 0-10V, On/off
		IP Grade
General Shape [more to be continued]		IP22
		LED Chips And Driver Options
		NICHIA , EPISTAR , SAMSUNG
		TRIDONIC, OSRAM, LIFUD

- Blueview's standard is 3-Step MacAdam
 The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
- 3. For more options, pls. check with your executive sales.