





2023

SIGNAGE CATALOG

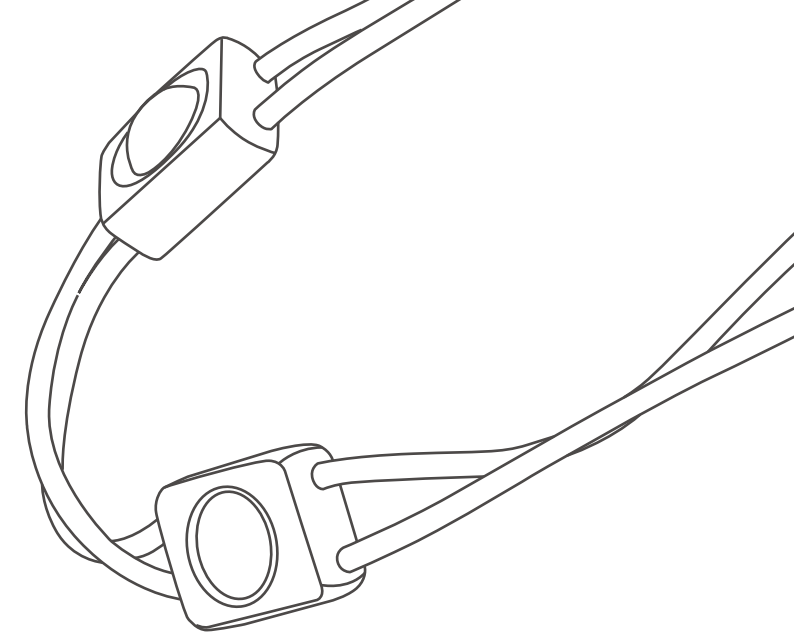

BETTER LIGHT BETTER VIEW

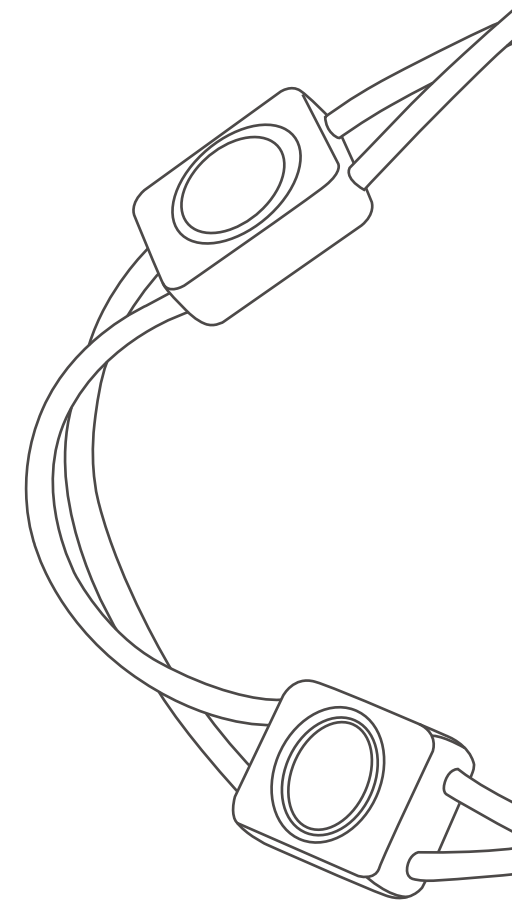

COMPANY PROFILE

BLUEVIEW ELEC-OPTIC TECH CO.,LTD. is a pioneer developer in China's LED signage lighting and linear lighting market, not only participating but also promoting the development of the entire LED industry.

Blueview has been offering professional integrated and ingenious solutions with abundant products including signage, lighting products and others since 2004.

To lead the innovation trend, Blueview introduced “Smart Control” to its products which triggered a major breakthrough for the whole LED industry. Blueview aims to provide customers with complete LED smart lighting system solutions, from lamps to systems to IOT, everything.

We always pursuit the faith that Better light could bring Better life and we never slow down the path for innovation&creation.

Missions

Lead the development for LED industry while shouldering the social responsibilities.
Bring the maximum profits to our consumers while maintaining the highest level of lighting solution services.

Strength

Meticulous Quality Control system
High reputation around the world
Seasoned and professional project experiences
Persistent Research&Development

Culture&Values

Perfectionism
We always treat every detail with rigorous and severe attitude.
Consumer Satisfaction
We always provide customization and circumspect lighting solution services for each individual project.
Innovation
We always challenge ourselves and exploit new path to “Blue Sea”.
High Performance Cost Ratio
We always require our products possessed with remarkable performance and reasonable cost.



COMPANY INTRODUCTION

PRODUCTION BASE

 **Scale**
40000m²

 **Employees**
1200+

 **Market Share**
Own the largest market shares for LED advertising signage lighting

 **Management System**
Acquired international management system certification of TUV,ISO9001, ISO14001,ISO45001,quality,environment, occupational health and safety

 **Certificates**
CE,UL,3C,FCC,ROHS etc.

 **Product Lines**
LED Signage,LED Lightbox ,LED Smart Lighting System ,LED Commercial Lighting

 **Global Business**
Domestic :55%,Overseas:45%

 **Revenue**
¥ 650 million in 2022

 **Embranchment**
50 directly affiliated offices in China, 30+ Blueview homes



Headquarters in Chengdu, Sichuan



Production base in Pujiang, Sichuan





Production base in Dazhou, Sichuan



Production base in Zhongshan, Guangdong

HISTORY & EVENTS

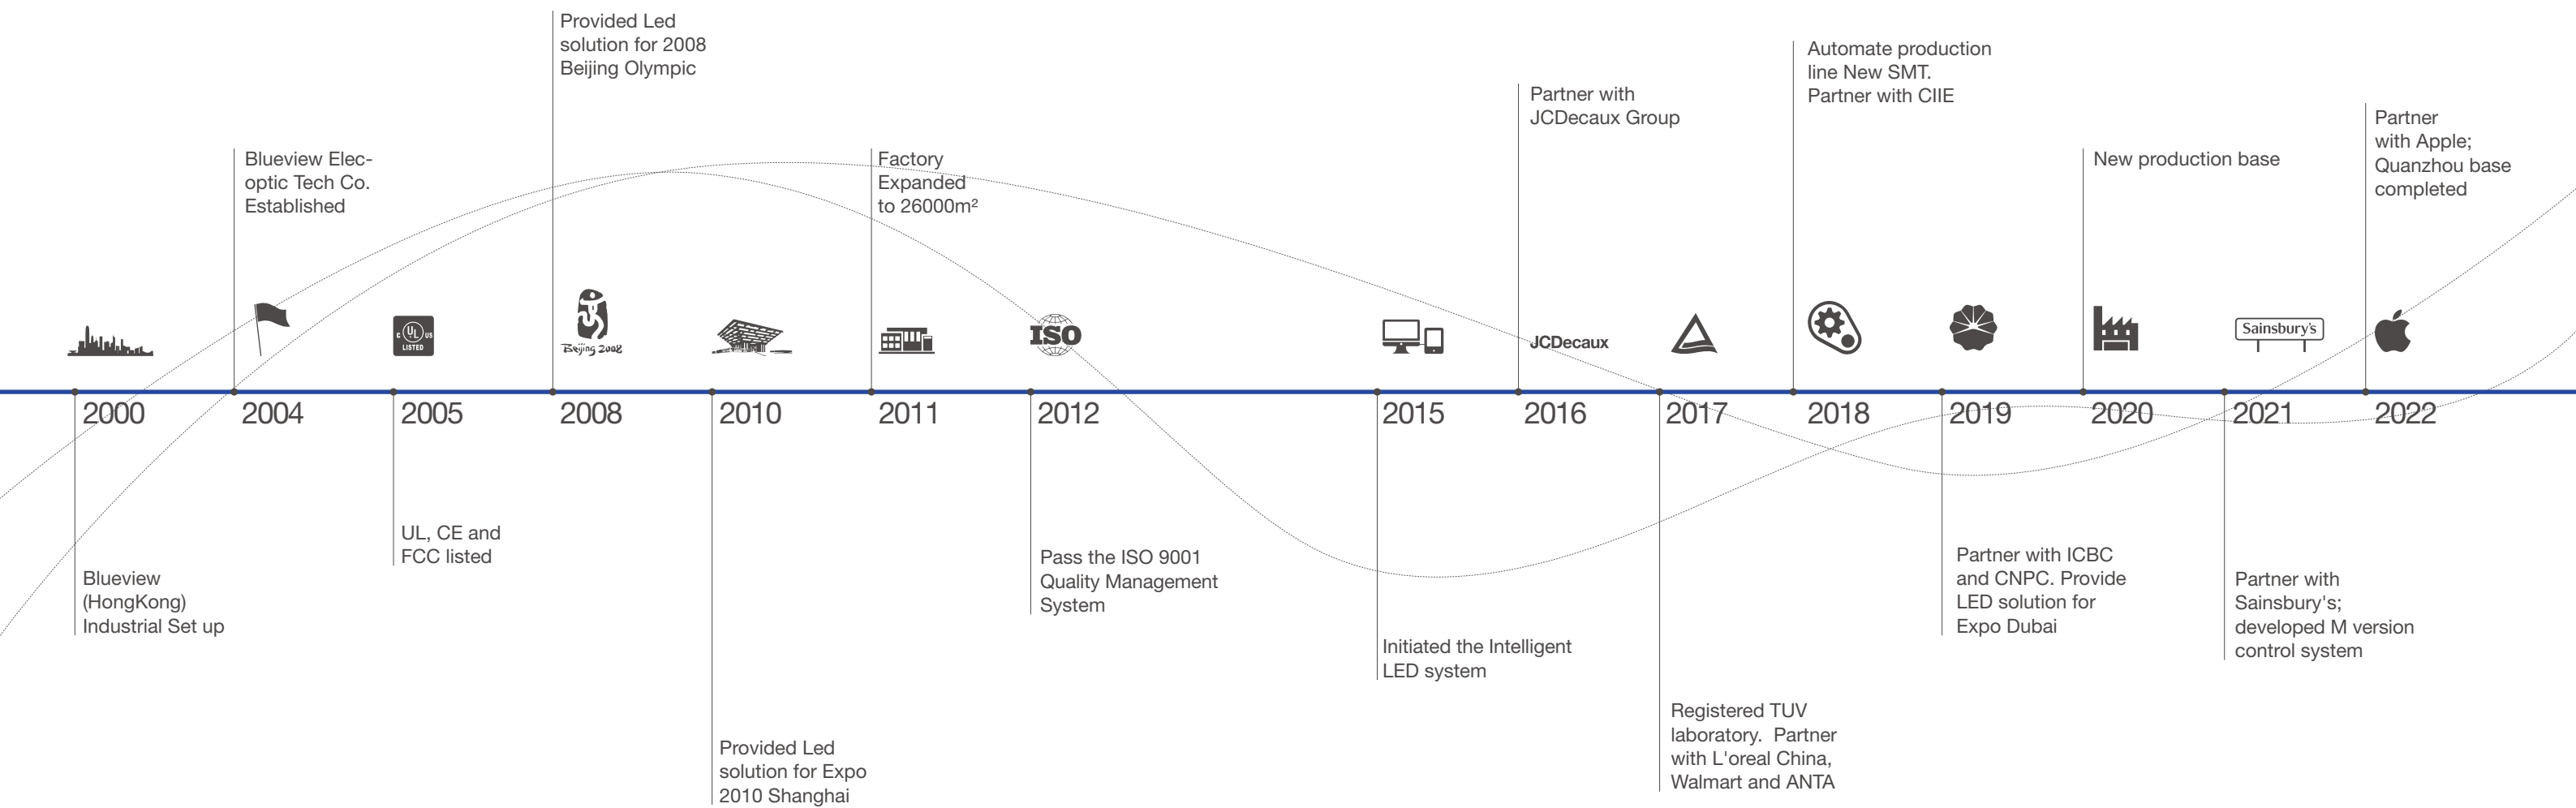

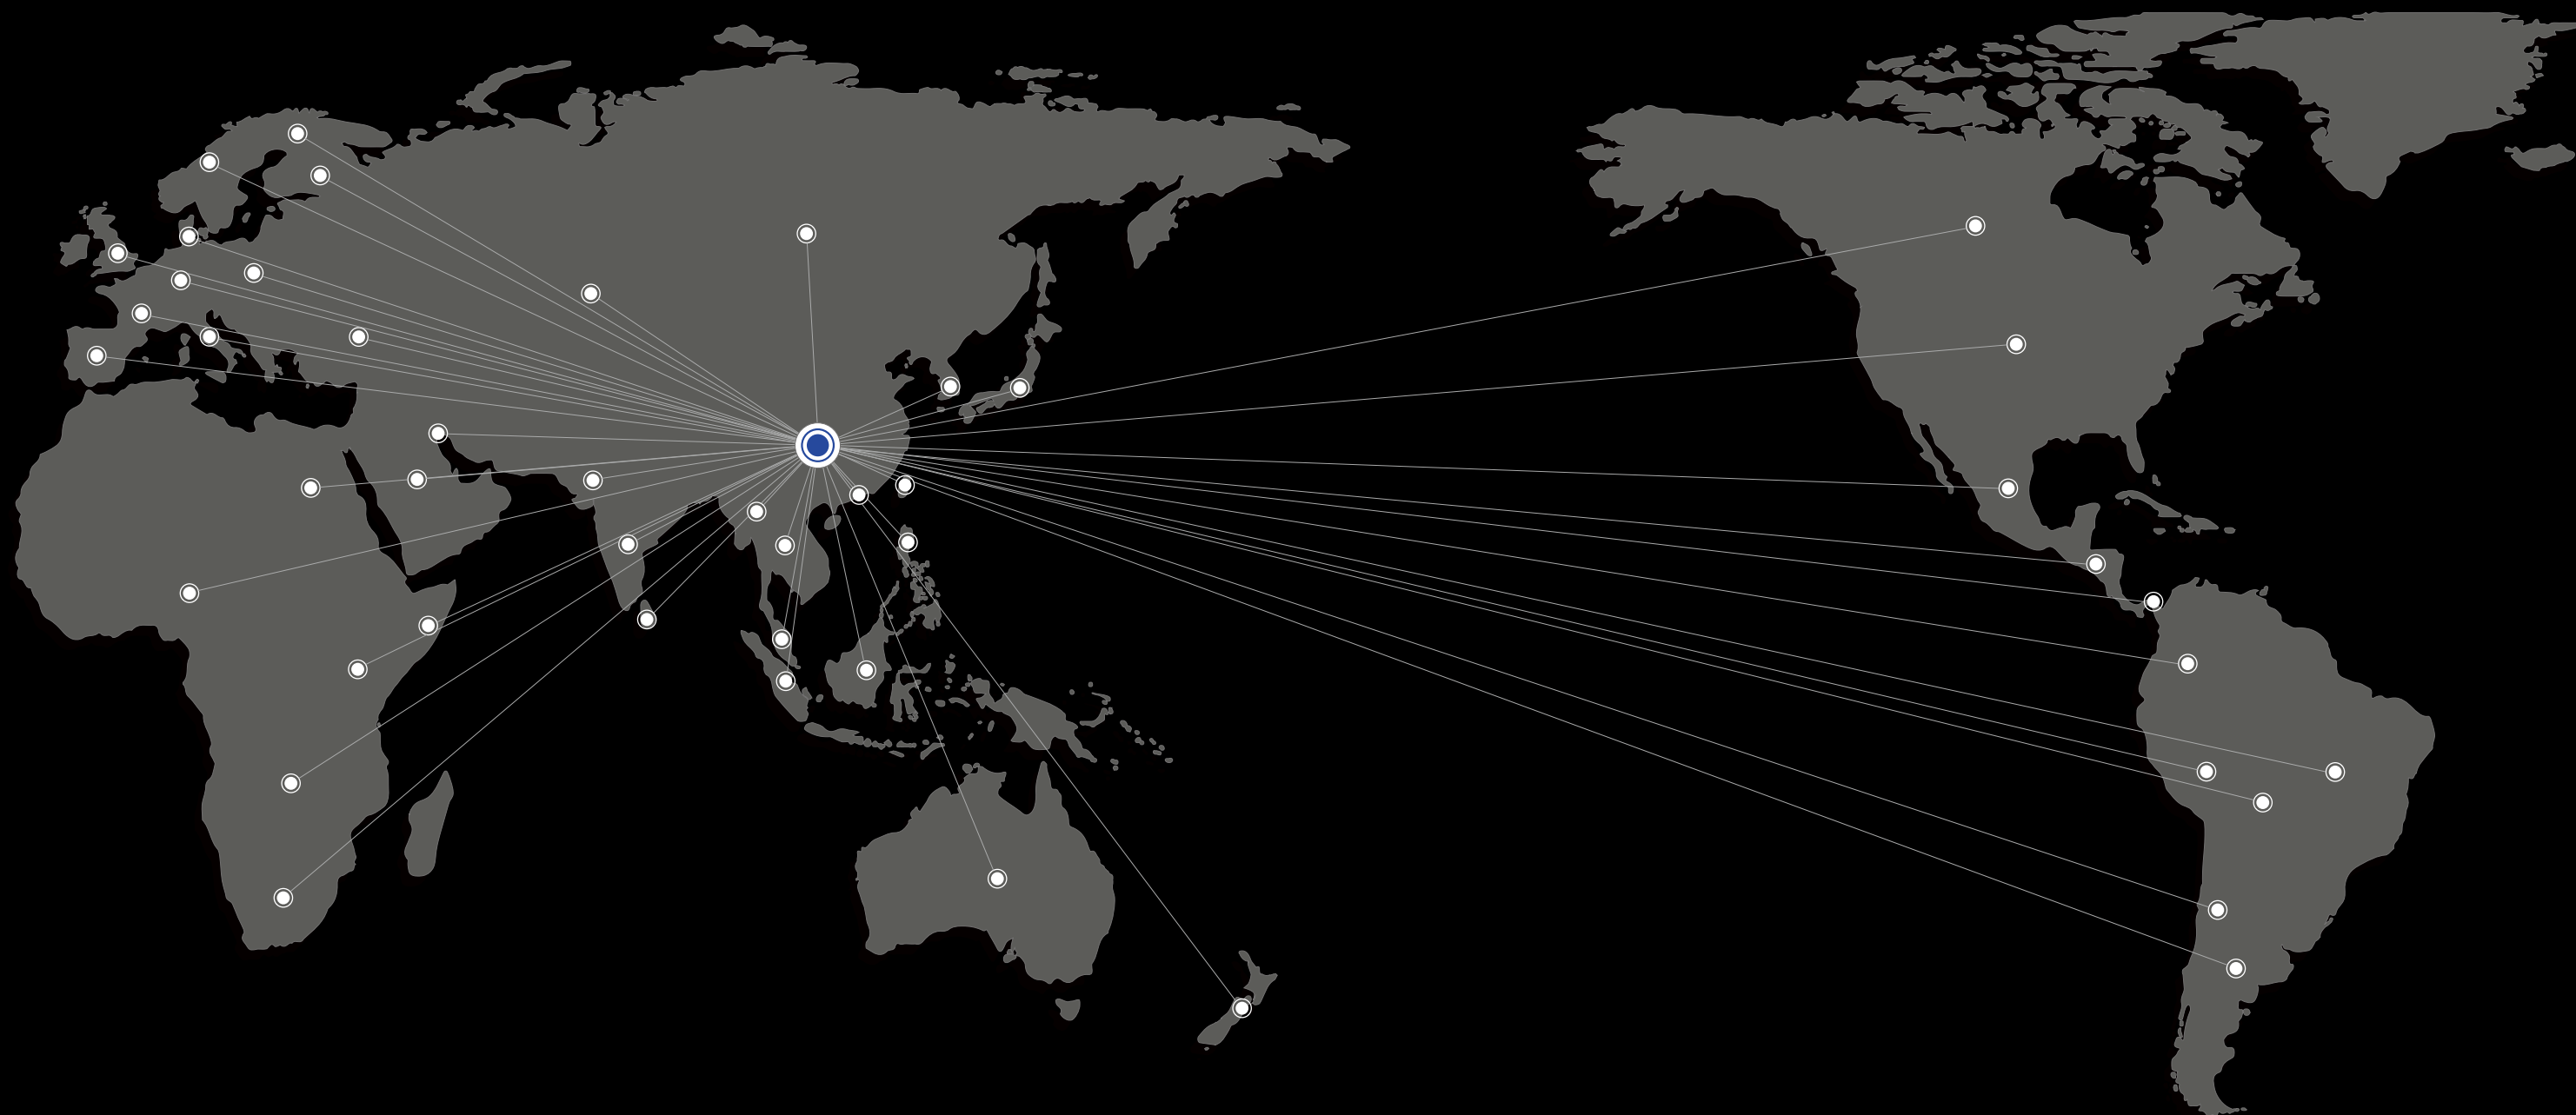

GLOBAL LAYOUT

Blueview not only has strong productivity and advanced quality inspection system, but also has a fast, convenient and personalized after-sales service system with more than 50 offices across the country.

Blueview's products has sold to more than 140 countries in North America, Europe, Asia and South America, and the export volume of LED strips ranked first in China in 2018. In order to expand the market, Blueview introduced its innovative linear lights to foreign customers during the Dubai World Expo in 2019.

"Leading the development of the industry with innovative products and improving people's lighting experiences" is the goal that Blueview always pursues.

FACILITIES

Blueview has full sets of incoming material inspection, environmental test, measurement and analytic equipment. We have been authorized as the third party testing lab by TÜV Rheinland.



Main Production Equipment List

SMT System	32 sets
12 Zone Reflow Soldering Machine	9 sets
Auto Extrusion System	2 sets
Tape Light Auto Soldering System	10 sets
Rigid Bar Soldering Machine	1 set
Semi-Automatic Solder Paste Printer	28 sets
PCB Separating Machines	5 sets
Horizontal Injection Machine	11 sets
Vertical Injection Machine	26 sets
Auto Glue Dispenser	18 sets
Electric Blast Drying Box	10 sets
UV Oven	2 sets
Aging System	75 sets
AOI 4Sets	4 sets
Auto Solder Paste Printer	10 sets
3D SPI	2 sets
Auto Online Laser Engraving Machine	14 sets
Auto Lens Mounter	3 sets
Auto Pad Printing Machine	1 set
Automatic Glue Sprayer	2 sets
Baking Oven	9 sets
Wave Soldering Machine	2 sets
Automatic Stencil Cleaner	1 set



Main Testing Equipment List

Pressure Tester	1 set
Copper Foil Peel Strength Tester	1 set
Two-Dimensional Tester	1 set
Metallographic Microscope	1 set
Drop Test Machine	1 set
Vibration Test Bench	1 set
LCR Tester	1 set
Xenon Lamp Weather Test Box	1 set
Programmable High And Low Temperature Test Chamber	1 set
Tensile Testing Machine	1 set
RoHS Test System	1 set
Electronic Load Tester	1 set
Ground Resistance Tester	1 set
Haas-2000 High Precision Fast Spectrum Tester	1 set
Safety Performance Tester	1 set
UV Weather Resistance Test Chamber	1 set
LED Signage Light Source Product Aging Line	75sets
Light Color Electrical Test System	1 set
Goniophotometers System	1 set
ICT Test System	2 sets
AOI Test System	4 sets
X-Ray	1 set
DC Low Resistance Tester	1 set
Antistatic Tester	1 set


R&D CENTER

Chengdu, Sichuan
Zhongshan, Guangdong

R&D TEAM

76 professional engineers and 5 senior engineers

Certification System




Patents



MARKETING ACTIVITIES

Blueview is the best in class for our forward-thinking capabilities and innovativeness. We work closely with our clients to develop products that are in trend to deliver functional and aesthetical advantages. All of our products are designed and engineered with the principles of captivating, ease of installation, usage and maintenance.

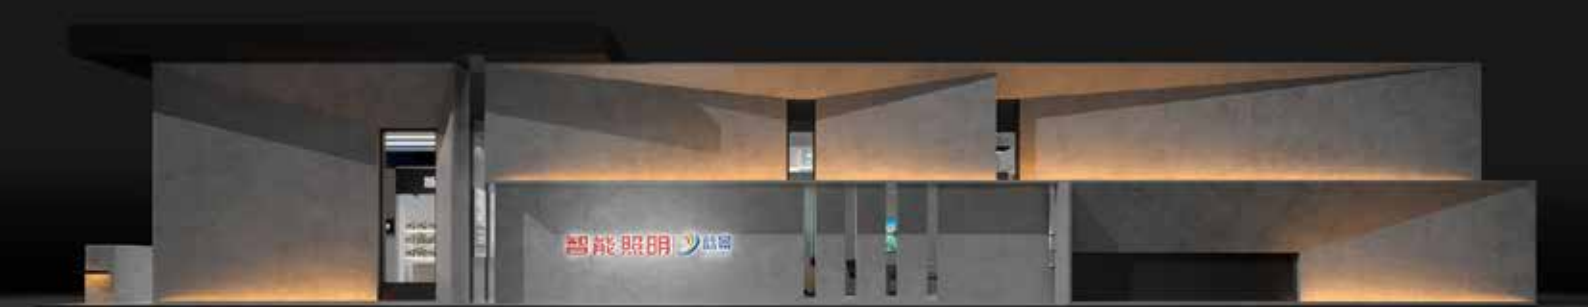

M A R K E T I N G A C T I V I T I E S



Blueview has always been customer-oriented, putting "product & service quality" in the first place, and persistently pursuing highly valuable products and innovative business models for employees, customers and society. Blueview will continue to lead the development of the industry and contribute to the global LED intelligentization process.

MODULE SERIES

CHANNEL LETTERS



STL-H	022
STL-H	023
QG05-H	024
QG10	025
STL	026
M6	027
QG05	028
ST2-W 3.0	029
M10	030
PT9	031
SS10	032
SS308	033

SIGN CABINET/BOX/AREA BACKLITS



ST2-T	034
MZ18-W	035
Z18-C	036
Z18 2.0	037
Z19 4.0	038
ST12-B	039
ST13 2.0	040
BV-AL-3030	041
M8-C	042
M8-B	043

RGB/RGBW Module



PS5-B	044
PZ5	045
PZ6	046
PS6	047

DIGITAL/ADDRESSABLE MODULE



PQ7	048
PQ8	049
CS8	050
CS8-A	051
PQ5-B	052
PQ6	053
CS6	054
CS7	055
D20	056
D30/50	057

RIGID BAR

YD SERIES (BACK-LIT)



YD7 3.0	060
WN-YD7 3.0	061
YD8 1.0	062
YD8 3.0	063
YD8-J	064
YD3-A	065
YD2-Y	066
YD2-W	067
YD2-C	068
H3	069
JYD7 3.0	070
JYD8 1.0	071
JYD3-A	072
JYD2-C	073
FYD7 3.0	074
FYD8	075
FYD3-A	076
FYD2-E	077
FYD2-Y	078
JFYD7 3.0	079
JFYD8	080
JFYD3-A	081
FB-R	082

SIDE LIGHTING



BPS300-C	083
BPS300-S	084
BPS1-S	085
BP2-W	086
YZ9	087

RGB/RGBW



QYD8	088
BQ5-A	089
RGBW-YD8	090
QBPS	091
QBPS-C	092

AC RIGID BARS



A1 2.0	093
A2 2.0	094
A4-W	095
A4-FW	096

DYNAMIC PANEL



NW-B	097
NF-B	098


MODULE SERIES

Blueview Modules are suitable for indoor and outdoor light boxes, channel letters, etc.

Designs include through hole series, mini series, digital series, etc.


STL-H CHANNEL LETTERS

- Self designed lens with 170° beam angle for uniform lighting
- High efficacy up to 160lm/W
- Adopts full glue injection molding, beautiful appearance
- Single module cuttable

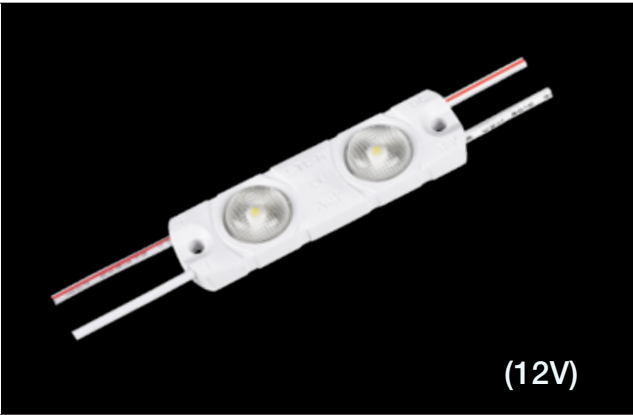


PROFILE DRAWINGS

Unit:mm/inch

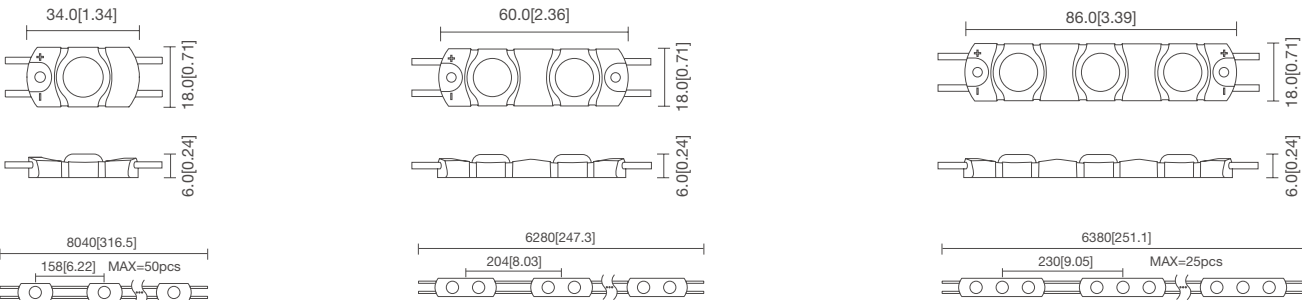

PHOTOMETRIC

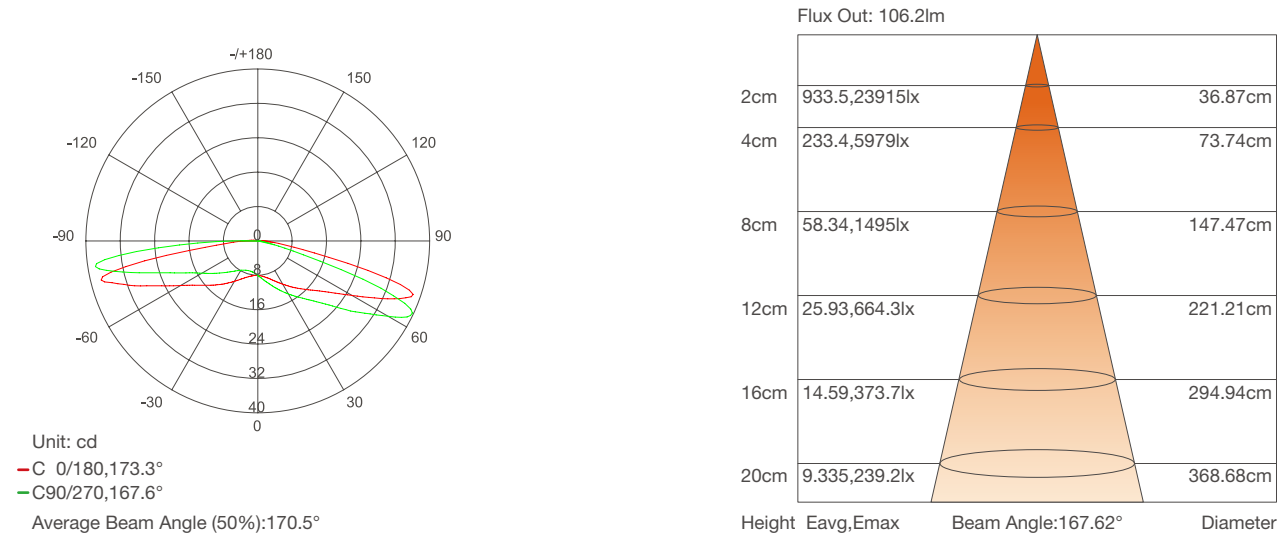

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-H-1	12V DC	6000-7000K	58	160	0.36	1	50pcs
STL-H-2	12V DC	6000-7000K	115	160	0.72	2	30pcs
STL-H-3	12V DC	6000-7000K	173	160	1.08	3	25pcs


STL-H CHANNEL LETTERS

- Self designed lens with 170° beam angle for uniform lighting
- High efficacy up to 160lm/W
- Adopts full glue injection molding, beautiful appearance
- Single module cuttable




PROFILE DRAWINGS

Unit:mm/inch

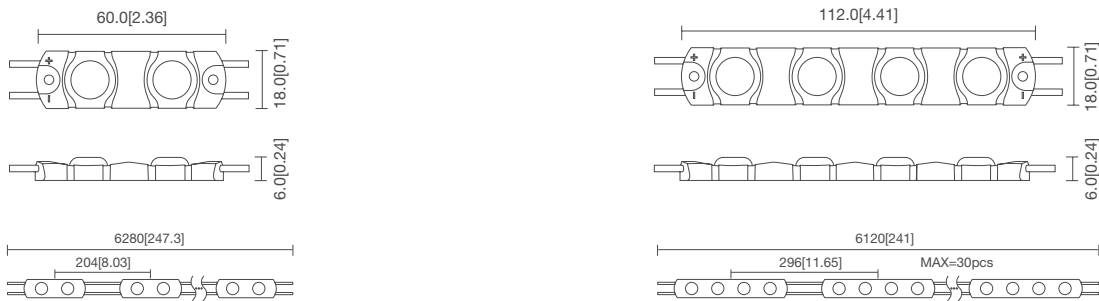

PHOTOMETRIC

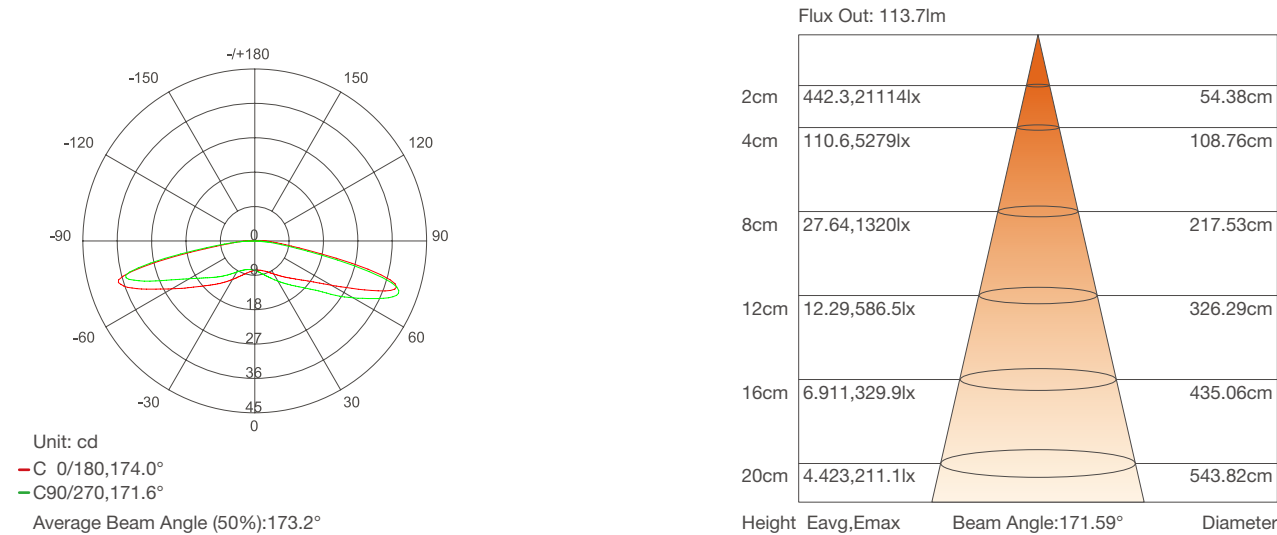

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-H-2	24V DC	6000-7000K	115	160	0.72	2	50pcs
STL-H-4	24V DC	6000-7000K	230	160	1.44	4	30pcs

QG05-H


HIGH EFFICIENCY MODULES

- High luminous efficiency
- Big beam angle
- Constant current design, long run series
- Adopt integrated lens
- Full glue coated, suitable for outdoor use
- Single module can be cut, customization available




PROFILE DRAWINGS

Unit:mm/inch

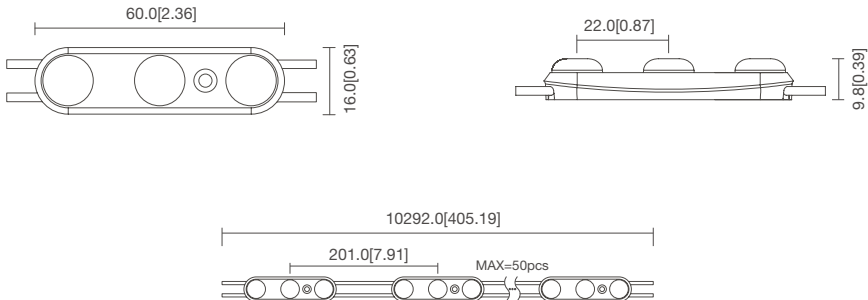

PHOTOMETRIC

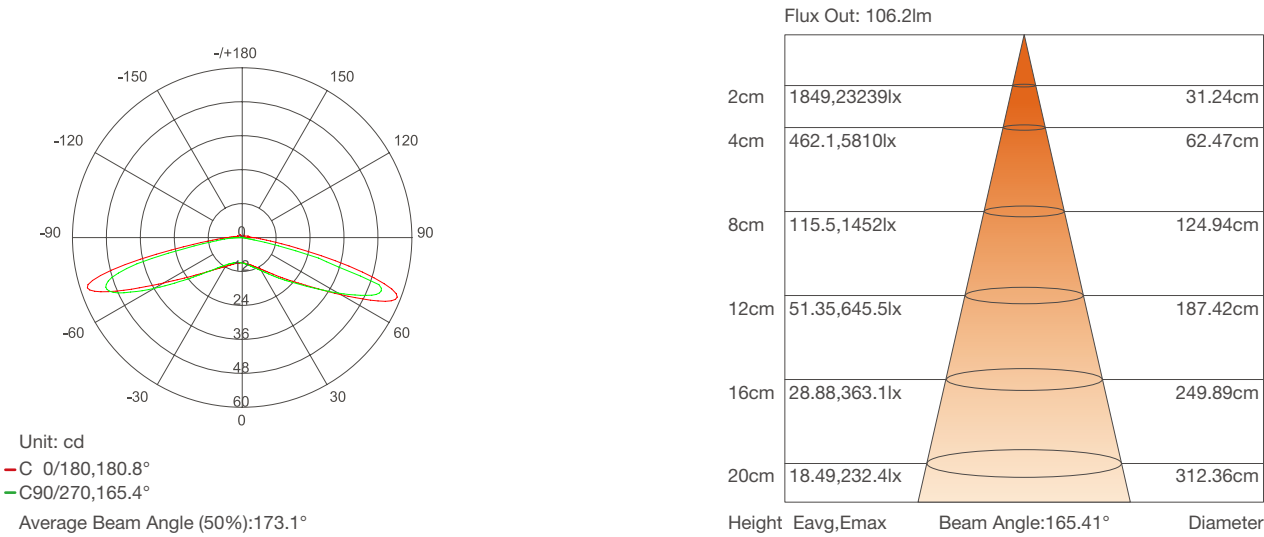

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QG05-H	12V DC	6000-7000K	175	175	1.0	3	50pcs

QG10


HIGH EFFICIENCY MODULES

- High efficacy
- Adopt integrated lens
- Module well sealed by glue,up to IP68
- Single module can be cut




PROFILE DRAWINGS

Unit:mm/inch

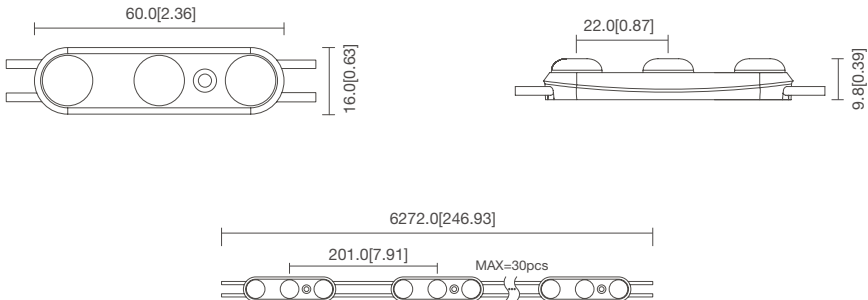

PHOTOMETRIC

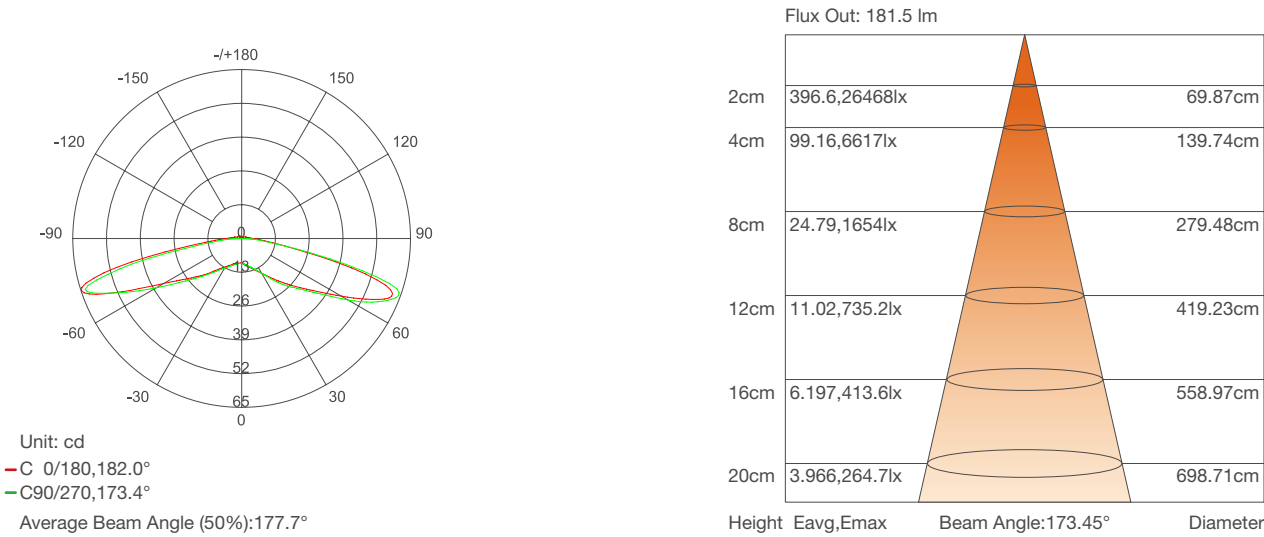

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QG10	12V DC	5900-6100K	192	160	1.2	3	30pcs

STL


DIFFUSOR LENS

- Adopt high quality 2835 LED
- Self designed lens with 170° beam angle for uniform lighting
- High efficacy up to 100lm/W
- Aluminum PCB injection molding for perfect outline, IP65
- Single module cuttable




PROFILE DRAWINGS

Unit:mm/inch

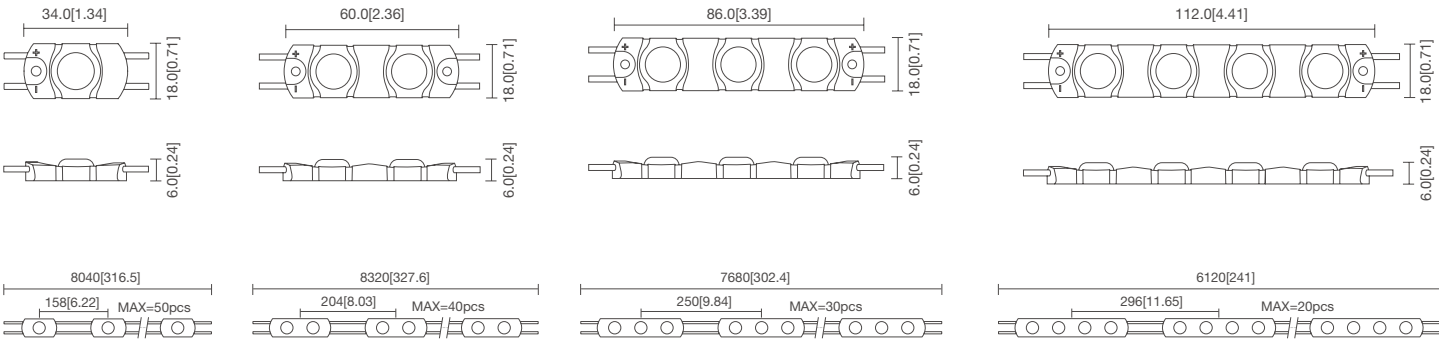

PHOTOMETRIC

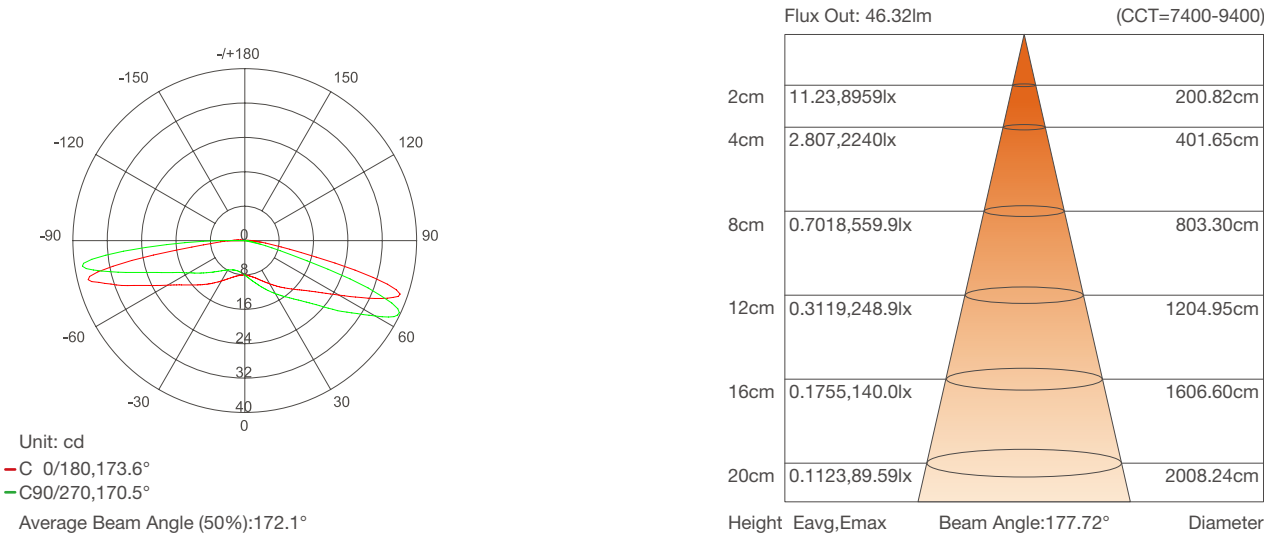

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-1	12V DC	2800-10000K	49	98	0.5	1	50pcs
STL-2	12V DC	2800-10000K	98	98	1.0	2	40pcs
STL-3	12V DC	2800-10000K	150	100	1.5	3	30pcs
STL-4	12V DC	2800-10000K	200	100	2.0	4	20pcs

M6


DIFFUSOR LENS

- Self-designed integrated lens with 175° beam angle.
- Diffuse reflection optical processing .
- Constant current design, high brightness, stable performance.
- Single module cuttable.




PROFILE DRAWINGS

Unit:mm/inch

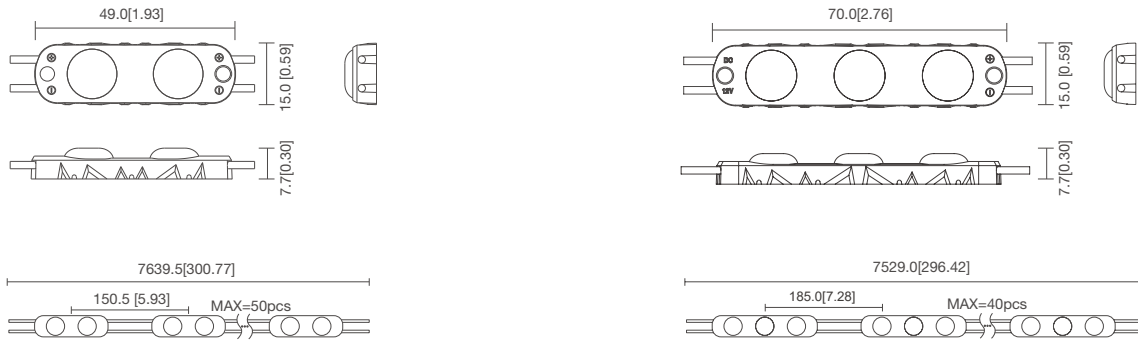

PHOTOMETRIC

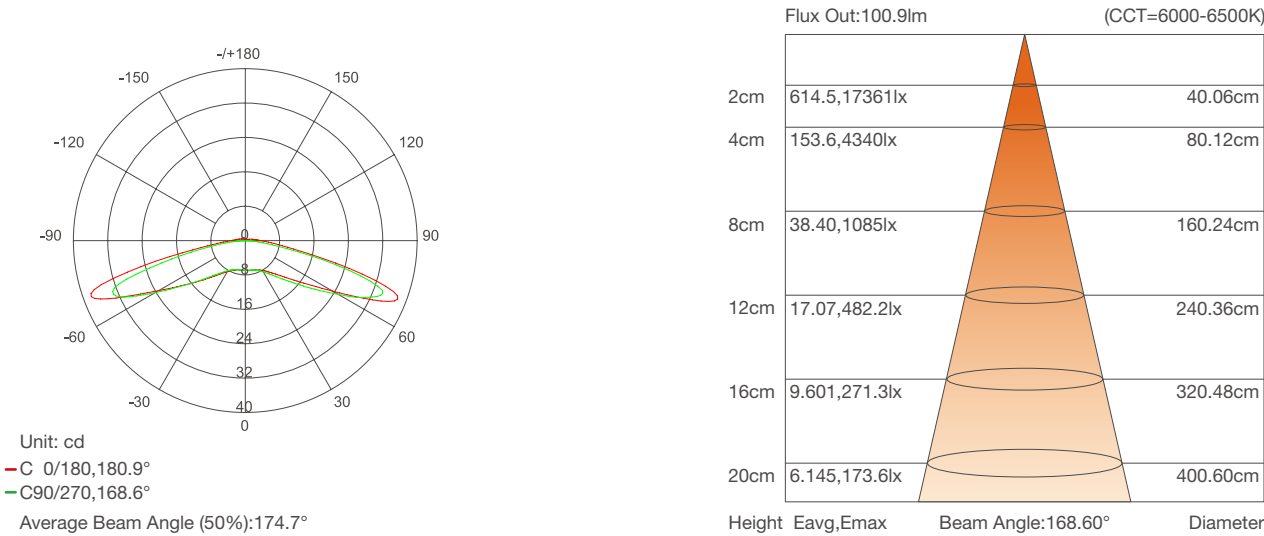

BASIC PARAMETERS


Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M6-2	12V DC	6000-6500K	72	100	0.72	2	50pcs
M6-3	12V DC	6000-6500K	110	100	1.1	3	40pcs

Q

G05


DIFFUSOR LENS

- Adopt integrated lens
- High efficiency
- Module well sealed by glue, up to IP68
- Single module cuttable

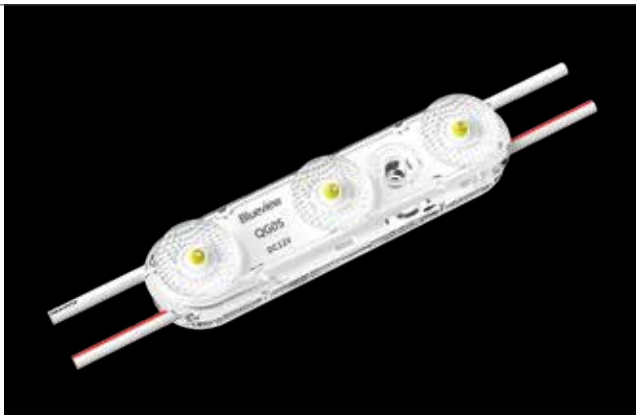


PROFILE DRAWINGS

Unit:mm/inch

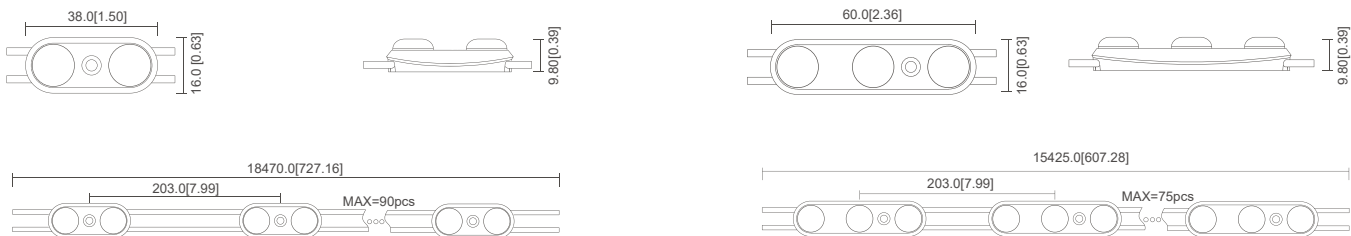

PHOTOMETRIC

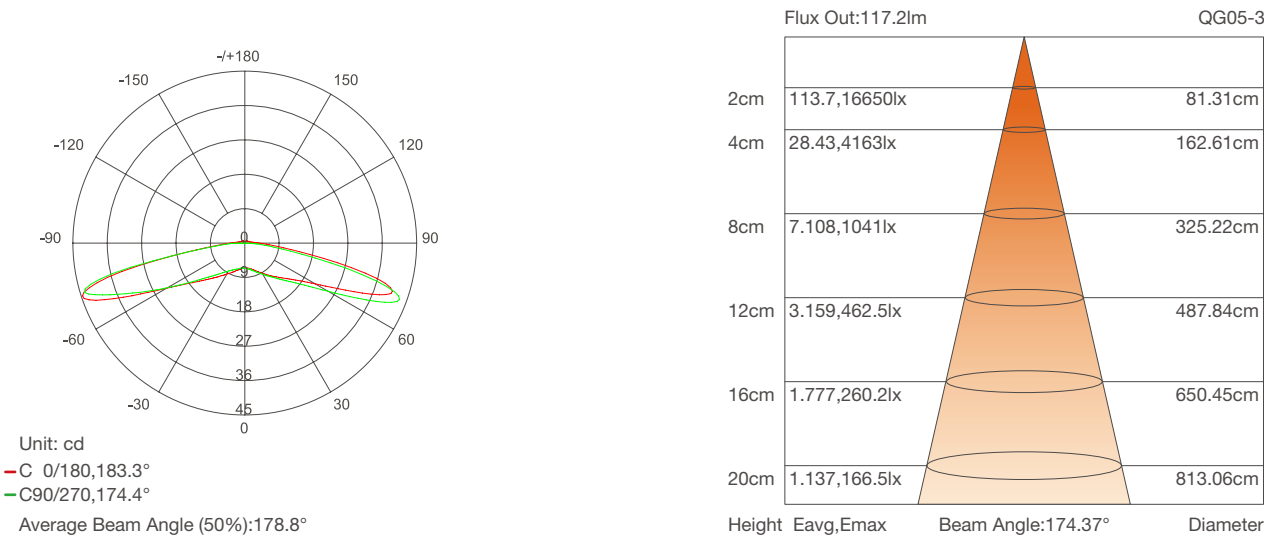

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QG05-2	12V DC	7400-9400K	81	101	0.8	2	90pcs
QG05-3	12V DC	7400-9400K	132	110	1.2	3	75pcs

ST2-W

3.0


ECO-SERIES

- High quality 2835 LEDs
- Aluminum PCB injection molding for better outline
- IP65 perfect for indoor and outdoor
- 160° wide beam angle for uniform lighting
- Single module cuttable




PROFILE DRAWINGS

Unit:mm/inch

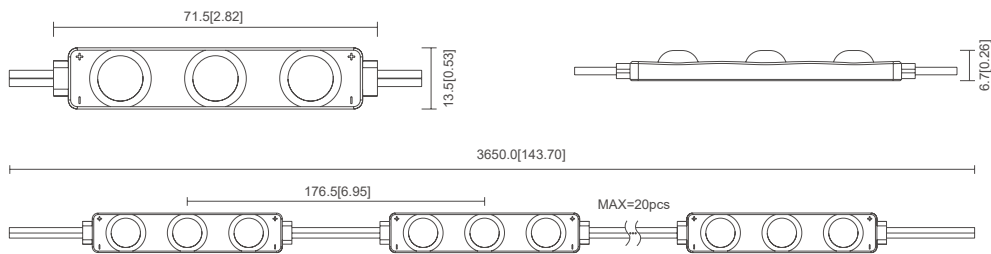

PHOTOMETRIC

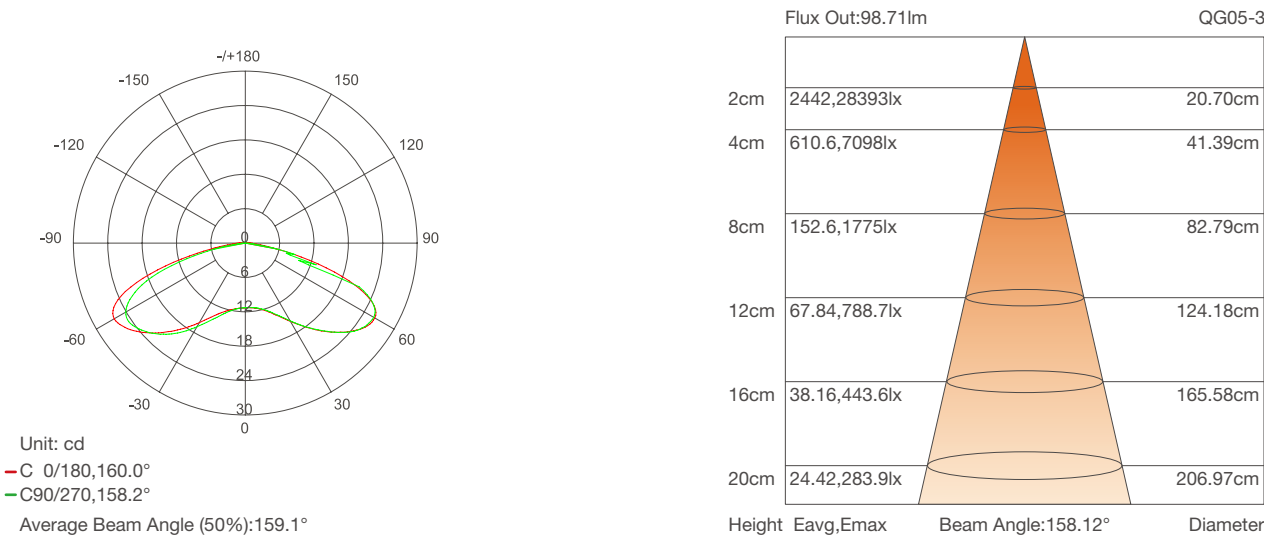

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST2W 3.0-3	12V DC	W	6000-12000K	100	100	1.0	3	20pcs
		R	620-625nm	12	25	0.48		
		G	465-470nm	39	54	0.72		
		B	520-525nm	6	16	0.36		
		Y	570-757nm	38	80	0.48		

M10

DIFFUSOR LENS

- Ultra high cost performance
- Adopt integrated lens
- Single module can be cut
- Support customization



CRI
80


160°

DC12V


5Years

PROFILE DRAWINGS

Unit:mm/inch

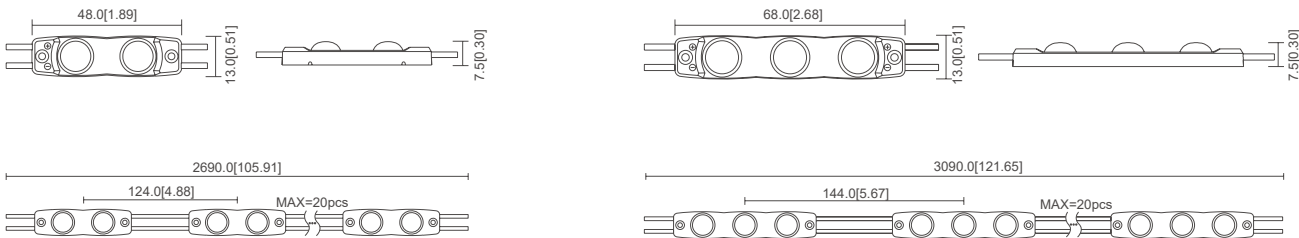

PHOTOMETRIC

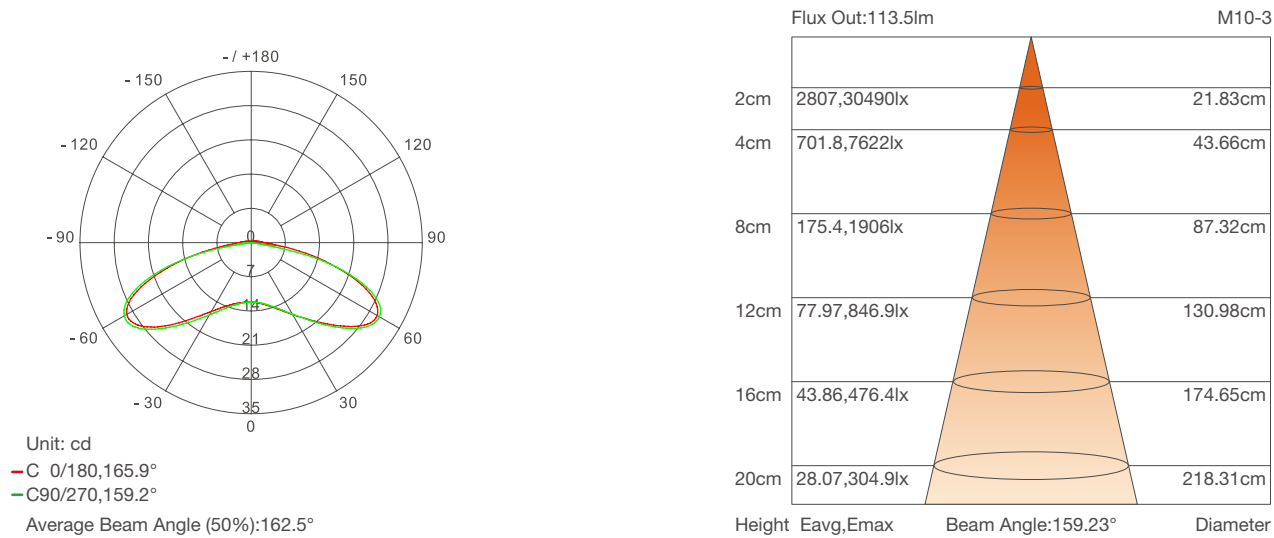

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M10-2	12V DC	9000-12000K	81	97	0.8	2	20pcs
M10-3	12V DC	9000-12000K	118	98	1.2	3	20pcs

PT9

DIFFUSOR LENS

- Adopt integrated optical lens, exquisite appearance, super cost-effective;
- Using ultrasonic waterproof technology;
- A single module can be cut, easy to install;
- Support customization;



CRI
80


165°

DC12V


5Years

PROFILE DRAWINGS

Unit:mm/inch

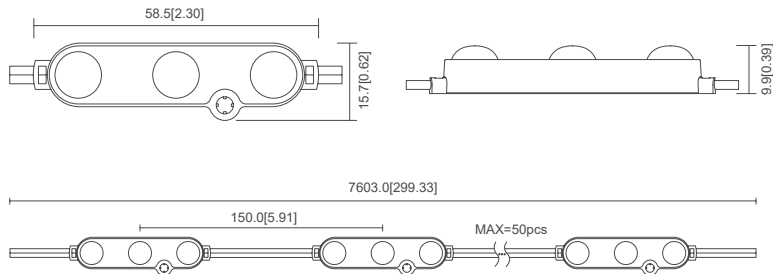

PHOTOMETRIC

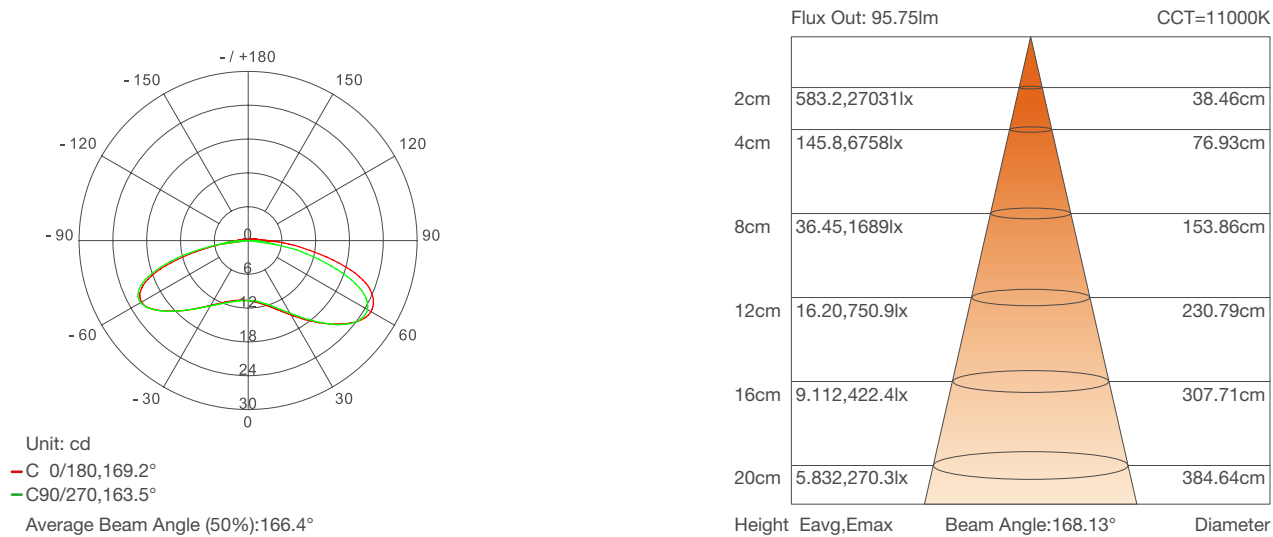


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PT9-3	12V DC	6000-6500K	100	100	1.0	3	50pcs


SS10 MINI SERIES

- Adopt McAdam 3 step LED,good color consistency
- Tiny 2835 LED, ideal for mini letters and light box
- High Rg,Rf value, wide CCT range from 2000-12000K
- Uniform light & stable performance
- Fully integrated glue filling process ,IP68, excellent weather resistance
- Single module cuttable
- Integrated diffuse reflection optical lens to achieve wide beam angle 150°

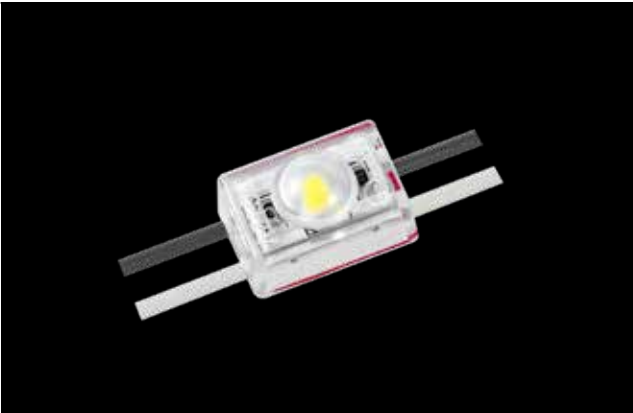


PROFILE DRAWINGS

Unit:mm/inch

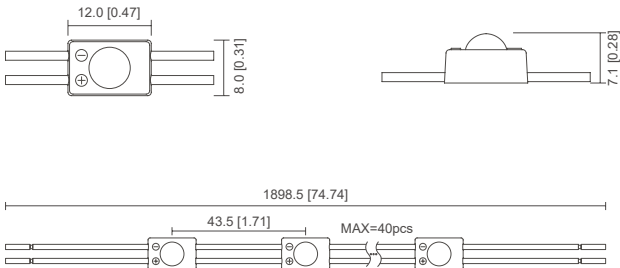

PHOTOMETRIC

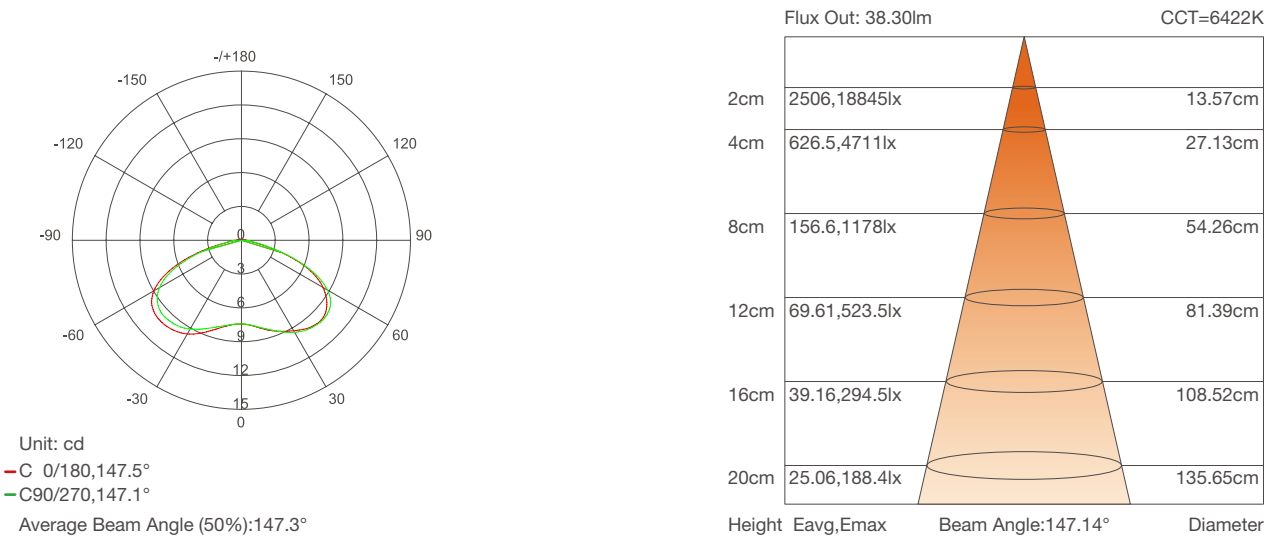

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
SS10	12V DC	2000-12000K	40	110	0.36	1	40pcs


SS308 MINI SERIES

- Adopt integrated lens;
- Use optical grade transparent PC material;
- A single module can be cut
- Support customization;




PROFILE DRAWINGS

Unit:mm/inch

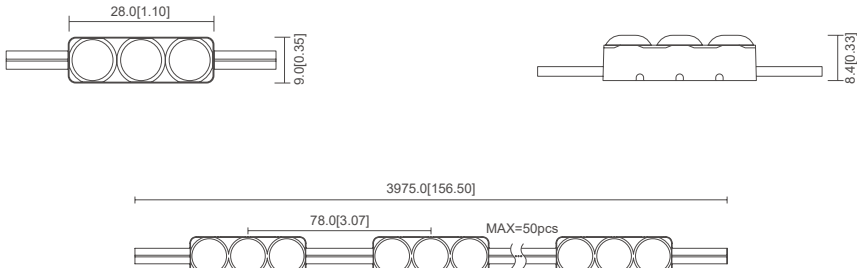

PHOTOMETRIC

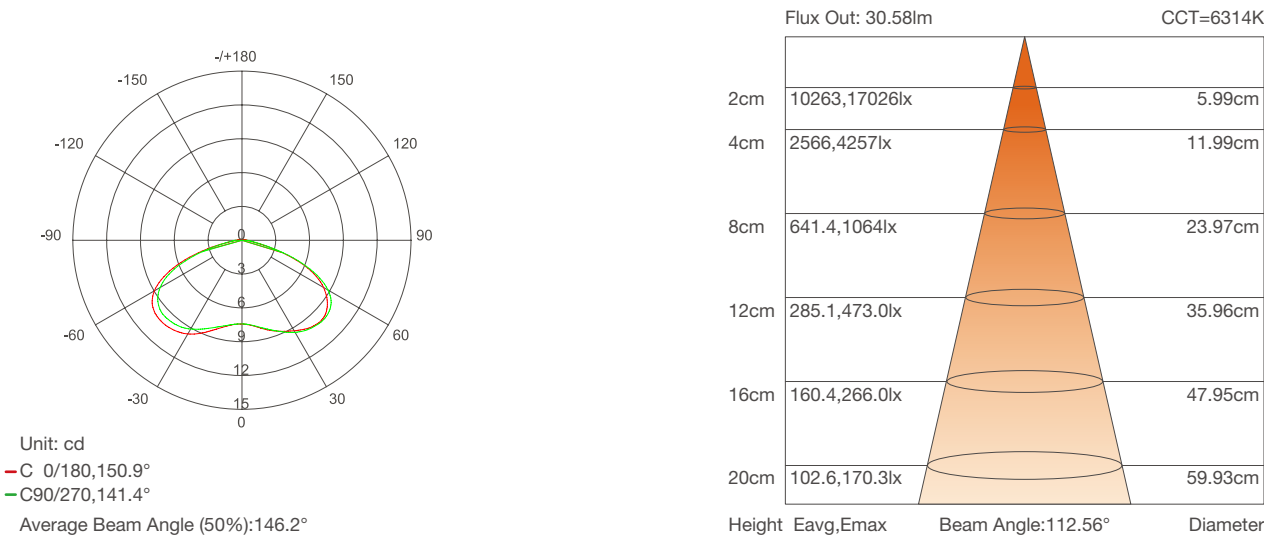

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
SS308	12V DC	3800-4200K	51	106	0.48	3	50pcs


ST2-T GUIDE SIGN BOX(side illumination)

- High CRI and dual color temperature
- Adopt full glue sealing design
- Brightness and color temperature adjustable via controller
- Single module cuttable, support customization




PROFILE DRAWINGS

Unit:mm/inch

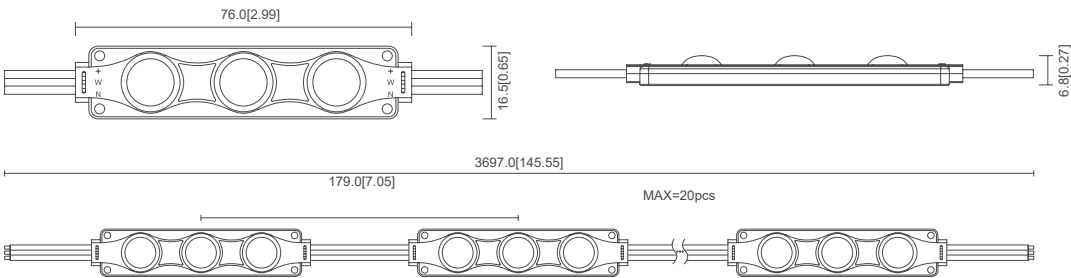

PHOTOMETRIC

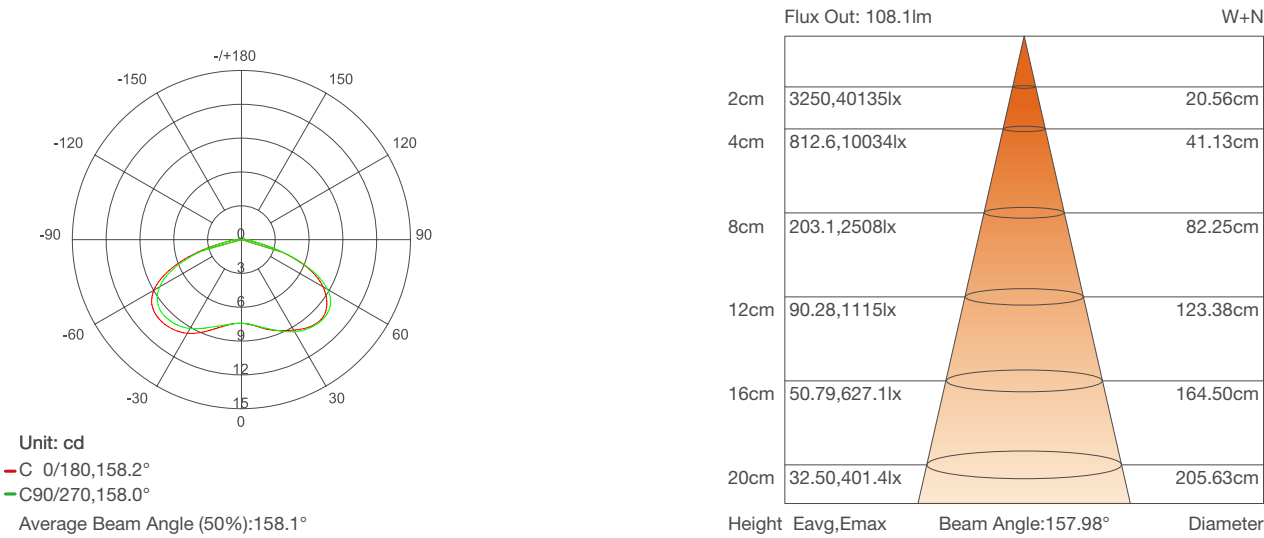

BASIC PARAMETERS

Model No.	Voltage	Light Color	CRI	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST2-T	12V DC	W	85	2800-3100K	47	87	0.54	3	20pcs
		N	85	6000-6500K	54	99	0.54		
		W+N	90	4100-4400K	101	93	1.08		


MZ18-W GUIDE SIGN BOX(side illumination)

- Edge-lit optical lens
- Adopt aluminum PCB injection molding process
- Single module cuttable




PROFILE DRAWINGS

Unit:mm/inch

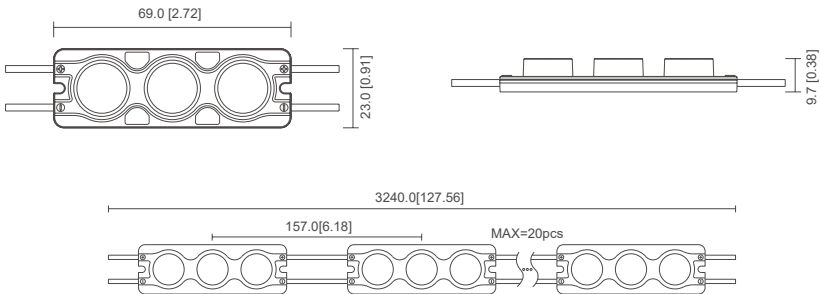

PHOTOMETRIC

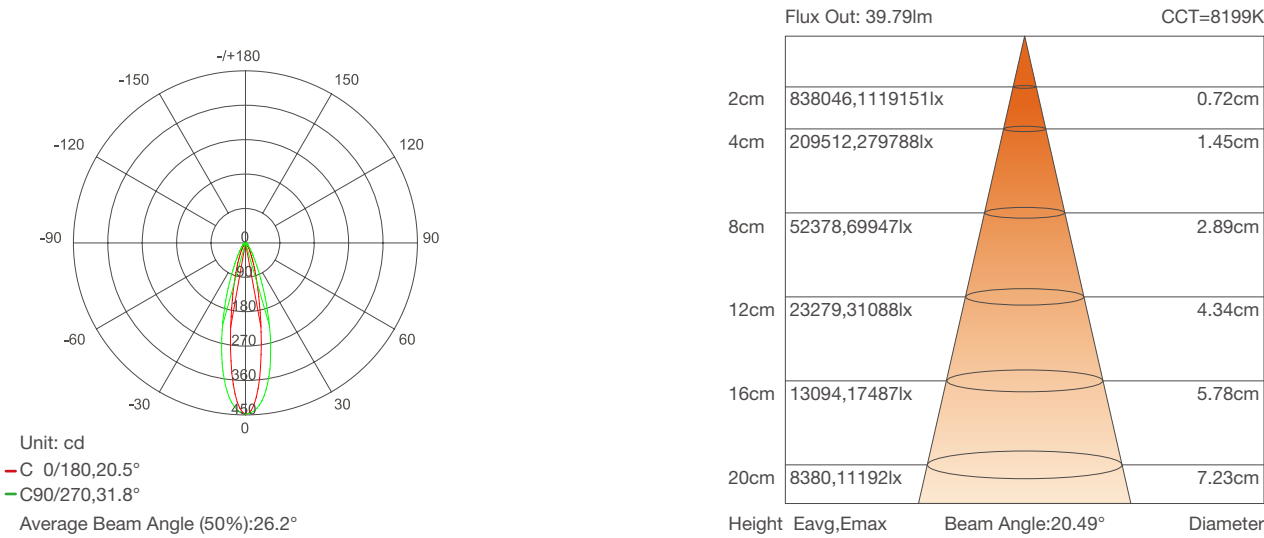

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
MZ18-W	12V DC	7800-9000K	135	90	1.5	3	20pcs

Z18-C POSTER BOX SIDE ILLUMINATION

- High efficacy 3030 LED
- Injection molding with IP65 water-proof
- Aluminum PCB with excellent heat dissipation
- Special lens with 10°28 deg beam angle
- Cutable between LEDs




CRI
70


10°28°

PROFILE DRAWINGS

Unit:mm/inch

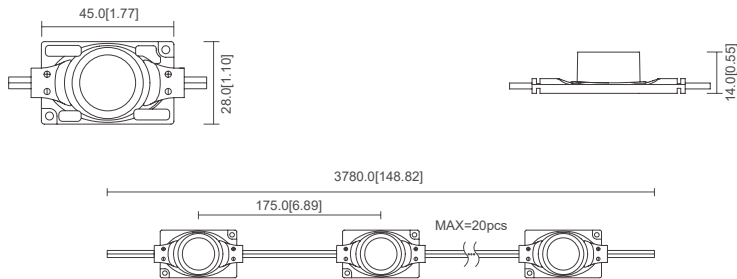

PHOTOMETRIC

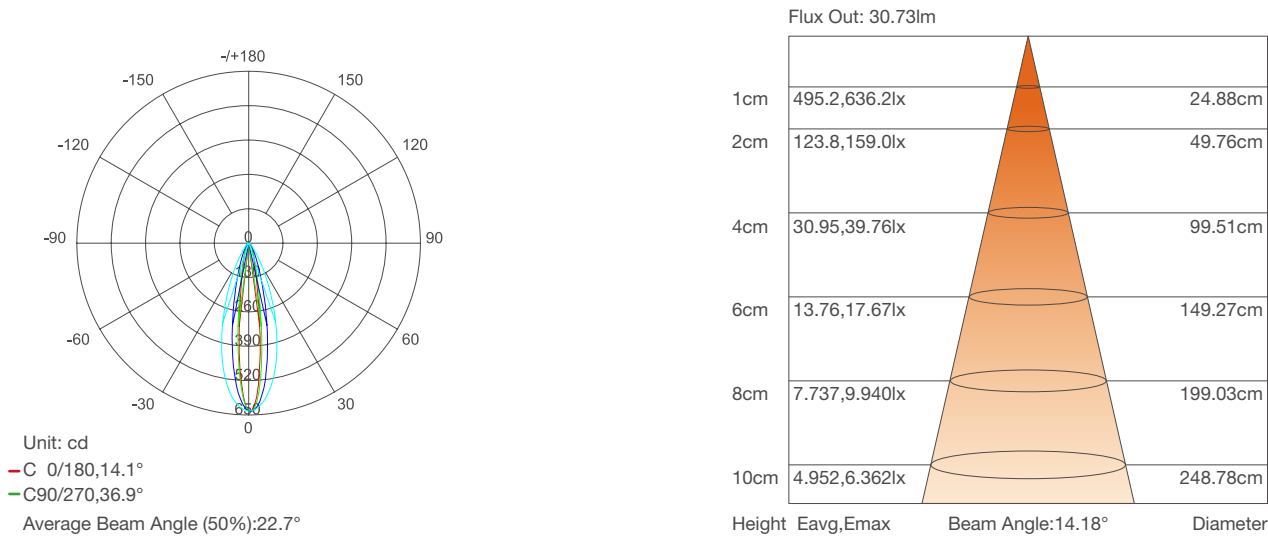

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z18-C	12V DC	6500K	184	92	2	1	20pcs

Z18 2.0 POSTER BOX SIDE ILLUMINATION

- Adopt Epistar/Sanan LEDs
- DC 12V constant voltage input
- Long run length, 20pcs/string with one end power feed
- Adopt UV resistant and flame retardant materials
- Injection molding process, IP65




CRI
70/80


10°45°

PROFILE DRAWINGS

Unit:mm/inch

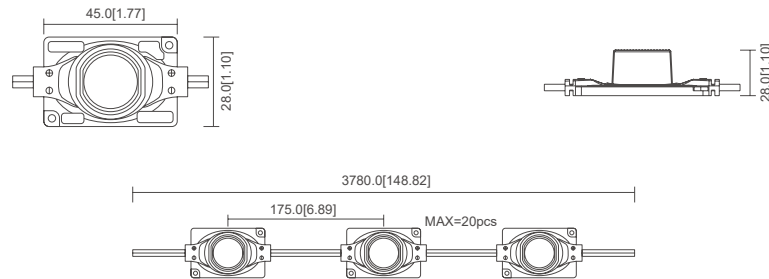

PHOTOMETRIC

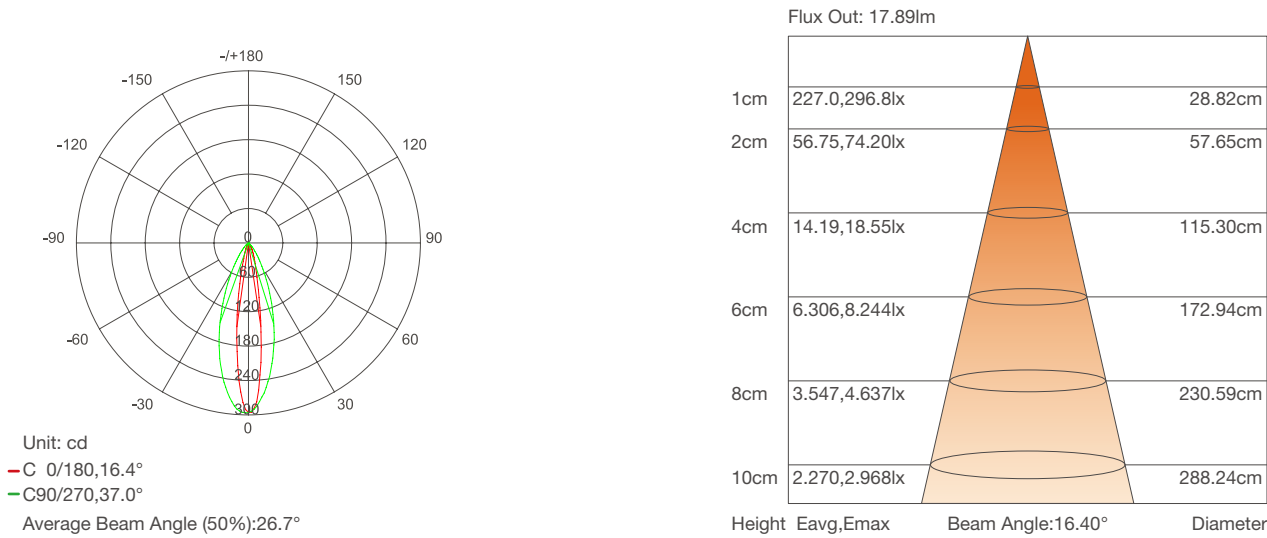

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z18 2.0	12V DC	6020-6530K	93-98	93	1	1	20pcs


Z19 4.0 POSTER BOX SIDE ILLUMINATION

- High light efficiency
- Every 3 modules can be cut;
- Match with aluminum profile can help heat dissipation
- Uniform effect within 3M of the reaching distance
- Support customization




PROFILE DRAWINGS

Unit:mm/inch

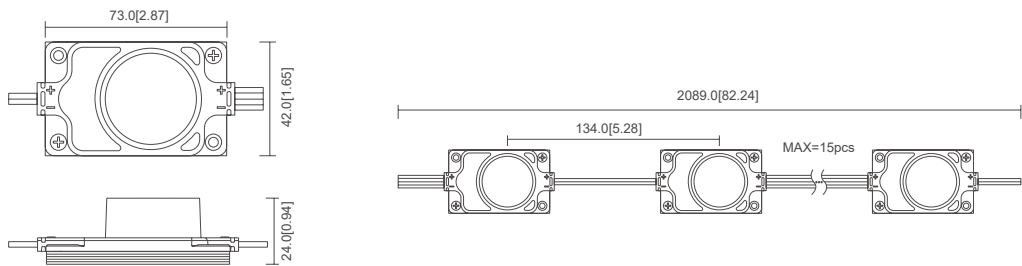

PHOTOMETRIC

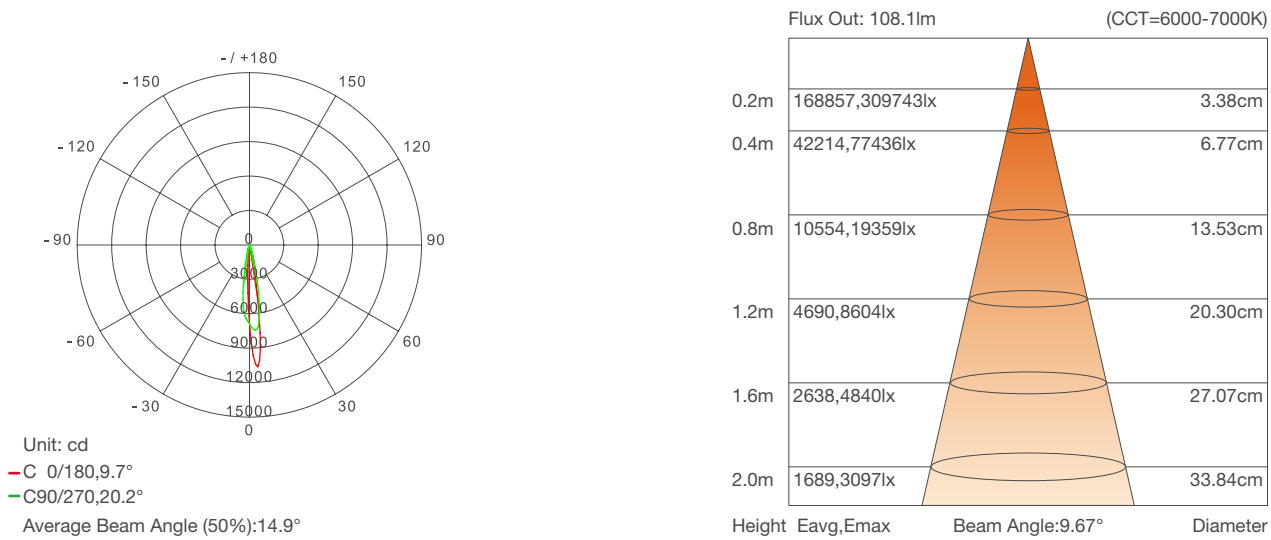

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z19 4.0	12V DC	6000-7000K	380	95	4	1	15pcs


ST12-B POSTER BOX BACKLIT ILLUMINATION

- High brightness
- Great lumen maintenance
- 170°beam angle, uniform lighting
- Excellent heat dissipation, long life span
- 40pcs/string with one end power feed
- Single module cuttable, easy to install




PROFILE DRAWINGS

Unit:mm/inch

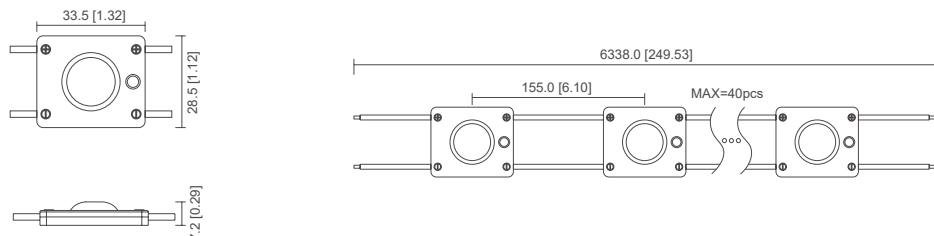

PHOTOMETRIC

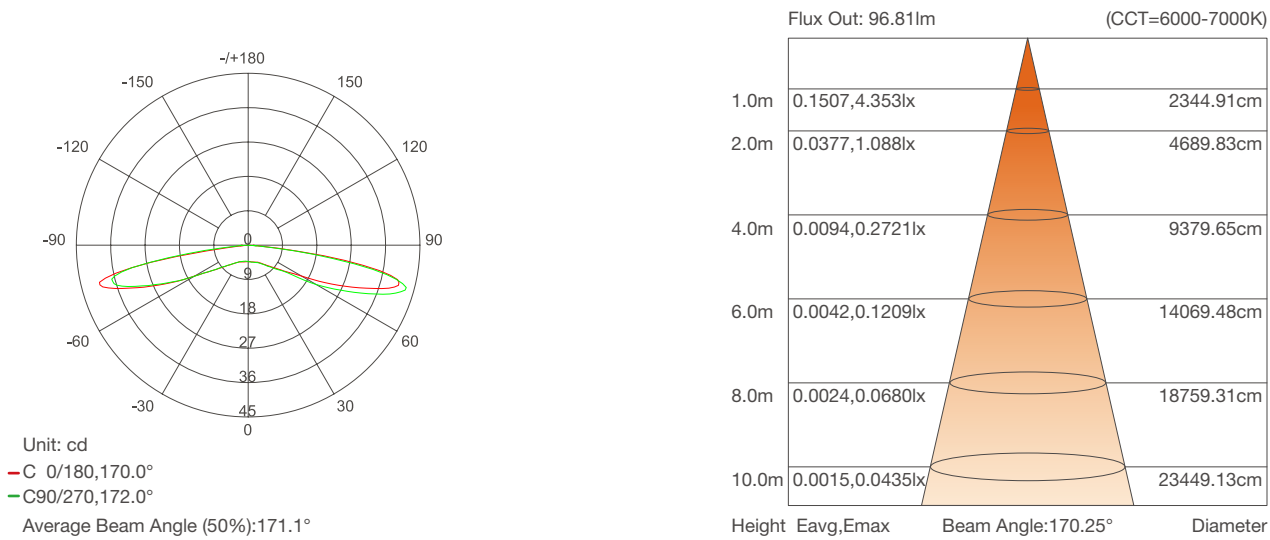

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST12-B	12V DC	8500K	106-112	88	1.2	1	40pcs

ST13 2.0 POSTER BOX SIDE ILLUMINATION


- Adopt Epistar/Sanan LEDs
- 160° beam angle, transmittance up to 97%
- Aluminum PCB is beneficial for heat dissipation of high-power LEDs
- Max run 20pcs with one end power feed
- Great lumen maintenance, IP65 rating
- Support PWM, 0-10V, DALI, DMX dimming




				CRI 70/80			
--	--	--	--	---------------------	--	--	--

PROFILE DRAWINGS

Unit:mm/inch

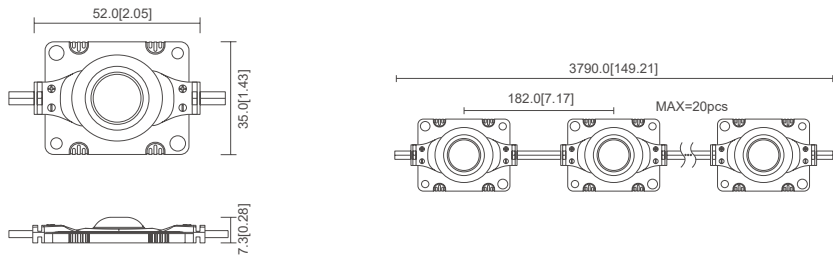

PHOTOMETRIC

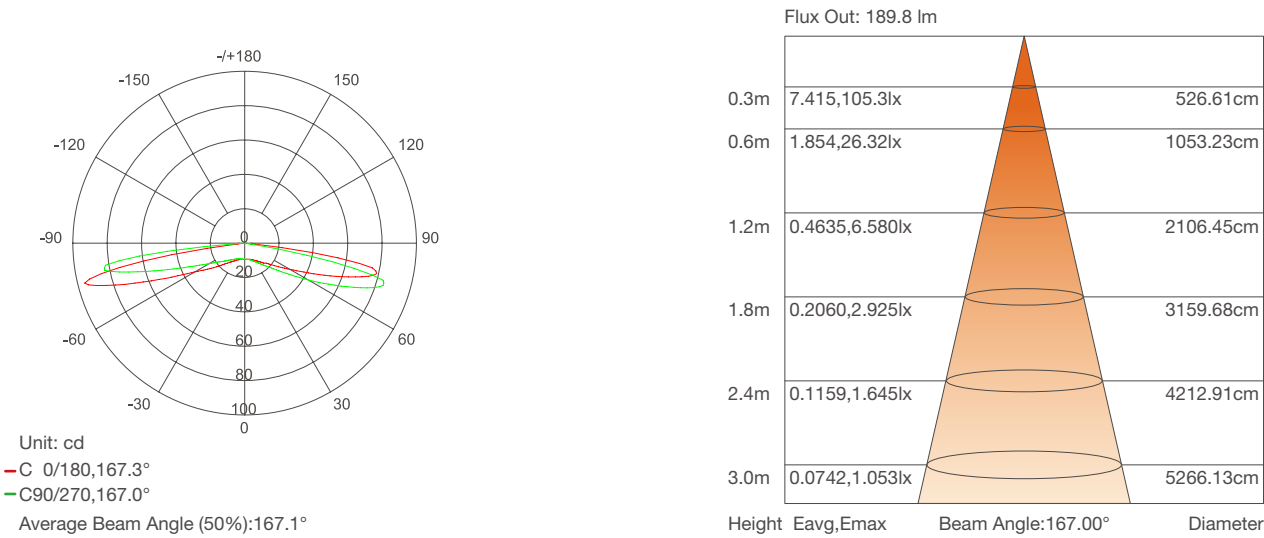

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST13 2.0-2W	12V DC	6500-7040K	189-194	90	2.1	1	20pcs

BV-AL-3030 POSTER BOX SIDE ILLUMINATION


- Adopt high quality 3030LED
- 160° beam angle
- Waterproof, IP65 rating
- Aluminum PCB for better heat dissipation




	NICHIA				CRI 80			
--	---------------	--	--	--	------------------	--	--	--

PROFILE DRAWINGS

Unit:mm/inch

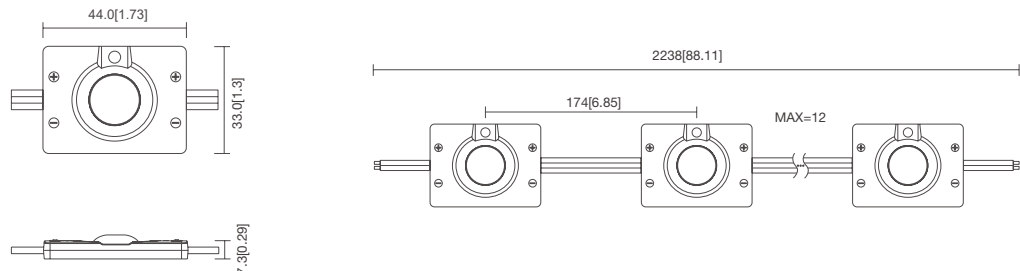

PHOTOMETRIC

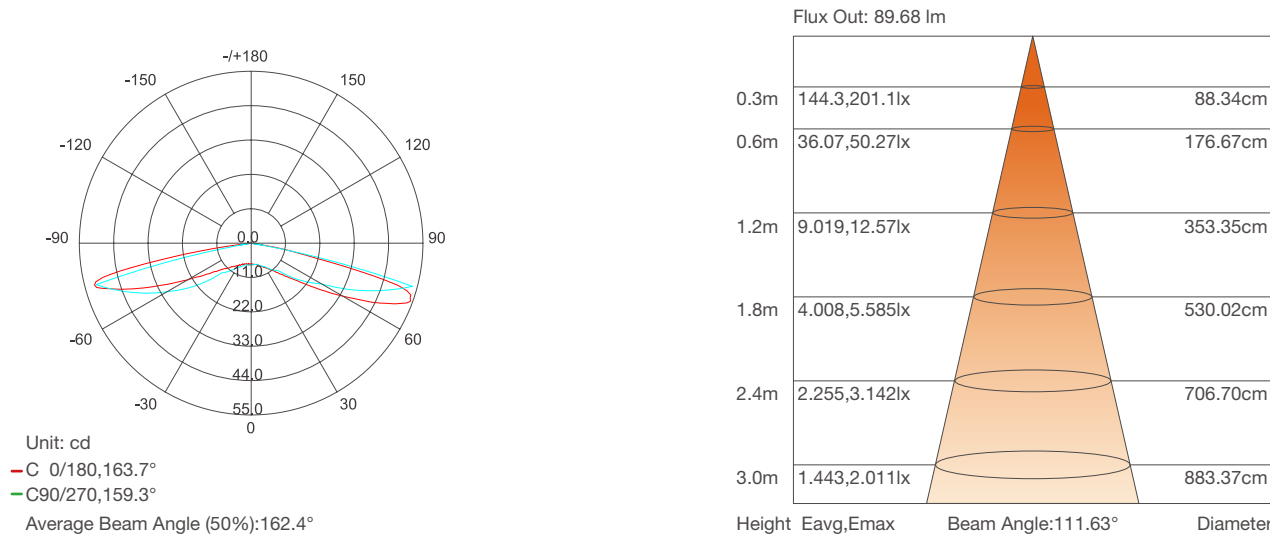

BASIC PARAMETERS


Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BV-AL-3030	24V DC	6500-7000K	130	86	1.5	1	12pcs

- Single module cuttable
- Every 3 modules can be cut
- Glue waterproof performance




PROFILE DRAWINGS

Unit:mm/inch

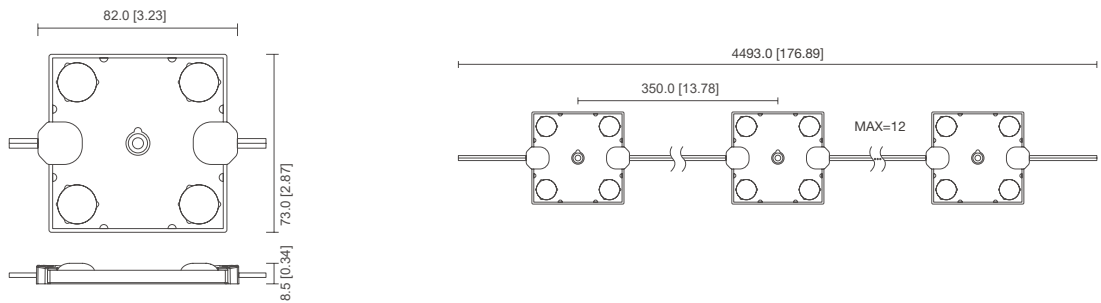

PHOTOMETRIC

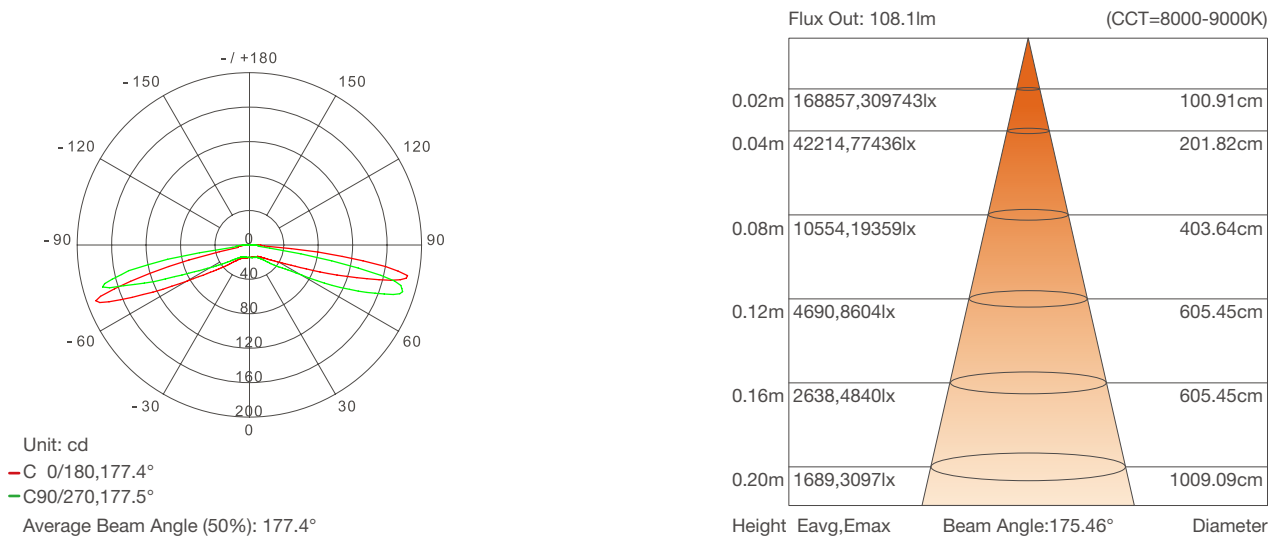

BASIC PARAMETERS


Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M8-C	12V DC	8000-9000K	380	95	4	4	12pcs

- Adopt 2835 LED
- Self designed lens with 170° beam angle for uniform lighting
- High-end design, requiring fewer products per unit area
- Single module cuttable




PROFILE DRAWINGS

Unit:mm/inch

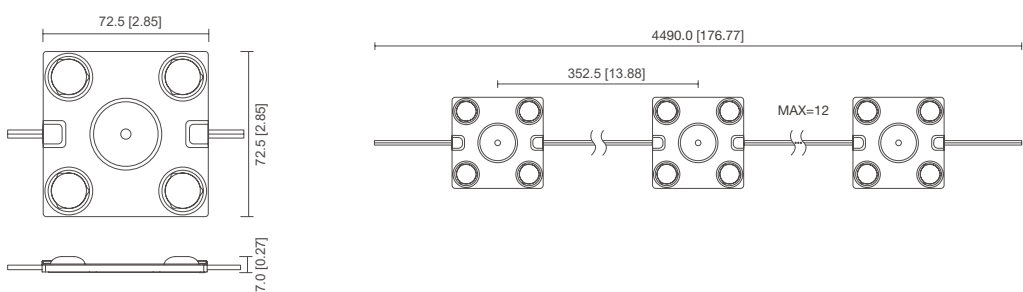

PHOTOMETRIC

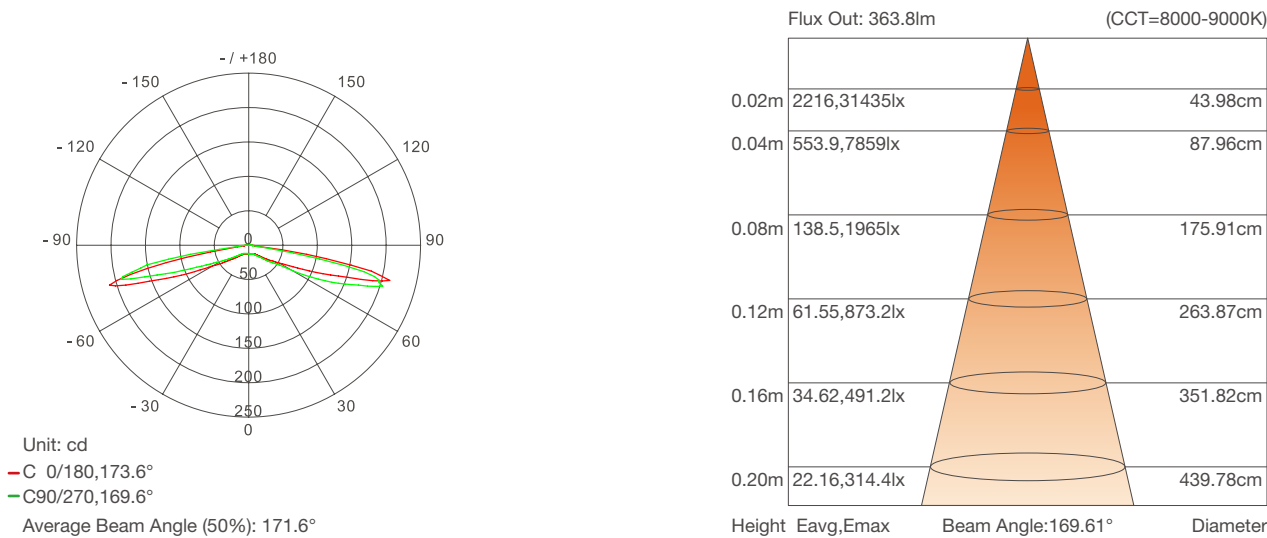


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M8-B	12V DC	8000-9000K	388	97	4	4	12pcs

PS5-B


RGB/RGBW MODULE

- Adopt high quality 5050RGB SMD
- Waterproof IP66 for perfect outdoor use
- Single module cuttable for easier installation

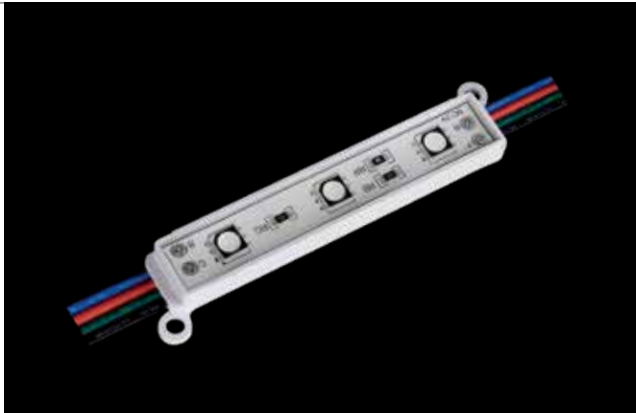


PROFILE DRAWINGS

Unit:mm/inch

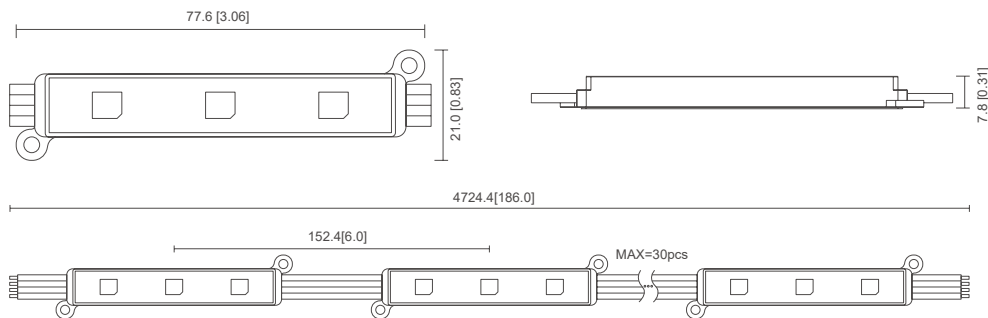

PHOTOMETRIC

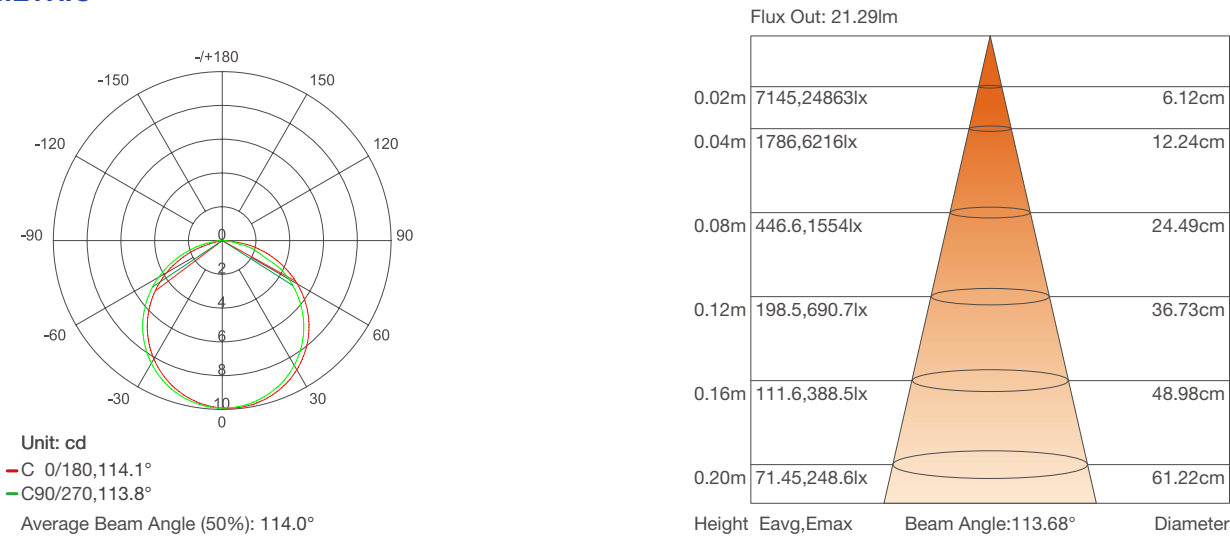

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PS5-B	12V DC	R	620-625nm	7	27	0.24	3	20pcs
		G	525-530nm	13	52	0.24		
		B	465-470nm	3	13	0.24		
		R+G+B	100000K+	22	30	0.72		

PZ5


RGB/RGBW MODULE

- Adopt RGB+W LEDs
- Strong anti-pulls ability
- Can create reach lighting effects via a controller
- Long run design, 50groups/string
- Single module cuttable for easier installation




PROFILE DRAWINGS

Unit:mm/inch

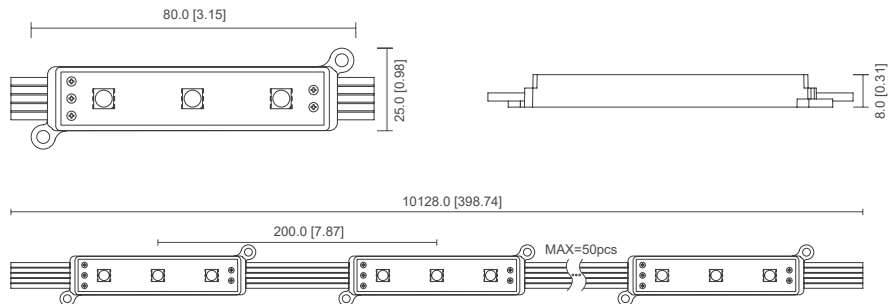

PHOTOMETRIC

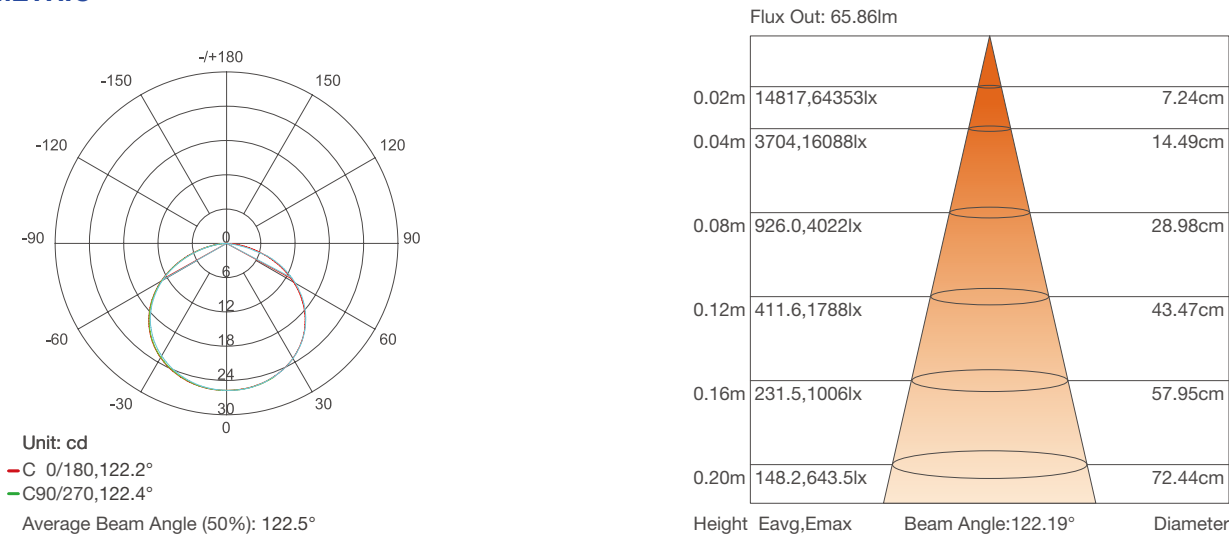

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PZ5	12V DC	R	620-625nm	/	/	0.24	3	50pcs
		G	515-530nm	/	/	0.24		
		B	465-470nm	/	/	0.24		
		RGB+W	100000K+	36	40	0.96		

PZ6 RGB/RGBW MODULE

- Adopt integrated optical lens
- Great environmental adaptability and UV resistance
- Can create reach lighting effects via a controller
- Single module cuttable, customization available




CRI
80

165°



3Years

PROFILE DRAWINGS

Unit:mm/inch

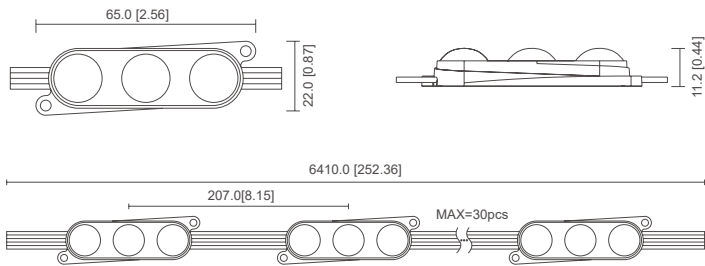

PHOTOMETRIC

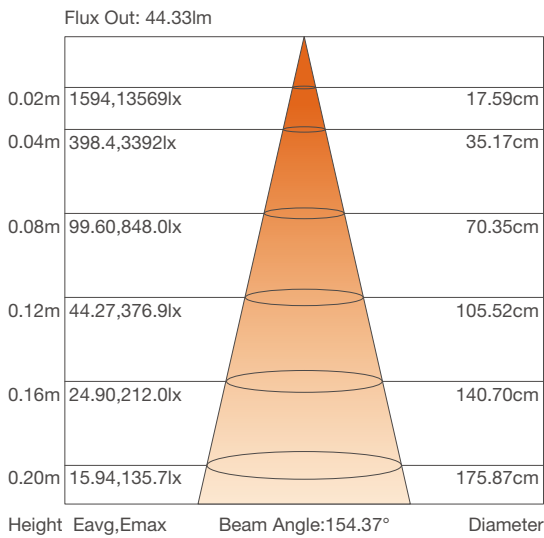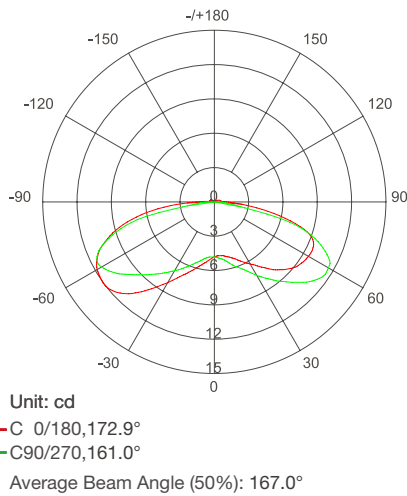

BASIC PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PZ6	12V DC	>80 /	W	6500K	19	90	0.21	3	30pcs
			R	620-625nm	7	30	0.21		
			G	520-530nm	15	67	0.21		
			B	465-470nm	3	15	0.21		
			RGBW	/	48	55	0.86		

PS6 RGB/RGBW MODULE

- Adopt integrated lens
- Full glue sealing process, super environmental adaptability
- Can create reach lighting effects via a controller
- Single module cuttable




CRI
80

165°



3Years

PROFILE DRAWINGS

Unit:mm/inch

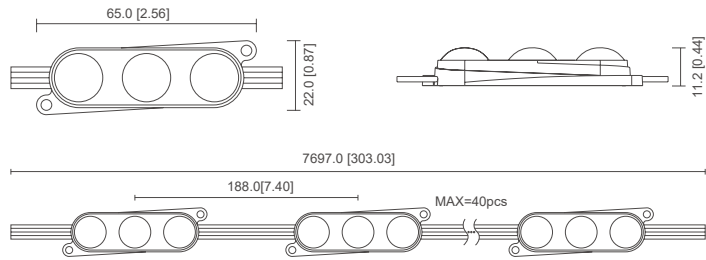

PHOTOMETRIC

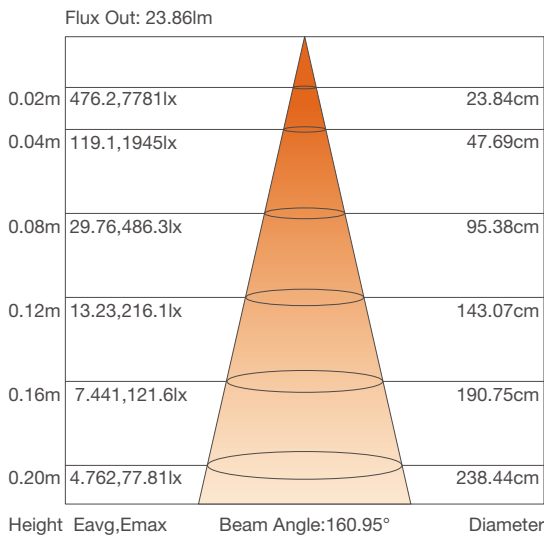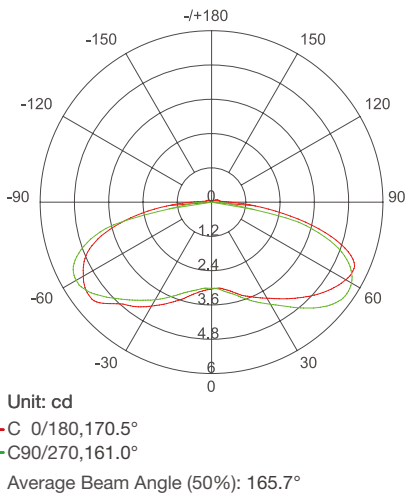

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PS6	12V DC	R	620-625nm	7	30	0.24	3	40pcs
		G	520-525nm	16	68	0.24		
		B	465-470nm	9	15	0.24		
		RGB	100000K+	25	35	0.72		


PQ7 DIGITAL/ADDRESSABLE MODULE / SPI

- Adopt integrated lens
- Double glue feeding process, IP68 rating
- Continuous transmission even 1 LED broken
- Great environmental adaptability and UV resistance
- Can create reach lighting effects via a controller, such as SP105E controller
- Single module can be cut





PROFILE DRAWINGS

Unit:mm/inch

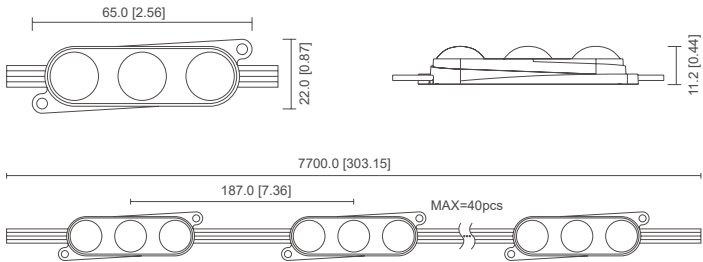

PHOTOMETRIC

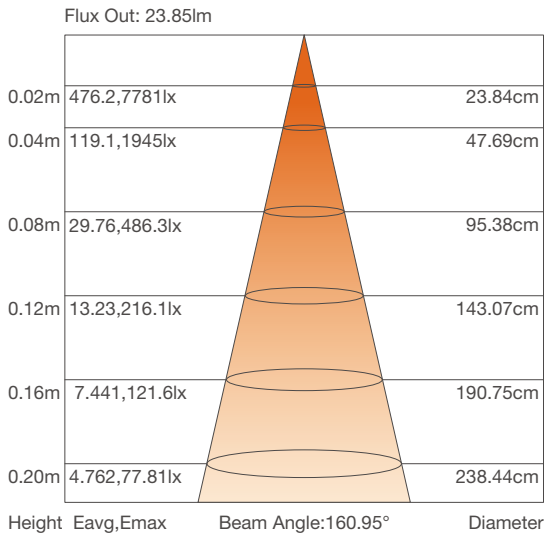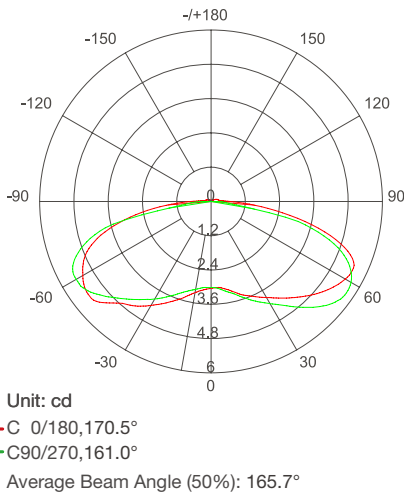

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ7	12V DC	R	620-625nm	6	18	0.21	3	40pcs
		G	520-530nm	14	42	0.21		
		B	460-470nm	3	8	0.21		
		RGB	/	22	23	0.21		


PQ8 DIGITAL/ADDRESSABLE MODULE / SPI

- Adopt integrated lens
- Great environmental adaptability and UV resistance
- Can create reach lighting effects via a controller, such as MR-502 controller
- Single module can be cut





PROFILE DRAWINGS

Unit:mm/inch

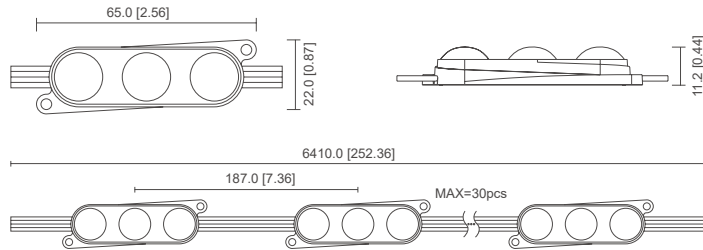

PHOTOMETRIC

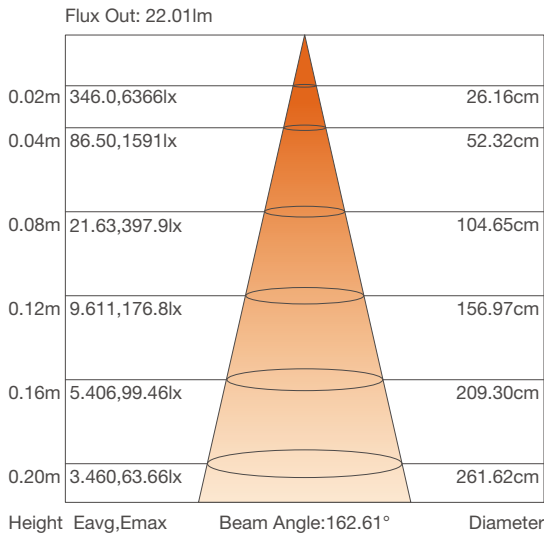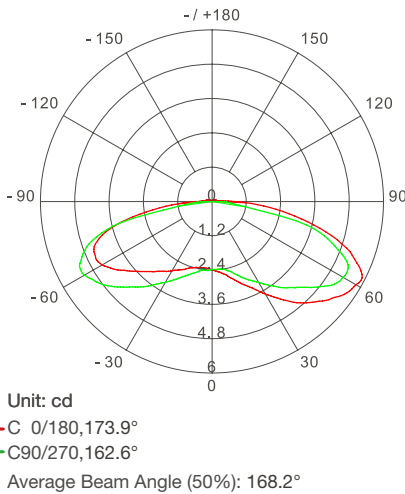

BASIC PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ8	12V DC	>80 /	W	6500K	10	50	0.2	3	30pcs
			R	620-630nm	2	10	0.2		
			G	520-530nm	6	30	0.2		
			B	460-470nm	1	6	0.2		
			RGBW	/	18	30	0.6		

CS8


DIGITAL/ADDRESSABLE MODULE / SPI

- Application for outdoor building decoration, large programmed logos or signage,etc
- 3LEDS RGB SMD5050 powered
- Lens with optic function, specially for large logos
- Signal never rip even foregoing led error
- Complied with controller such as BV-T1000\T4000\T8000\MR-318A





PROFILE DRAWINGS

Unit:mm/inch

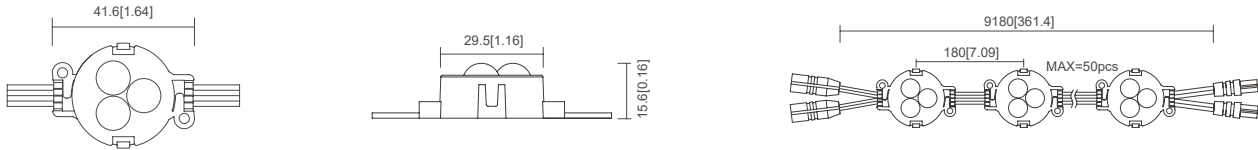

PHOTOMETRIC

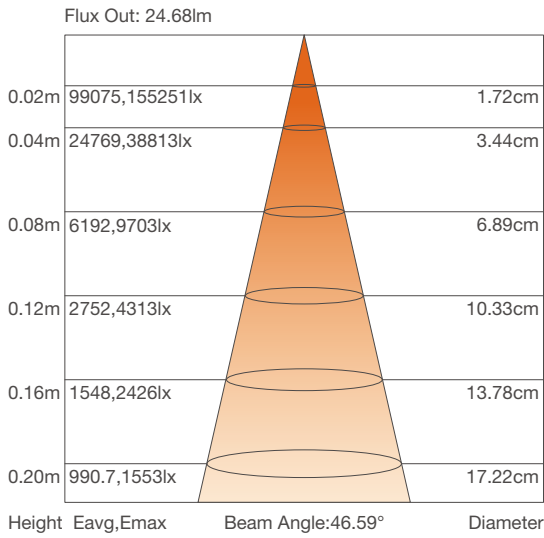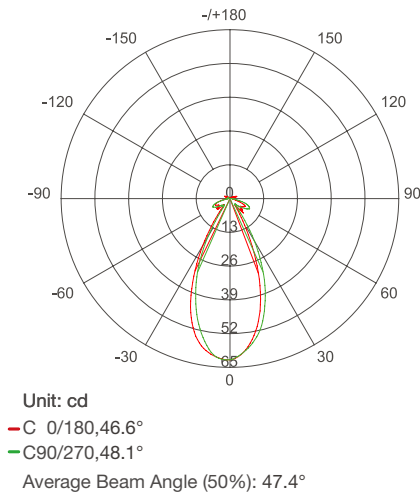


BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS8	12V DC	R	620-625nm	19	29	0.65	3	50pcs
		G	525-530nm					
		B	465-470nm					

CS8-A


DIGITAL/ADDRESSABLE MODULE / SPI

- Glue sealing process, IP67 rating
- Adopt auto integer forwarding technology
- Long run design and the signals will not distort and attenuate
- Signal never rip even foregoing led error
- Support multiple controllers to realize various lighting effects


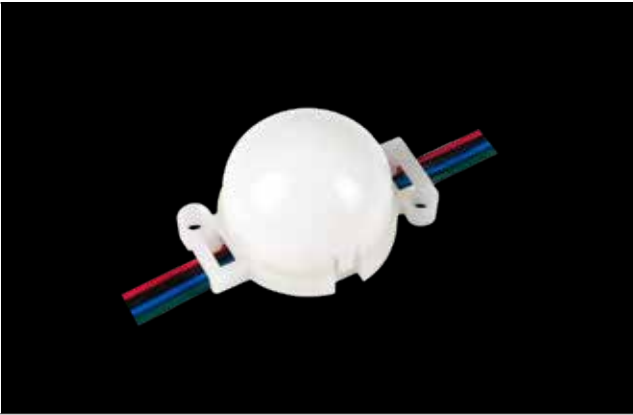


PROFILE DRAWINGS

Unit:mm/inch

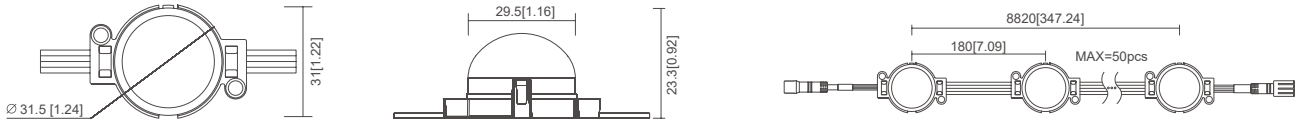

PHOTOMETRIC

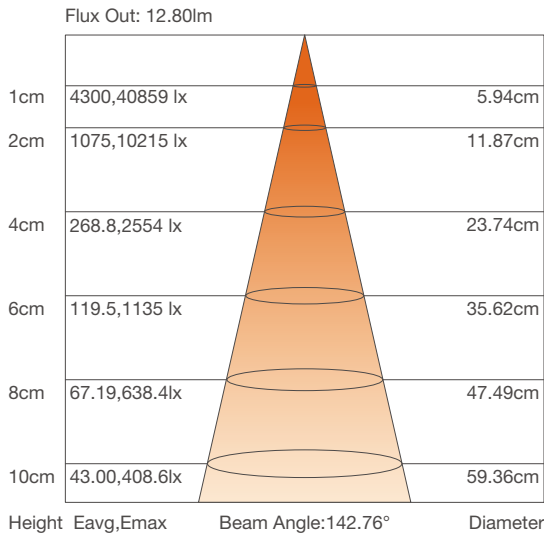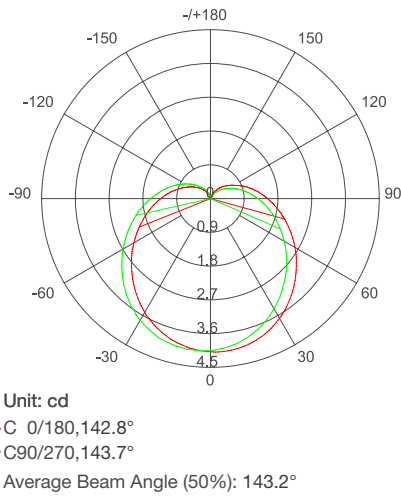


BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS8-A	12V DC	R	620-625nm	/	/	0.22	3	50pcs
		G	520-525nm	/	/	0.22		
		B	465-470nm	/	/	0.22		
		RGB	100000K+	17	25	0.65		


PQ5-B DIGITAL/ADDRESSABLE MODULE / SPI

- Adopt TM1914A IC for long distance signal transmission
- Signal never rip even foregoing led error
- Support multiple controllers to realize various light effects
- Do not support PWM dimming

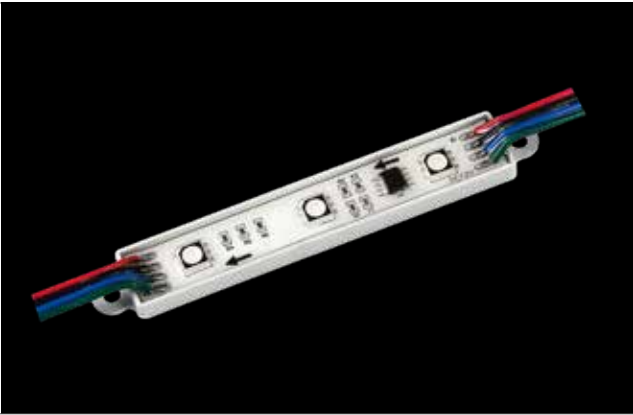


PROFILE DRAWINGS

Unit:mm/inch

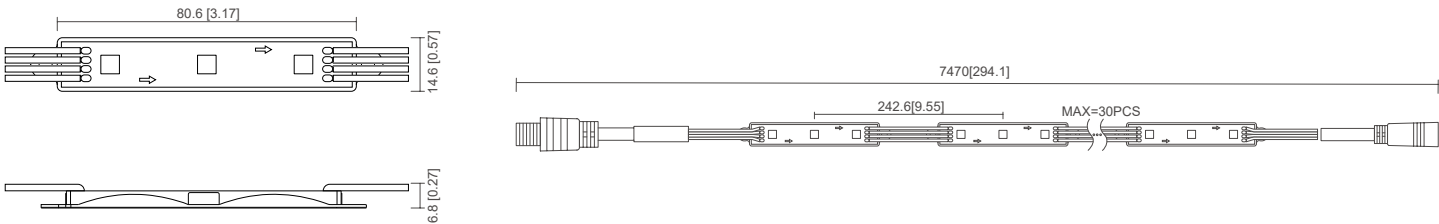

PHOTOMETRIC

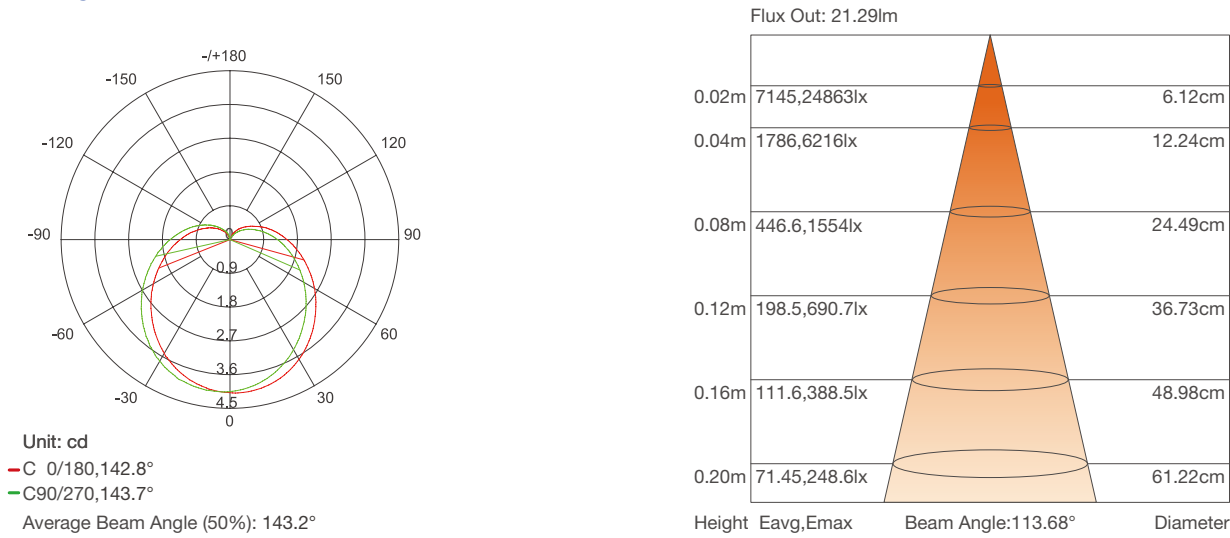

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ5-B	12V DC	R	620-625nm	5-7	≥24	0.2	3	30pcs
		G	525-530nm	10-12	≥49	0.2		
		B	465-470nm	2-3	≥9	0.2		
		RGB	100000K+	19-21	≥24.5	0.65		


PQ6 DIGITAL/ADDRESSABLE MODULE / DMX

- Adopt integrated optical lens
- Great weather and UV resistance
- Support DMX512
- Can use external controller to achieve multiple color changes
- Single module can be cut, customization available




PROFILE DRAWINGS

Unit:mm/inch

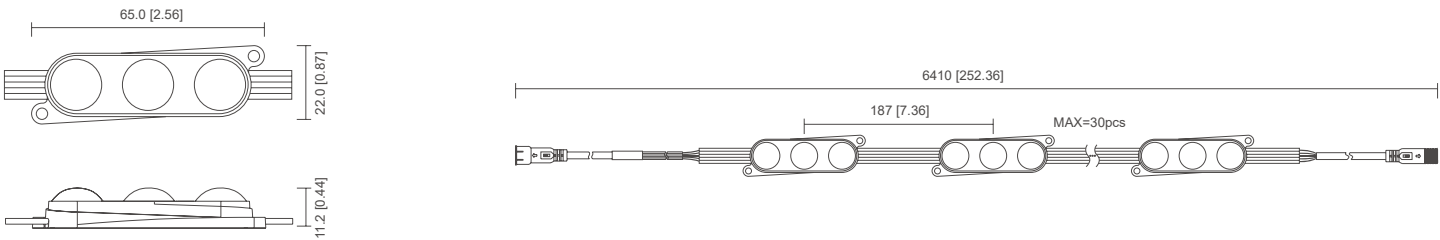

PHOTOMETRIC

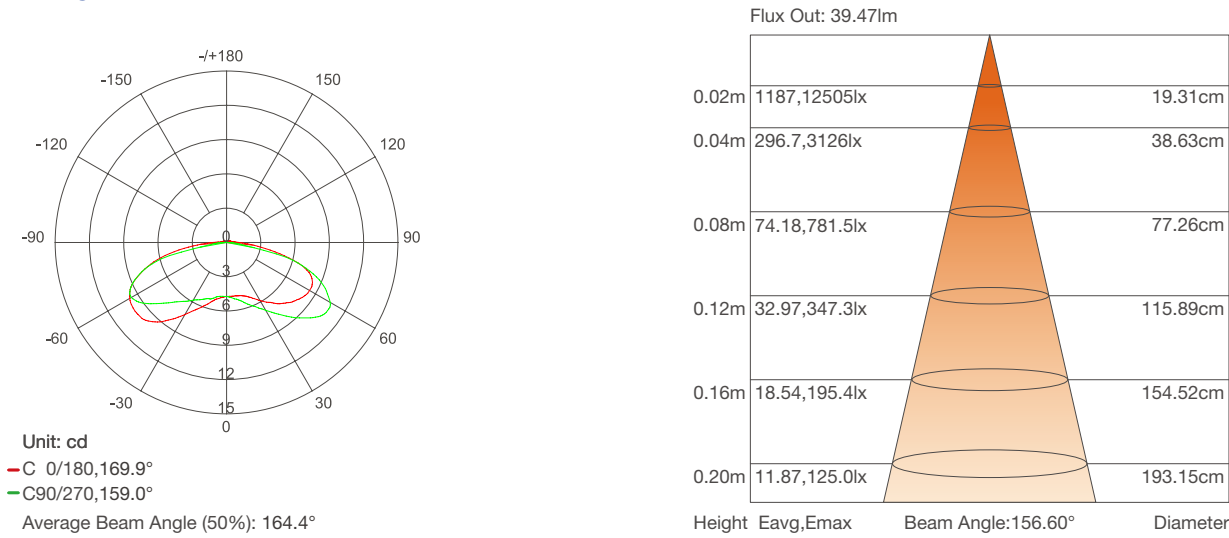


BASIC PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ6	12V DC	>80	W	6500K	17	50	0.33	3	30pcs
			R	620-630nm	3	10	0.33		
			G	520-530nm	11	30	0.33		
			B	460-470nm	4	12	0.33		
			RGBW	/	40	40	0.98		

CS6

DIGITAL/ADDRESSABLE MODULE / SPI

- Adopt Fresnel lens
- Digital control, constant current drive
- Long run with no brightness drop and signal attenuate
- Signal never rip even foregoing led error
- Single module can be cut, easy to install

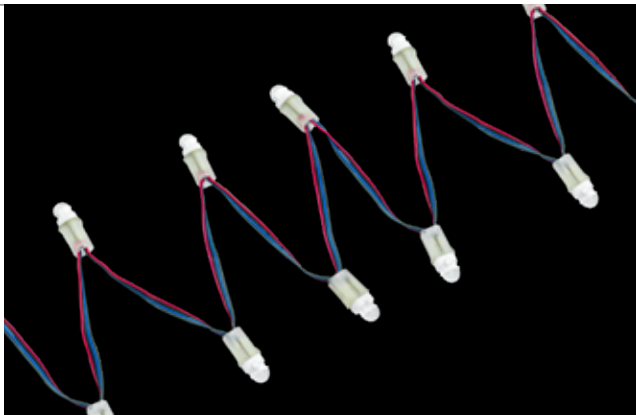

IP67

LED5050


45°

DC5V



3Years

PROFILE DRAWINGS

Unit:mm/inch

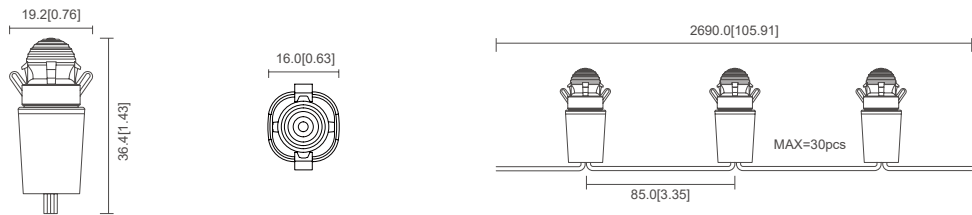

PHOTOMETRIC

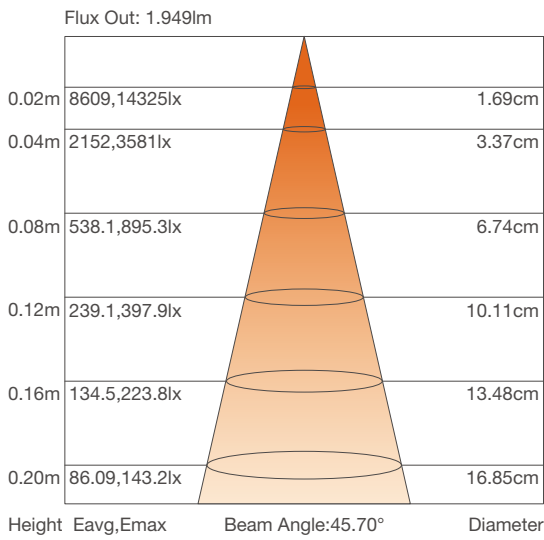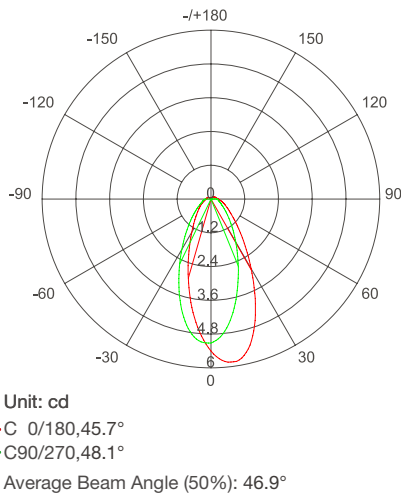


BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS6	5V DC	R	620-630nm	2	18	/	1	30pcs
		G	520-530nm	4	35	/		
		B	460-470nm	1	9	/		
		RGB	100000K+	7	25	0.27		

CS7

DIGITAL/ADDRESSABLE MODULE / SPI

- High quality Fresnel Lens
- Constant current driving
- Uniform lighting with no brightness drop and signal attenuate
- Signal never rip even foregoing led error
- Single module can be cut, easy to install

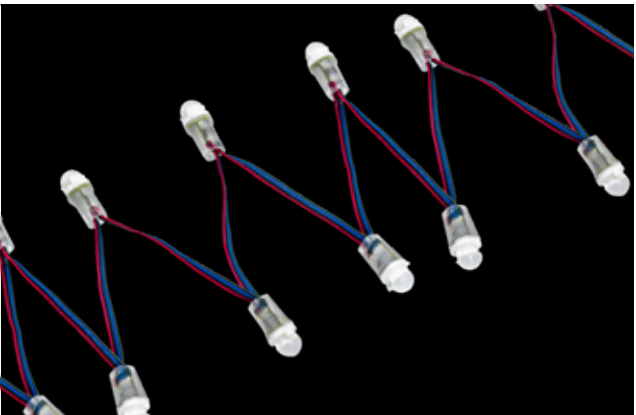

IP67

LED5050


50°

DC5V



3Years

PROFILE DRAWINGS

Unit:mm/inch

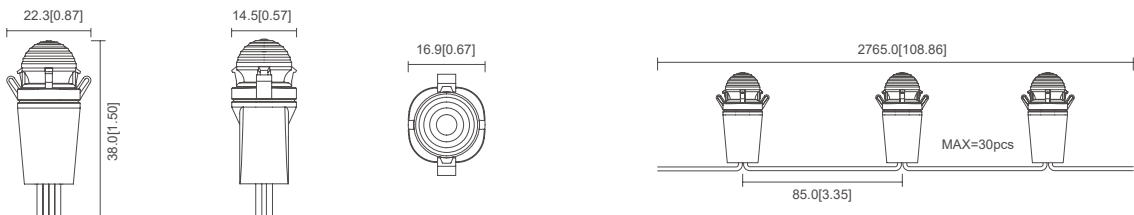

PHOTOMETRIC

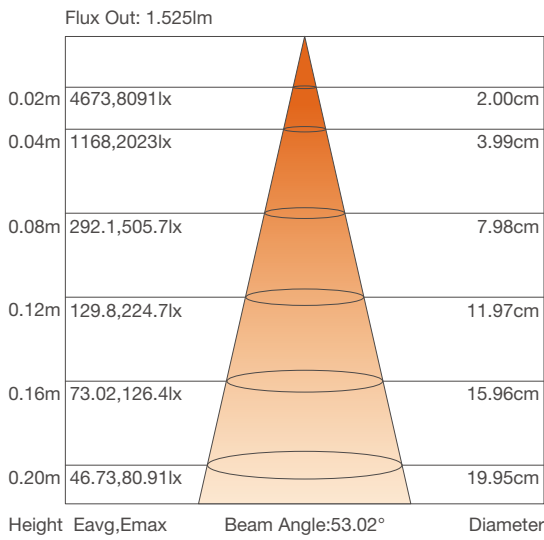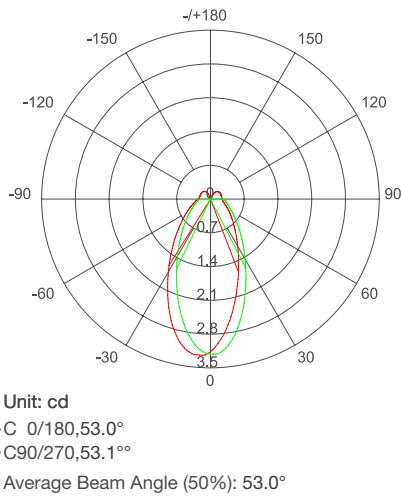

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS7	5V DC	R	620-625nm	2	16	/	1	30pcs
		G	525-530nm	4	34	/		
		B	465-470nm	1	8	/		
		RGB	100000K+	6	20	0.27		

D20

DIGITAL/ADDRESSABLE MODULE / DMX

- Using imported chips with high brightness and long life span
- Adopt wire and cover of cold-resistant, anti-UV, flame retardant
- IP67 rating, perfect for outdoor use
- Beautiful appearance and cost-effective
- Multiple mounting methods





IP67



LED3535



LM-80



120°




DC5V



3Years

PROFILE DRAWINGS

Unit:mm/inch

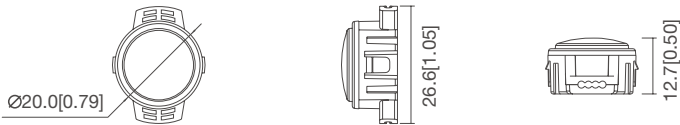

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	Gray Level	W/pcs	LED/pc	Max Run
D202-Y	5V DC	Y	2000±200K	18	/	0.26	1	30pcs
D202-W	5V DC	W	2800-6500K	20	/			
D204-RGB	5V DC	RGB	100000K	7	256			

D30/50

DIGITAL/ADDRESSABLE MODULE / DMX

- Using imported chips with high brightness and long life span
- Adopt wire and cover of cold-resistant, anti-UV, flame retardant
- IP67 rating, perfect for outdoor use
- Beautiful appearance and cost-effective
- Multiple mounting methods





IP67



LED3535



LM-80



120°




DC12/24V



3Years

PROFILE DRAWINGS

Unit:mm/inch

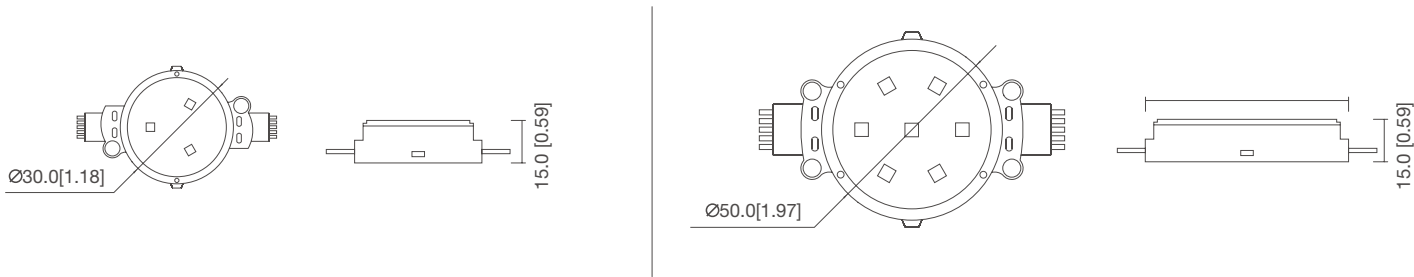

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	Gray Level	W/pcs	LED/pc	Max Run
D302-Y	12V DC	Y	2000±200K	5	/	0.66	3	40pcs
D302-G	12V DC	G	520-525nm	14	/			
D302-B	12V DC	B	465-470nm	3	/			
D302-W	12V DC	W	2800-6500K	42	/	22	256	
D302-RGB	12V DC	R+G+B	100000K	22	256			
D302-RGB	12V DC	R+G+B	100000K	22	256/65536			

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	Gray Level	W/pcs	LED/pc	Max Run
D502-Y	24V DC	Y	2000±200K	84	/	1.3	7	20pcs
D502-G	24V DC	G	520-525nm	32	/			
D502-B	24V DC	B	465-470nm	7	/			
D502-W	24V DC	W	2800-6500K	98	/	49	256	
D502-RGB	24V DC	R+G+B	100000K	49	256			
D502-RGB	24V DC	R+G+B	100000K	49	256/65536			

RIGID BAR SERIES


Back-lit light box, double sided
Edge-lit light box

YD SERIES (BACK-LIT)
SIDE LIGHTING
RGB/RGBW
AC RIGID BARS
DYNAMIC PANEL



YD7 3.0

YD SERIES (BACK-LIT)/SINGLE BAR

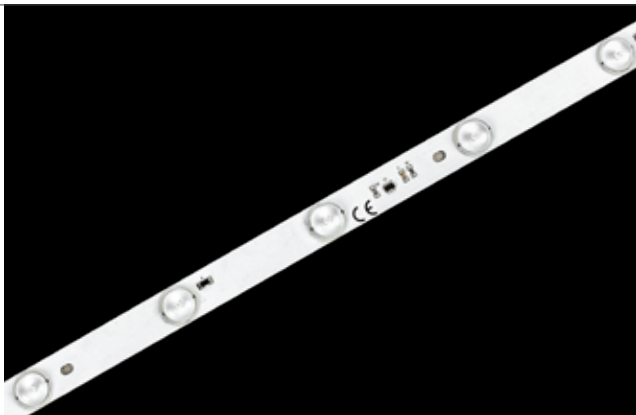


- Adopt LUMILEDS 3030SMD
- Aluminum PCB for better heat dissipation
- Back-lit, high brightness, and uniform lighting
- It can be protective when connect the wire inversely or wrong
- Constant current driving with same brightness from end to end




PROFILE DRAWINGS

Unit:mm/inch

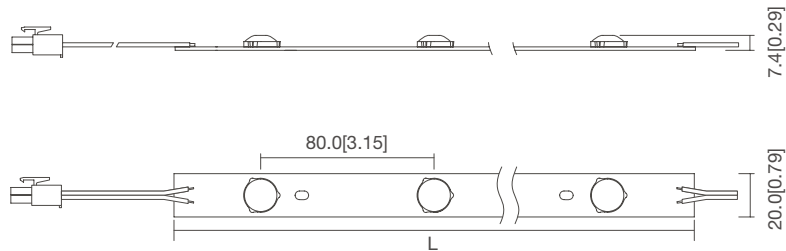

Model No.	L:mm/inch
YD7 3.0-0303	240[9.45]
YD7 3.0-0506	480[18.9]
YD7 3.0-1012	960[37.8]

PHOTOMETRIC

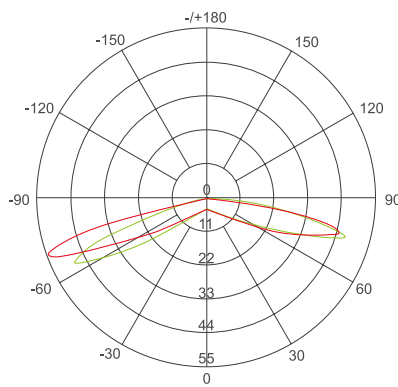

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°


Height	Eavg,Emax	Beam Angle:175.16°	Diameter
1cm	4388,3548lx		47.29cm
2cm	1097,88708lx		94.59cm
4cm	274.2,22177lx		189.18cm
6cm	121.9,9856lx		283.77cm
8cm	68.56,5544lx		378.35cm
10cm	43.88,3548lx		472.94cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD7 3.0-0303	24V DC	3000-6500K	333-357	90	3.7	3	8pcs
YD7 3.0-0506	24V DC	3000-6500K	333-357	90	7.5	6	4pcs
YD7 3.0-1012	24V DC	3000-6500K	333-357	90	15	12	2pcs

WN-YD7 3.0

YD SERIES (BACK-LIT)

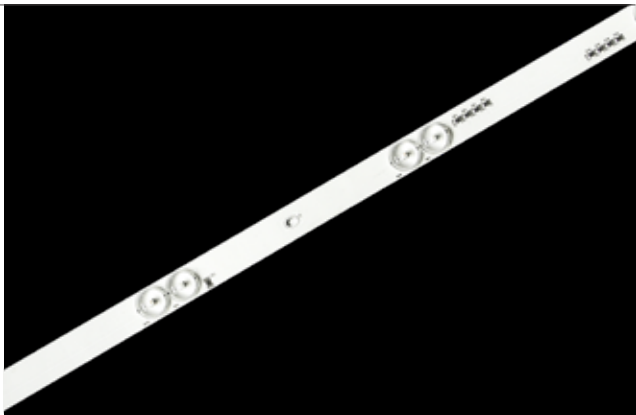


- Adopt high quality 3030 LED
- Self-designed lens with 170° beam angle, suitable for slim lightbox
- Aluminum PCB for direct and quick heat dissipation
- Create rich color changing effects via controller




PROFILE DRAWINGS

Unit:mm/inch

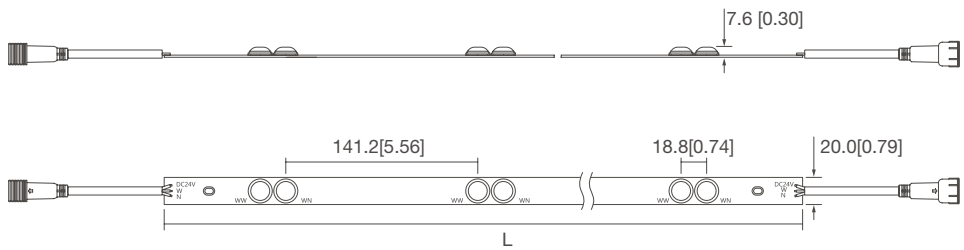

Model No.	L:mm/inch
WN-YD7 3.0-3204	320[12.60]
WN-YD7 3.0-4806	480[18.89]
WN-YD7 3.0-9612	960[37.80]

PHOTOMETRIC

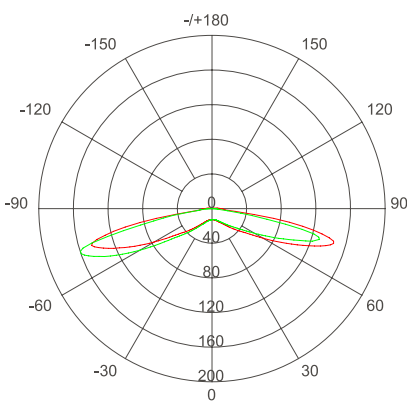

Unit: cd
- C 0/180,188.7°
- C90/270,171.4°
Average Beam Angle (50%):180.0°

Height	Eavg,Emax	Beam Angle:171.15°	Diameter
1cm	5608,138544lx		25.83cm
2cm	1402,34636lx		51.67cm
4cm	350.5,8659lx		103.34cm
6cm	155.8,3848lx		155.01cm
8cm	87.62,2165lx		206.68cm
10cm	56.08,1385lx		258.35cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
WN-YD7 3.0-3204	24V DC	2500-6500K	260	70	3.72	4	8pcs
WN-YD7 3.0-4806	24V DC	2500-6500K	335	90	3.72	6	5pcs
WN-YD7 3.0-9612	24V DC	2500-6500K	670	90	7.44	12	3pcs

YD8 1.0


YD SERIES (BACK-LIT)/SINGLE BAR

- Adopt 3V NICHIA 3030LED
- Secondary light distribution lens, uniform lighting
- Aluminum PCB for better heat dissipation
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

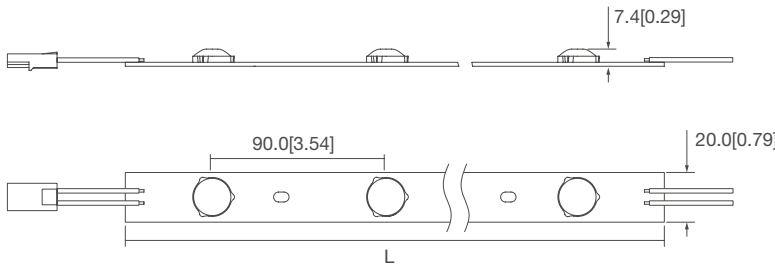


Model No.	L:mm/inch
YD8 1.0-0303	270[10.63]
YD8 1.0-0404	360[14.17]
YD8 1.0-0707	630[24.80]

PHOTOMETRIC

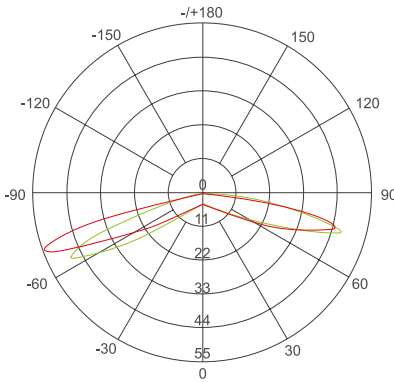

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

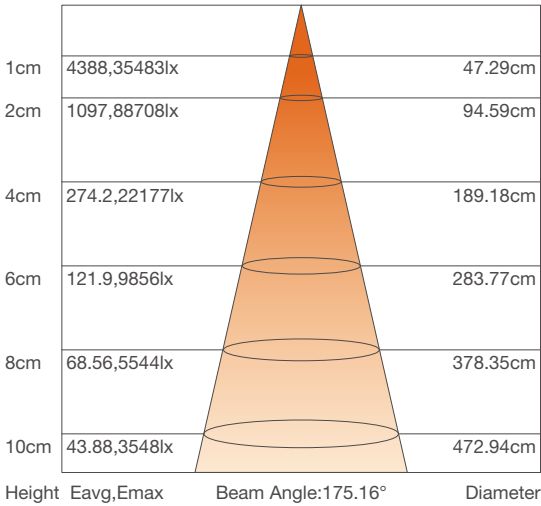

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD8 1.0-0303	24V DC	3000-6500K	158	50	3.1	3	8pcs
YD8 1.0-0404	24V DC	3000-6500K	210	60	3.1	4	8pcs
YD8 1.0-0707	24V DC	3000-6500K	370	116	3.1	7	8pcs

YD8 3.0


YD SERIES (BACK-LIT)/SINGLE BAR

- Adopt 3V NICHIA 3030SMD
- Back-lit, high brightness, uniform lighting
- It can be protective when connect the wire inversely or wrong
- Adopt SA2-01 connector
- Constant current driving with same brightness from end to end




PROFILE DRAWINGS

Unit:mm/inch

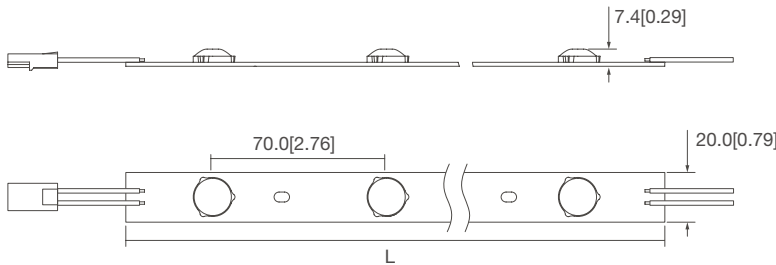


Model No.	L:mm/inch
YD8 3.0-0507	490[19.29]
YD8 3.0-1014	980[38.58]

PHOTOMETRIC

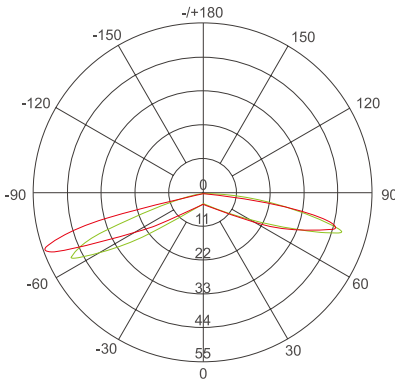

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

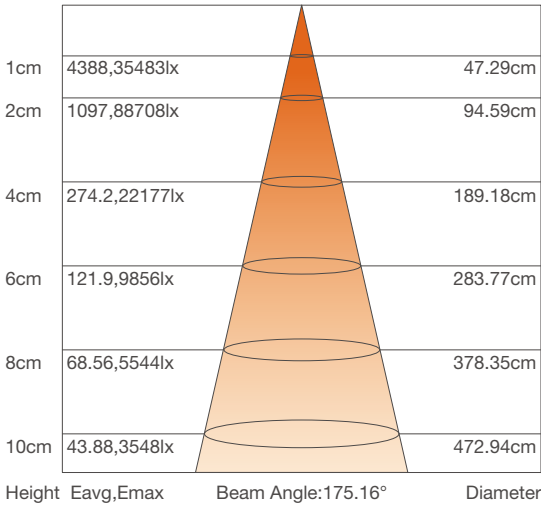

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD8 3.0-0507	24V DC	3000-6500K	366	114	3.1	7	8pcs
YD8 3.0-1014	24V DC	3000-6500K	703	110	6.3	14	8pcs

YD8-J

YD SERIES (BACK-LIT)/SINGLE BAR




- High light efficacy, up to 140lm/w
- Adopt secondary light distribution lens, uniform lighting
- Aluminum PCB for direct heat dissipation
- Multiple specifications available, support customization

CRI

80



PROFILE DRAWINGS

Unit:mm/inch

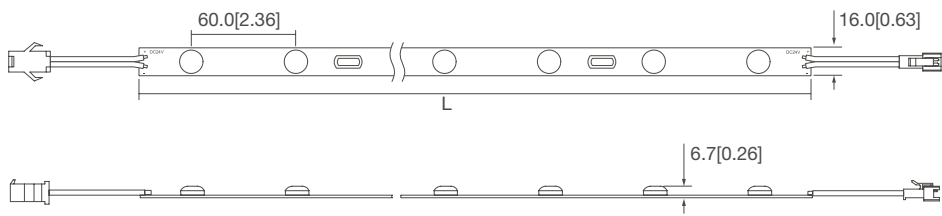

Model No.	L:mm/inch
YD8-J-4808	480[18.90]
YD8-J-9616	960[37.80]

PHOTOMETRIC

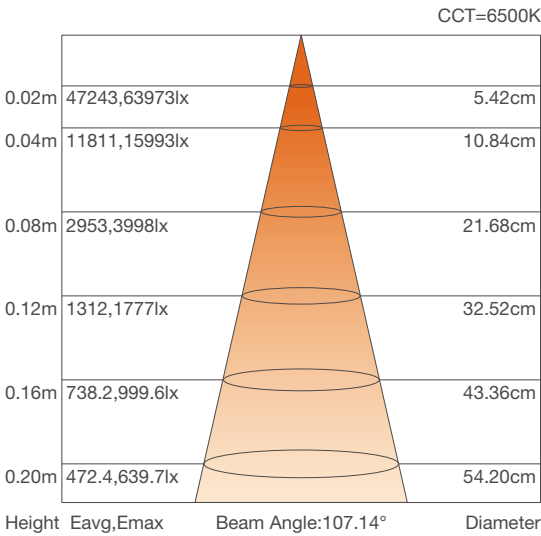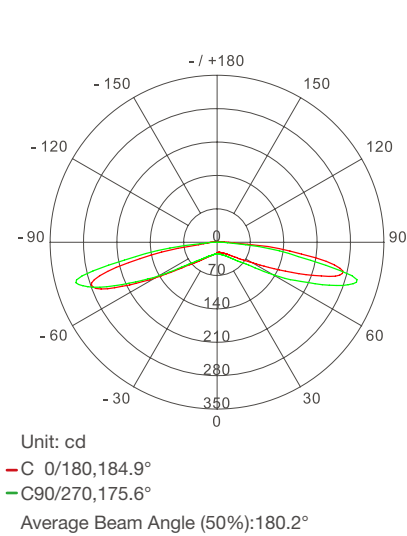

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD8-J-4808	24V DC	2200-6500K	330	140	2.4	8	1pcs
YD8-J-9616	24V DC	2200-6500K	670	140	4.8	16	1pcs

YD3-A

YD SERIES (BACK-LIT)/SINGLE BAR



- High quality SMD 3030LED
- Adopt secondary light distribution lens, uniform lighting
- Aluminium PCB for better heat dissipation
- 180° wide beam angle helps eliminate wasted light
- Single LED cuttable, customization available

CULus


E318168

CRI

80



PROFILE DRAWINGS

Unit:mm/inch

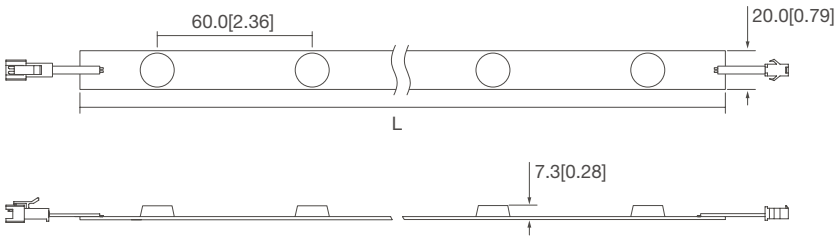

Model No.	L:mm/inch
YD3-A-4806	480[18.90]
YD3-A-9612	960[37.80]

PHOTOMETRIC

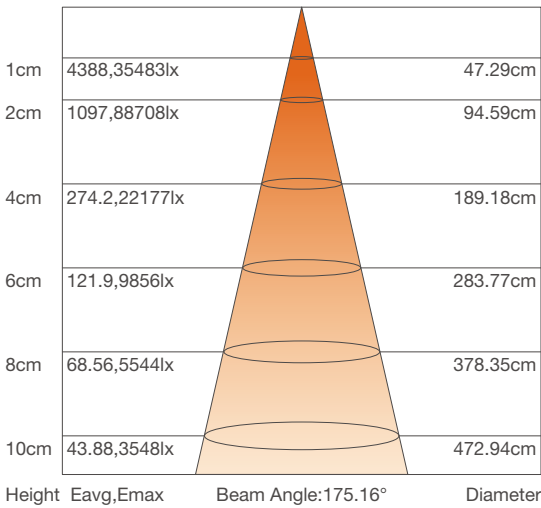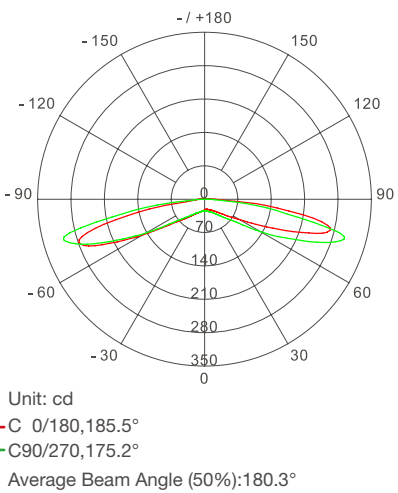


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
YD3-A-4806	12V DC	3000-9000K	648	90	7.2	6	8pcs
YD3-A-9612	12V DC	3000-9000K	1296	90	14.4	12	4pcs

YD2-Y

YD SERIES (BACK-LIT)/CURTAIN STYLE

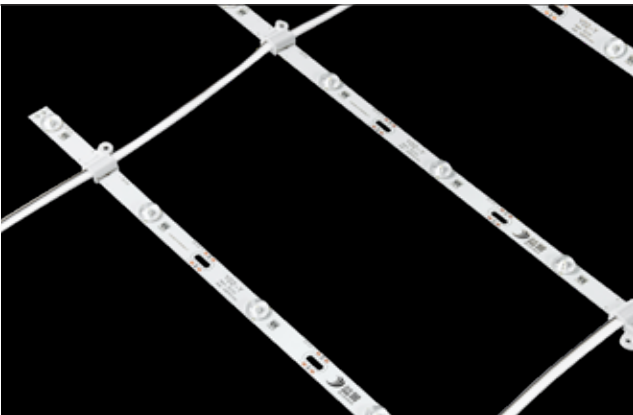


- High light efficiency
- Cost-effective, suitable for circulation market
- Self-designed secondary light distribution lens
- Curtain style, exclusive mounting clips
- Multiple specifications available, customization available

		CRI 80			
--	--	------------------	--	--	--



PROFILE DRAWINGS

Unit:mm/inch

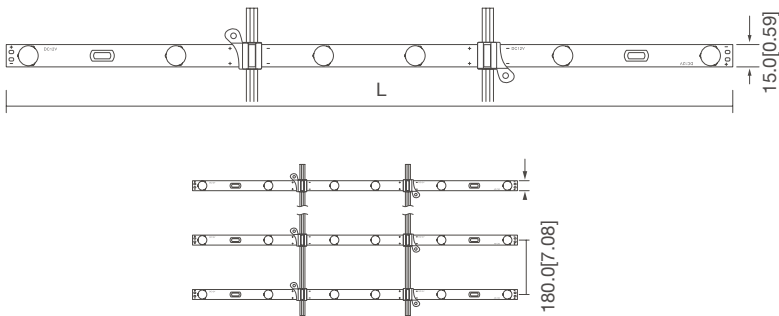

Model No.	L:mm/inch
YD2-Y-4305	430[16.93]
YD2-Y-9310	930[36.61]
YD2-Y-1212	1130[44.49]

PHOTOMETRIC

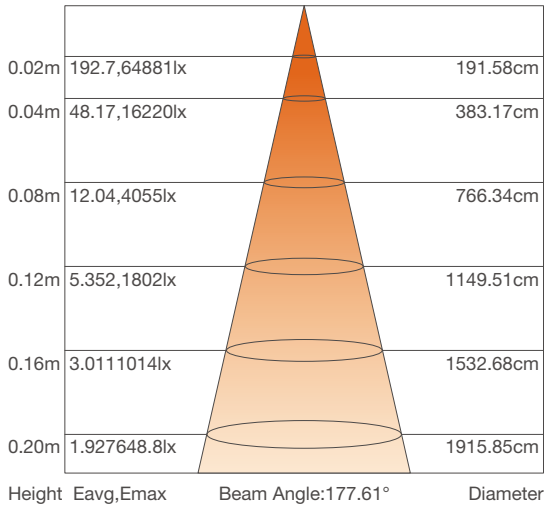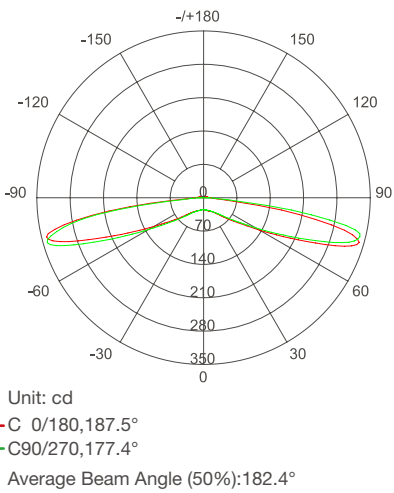


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD2-Y-4305	12V DC	3000-12000K	432	90	4.8	5	10pcs
YD2-Y-9310	12V DC	3000-12000K	864	90	9.6	10	10pcs
YD2-Y-1212	12V DC	3000-12000K	1037	90	11.6	12	8pcs

YD2-W

YD SERIES (BACK-LIT)/CURTAIN STYLE

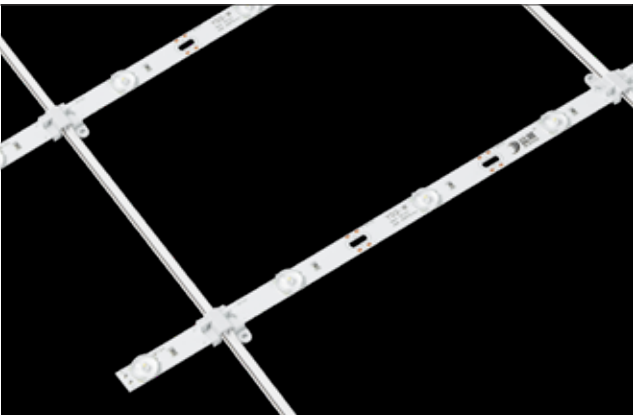


- Adopt high quality 2835 LED
- High efficacy up to 90lm/W
- Self-designed secondary light distribution lens with 170° beam angle
- Curtain style for easy mounting
- Multiple specification available

			CRI 80			
--	--	--	------------------	--	--	--



PROFILE DRAWINGS

Unit:mm/inch

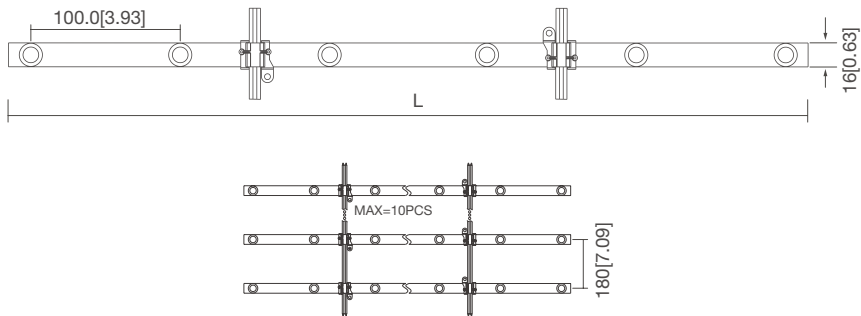

Model No.	L:mm/inch
YD2-W-4305	430[16.93]
YD2-W-5306	530[20.87]
YD2-W-9310	930[36.61]
YD2-W-1212	1130[44.49]

PHOTOMETRIC

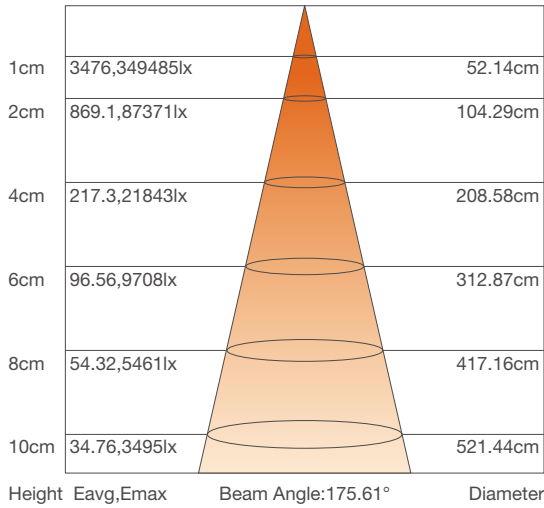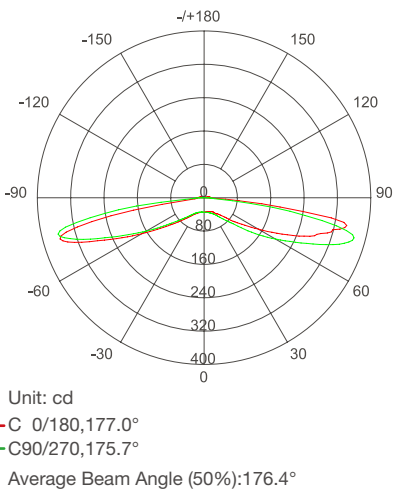

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
YD2-W-4305	12V DC	3000-9000K	432	90	4.80	5	10pcs
YD2-W-5306	12V DC	3000-9000K	518	90	5.76	6	10pcs
YD2-W-9310	12V DC	3000-9000K	864	90	9.60	10	10pcs
YD2-W-1212	12V DC	3000-9000K	1037	90	11.52	12	10pcs

YD2-C


YD SERIES (BACK-LIT)/SINGLE BAR



- Adopt 9V 2835LED
- Aluminum PCB for more direct heat dissipation
- Curtain style for easy mounting
- Multiple specifications available


PROFILE DRAWINGS

Unit:mm/inch

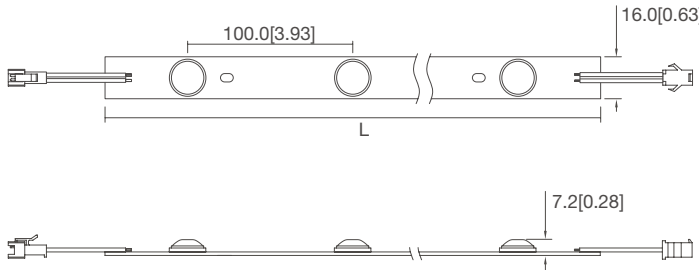


Model No.	L:mm/inch
YD2-C-4305	430[16.92]
YD2-C-9310	930[36.61]

PHOTOMETRIC

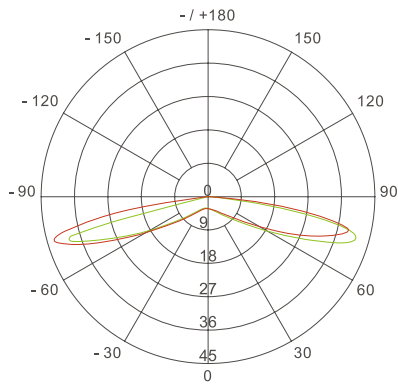

Unit: cd
- C 0/180,180.0°
- C90/270,174.1°
Average Beam Angle (50%):177.0°

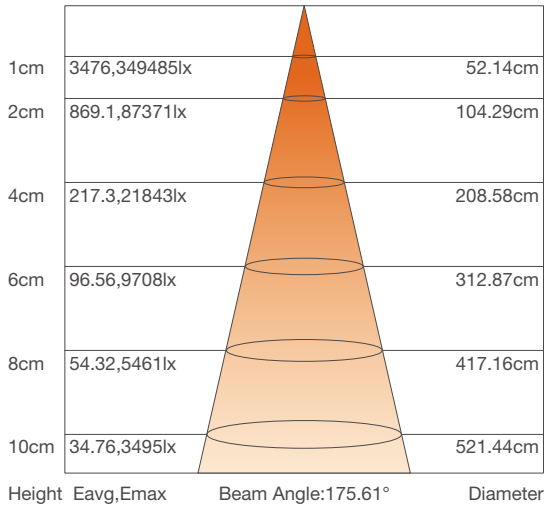

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD2-C-4305	12V DC	3000-9000K	432-460	90	4.8	5	20pcs
YD2-C-9310	12V DC	3000-9000K	858-864	90	9.6	10	15pcs

H3


YD SERIES (BACK-LIT)/SINGLE BAR



- Adopt secondary light distribution lens, uniform lighting
- Curtain style for easy mounting
- Single LED can be cut
- Multiple specifications, customization available


PROFILE DRAWINGS

Unit:mm/inch

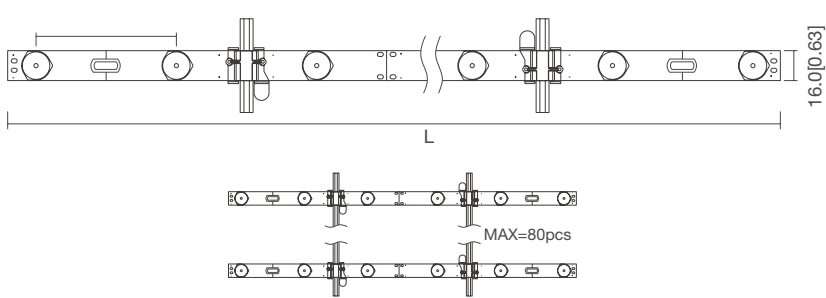


Model No.	L:mm/inch
H3-4807	480[18.90]
H3-5208	515[20.28]
H3-9313	930[36.61]
H3-9314	930[36.61]

PHOTOMETRIC

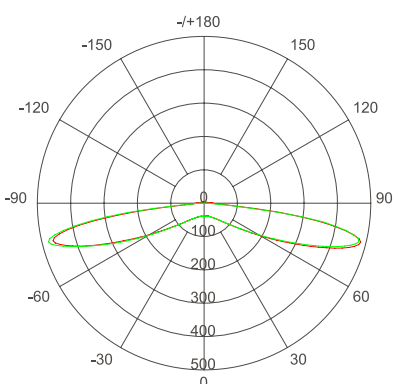

Unit: cd
- C 0/180,187.8°
- C90/270,175.6°
Average Beam Angle (50%):181.7°

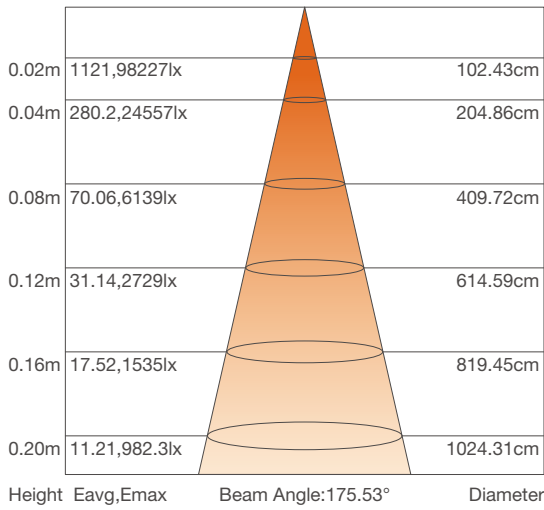


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
H3-4807	12V DC	3000-9000K	780	130	6	7	10pcs
H3-5208	24V DC	3000-9000K	910	130	7	8	10pcs
H3-9313	12V DC	3000-9000K	1430	130	11	13	10pcs
H3-9314	24 V DC	3000-9000K	1560	130	12	14	10pcs

JYD7 3.0


YD SERIES (BACK-LIT)/
CURTAIN STYLE

- Adopt 3V Samsung 2835LED
- Specially designed secondary light distribution lens, 172 ° beam angle
- Curtain style for easy mounting
- Multiple specifications available

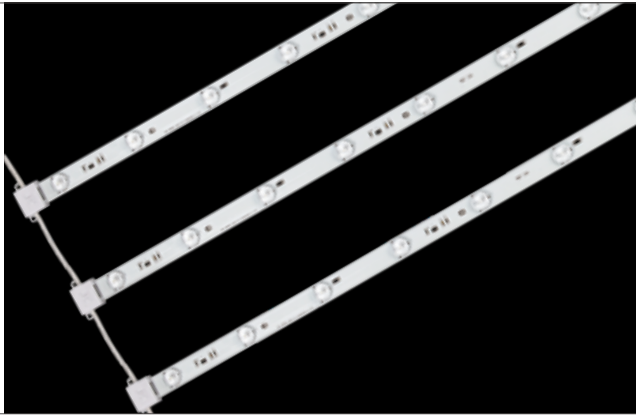


PROFILE DRAWINGS

Unit:mm/inch

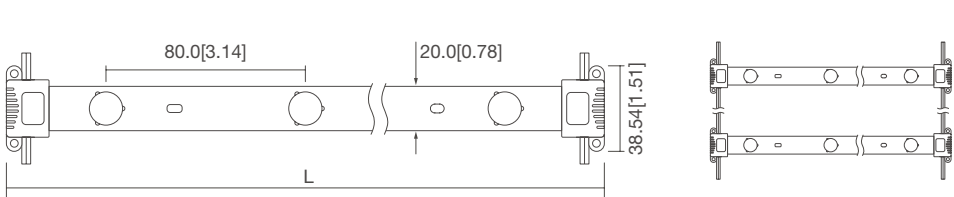


Model No.	L:mm/inch
JYD7 3.0-3030	244[9.60]
JYD7 3.0-0506	484[19.05]
JYD7 3.0-1012	964[37.95]

PHOTOMETRIC

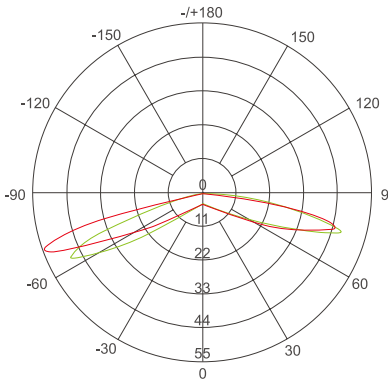

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

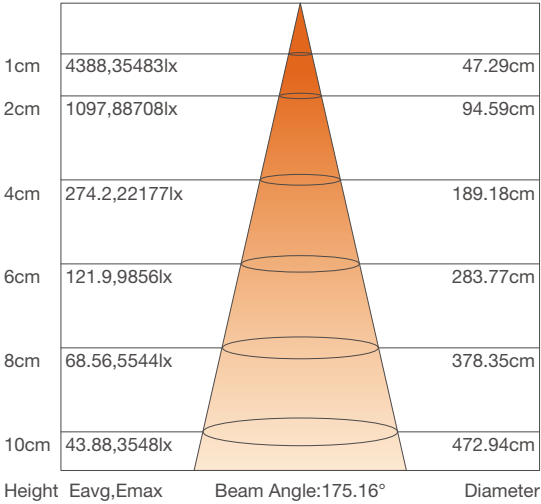


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD7 3.0-0303	24V DC	3000-6500K	333	90	3.7	3	/
JYD7 3.0-0506	24V DC	3000-6500K	666	90	7.5	6	/
JYD7 3.0-1012	24V DC	3000-6500K	1332	90	15	12	/

JYD8 1.0


YD SERIES (BACK-LIT)/
CURTAIN STYLE

- Adopt 3V NICHIA 3030 LED
- Uniform lighting, suitable for lightbox with depth of 5-10cm
- Curtain style for easy mounting
- Multiple specifications available

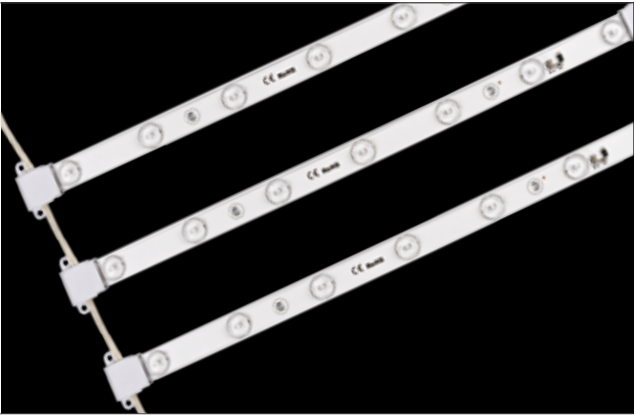


PROFILE DRAWINGS

Unit:mm/inch

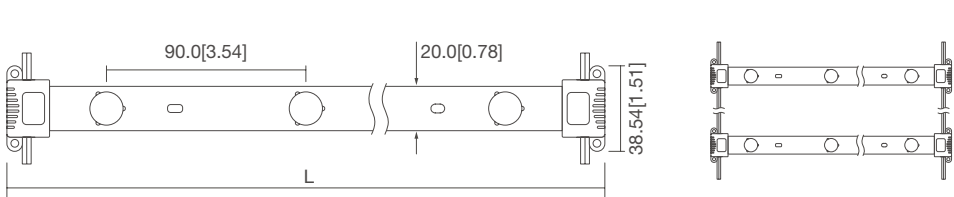


Model No.	L:mm/inch
JYD8 1.0-3030	270[10.63]
JYD8 1.0-0404	360[14.17]
JYD8 1.0-0707	630[24.80]

PHOTOMETRIC

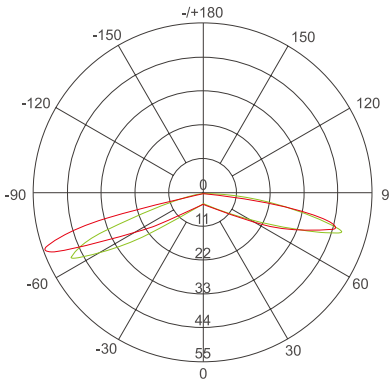

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

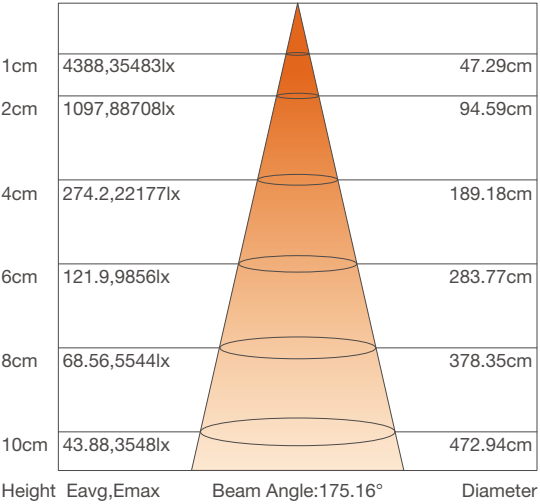


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD8 1.0-0303	24V DC	3000-6500K	158	50	3.1	3	8pcs
JYD8 1.0-0404	24V DC	3000-6500K	210	60	3.1	4	8pcs
JYD8 1.0-0707	24V DC	3000-6500K	370	116	3.1	7	8pcs

JYD3-A


YD SERIES (BACK-LIT)/CURTAIN STYLE

- Adopt 9V 3030 LED
- Specially designed secondary light distribution lens, uniform lighting
- Curtain style for easy mounting
- Support PWM, 0-10V, DALI, DMX dimming
- Multiple specifications available

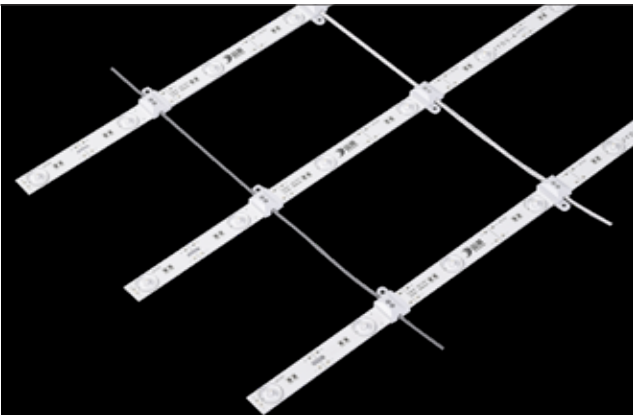



PROFILE DRAWINGS

Unit:mm/inch

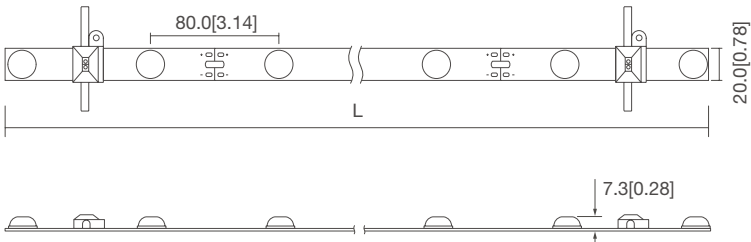

Model No.	L:mm/inch
JYD3-A-2604	260[10.23]
JYD3-A-4206	420[16.53]
JYD3-A-5808	580[22.83]
JYD3-A-9012	900[35.43]

PHOTOMETRIC

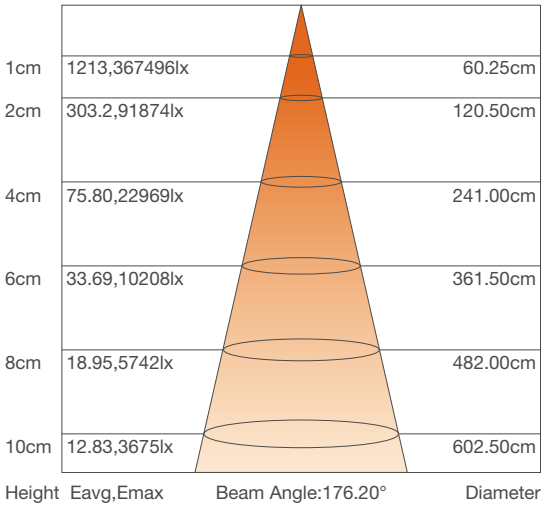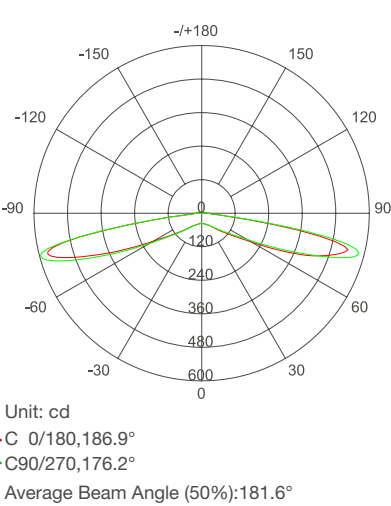


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD3-A-2604	24V DC	7800-9000K	408	85	4.8	4	10pcs
JYD3-A-4206	24V DC	7800-9000K	612	85	7.2	6	10pcs
JYD3-A-5808	24V DC	7800-9000K	816	85	9.6	8	10pcs
JYD3-A-9012	24V DC	7800-9000K	1224	85	14.4	12	10pcs

JYD2-C


YD SERIES (BACK-LIT)/CURTAIN STYLE

- Adopt 2835 LED
- Uniform lighting
- Curtain style for easy mounting
- Multiple specifications available

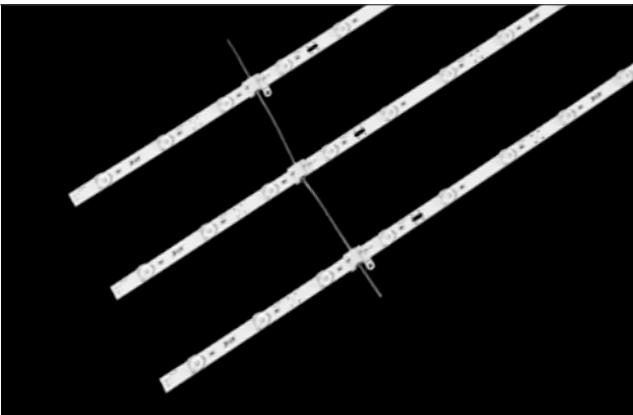



PROFILE DRAWINGS

Unit:mm/inch

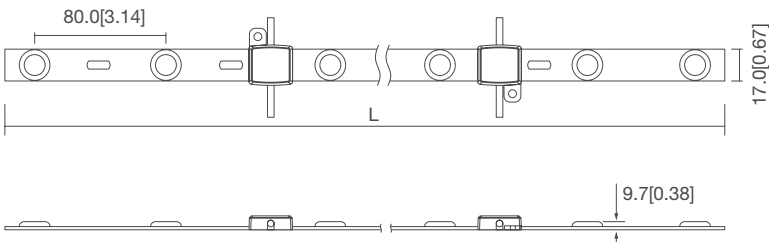

Model No.	L:mm/inch
JYD2-C-4305	430[16.92]
JYD2-C-9310	930[36.61]

PHOTOMETRIC

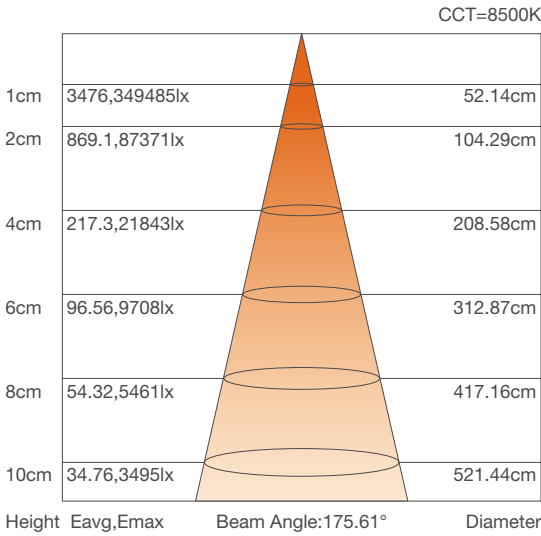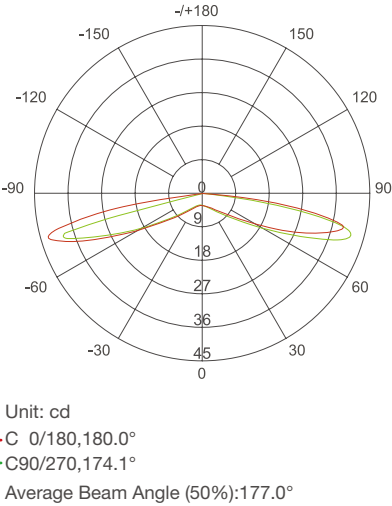


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD2-C-4305	12V DC	3000-9000K	456-460	98.46	4.8	5	/
JYD2-C-9310	12V DC	3000-9000K	858-912	98.07	9.6	10	/

FYD7 3.0


YD SERIES (BACK-LIT)/
SINGLE BAR WATERPROOF

- Aluminum PCB & glue filled aluminum channel, better heat dissipation
- High brightness, uniform lighting
- Constant current driving with same brightness from end to end
- Reverse connection of the wire will be protected

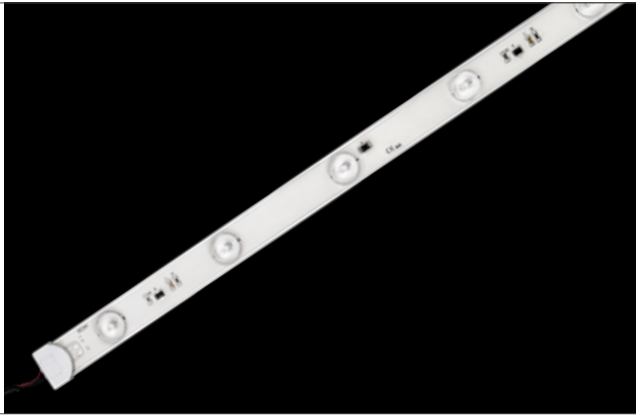


PROFILE DRAWINGS

Unit:mm/inch

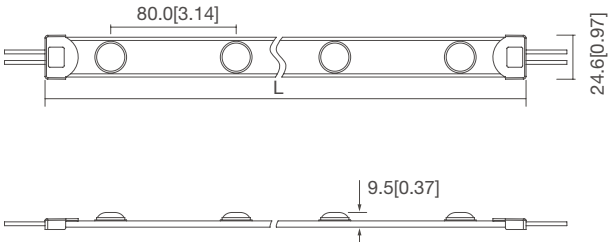


Model No.	L:mm/inch
FYD7 3.0-0303	/
FYD7 3.0-0506	/
FYD7 3.0-1012	/

PHOTOMETRIC

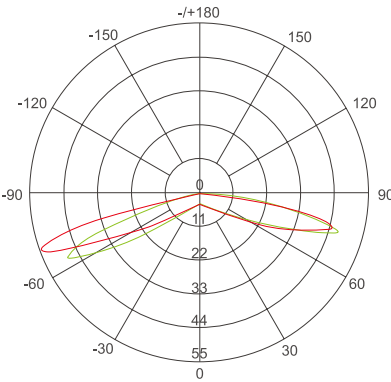

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

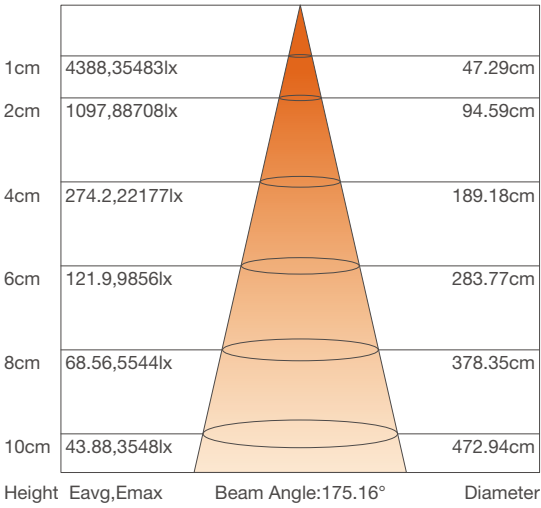


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD7 3.0-0303	24V DC	3000-6500K	333	90	3.7	3	/
FYD7 3.0-0506	24V DC	3000-6500K	666	90	7.5	6	/
FYD7 3.0-1012	24V DC	3000-6500K	1332	90	15	12	/

FYD8


YD SERIES (BACK-LIT)/
SINGLE BAR WATERPROOF

- Adopt 3V NICHIA 3030LED
- Aluminum PCB & glue filled aluminum channel, better heat dissipation
- Constant current driving with same brightness from end to end

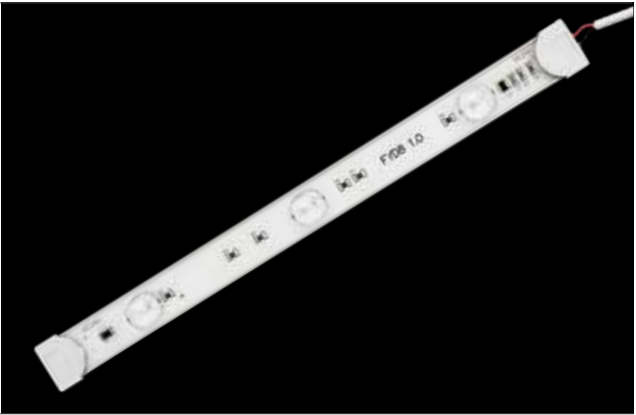


PROFILE DRAWINGS

Unit:mm/inch

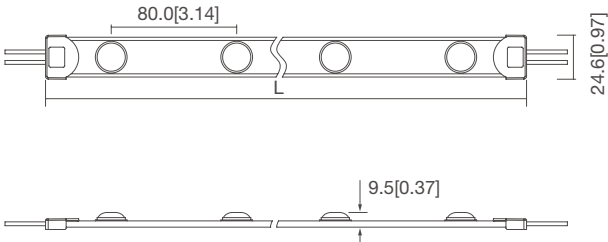


Model No.	L:mm/inch
FYD8-0303	282[11.10]
FYD8-0303	372[14.65]
FYD8-0707	642[25.28]

PHOTOMETRIC

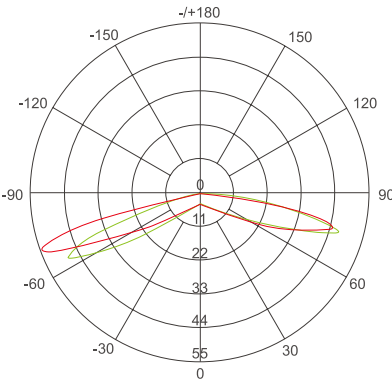

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

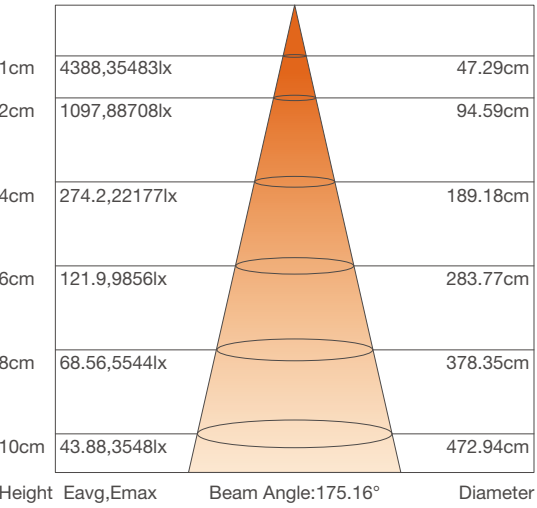

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD8-0303	24V DC	3000-6500K	158	50	3.1	3	10pcs
FYD8-0404	24V DC	3000-6500K	210	60	3.1	4	8pcs
FYD8-0707	24V DC	3000-6500K	370	116	3.1	7	5pcs

FYD3-A

YD SERIES (BACK-LIT)/
SINGLE BAR WATERPROOF




- Adopt 9V 3030 LED
- Specially designed secondary light distribution lens, uniform lighting
- Adopt aluminum PCB & aluminum channel for better heat dissipation
- Support PWM, 0-10V, DALI, DMX dimming
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

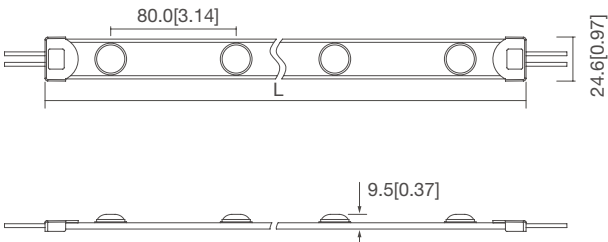


Model No.	L:mm/inch
FYD3-A-2503	970[38.19]
FYD3-A-5006	490[19.29]
FYD3-A-1012	250[9.84]

PHOTOMETRIC

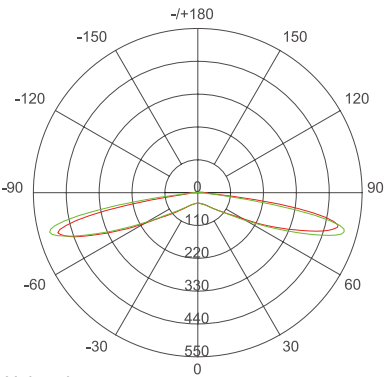

Unit: cd
- C 0/180,185.5°
- C90/270,175.2°
Average Beam Angle (50%):180.3°

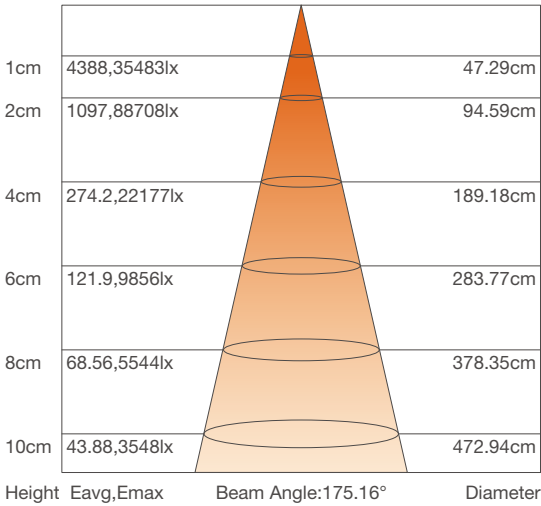

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD3-A-2503	24V DC	3000-9000K	324	90	3.6	12	10pcs
FYD3-A-5006	24V DC	3000-9000K	648	90	7.2	6	8pcs
FYD3-A-1012	24V DC	3000-9000K	1296	90	14.4	3	4pcs

FYD2-E

YD SERIES (BACK-LIT)/
CURTAIN STYLE WATERPROOF




- High efficacy 2835LED
- Special optical lens for uniform lighting
- Aluminium PCB for excellent heat dissipation
- 170° wide beam angle helps eliminate wasted light
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

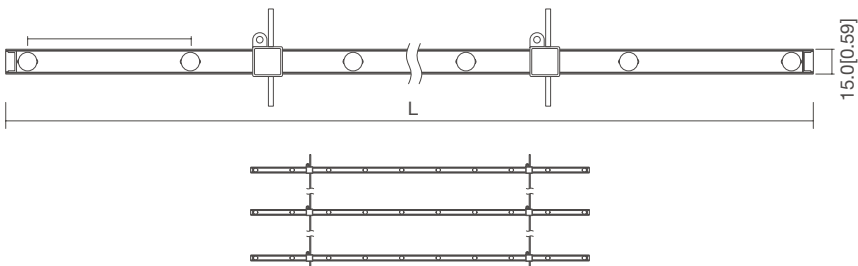


Model No.	L:mm/inch
FYD2-E-0506	520[20.47]
FYD2-E-0910	910[35.83]
FYD2-E-1112	1110[43.70]

PHOTOMETRIC

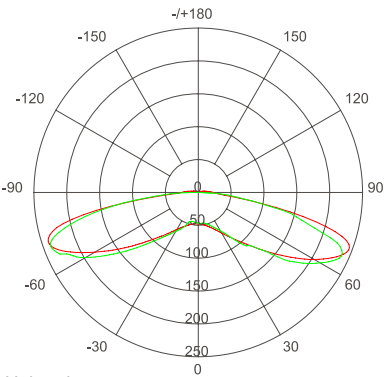

Unit: cd
- C 0/180,179.9°
- C90/270,176.2°
Average Beam Angle (50%):178.0°

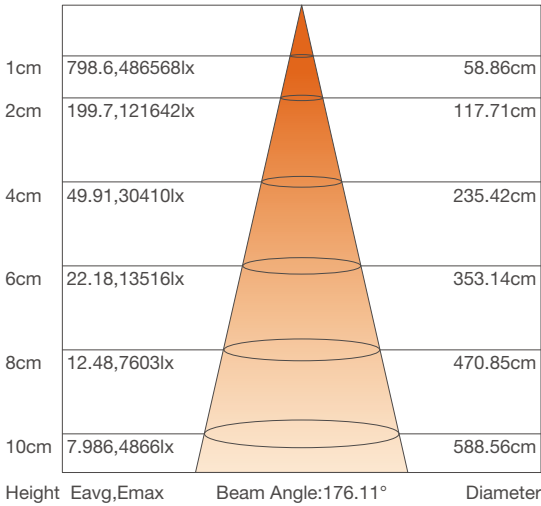


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD2-E-0506	24V DC	7836-9000K	432	85	5	6	10pcs
FYD2-E-0910	24V DC	7836-9000K	714	85	8.4	10	8pcs
FYD2-E-1112	24V DC	7836-9000K	850	85	10	12	4pcs

FYD2-Y


YD SERIES (BACK-LIT)/
CURTAIN STYLE WATERPROOF

- Adopt special optical lens
- Waterproof IP67
- Curtain style design, easy to install
- Multiple specifications available

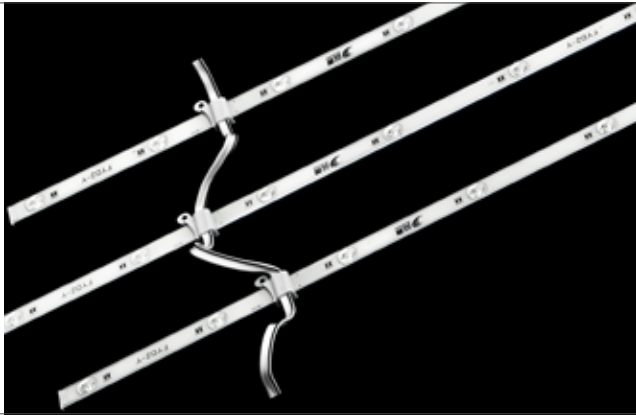


PROFILE DRAWINGS

Unit:mm/inch

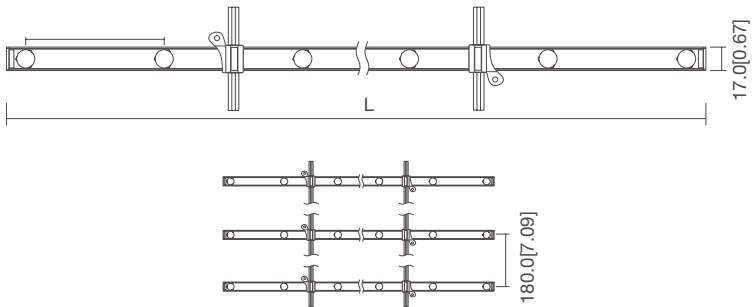


Model No.	L:mm/inch
FYD2-Y-4305	520[20.47]
FYD2-Y-9310	910[35.83]
FYD2-Y-1212	1110[43.70]

PHOTOMETRIC

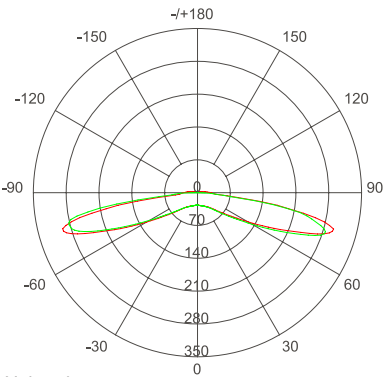

Unit: cd
- C 0/180,200.5°
- C90/270,177.4°
Average Beam Angle (50%): 188.9°

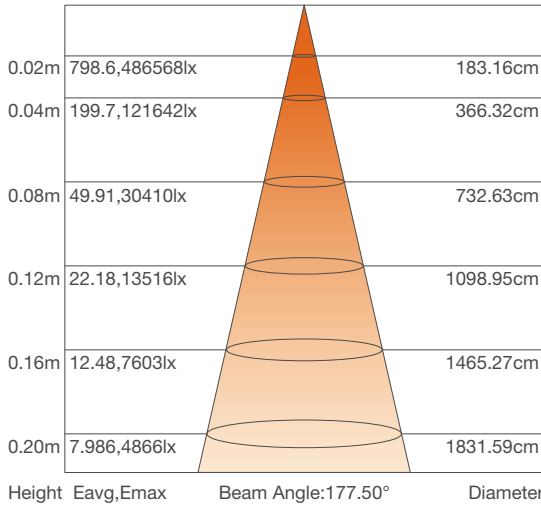


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD2-Y-4305	12V DC	3000-12000K	378	90	4.2	5	10pcs
FYD2-Y-9310	12V DC	3000-12000K	756	90	8.4	10	10pcs
FYD2-Y-1212	12V DC	3000-12000K	900	90	10.08	12	8pcs

JFYD7 3.0


YD SERIES (BACK-LIT)/
CURTAIN STYLE WATERPROOF

- Adopt high quality 3030 LED
- Secondary light distribution lens, uniform lighting
- Aluminum PCB for better heat dissipation
- Curtain style + clips, easy to install

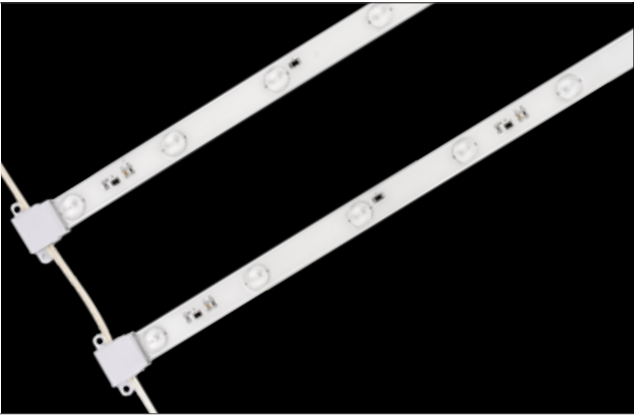


PROFILE DRAWINGS


Unit:mm/inch

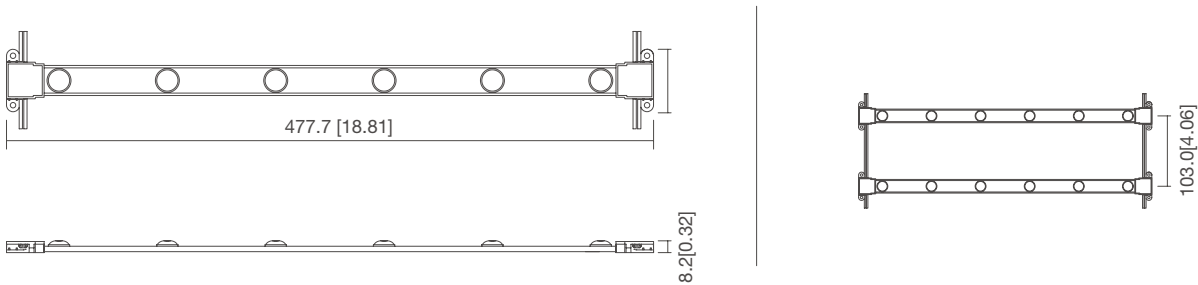

PHOTOMETRIC

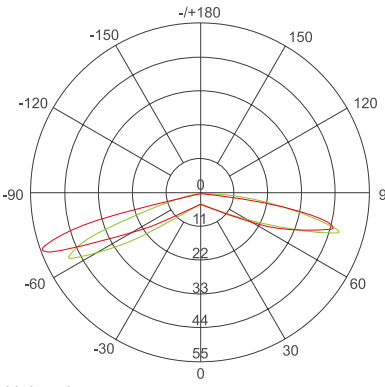

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

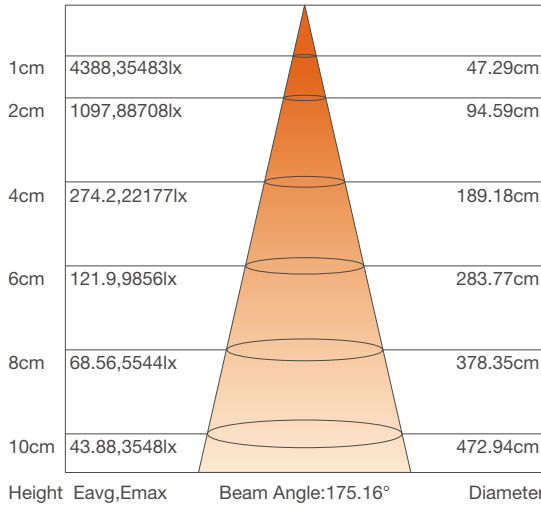


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JFYD7 3.0-0303	24V DC	3000-6500K	333	90	3.7	3	10pcs
JFYD7 3.0-0506	24V DC	3000-6500K	666	90	7.5	6	10pcs
JFYD7 3.0-1012	24V DC	3000-6500K	1332	90	15	12	8pcs

JFYD8



YD SERIES (BACK-LIT)/
CURTAIN STYLE WATERPROOF

- Adopt high quality 3030 LED
- 160° wide beam angle
- Secondary light distribution lens, uniform lighting
- Aluminum PCB for better heat dissipation
- Curtain style, easy to install

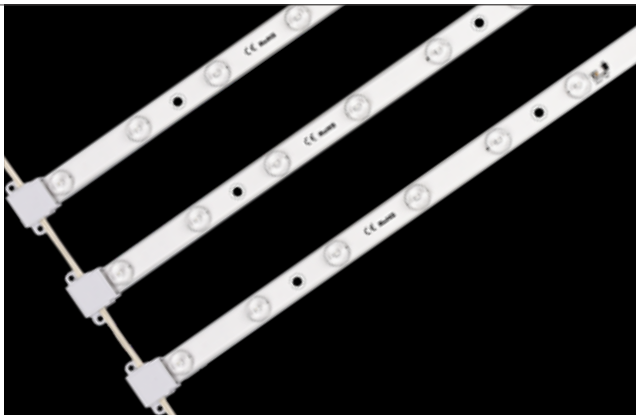


PROFILE DRAWINGS

Unit:mm/inch

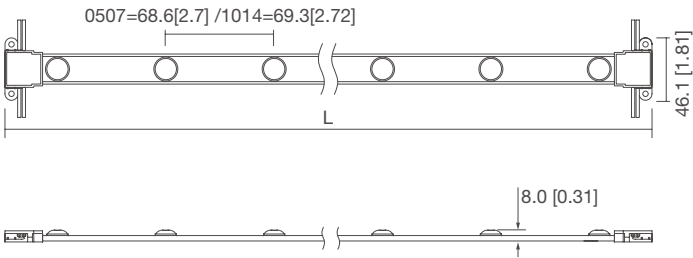


Model No.	L:mm/inch
JFYD8-0507	492[19.4]
JFYD8-1014	982[38.7]

PHOTOMETRIC

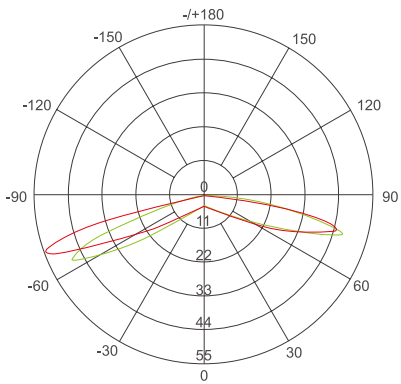

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

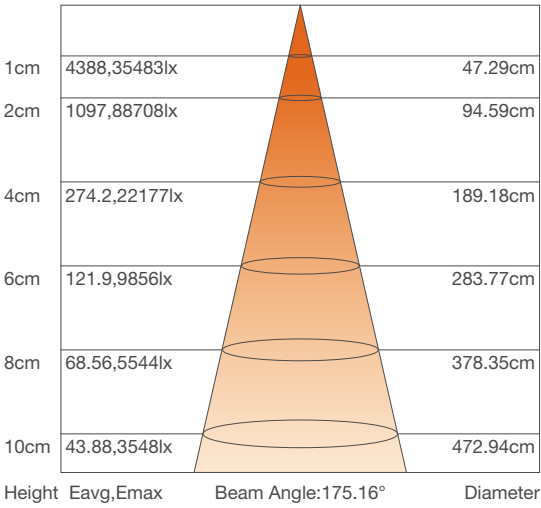

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JFYD8-4907	24V DC	3000-6500K	352	110	3.2	7	/
JFYD8-9814	24V DC	3000-6500K	704	110	6.4	14	/

JFYD3-A



YD SERIES (BACK-LIT)/
CURTAIN STYLE WATERPROOF

- Adopt 9V 3030 LED
- Secondary light distribution lens, uniform lighting
- Aluminum PCB + metal channel, better heat dissipation
- Curtain style for easy mounting
- Support PWM, 0-10V, DALI, DMX dimming




PROFILE DRAWINGS


Unit:mm/inch

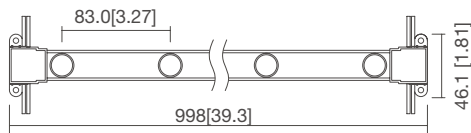

PHOTOMETRIC

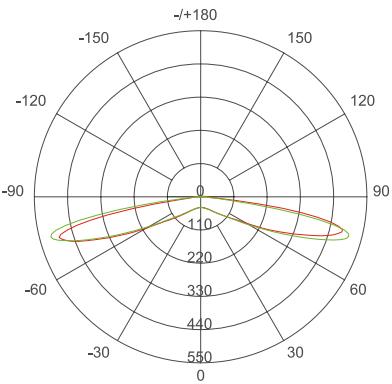

Unit: cd
- C 0/180,185.5°
- C90/270,175.2°
Average Beam Angle (50%):180.3°

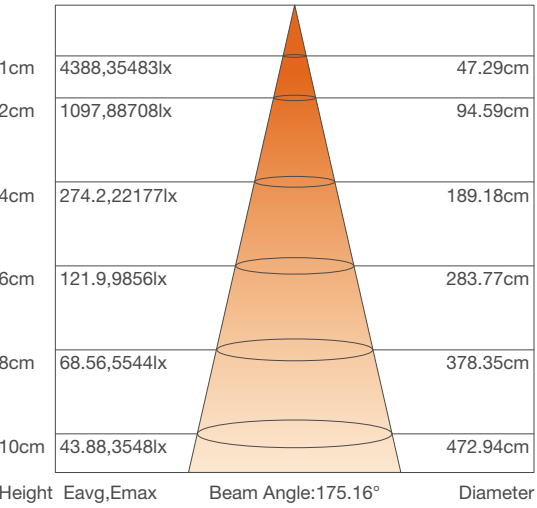

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JFYD3-A-1012	24V DC	3000-7800K	1296	90	14.4	12	/

FB-R YD SERIES (BACK-LIT)/Explosion-Proof

- Explosion-proof product
- Using a frosted PC cover, give out light evenly
- Adopted 2835 LED
- Various specifications are available and support customization




CRI
80

DC24V

5Years


PROFILE DRAWINGS

Unit:mm/inch

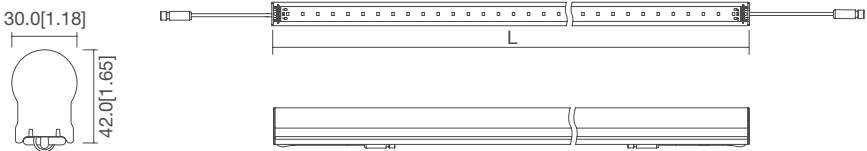


Model No.	L:mm/inch
FB-R-05028	500[19.69]
FB-R-10056	1000[39.37]
FB-R-14084	1400[55.12]
FB-R-27161	2700[106.30]

PHOTOMETRIC

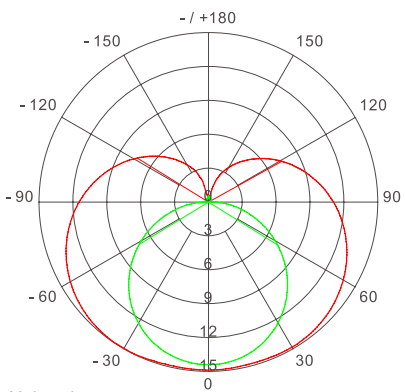

Unit: cd
- C 0/180,240.8°
- C90/270,116.8°
Average Beam Angle (50%):178.8°

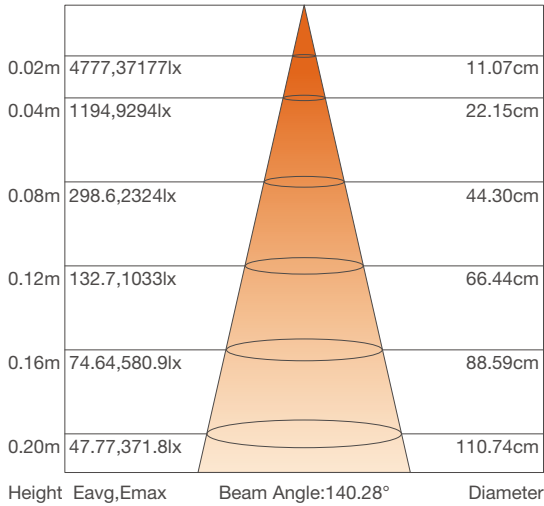

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FB-R-05028	24V DC	R:620-625nm	73	19	3.84	28	/
FB-R-10056	24V DC	R:620-625nm	146	19	7.68	56	/
FB-R-14084	24V DC	R:620-625nm	204	19	10.75	84	/
FB-R-27161	24V DC	R:620-625nm	394	19	20.74	161	/

BPS300-C SIDE LIGHTING/Non-Waterproof

- Adopt high quality 3535 LED
- High brightness up to 1944lm/pcs with competitive price
- Secondary light distribution lens,no dark area
- Stable and reliable performance, easy to install




CRI
70

DC24V

4Years


PROFILE DRAWINGS

Unit:mm/inch

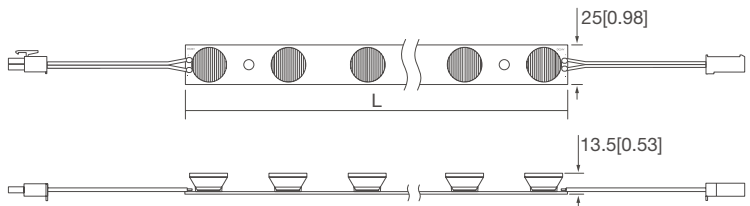


Model No.	L:mm/inch
BPS300-C-0205	250[9.84]
BPS300-C-0510	480[18.90]

PHOTOMETRIC

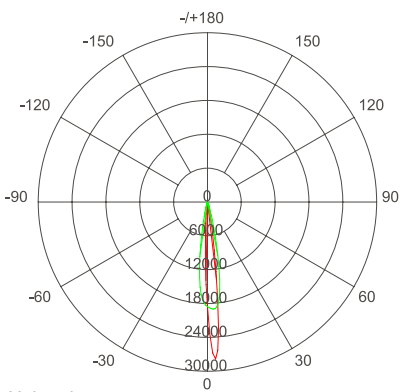

Unit: cd
- C 0/180,7.9°
- C90/270,19.1°
Average Beam Angle (50%):13.5°

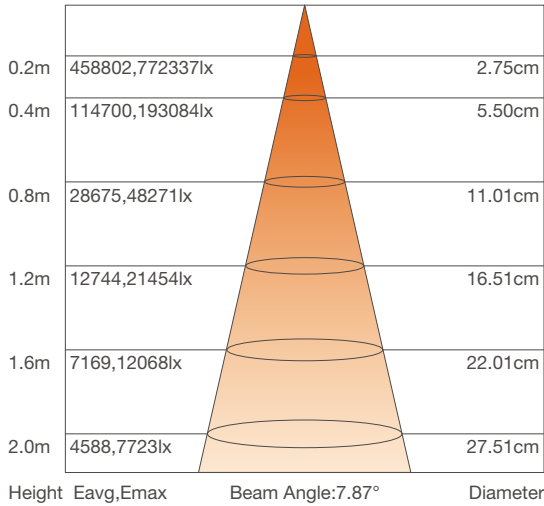

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BPS300-C-0205	24V DC	3000-6500K	972	90	10.8	5	4pcs
BPS300-C-0510	24V DC	3000-6500K	1944	90	21.6	10	3pcs

BPS300-S


SIDE LIGHTING/Non-Waterproof

- Imported high-power SMD 3535Led
- Adopt special secondary light distribution lens
- Uniform light distribution, no dark spots or stripes




PROFILE DRAWINGS

Unit:mm/inch

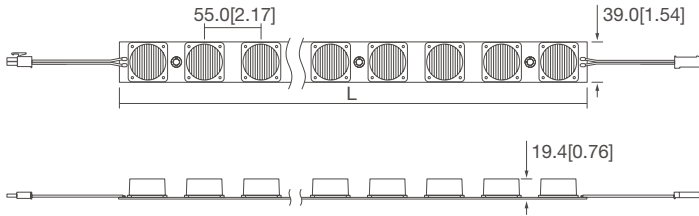


Model No.	L:mm/inch
BPS300-S5	275[10.83]
BPS300-S10	550[21.65]

PHOTOMETRIC

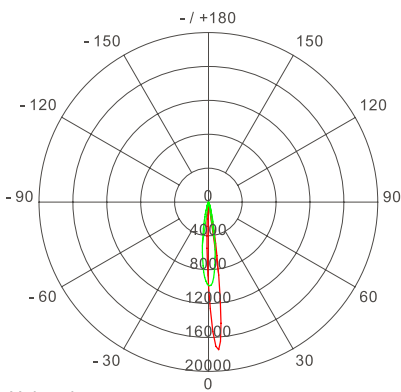

Unit: cd
- C 0/180,8.4°
- C90/270,17.2°
Average Beam Angle (50%):12.8°

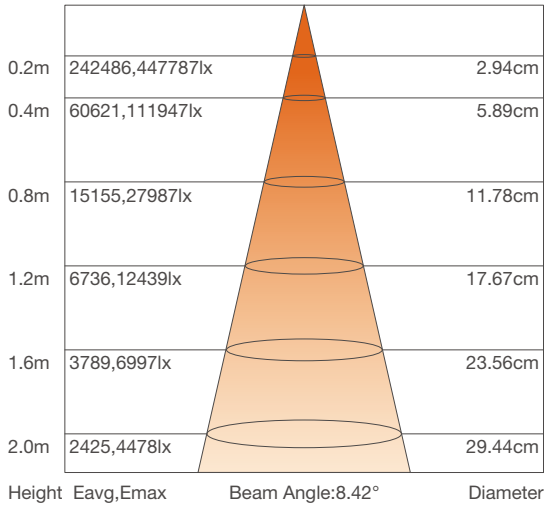

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BPS300-S5	24V DC	6000-7000K	1188	110	10.8	5	5pcs
BPS300-S10	24V DC	6000-7000K	2376	110	21.6	10	3pcs

BPS1-S


SIDE LIGHTING/Non-Waterproof

- High efficacy up to 105 lm/W
- High brightness and small voltage drop of single bar, radiation-free
- Stable and reliable performance, easy to install
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

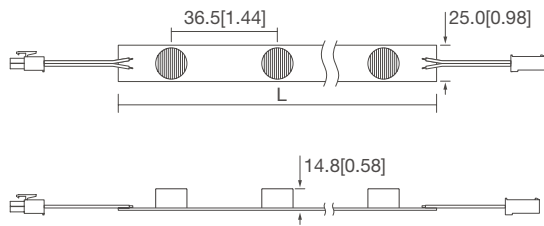


Model No.	L:mm/inch
BPS1-S3	219[8.62]
BPS1-S5	365[14.37]
BPS1-S6	438[17.24]
BPS1-S8	360[14.17]

PHOTOMETRIC

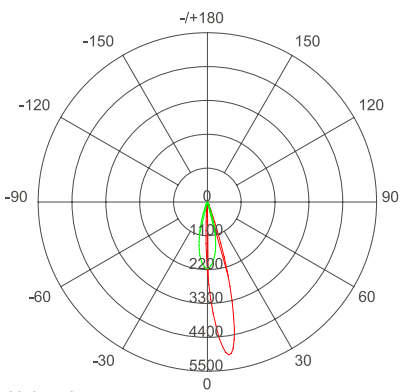

Unit: cd
- C 0/180,15.0°
- C90/270,27.6°
Average Beam Angle (50%):21.3°

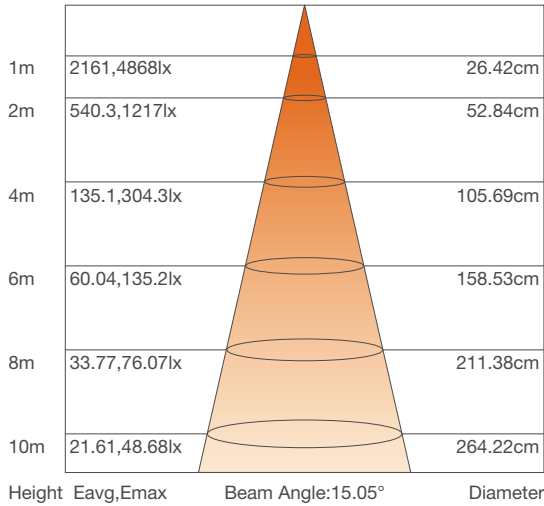

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BPS1-S3	24V DC	>6400K	984	120	8.2	3	10pcs
BPS1-S5	24V DC	>6400K	1620	120	13.5	5	6pcs
BPS1-S6	24V DC	>6400K	1872	120	15.6	6	5pcs
BPS1-S8	24V DC	>6400K	1920	120	16	8	4pcs

BP2-W

SIDE LIGHTING/Non-Waterproof



- Suitable for edge-lit lightbox with width less than 2m
- Secondary light distribution lens, uniform lighting
- Cuttable and easy to install
- Multiple specifications, support customization


CRI
70

DC24V

3Years



PROFILE DRAWINGS

Unit:mm/inch

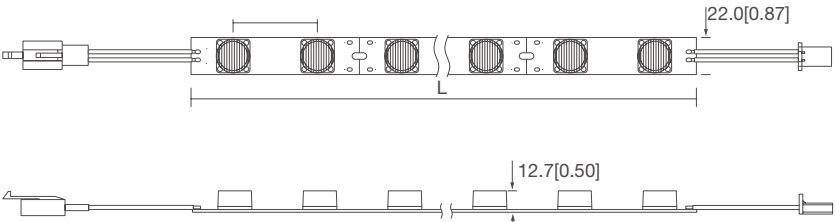

Model No.	L:mm/inch
BP2-W-0510	550[21.65]
BP2-W-0918	900[35.43]

PHOTOMETRIC

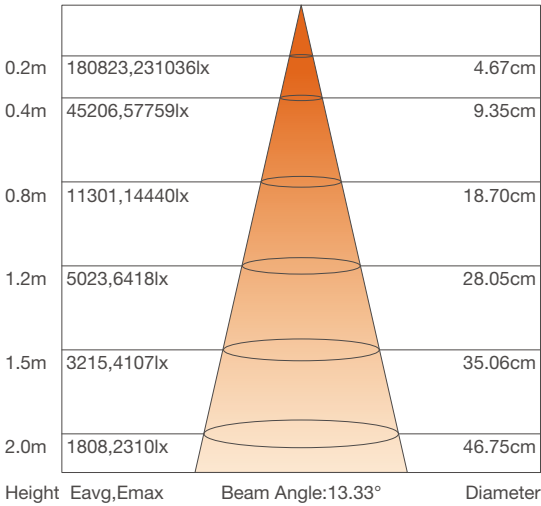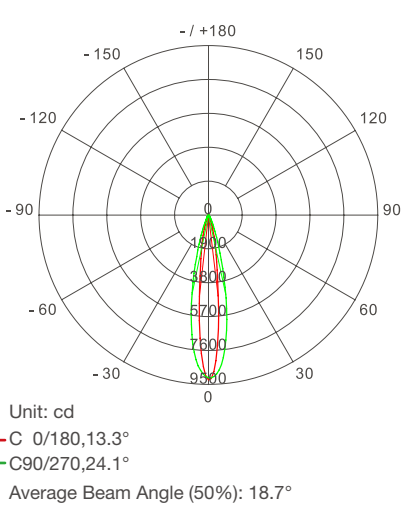


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BP2-W-0510	24V DC	3000-9000K	1530	85	18	10	4pcs
BP2-W-0918	24V DC	3000-9000K	2760	85	32	18	2pcs

YZ9

SIDE LIGHTING/Non-Waterproof

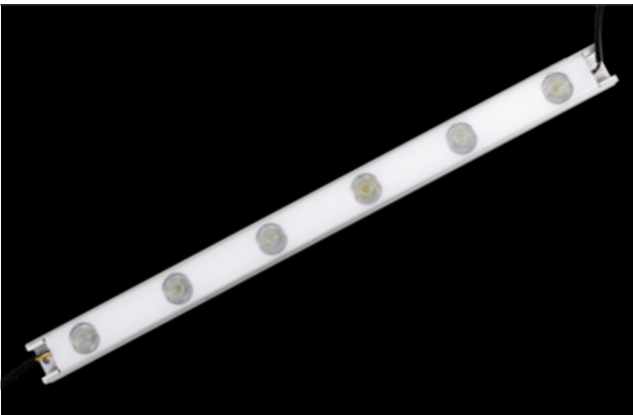

- Support dimming
- Use aluminum cover, better heat dissipation
- Adopt secondary light distribution lens
- Multiple specifications, support customization

SAMSUNG


CRI
70

DC24V

3Years



PROFILE DRAWINGS

Unit:mm/inch

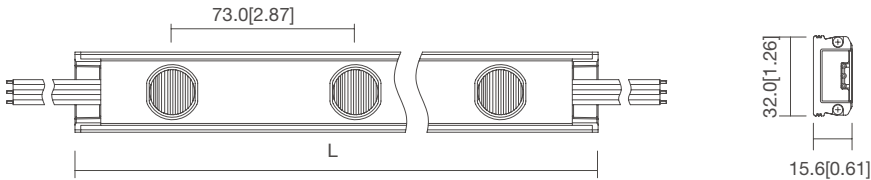

Model No.	L:mm/inch
YZ9-3	223.6[8.80]
YZ9-5	369.6[14.55]
YZ9-6	442.6[17.43]

PHOTOMETRIC

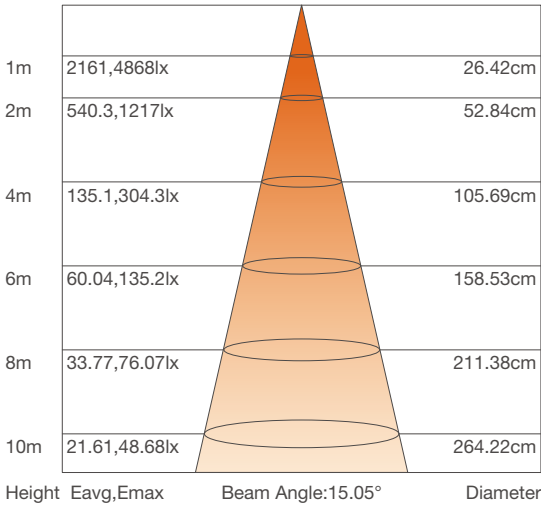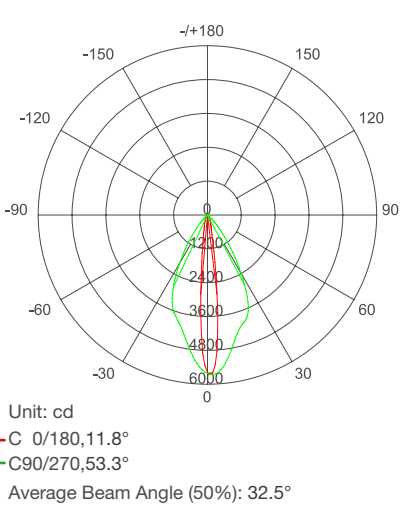

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
YZ9-3	24V DC	3000-6500K	704	96	7.92	3	7pcs
YZ9-5	24V DC	3000-6500K	1176	100	13.2	5	5pcs
YZ9-6	24V DC	3000-6500K	1389	104	15.02	6	4pcs

QYD8

RGB/RGBW/Back-lit light sources

- Adopt OSRAM LED with high stability
- 170 ° beam angle, suitable for thin lightbox
- Aluminum PCB for better heat dissipation



OSRAM

LM-80

IP60

LED3030

170°


ONE BIN ONLY

DC24V

3Years



PROFILE DRAWINGS

Unit:mm/inch

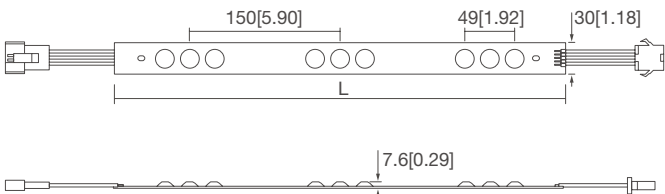

Model No.	L:mm/inch
QYD8-0509	450[17.71]

PHOTOMETRIC

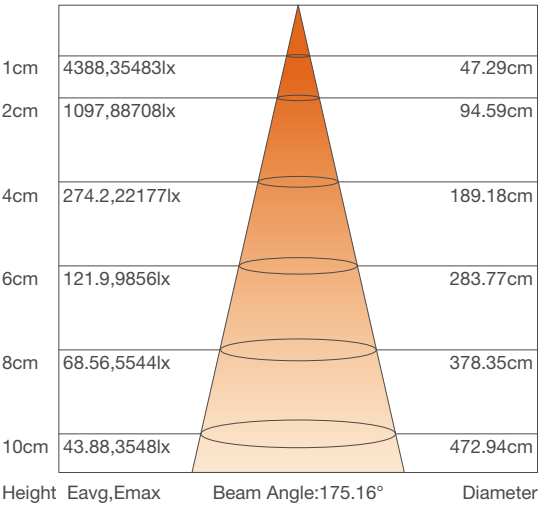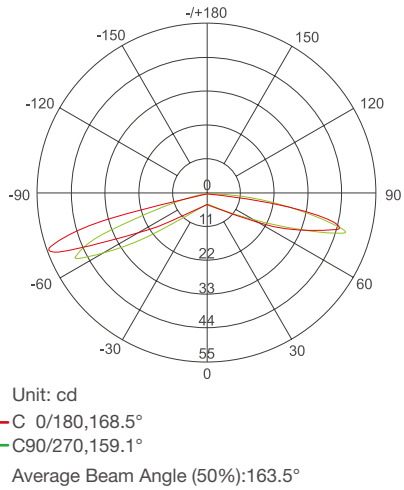

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QYD8-0509	24V DC	R:620nm G:540nm B:450nm	500	42	12	8	8pcs

BQ5-A

RGB/RGBW/Back-lit light sources

- Adopt RGB 3in1 2830 LED
- Good color-mixing effect and stability
- Special lens with 170° beam angle, suitable for thin light box
- Create rich color changing effects via controller
- Adopt standard terminals for easy mounting



NICHIA

LM-80

IP20

LED2830


170°

DC24V

3Years



PROFILE DRAWINGS

Unit:mm/inch

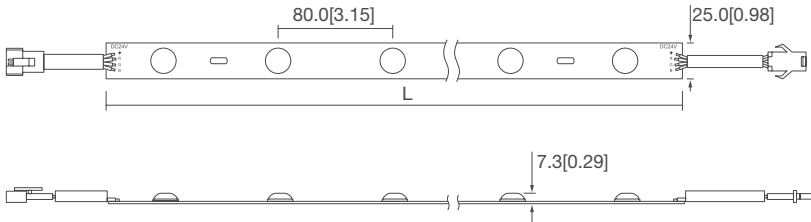

Model No.	L:mm/inch
BQ5-A	480[18.90]

PHOTOMETRIC

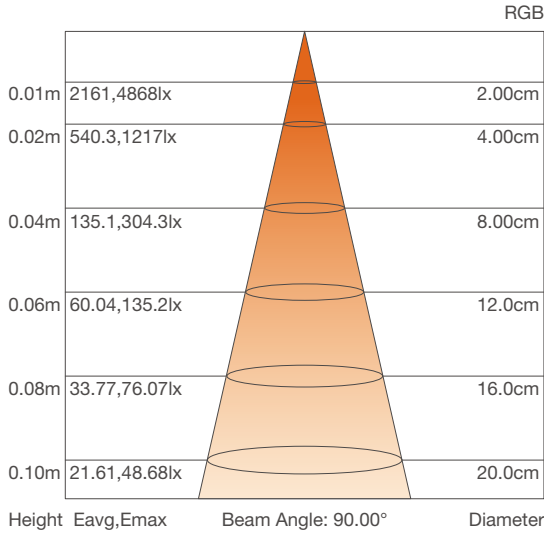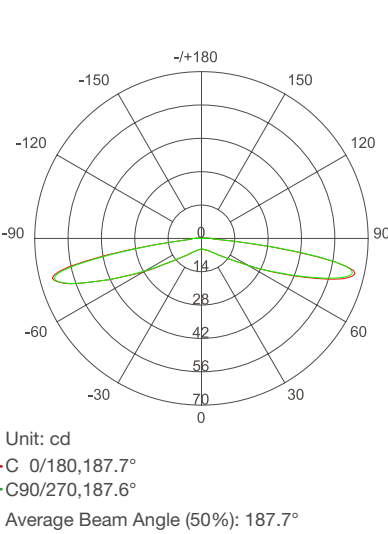

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BQ5-A	24V DC	R:620nm G:540nm B:450nm RGB:100000K	48 77 25 142	30.0 48.2 15.7 29.6	1.92 1.92 1.92 5.76	6	1pcs

RGBW-YD8

RGB/RGBW/
Back-lit light sources

- Adopt high quality 3030LED
- 170° large beam angle
- Create rich color changing effects via controller



NICHIA

LM-80

IP20

LED3030

CRI
70


170°

DC24V


3Years

PROFILE DRAWINGS


Unit:mm/inch

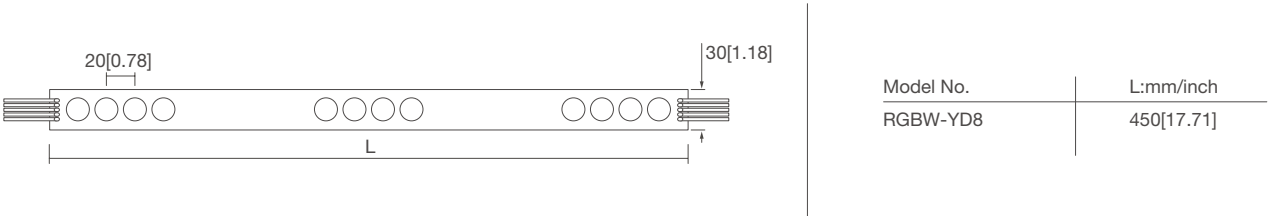

PHOTOMETRIC

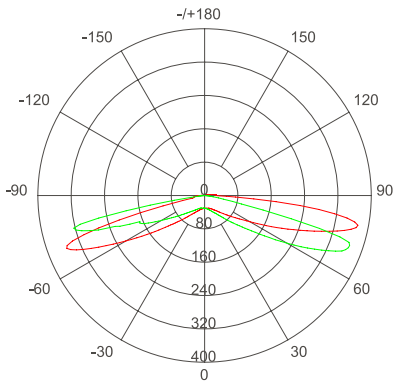

Unit: cd
- C 0/180,187.3°
- C90/270,164.4°
Average Beam Angle (50%):175.9°

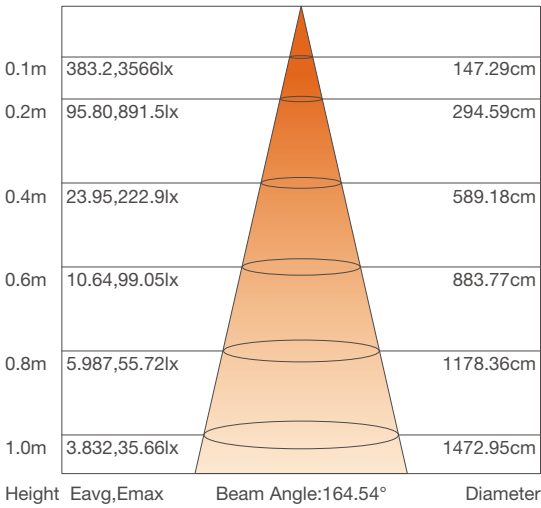

BASIC PARAMETERS

Model No.	Voltage	CRI	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
RGBW-YD8	24V DC	/	R:620nm	500	42	≤15	12	/
		/	G:540nm	500	42			
		/	B:450nm	500	42			
		>80	W:6500K	162	90			

QBPS

RGB/RGBW/Edge-lit light sources

- Adopt CREE LEDs with good stability
- Great lighting effect, long reach distance
- Aluminum PCB for better heat dissipation
- Create rich color changing effects via controller



CREE

LM-80

IP66

LED2525

ONE BIN ONLY


10°60°

DC24V


3Years

PROFILE DRAWINGS


Unit:mm/inch

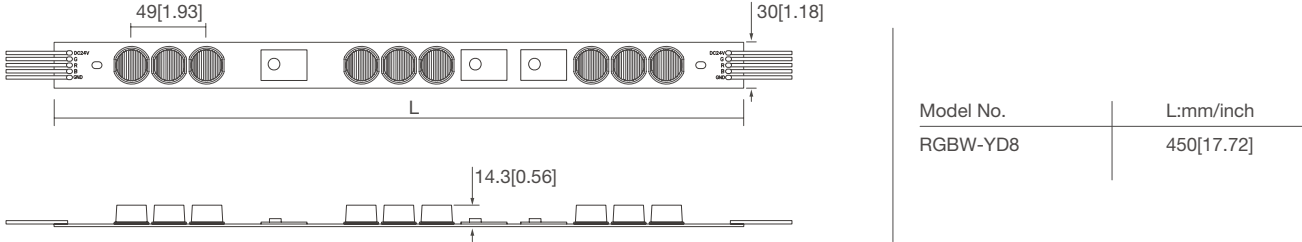

PHOTOMETRIC

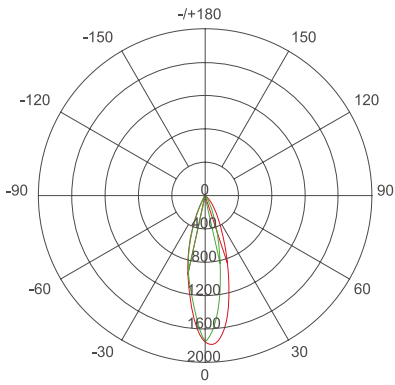

Unit: cd
- C 0/180,30.4°
- C90/270,21.7°
Average Beam Angle (50%): 25.1°

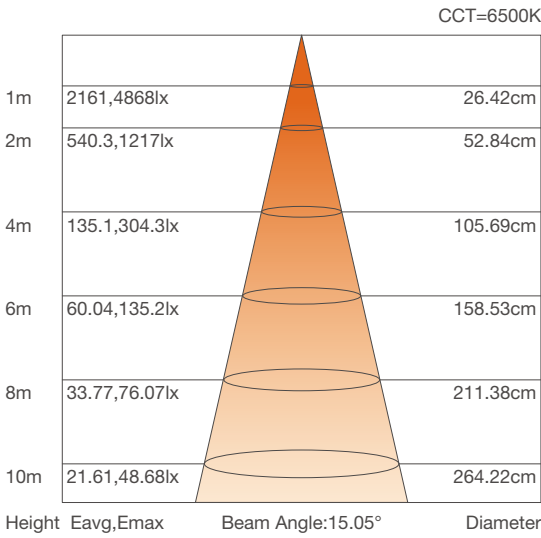

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QBPS-0509	24V DC	R:620-625nm	800	42	≤19	9	4pcs
		G:520-525nm					
		B:465-470nm					

QBPS-C

RGB/RGBW/Edge-lit light sources




- Special optical lens is used
- Adopt aluminum PCB for better heat dissipation
- Create rich color changing effects via controller
- Multiple specifications, support customization

CRI
70

3Years


PROFILE DRAWINGS

Unit:mm/inch

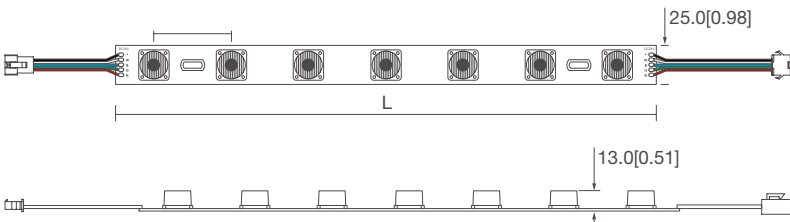

Model No.	L:mm/inch
QBPS-C	350[13.78]

PHOTOMETRIC

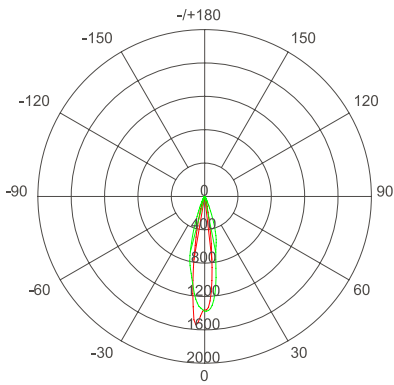

Unit: cd
- C 0/180,16.2°
- C90/270,25.8°
Average Beam Angle (50%): 21.0°

Height	Eavg,Emax	Beam Angle: 16.19°	Diameter
0.2m	28444,38332lx		5.69cm
0.4m	7111,9583lx		11.38cm
0.8m	1778,2396lx		22.76cm
1.2m	790.1,1065lx		34.14cm
1.6m	444.4,598.9lx		45.52cm
2.0m	284.4,383.3lx		56.90cm

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QBPS-C	24V DC	W:6500K	243	86	3	7	1pcs
		R:615-625nm	138	45	3		
		G:515-530nm	247	83	3		
		B:450-460nm	38	14	3		
		RGB:100000K	409	46	9		
		RGBW:100000K	630	53	12		

A1 2.0

AC RIGID BARS





- Aluminum PCB with PC cover, IP66 suitable for outdoor use.
- High efficiency & high power factor with PF>0.9, η>90%.
- Wide input voltage range from 85-240VAC
- Two length in 0.6m & 1.2m for option

CRI
70

3Years


PROFILE DRAWINGS

Unit:mm/inch

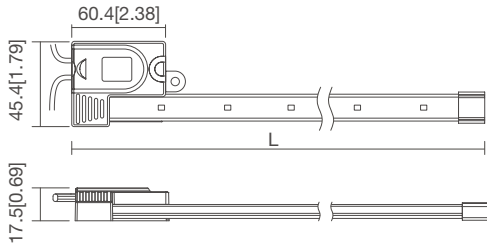

Model No.	L:mm/inch
A1 2.0-0626	595[23.43]
A1 2.0-07534	740[29.13]
A1 2.0-0940	900[35.43]
A1 2.0-1252	1180[46.46]

PHOTOMETRIC

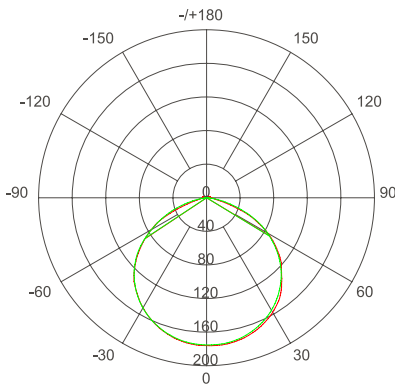

Unit: cd
- C 0/180,115.2°
- C90/270,115.3°
Average Beam Angle (50%): 115.2°

Height	Eavg,Emax	Beam Angle: 115.06°	Diameter
1m	490682,1760174lx		3.14cm
2m	122671,440044lx		6.28cm
4m	30668,110011lx		12.14cm
6m	13630,48894lx		18.86cm
8m	7667,27503lx		25.15cm
10m	4907,17602lx		31.43cm

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A1 2.0-0626	AC85-240V	2700-10000K	515	106	5	26	6pcs
A1 2.0-07534	AC85-240V	2700-10000K	729	105	7	34	
A1 2.0-0940	AC85-240V	2700-10000K	813	105	8	40	
A1 2.0-1252	AC85-240V	2700-10000K	1078	105	10	52	

A2 2.0 AC RIGID BARS

- Wide input voltage range from 90-265V AC
- High power factor with PF≥ 0.93
- Curtain style for easy mounting
- Aluminum PCB for better heat dissipation



INDOOR

OUTDOOR

LM-80

IP66

LED2835

120°


CRI
70

AC90-265V



3Years

PROFILE DRAWINGS

Unit:mm/inch

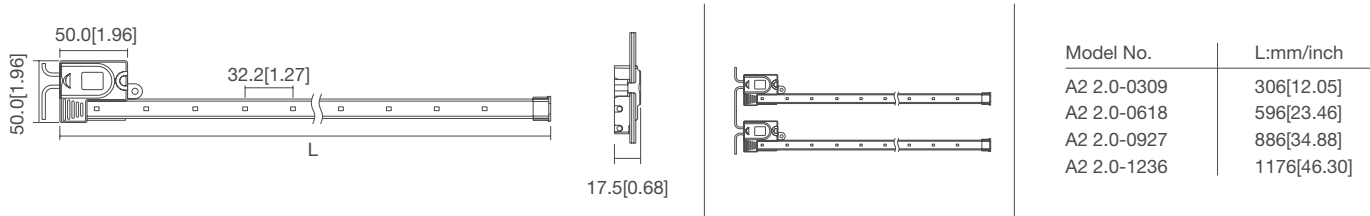

PHOTOMETRIC

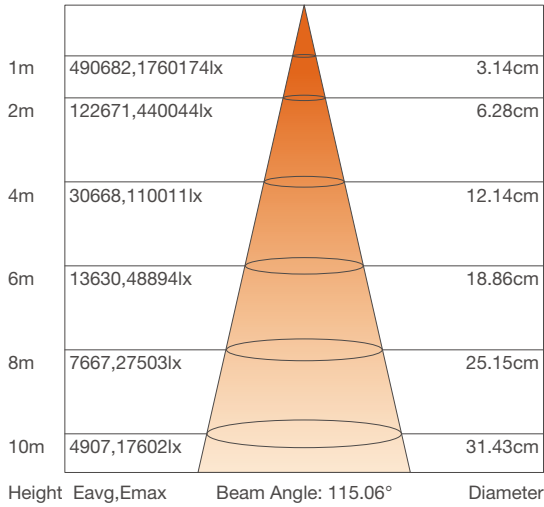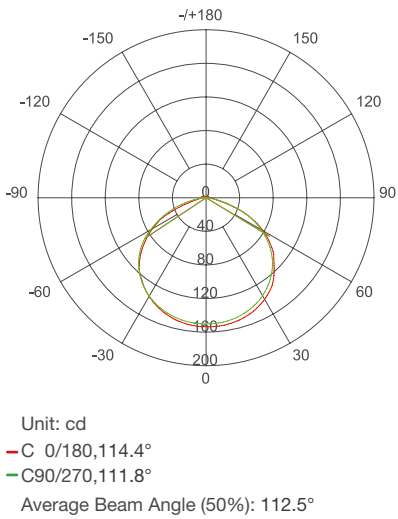

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A2 2.0-0309	90-265V AC	9000-11000K	225	75	3	9	6pcs
A2 2.0-0618	90-265V AC	9000-11000K	450	75	6	8	
A2 2.0-0927	90-265V AC	9000-11000K	675	75	9	27	
A2 2.0-1236	90-265V AC	9000-11000K	900	81	11	36	

A4-W AC RIGID BARS

- AC 220V input
- Self-designed optical lens for uniform lighting
- Do not support PWM dimming
- Multiple specifications, support customization



INDOOR

LM-80

IP20

LED2835

180°


CRI
80

AC220V



3Years

PROFILE DRAWINGS

Unit:mm/inch

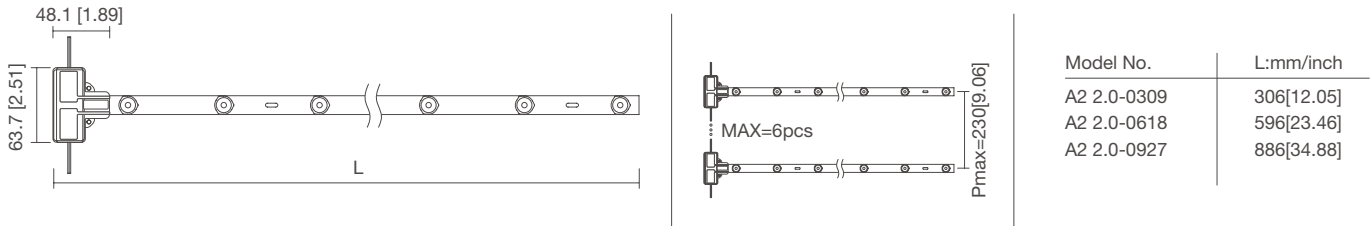

PHOTOMETRIC

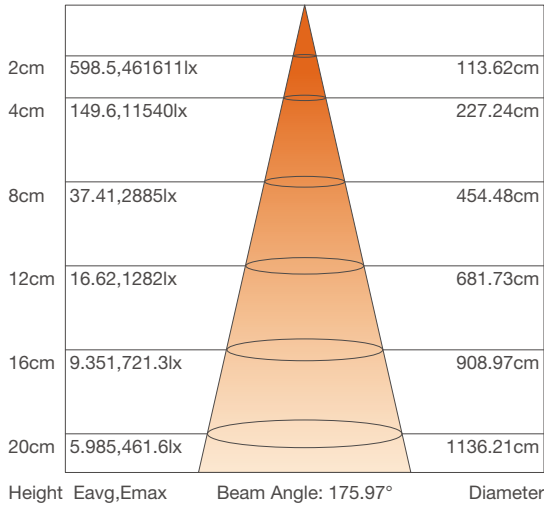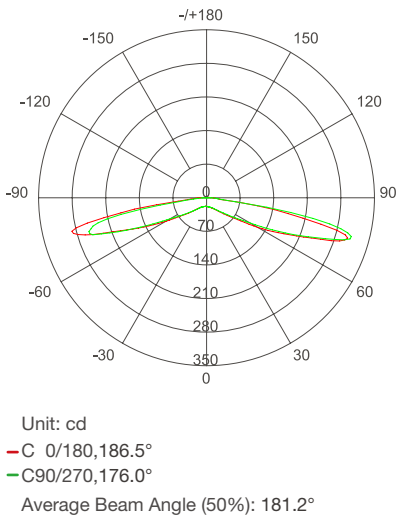

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A4-W-0606	220V AC	2700-12000K	599	106	6	6	6pcs
A4-W-0909	220V AC	2700-12000K	890	101	9	9	
A4-W-1212	220V AC	2700-12000K	1108	102	11	12	

A4-FW AC RIGID BARS



- 220V AC input
- Self-designed 170° wide beam angle for uniform lighting
- IP67 suitable for outdoor use
- Carton style ,6pcs/string for easy installation
- Four length for option,customization available

LM-80

IP67

LED2835

170°



CRI
80

AC220V

4Years


PROFILE DRAWINGS

Unit:mm/inch

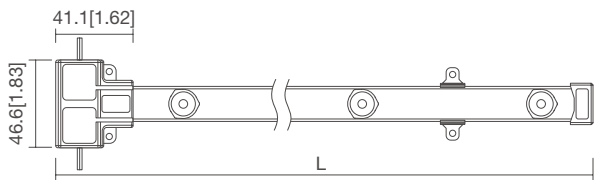

Model No.	L:mm/inch
A4-FW-0303	285[11.22]
A4-FW-0606	570[22.44]
A4-FW-0909	855[33.66]
A4-FW-1212	1150[45.28]

PHOTOMETRIC

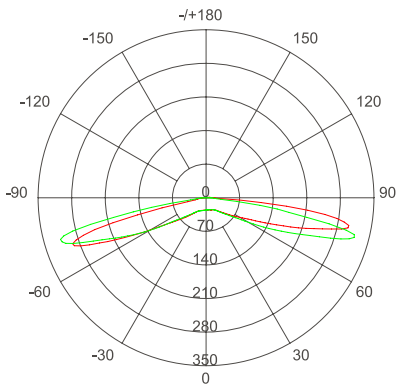


Unit: cd
- C 0/180,176.4°
- C90/270,174.8°
Average Beam Angle (50%): 175.6°

Height	Eavg,Emax	Beam Angle: 174.29°	Diameter
2cm	628.5,64893lx		80.21cm
4cm	157.1,16223lx		160.41cm
8cm	39.28,4056lx		320.83cm
12cm	17.46,1803lx		481.24cm
16cm	9.820,1014lx		641.66cm
20cm	6.285,648.9lx		802.07cm

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A4-FW-0303	220V AC	9000-12000K	309	99	3	3	6pcs
A4-FW-0606	220V AC	9000-12000K	608	104	6	6	
A4-FW-0909	220V AC	9000-12000K	906	104	9	9	
A4-FW-1212	220V AC	9000-12000K	1188	105	12	12	

NW-B DYNAMIC PANEL/White

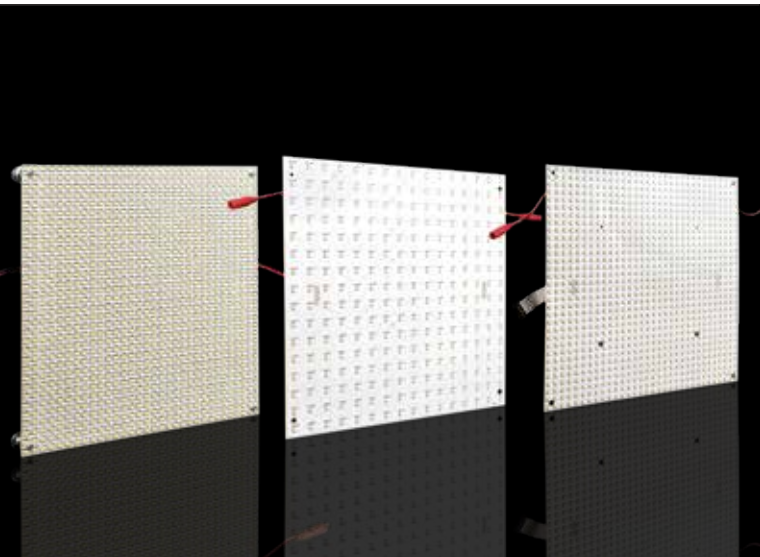

- Can play various media files smoothly
- To get better picture quality than display screen with less cost
- Low-power consumption with timing control
- Suitable for lightbox with a depth of 6cm or more
- Highly modular, easy to install and maintain

LM-80

ONE BIN ONLY

IP20


LED2835

DC5V

3Years

PROFILE DRAWINGS

Unit:mm/inch

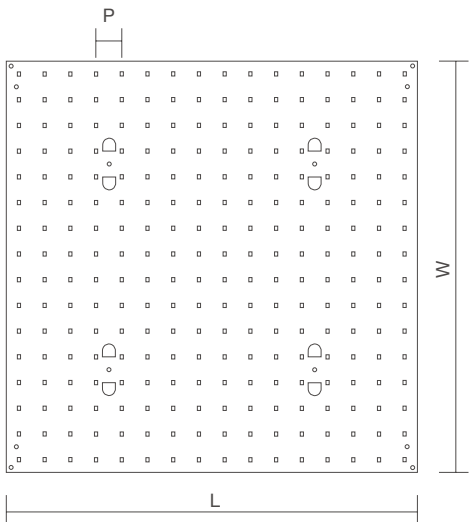


Model No.	L :mm/inch	W :mm/inch	P :mm/inch
NW128-B-P20-A1	320[12.90]	320[12.90]	20[0.79]
NW260-B-P10-A1	320[12.90]	320[12.90]	10[0.39]
NW260-B-P12-A1	384[15.12]	384[15.12]	12[0.47]
NW260-B-P6.5-A1	384[15.12]	384[15.12]	6.5[0.26]

BASIC PARAMETERS

Model No.	Voltage	Light Color	LM/pcs	Max. Current	Max.Power	LED-to-Canvas Distance
NW128-B-P20-A1	5V DC	W	1000	2.56 A/piece	12.8 W/piece	30-40mm
NW260-B-P10-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	25-30mm
NW260-B-P12-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	25-35mm
NW260-B-P6.5-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	20-25mm

NF-B DYNAMIC PANEL/RGB

- This system could play various media files smoothly
- Various expressions and vivid contents with powerful visual impact
- To get better picture quality than display screen with less cost
- Low-power consumption with timing control
- Suitable for light boxes with a depth of 6CM or more
- Highly modular, easy to install and maintain

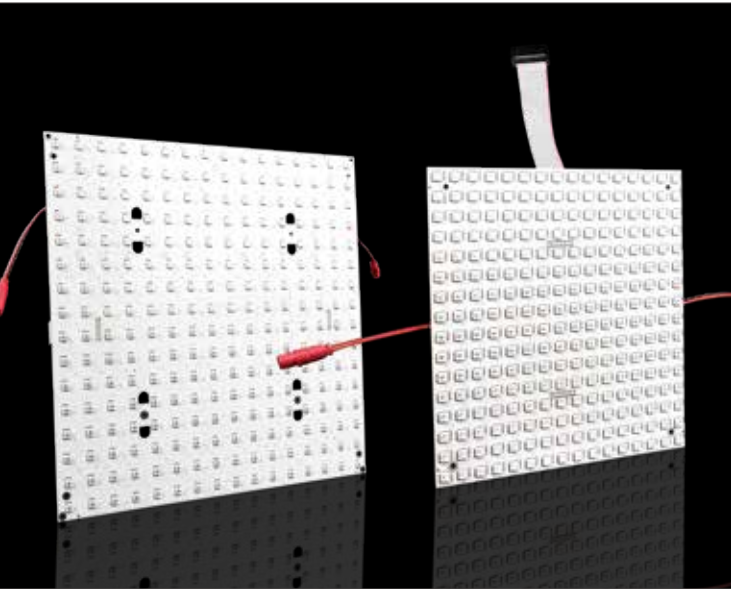

LM-80

ONE BIN ONLY

IP20

LED5050


DC5V

3Years


PROFILE DRAWINGS

Unit:mm/inch

NW128-B-P20-A1

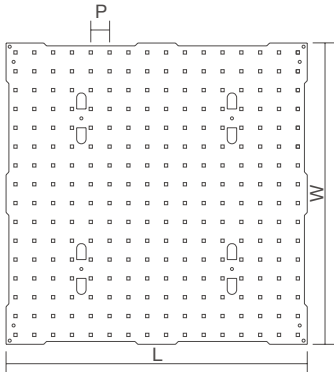

NW260-B-P10-A1

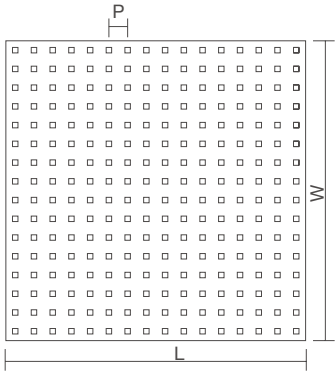

Model No.	L :mm/inch	W :mm/inch	P :mm/inch
NF230-B-P20-B1	320[12.90]	320[12.90]	20[0.79]
NF230-B-P12-B1	192[7.56]	192[7.56]	12[0.47]

BASIC PARAMETERS

Model No.	Voltage	Light Color	LM/pcs	Max. Current	Max.Power	LED-to-Canvas Distance
NW128-B-P20-A1	5V DC	W	1000	2.56 A/piece	12.8 W/piece	30-40mm
NW260-B-P10-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	25-30mm



BLUEVIEW ELEC-OPTIC TECH CO., LTD

☎ +86-28-8148 0011
☎ +86-28-8148 1258

🌐 www.blueviewled.com
✉ sales@blueviewled.com

📍 No.1000,Section 2,2nd Konggang Road,Southwest
Aviation Industrial Zone,Chengdu,Sichuan,China