

L / E / D / N / E / O / N

NEON

CATALOG

BETTER LIGHT BETTER VIEW

◀ 2024 ▶

Blueview Elec-Optic Tech Co., Ltd



BETTER LIGHT BETTER VIEW

COMPANY PROFILE

BLUEVIEW ELEC-OPTIC TECH CO.,LTD. is a pioneer developer in China's LED signage lighting and linear lighting market, not only participating but also promoting the development of the entire LED industry.

Blueview has been offering professional integrated and ingenious solutions with abundant products including signage, lighting products and others since 2004.

To lead the innovation trend, Blueview introduced “Smart Control” to its products which triggered a major breakthrough for the whole LED industry. Blueview aims to provide customers with complete LED smart lighting system solutions, from lamps to systems to IOT, everything.

We always pursuit the faith that Better light could bring Better life and we never slow down the path for innovation&creation.

Missions

Lead the development for LED industry while shouldering the social responsibilities.
Bring the maximum profits to our consumers while maintaining the highest level of lighting solution services.

Strength

Meticulous Quality Control system
High reputation around the world
Seasoned and professional project experiences
Persistent Research&Development

Culture&Values

Perfectionism
We always treat every detail with rigorous and severe attitude.
Consumer Satisfaction
We always provide customization and circumspect lighting solution services for each individual project.
Innovation
We always challenge ourselves and exploit new path to “Blue Sea”.
High Performance Cost Ratio
We always require our products possessed with remarkable performance and reasonable cost.



COMPANY INTRODUCTION

**Scale**
40,000m²

**Employees**
1,200+

**Market Share**
Own the largest market shares for LED advertising signage lighting

**Management System**
Acquired international management system certification of TUV,ISO9001, ISO14001,ISO45001,quality,environment, occupational health and safety

**Certificates**
CE,UL,3C,FCC,ROHS etc.

**Product Lines**
LED Signage,LED Lightbox ,LED Smart Lighting System ,LED Commercial Lighting

**Global Business**
Domestic :55%,Overseas:45%

**Embranchment**
50 directly affiliated offices in China, 19 branches

**Revenue**
¥ 650 million in 2023

TOP TEN REASONS TO SELECT BLUEVIEW

Best-In-Class Services

Experience

One Of The 1St Movers For Led Tape Light

Strict Quality Control

Leading Industry Warranty Up To 10 Yrs


Reliable High Standard

ODM&OEM Capacity

High Efficient Leading Time

Wide Color Temperature Options In Only One Bin

Wide Products Options

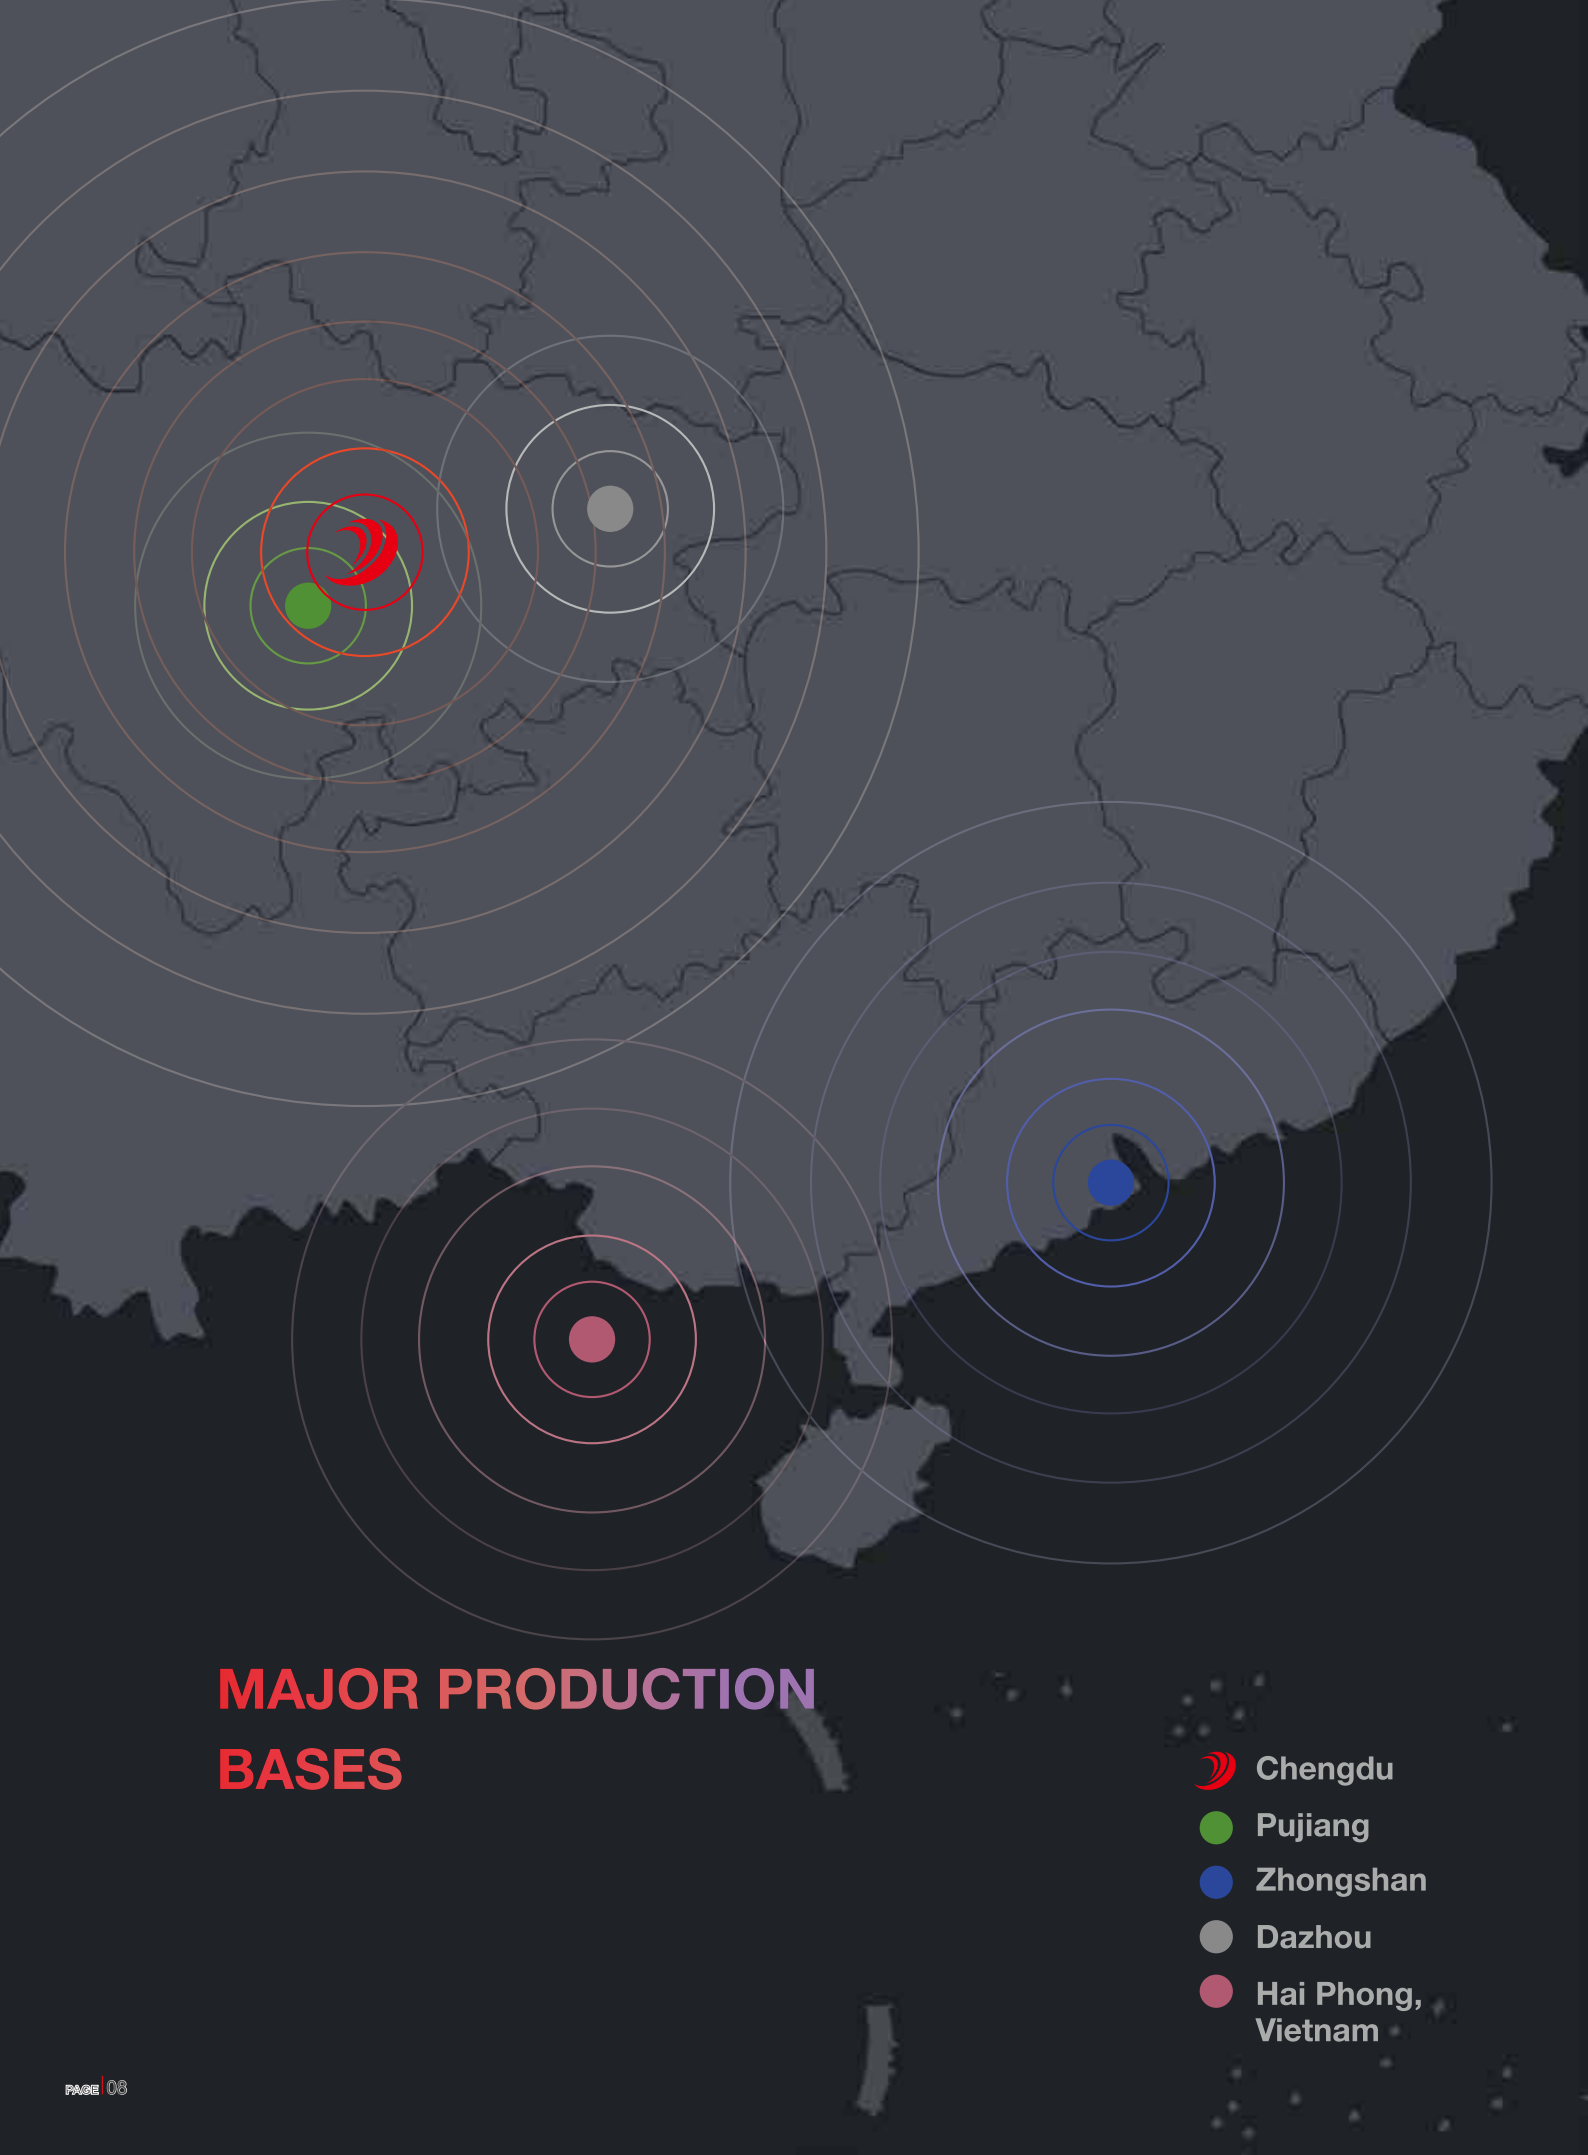

MAJOR PRODUCTION BASES

- Chengdu
- Pujiang
- Zhongshan
- Dazhou
- Hai Phong, Vietnam



Headquarters in
Chengdu, Sichuan



Production base in
Zhongshan, Guangdong



Production base in
Pujiang, Sichuan




Production base in
Dazhou, Sichuan



Production base in
Hai Phong, Vietnam

HISTORY & EVENTS

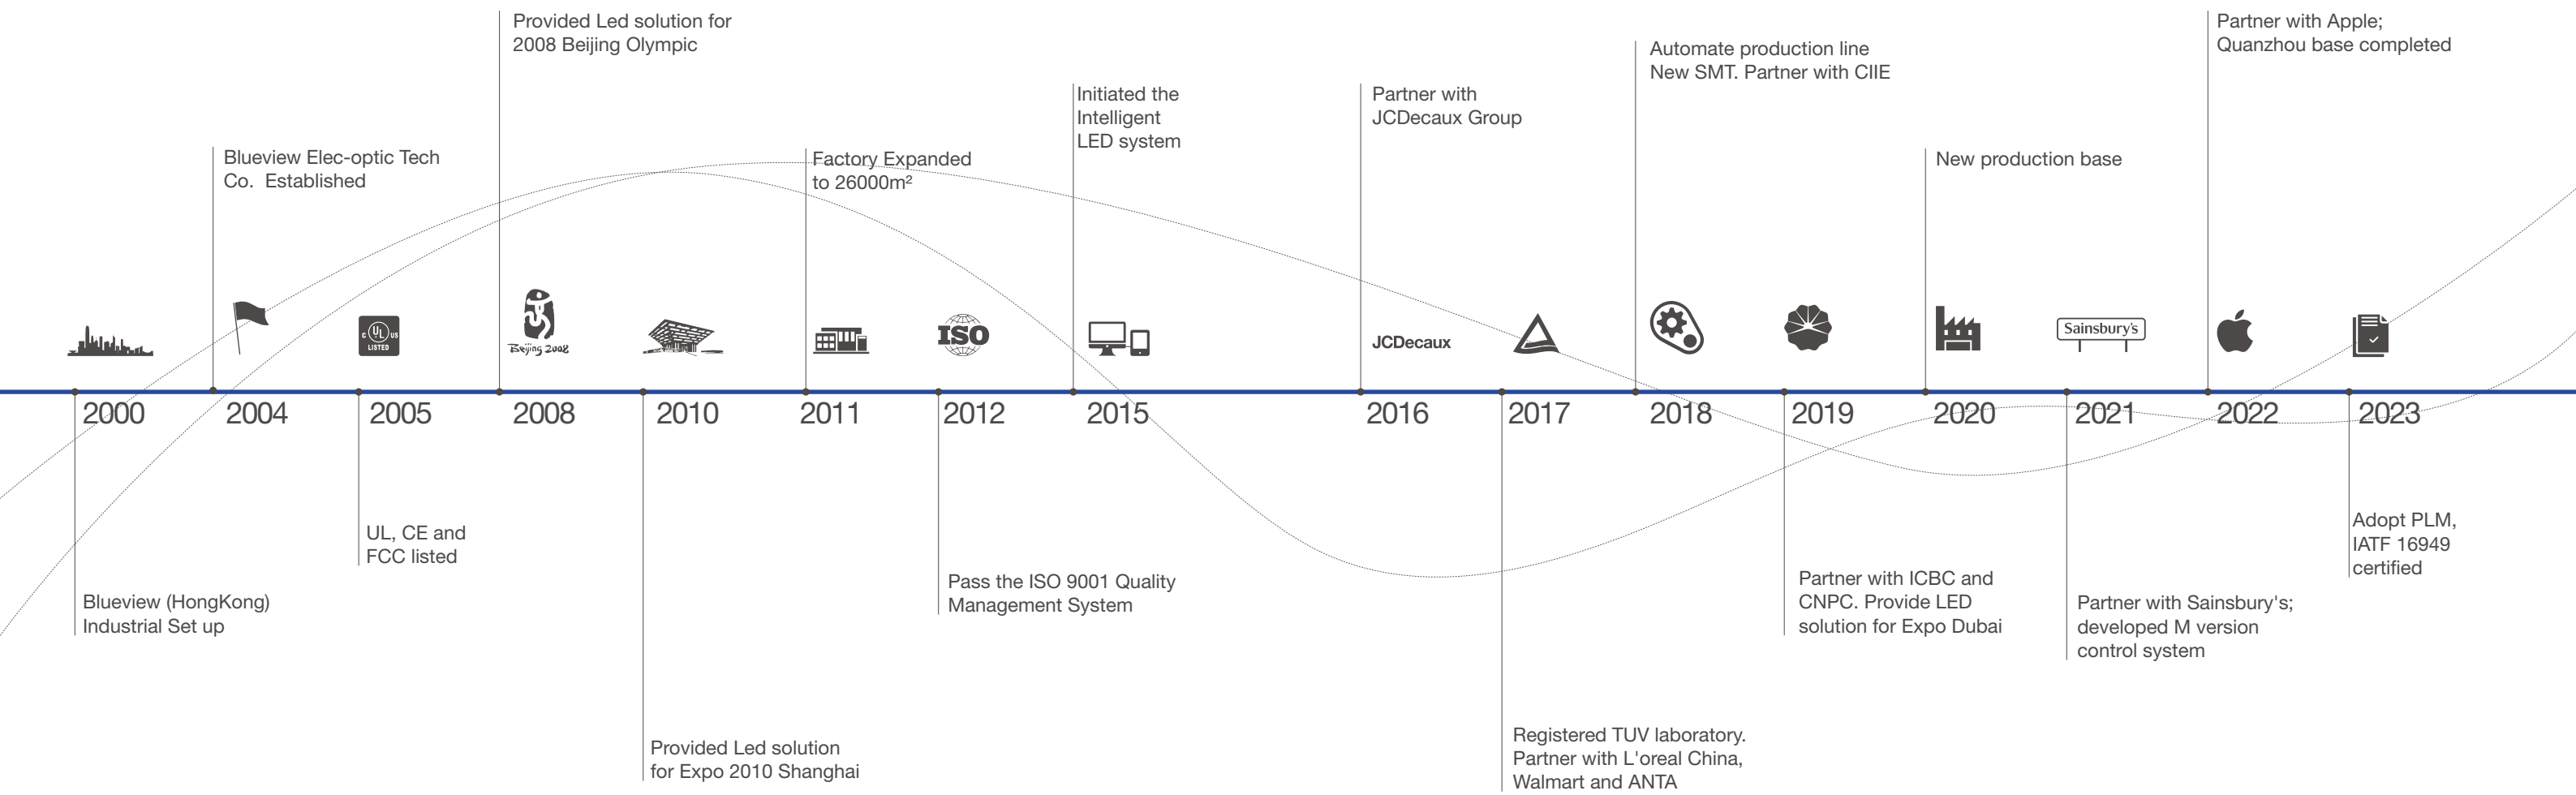



3
R&D Center

R&D INVESTMENT



76
R&D Engineer



◇◇ **Chengdu** ◇◇
R&D Center

◇◇ **Shenzhen** ◇◇
R&D Center

◇◇ **Zhongshan** ◇◇
R&D Center



5
Senior
Engineers


Developing the entire industry chain system, including smart systems and supporting devices.

Developing commercial lighting products

Developing linear lighting products

SGS AUTHORIZED FIRST-CLASS LABORATORY

It has a complete set of testing equipment, which can independently undertake products testings.

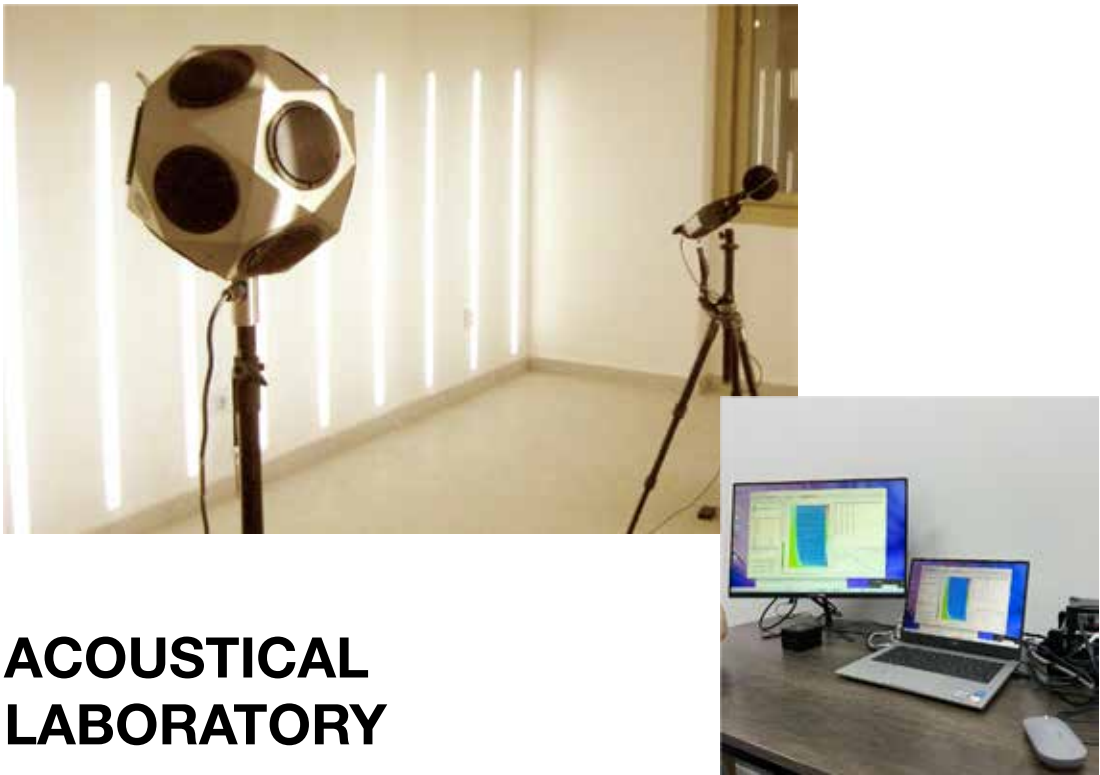

ACOUSTICAL LABORATORY

Our Acoustic Testing Facility is designed to comply with ISO 354 standards.
Our laboratory proudly carries accreditation from the China Inspection Body and Laboratory Mandatory Approval (CMA).

PATENT & CERTIFICATE



18 innovation patents [partly]



19 appearance design patents [partly]



Passed CE, ROHS, UL, FCC, 3C certification, SGS, TUV and UL official test laboratory certification.



79 utility model patents [partly]
Acquired international management system certification of energy saving, environment, occupational health and safety.

PATENT & CERTIFICATE



Domestic Certificates

CCC, CQC, energy-saving, environmental protection, explosion-proof, etc

International Certificates

UL、NA、ENEC、CE、CB、UKCA、BSCI、FCC、REACH、RoHS、ErP、TITLE 24, etc

MANAGEMENT SYSTEM

ISO 9001 QMS

ISO 14001 EMS

ISO 45001 OH&S

IATF 16949 Automotive Quality Management

ISO 14064 Greenhouse Gas

PAS 2060 Carbon-neutral

BSCI



120+ Reliability Tests

Including lifespan test, reliability test, safety test, IP test, optical test, material test etc., laying the foundation for the product quality.

60+ Test Equipment

We have high-precision and fast spectral analyzers, X-RAY testing equipment, RoHS testers, IP rating testers, lightning surge testers, drop testers, and twisting machines, among other testing equipment, to comprehensively assess product reliability.



Mechanical Strength
IEC60598 4.13




Temperature -40~80°C
336 hours



X-Ray Test
welding quality inspection



Xenon Lamp Test
336 hours

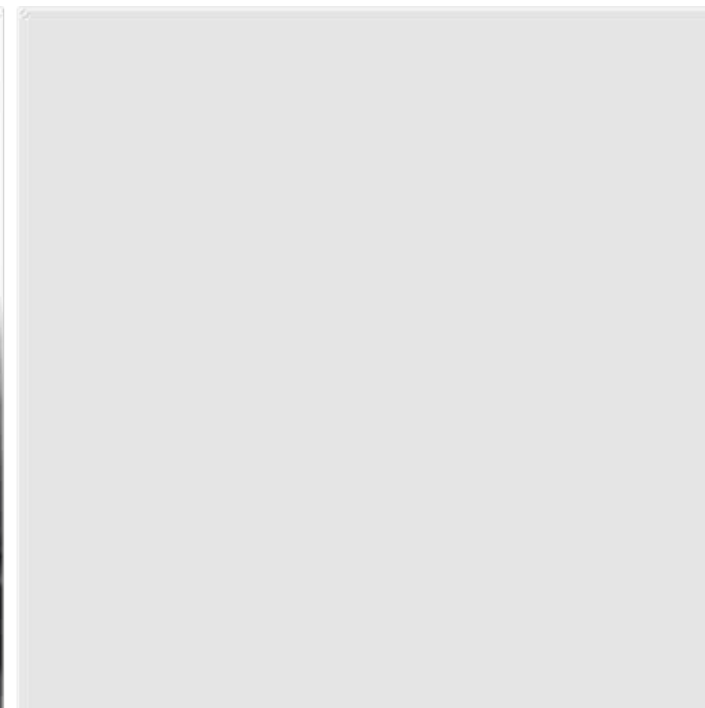

Water spray IPX5/6 standard
336 hours



Corrosion Resistance Test
72 hours



No-load/Load Capacity Test
within $\pm 0.5V$



Long-term indoor aging
8,500 hours

COMPREHENSIVE PRODUCTION LINE

Production environment meets ISO 7 standard of number of particles per cubic meter, temperature and humidity.



SMT Dust-free Workshop



Continuous Quality Improvement



Lead-free Workshop



INTERNATIONAL TRADE FAIR

Blueview attaches great importance to the development of the global market, so it has actively participated in foreign exhibitions for many years, including exhibitions in Dubai, the United States, the United Kingdom, Germany, India and other countries.



- 01 **Germany** · Frankfurt
- 02 **India** · LED Expo
- 03 **Dubai** · SGI
- 04 **America** · ISA
- 05 **Guangzhou** · GILE
- 06 **Hong Kong** · International lighting fair

PRODUCT LIST

VERTICAL BENDING-D SERIES

Model	Voltage	Color	Drawing	Bending Diameter	Warranty	PAGE
NDF1617	24V DC	Single colorWNRGBRGBWPixel		∅ 120mm	5years 3years	034
NDF1617-48V	48V DC	Single colorWNRGBRGBWPixel		∅ 120mm	5years 3years	037
NDF1617A	24V DC	Single colorWNRGBRGBWPixel		∅ 120mm	5years 3years	038
NDF1212	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	039
NDF1010	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	040
NDF1010A	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	041
NDF1005	24V DC	Single colorWNRGBRGBWPixel		∅ 30mm	3years 3years	042
NDF1306-COB	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	043
N2-8 Multi-color	24V DC	Single colorWNRGBRGBWPixel		∅ 120mm	5years 3years	044
NDR2018	24V DC	Single colorWNRGBRGBWPixel		∅ 120mm	5years 3years	045
NDR1414	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	046
NDR1010	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years	047

HORIZONTAL BENDING-S SERIES

Model	Voltage	Color	Drawing	Bending Diameter	Warranty	PAGE
NSF1617	24V DC	Single colorWNRGBRGBWPixel		∅ 120mm	5years 3years	050
NSF1212	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	052
NSF1220	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	053
NSF1017	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	054

Model	Voltage	Color	Drawing	Bending Diameter	Warranty	PAGE
NSF1010	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	055
NSF1010A	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	056
NSF0612	12V DC	Single colorWNRGBRGBWPixel		∅ 30mm	5years 3years	057
NSF0410	24V DC	Single colorWNRGBRGBWPixel		∅ 30mm	5years 3years	058
NSR1025	24V DC	Single colorWNRGBRGBWPixel		∅ 25mm	5years 3years	059
NSR0817	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	3years 3years	060
NSR0615	24V DC	Single colorWNRGBRGBWPixel		∅ 30mm	5years 3years	061
NSR0512	24V DC	Single colorWNRGBRGBWPixel		∅ 30mm	5years 3years	062
N2-4 pro	24V DC	Single colorWNRGBRGBWPixel		∅ 120mm	5years 3years	063

3D NEON / 360° NEON / HIGH VOLTAGE SERIES / SWIMMING POOL SERIES

Model	Voltage	Color	Drawing	Bending Diameter	Warranty	PAGE
N2-8 Pro	24V DC	Single colorWNRGBRGBWPixel		∅ 200mm (Top) ∅ 500mm (Side)	5years 3years	066
NCR32	24V DC	Single colorWNRGBRGBWPixel		∅ 300mm	5years 3years	069
NCR23	24V DC	Single colorWNRGBRGBWPixel		∅ 120mm	5years 3years	070
NCR23S	24V DC	Single colorWNRGBRGBWPixel		∅ 200mm	5years 3years	071
NCR13-COB	24V DC	Single colorWNRGBRGBWPixel		∅ 120mm	5years 3years	072
AWHE1608-D	230V AC	Single colorWNRGBRGBWPixel		∅ 50mm	5years 3years	074
AN2-4	220V AC	Single colorWNRGBRGBWPixel		∅ 60mm	5years 3years	075
WE1405/1606	24V DC	Single colorWNRGBRGBWPixel		∅ 60mm	3years	077

END CAP IP PROCESS

VERTICAL BENDING-D SERIES

NDF1617

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color												
WN												
RGB												
RGBW												
Pixel(RGB)												
Pixel(RGBW)												

NDF1617-48V

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	x

NDF1212

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒	☐
WN	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒	☐
RGB	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒	☐

NDF1010/1010A

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒

NDF1005

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐	☒	☐	☐	☒	☒	☐	☐	☐

NDF1306COB

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐	☒	☐	☐	☐	☐	☐	☐	☐
WN	☒	☐	☐		☒	☐	☐	☐	☐	☐	☐	☐
RGB	☒	☐	☐	☐	☒	☐	☐	☐	☐	☐	☐	☐

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Pixel(RGB)	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☒
Pixel(RGBW)	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☒

NDR2018

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☐	☐	☐	☒	☐	☐	☐
WN	☒	☒	☒	☒	☒	☐	☐	☐	☒	☐	☐	☐
RGB	☒	☒	☒	☒	☒	☐	☐	☐	☒	☐	☐	☐
RGBW	☒	☒	☒	☒	☒	☐	☐	☐	☒	☐	☐	☐
Pixel(W)	☒	☒	☒	☒	☒	☐	☐	☐	☒	☐	☐	☐
Pixel(RGB)	☒	☒	☒	☒	☒	☐	☐	☐	☒	☐	☐	☐
Pixel(RGBW)	☒	☒	☒	☒	☒	☐	☐	☐	☒	☐	☐	☐

NDR1414

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☐
WN	☒	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☐
RGB	☒	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☐

HORIZONTAL BENDING-S SERIES

NSF1617

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
WN	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
RGB	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
RGBW	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
Pixel(RGB)	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑

NSF1212

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒	☒
WN	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒	☒
RGB	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒	☒

NSF1017

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color												
WN												
RGB												
RGBW												

NSF1220

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☐
WN	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☐
RGB	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☐
Pixel(RGBW)	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☐

NSF1010 -----

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒

NSF1010A

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒

NSF0612

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐
WN	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐

NSF0410

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐	☐

NSR1025

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
WN	☒	☒	☒	☒	☒	☐	☐	☒	☒	☐	☐	☒
RGB	☒	☒	☒	☒	☒	☐	☐	☒	☒	☐	☐	☒
RGBW	☒	☒	☒	☒	☒	☐	☐	☒	☒	☐	☐	☒
Pixel(RGB)	☒	☒	☒	☒	☒	☐	☐	☒	☒	☐	☐	☒
Pixel(RGBW)	☒	☒	☒	☒	☒	☐	☐	☒	☒	☐	☐	☒

NSR0817

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☒	☐	☐	☒	☐	☐	☐	☐
WN	☒	☒	☒	☒	☒	☐	☐	☒	☐	☐	☐	☐
RGB	☒	☒	☒	☒	☒	☐	☐	☒	☐	☐	☐	☐

NSR0615

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☐	☐	☐	☒	☐	☐	☐	☐
WN	☒	☒	☒	☒	☐	☐	☐	☒	☐	☐	☐	☐

NSR0512

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑

3D / 360°NEON / HIGH VOLTAGE SERIES / SWIMMING POOL SERIES

N-8 Pro

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑

-----NCR13-COB-----

[illegible]

NCR23

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☐	☐	☐	☐	☐	☐	☐	☐
RGB	☒	☒	☒	☒	☐	☐	☐	☐	☐	☐	☐	☐

NCR23S

[illegible]

NCR32

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
RGBW	☒	☒	☒	☒	☐	☐	☐	☐	☐	☒	☒	☒
Pixel(RGBW)	☒	☒	☒	☒	☐	☐	☐	☐	☐	☒	☒	☒

AWHE1608-D

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐

AN2-4

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒	☐	☐	☐	☒	☒	☐	☐	☒

WE1405

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐
WN	☒	☐	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐
RGBW	☒	☐	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐
Pixel(RGBW)	☒	☐	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐

TOP BENDING

NEON FLEX



NDF1617
NDF1617-48V
NDF1617A
NDF1212
NDF1010
NDF1010A
NDF1005
NDF1306-COB
N-8

NDR2018
NDR1414

Reliable structure with good flexibility, suitable for various shapes
Outstanding weather resistance, suitable for both indoor and outdoor use



NDF1617

D-SERIES

CE

RoHS

UL LISTED E354137

IP67/68

DC24V

114/115°

LM-80

FLAME RESISTANT

SOLVENT RESISTANT

SALTWATER RESISTANT

UV RESISTANT

5Years INDOOR

3Years OUTDOOR

FEATURES


- Color options: Single color, WN.

- Constant current design with stable and reliable performance.

- Top bending with good flexibility.

- Warranty: 5 years indoor, 3 years outdoor.

- Customization: multiple spec options, can be customized upon requirements.

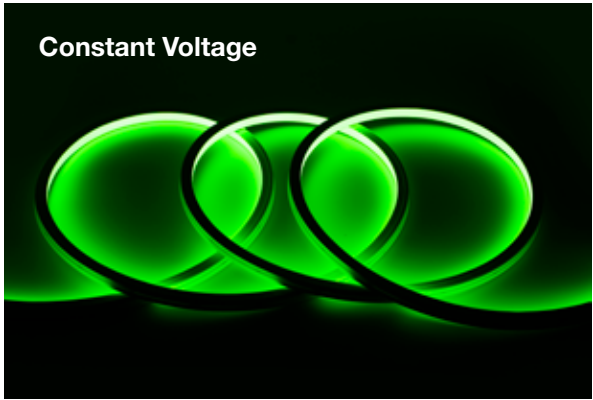

NDF1617

D-SERIES

CE

RoHS

UL LISTED E354137

IP67/68

DC24V

115°

LM-80

FLAME RESISTANT

SOLVENT RESISTANT

SALTWATER RESISTANT

UV RESISTANT

5Years INDOOR

3Years OUTDOOR

FEATURES

- Color options: RGB, RGBW.


- Constant voltage design with stable and reliable performance.

- Top bending with good flexibility.


- Warranty: 5 years indoor, 3 years outdoor.

- Customization: multiple spec options, can be customized upon requirements

PROFILE DRAWINGS

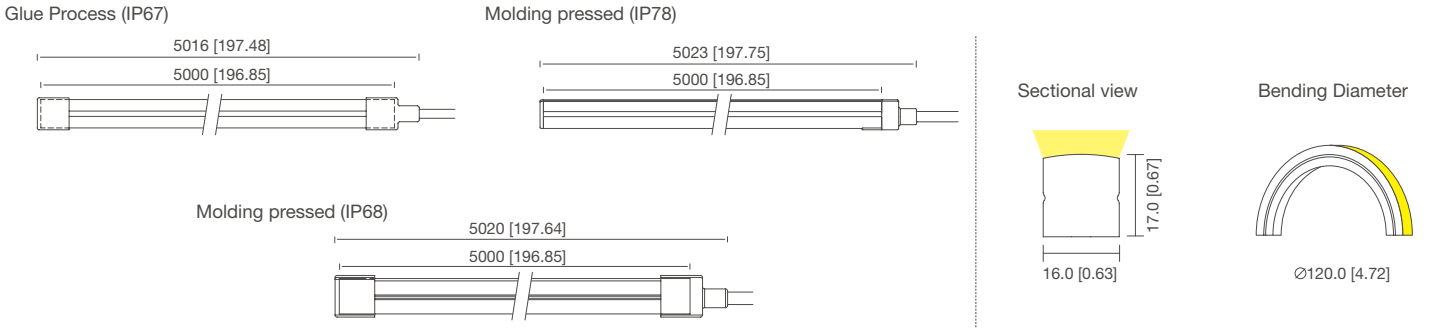

PROFILE DRAWINGS

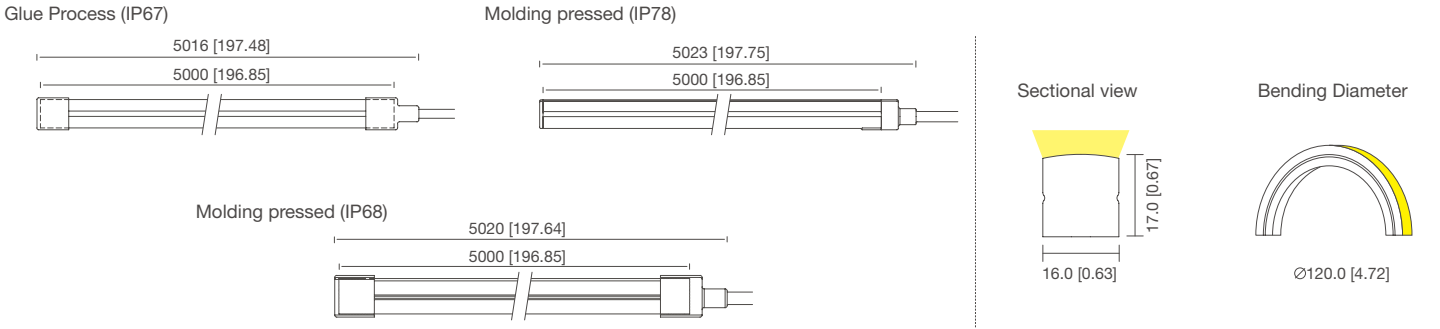

PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDF1617- Single color-CC	24V DC	80+	2300-6000K	1074	64.3	17.2	112pcs/m	10m	62.5mm	10000*16*17mm
		/	Red	235	13.1					
			Green	687	38.2					
			Blue	148	8.2					
			Yellow	202	11.2					
			Orange	211	11.7					


PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDF1617-RGB- CC	24V DC	/	Red	89	17.6	5.7	72pcs/m	5m	83.3mm	5000*16*17mm
			Green	203	35	5.7				
			Blue	46	7.8	5.7				
			Yellow	317	19	17.2				

Note: ☐ The data of 2300K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.


Note: ☐ For more information, please contact our sales representative.

PHOTOMETRIC

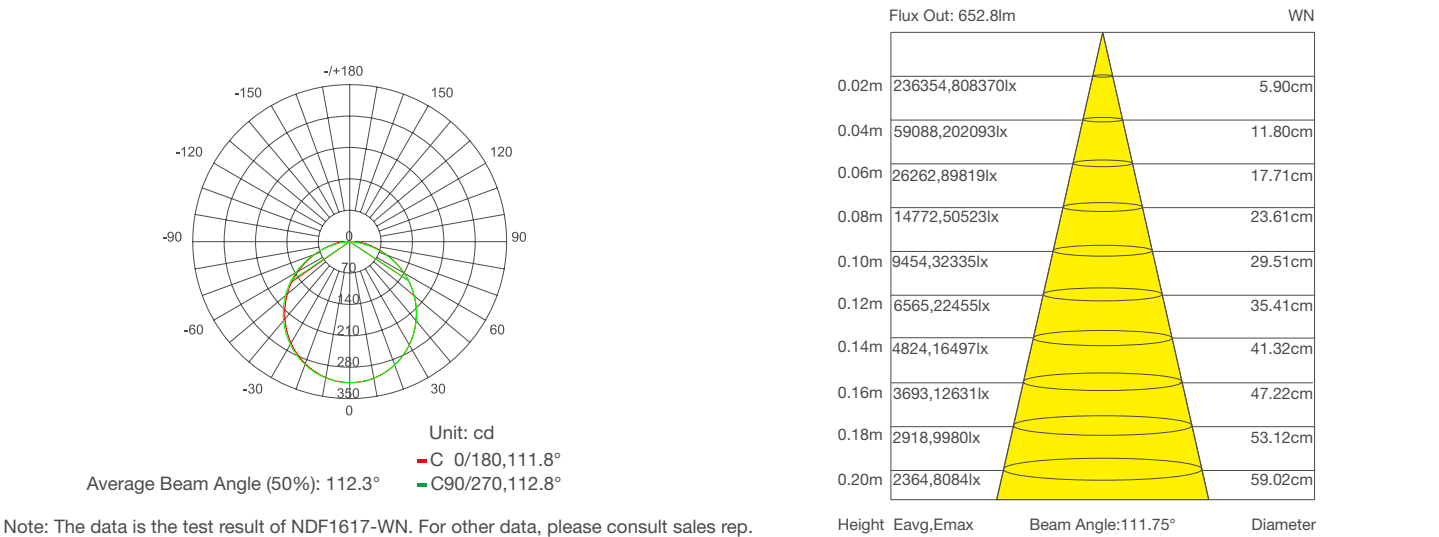



NDF1617-DMX
D-SERIES




FEATURES

- Color options: DMX-RGB, DMX-RGBW.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

PROFILE DRAWINGS

Unit: mm[inch]

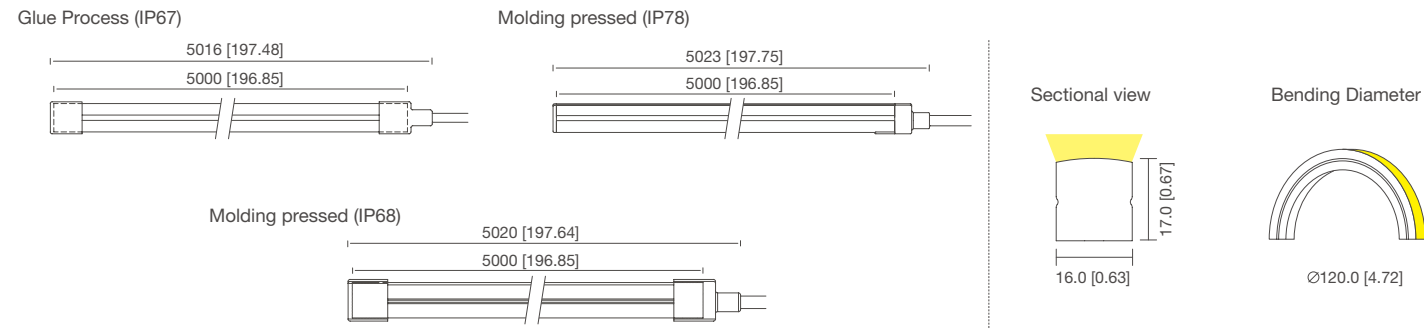


PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDF1617-DMX- RGB	24V DC	/	 Red	50	7.5	6.72	60pcs/m	5m	100mm	5000*16*17mm
			 Green	112	16	6.72				
			 Blue	27	3.7	6.72				
			 RGB	180	12.8	15.36				

Note: ☐ For more information, please contact our sales representative.


PHOTOMETRIC

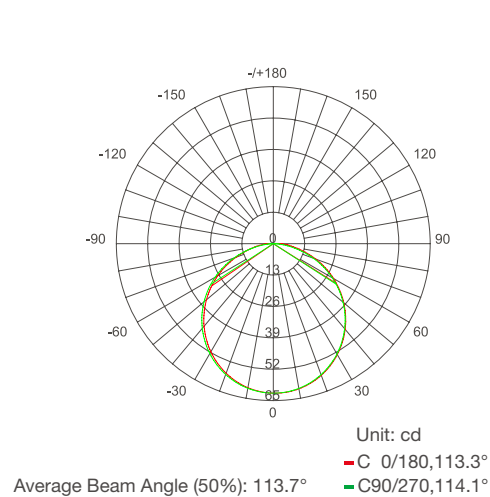

Note: The data is the test result of NDF1617-DMX-RGB. For other data, please consult sales rep.

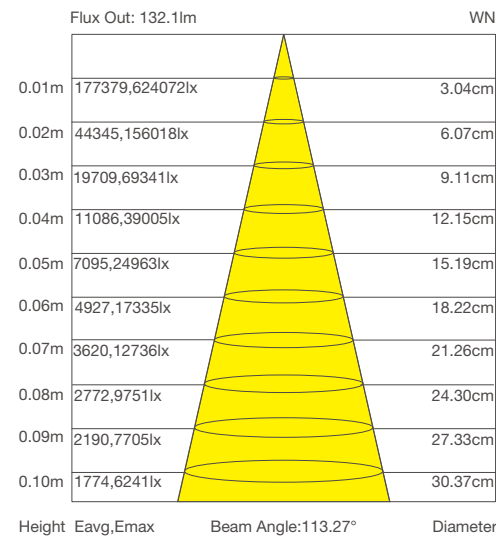

NDF1617-48V
D-SERIES




FEATURES

- Color options: Single color.
- Adopt 48VDC voltage with max run of 35m
- Top bending with good flexibility.
- Adopt high-quality constant current components, stable and reliable performance.
- Warranty: 5 years indoor, 3 years outdoor.
- Single color supports PWM dimming within 1KHz.
- Customization: multiple spec options, can be customized upon requirements.

PROFILE DRAWINGS

Unit: mm[inch]

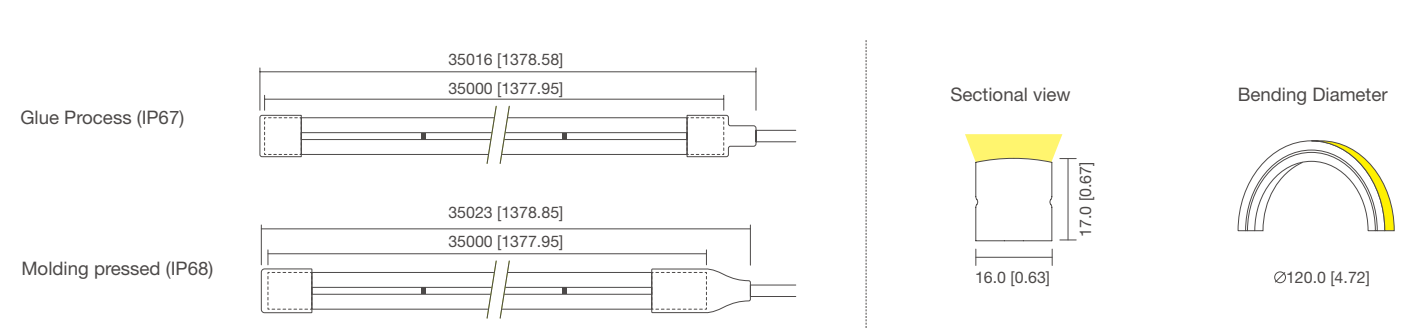

PRODUCT PARAMETERS



Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDF1617-48V- Single color	48V DC	80+	 2600-6000K	570	63	9.6	120pcs/m	35m	100mm	35000*16*17mm
		/	 Red	190	21					
			 Green	540	61					
			 Blue	120	13					
			 Yellow	150	17					
			 Orange	230	26					

Note:

☐ The data of 2600K-6000K is based on 4000K.

☐ For more information, please contact our sales representative.

PHOTOMETRIC

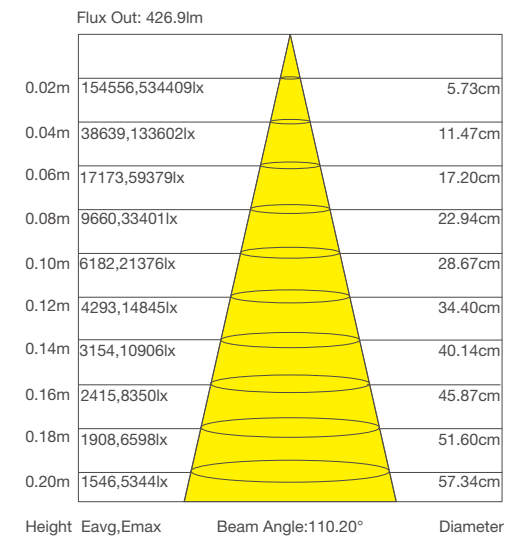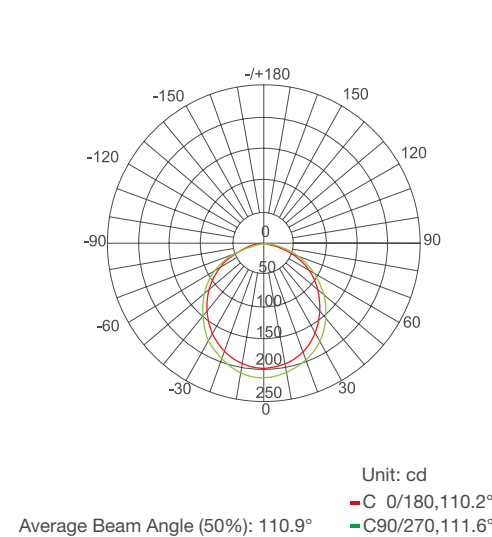



NDF1617A

D-SERIES




FEATURES

- Color options: Single color
- Mini cut, can be cut into any specific size
- Support PWM, 0-10V, DALI, and DMX dimming
- Warranty: 5 years indoor, 3 years outdoor

PROFILE DRAWINGS

Unit: mm[inch]

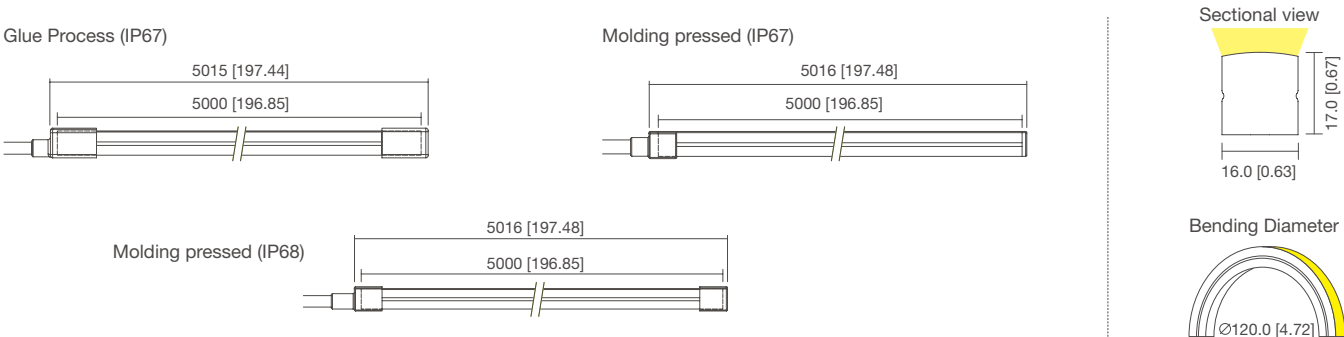

PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDF1617A-Single color	24V DC	90+	2500-6000K	544	46	11.76	140pcs/m	5m	7.14mm	5000*16*17mm

Note:


☐ The data of 2500K-6000K is based on 4000K.

☐ For more information, please contact our sales representative.

PHOTOMETRIC

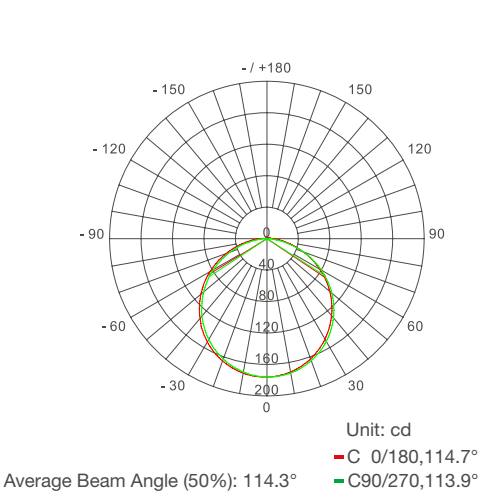

Note: The data is the test result of DF1617A-2700K. For other data, please consult sales rep.

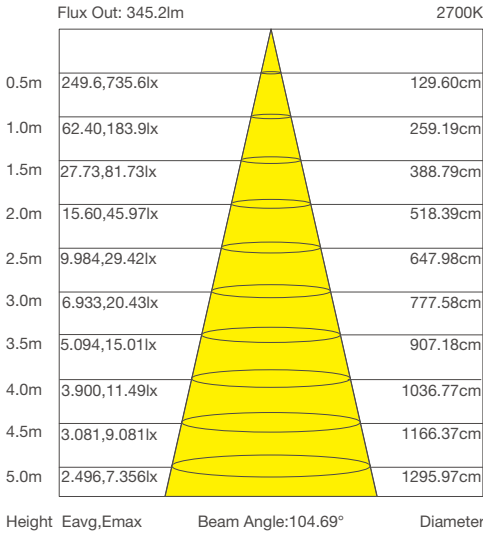

NDF1212

D-SERIES




FEATURES

- Color options: Single color, WN and RGB.
- Design: Superior design with exquisite craftsmanship ensure stable and reliable performance.
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

PROFILE DRAWINGS

Unit: mm[inch]

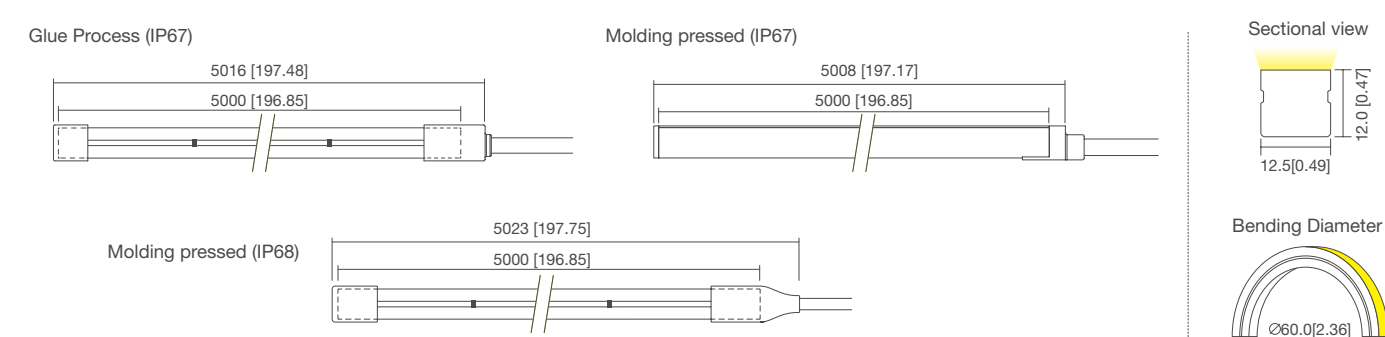

PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDF1212-Single color	24V DC	80+	2300-6000K	734	62.8	11.5	144pcs/m	15m	41.66mm	15000*12.5*12mm
		/	Red	260	22.3					
			Green	758	65.0					
			Blue	154	13.2					
			Yellow	184	16.0					
			Orange	304	26.1					

Note:


☐ The data of 2300K-6000K is based on 4000K.

☐ For more information, please contact our sales representative.

PHOTOMETRIC

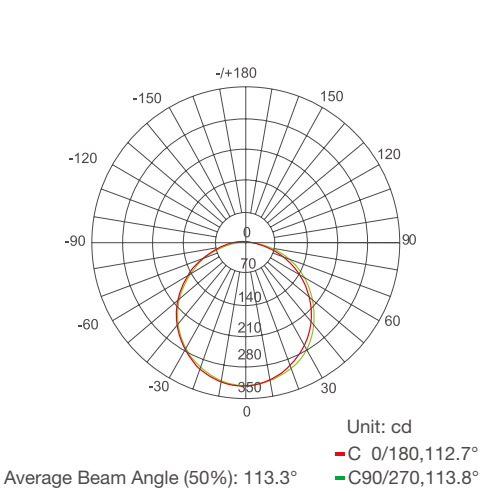


Note: the above two figures are tested with the sample NDF1212-WN at CCT 6000K.

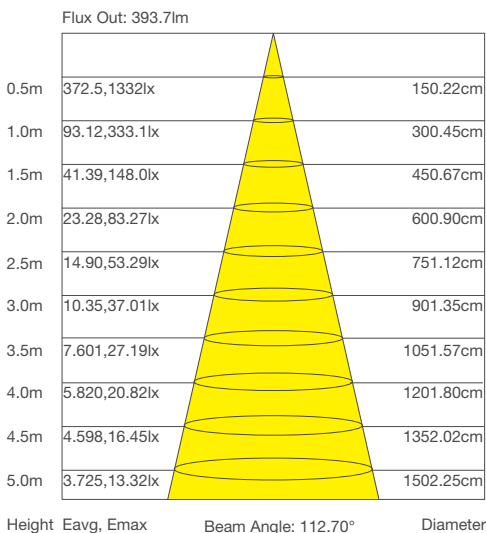



NDF1010 D-SERIES




FEATURES


- Color options: Single color
- Good linear effect and better environmental adaptability
- Top bending with good flexibility
- A variety of specifications are available,support customization
- Max. 5m with one end power feeding; Max. 10m with two ends power feeding
- Warranty: 5 years indoors, 3 years outdoors
- Single color supports PWM, 0-10V, DALI and DMX dimming

PROFILE DRAWINGS


Unit: mm[inch]

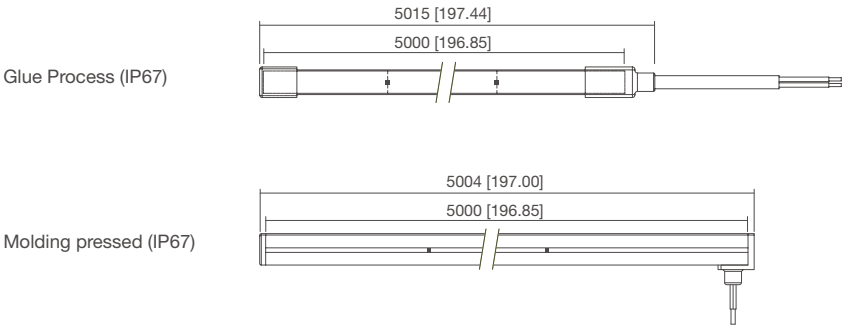

Sectional view



Bending Diameter




PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDF1010-Single color	24V DC	90+	2300-6200K	556	71	8	120pcs/m	5m	50mm	5000*10*10mm
		/	Red	186	24					
			Green	635	70					
			Blue	116	15					
			Yellow	132	18					
			Orange	200	28					

Note:
☐ The data of 2300K-6200K is based on 4000K. ☐ For more information, please contact our sales representative.


PHOTOMETRIC

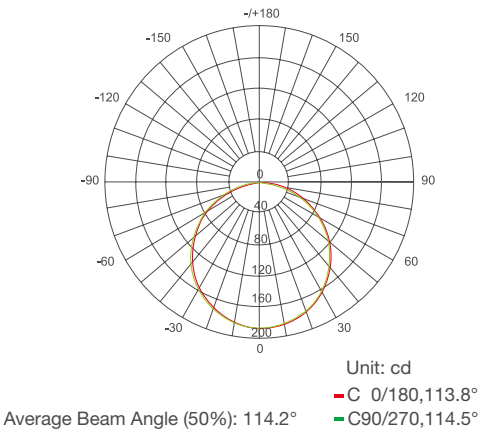

Note: above data tested with NDF1010-single color at 2300K , for other data,please consult sales rep.

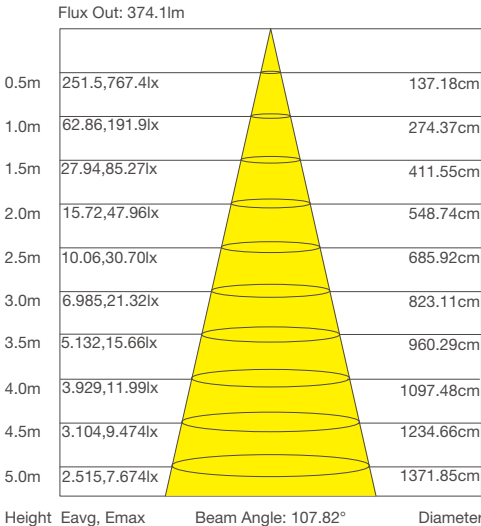

NDF1010A D-SERIES




FEATURES


- Color options: Single color
- Mini size neon, top bending with good flexibility
- Short cut, can be cut into any specific size
- Support PWM, 0-10V, DALI, and DMX dimming
- Warranty: 5 years indoor, 3 years outdoor

PROFILE DRAWINGS

Unit: mm[inch]

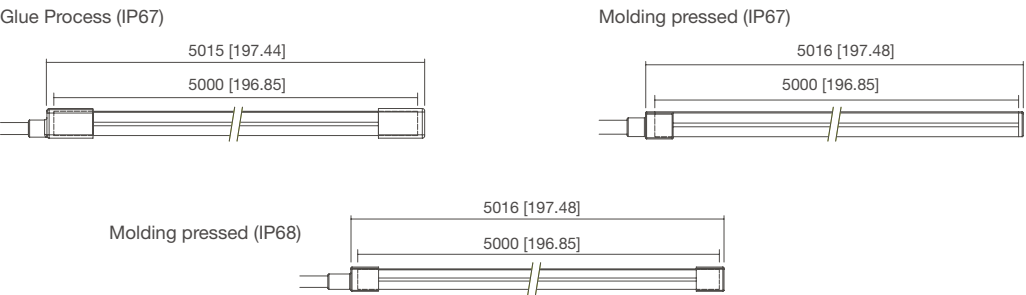

Sectional view



Bending Diameter




PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDF1010A-Single color	24V DC	90+	2500-6000K	473	59	8	140pcs/m	5m	7.14mm	5000*10*10mm

Note:
☐ The data of 2500K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

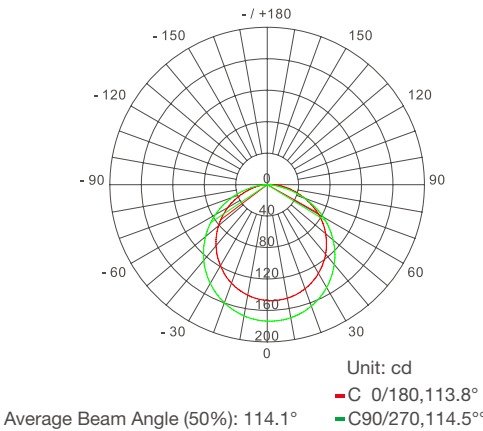


Note: The data is the test result of NDF1010A-6500K. For other data, please consult sales rep.

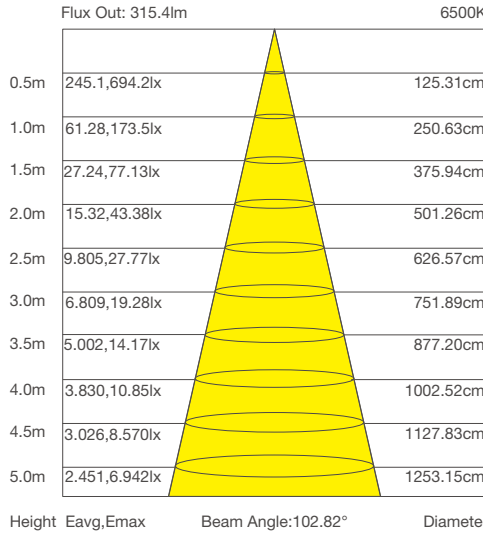



NDF1005
D-SERIES




FEATURES

- Color options: Single color.
- Superior design with exquisite craftsmanship ensure stable and reliable performance.
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.
- Single color supports PWM, 0-10V, DALI and DMX dimming.

PROFILE DRAWINGS

Unit: mm[inch]

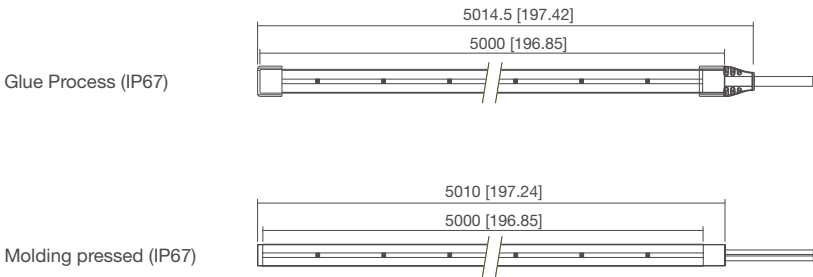

Sectional view

Bending Diameter




PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDF1005- Single color	24V DC	90+	2200-6000K	470	63	7.2	336pcs/m	5m	20.83mm	5000*10*4.8mm
		/	Red	45	6					
			Green	510	71					
			Blue	98	13					
			Yellow	48	6					
			Orange	40	5					

Note:
☐ The data of 2200K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.


PHOTOMETRIC

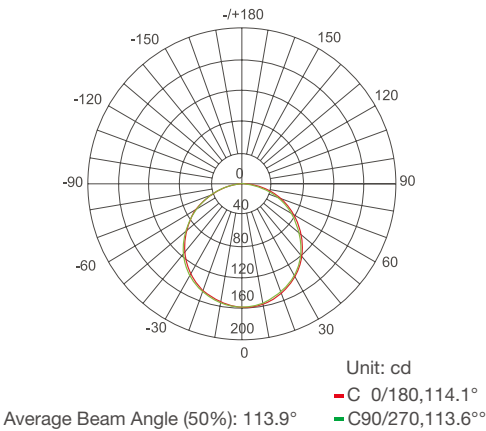

Note: Above data are tested at 4000K, for other date, please consult sales rep.

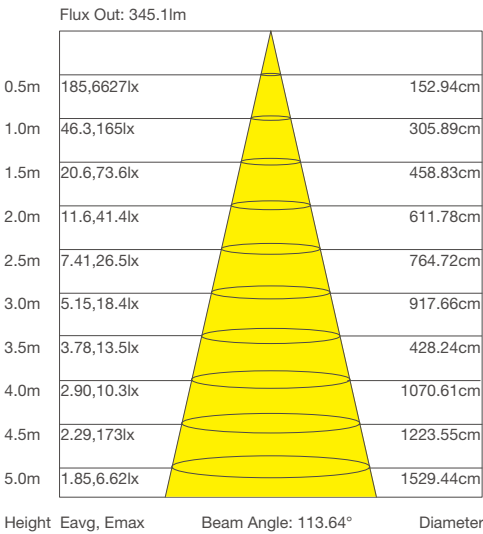

NDF1306-COB
D-SERIES




FEATURES

- Color options: Single color, WN,RGB.
- Linear illumination, good environmental adaptability.
- Top bending and suitable for curved mounting surface.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

PROFILE DRAWINGS

Unit: mm[inch]

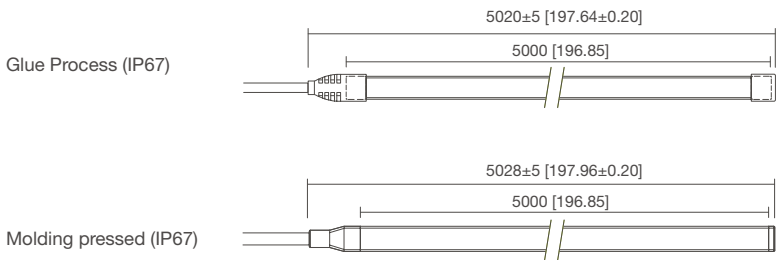

Sectional view

Bending Diameter




PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDF1306-COB- Single color	24V DC	90+	2300-6000K	507	51	10	320pcs/m	5m	50mm	5000*13*6mm
		/	Red	54	5					
			Green	428	43					
			Blue	67	7					
			Yellow	285	28					

Note:
☐ The data of 2300K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

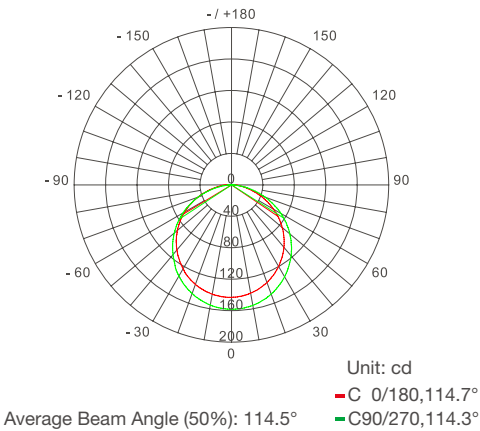


Note: The data is the test result of NDF1306-COB-2700K. For other data, please consult sales rep.

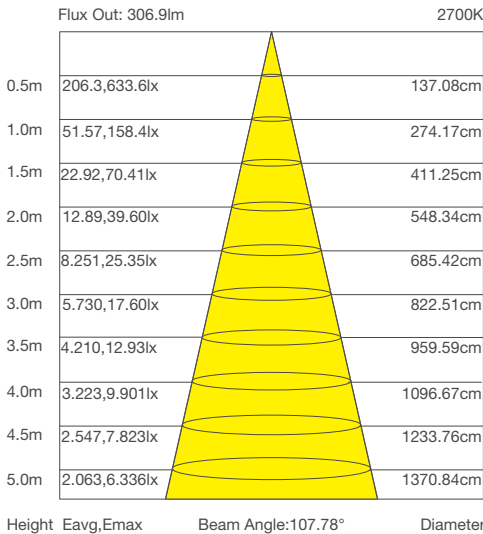



N2-8 Multi-color
D-SERIES




FEATURES

- Color options: WN,RGB, RGBW, Pixel
- RGB max running length 15m with one end power feed
- RGBW max running length 10m with one end power feed
- Top bending with good flexibility, perfectly fixing for many irregular structures
- PCB designed in parallel with function of skipping the broken cuttable unit
- High strength silicone body with super tensile resistance
- Warranty: 5 years indoors, 3 years outdoors


PROFILE DRAWINGS

Unit: mm[inch]

Molding pressed (IP68)

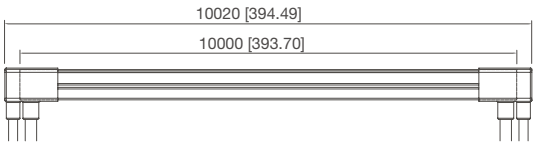


Sectional view



Bending Diameter

Top bending




PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
(PIXEL)N2-8-DMX-RGBW	24V DC	>90	4000K	188	28	6.72	60pcs/m	10m	500mm	10000*20*20mm
		\	Red	58	17	6.72				
			Green	155	48	6.72				
			Blue	37	10	6.72				
			RGB	\	25	15.36				
			RGBW	413	21	19.68				

Note: ☐ For more information, please contact our sales representative.


PHOTOMETRIC

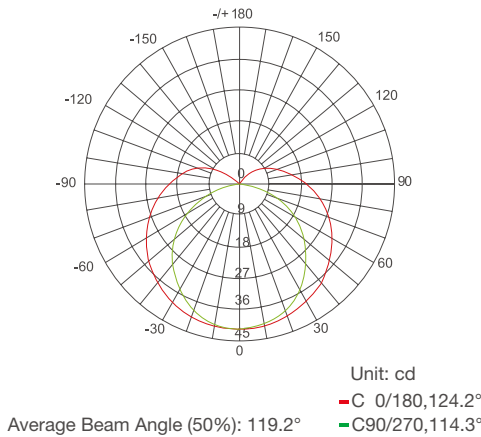

Note: Above data are tested at 4000K, for other date, please consult sales rep.

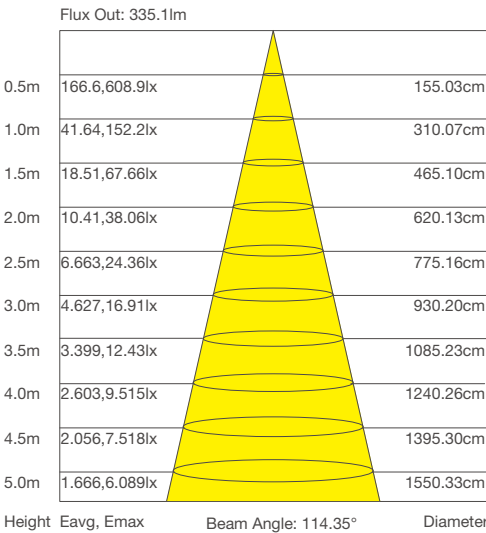

NDR2018
D-SERIES




FEATURES

- Color options: Single color, WN, RGB, RGBW and Pixel
- Single color support PWM, 0~10V, DALI, DMX dimming
- Top bending with good flexibility
- Silicone integrated extrusion shaping process with good weather resistance
- Warranty: 5 years indoor, 3 years outdoor
- Customization: multiple spec options, can be customized upon requirements


PROFILE DRAWINGS

Unit: mm[inch]


Glue Process (IP67)



Sectional view



Bending Diameter




PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDR2018-Single color	24V DC	80+	2200-6200K	1469	91.7	15.3	96pcs/m	5m	62.5mm	5000*20*18mm
		/	Red	290	19.3					
			Green	925	61.7					
			Blue	224	14.9					
			Yellow	332	22.1					
			Orange	129	8.6					


Note:

☐ The data of 2200K-6200K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

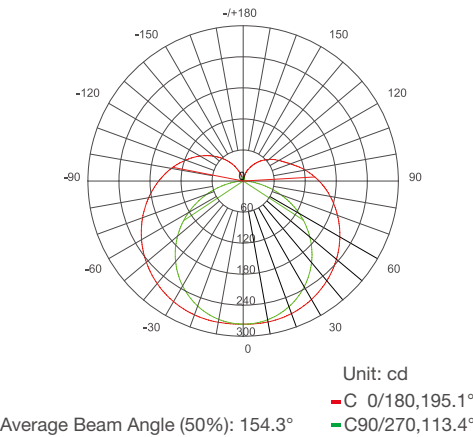


Note: the above two figures are tested with the sample 2700K, for other datas, please consult sales rep.

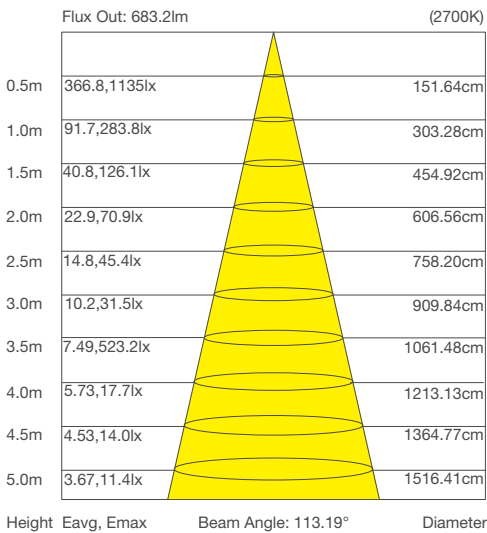



NDR1414

D-SERIES




FEATURES

- Color options: Single color, WN and RGB.
- Adopt constant current components with stable and reliable performance.
- Top bending with good flexibility.
- Silicone integrated extrusion, good weather resistance .
- Warranty: 5 years indoor, 3 years outdoor .
- Customization: multiple spec options, can be customized upon requirements.


PROFILE DRAWINGS

Unit: mm[inch]


Glue Process (IP67)




Molding pressed (IP68)



Sectional view



Bending Diameter




PRODUCT PARAMETERS



Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDR1414- Single color	24V DC	80+	2300-5700K	733	62.8	11.5	144pcs/m	15m	41.66mm	15000*14*14mm
		/	Red	272	23.4					
			Green	773	66.8					
			Blue	158	13.6					
			Yellow	195	16.9					
			Orange	334	28.8					

Note:
☐ The data of 2300K-5700K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

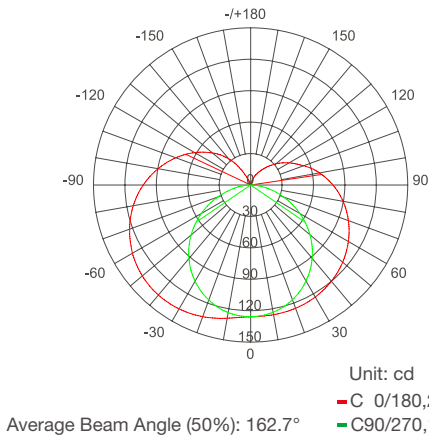


Note: the above two figures are tested with the sample NDR1414-W.

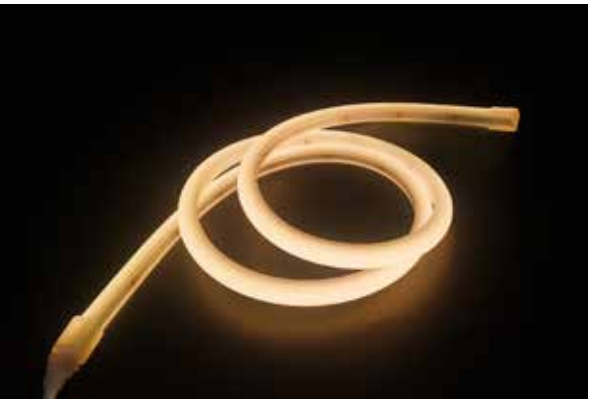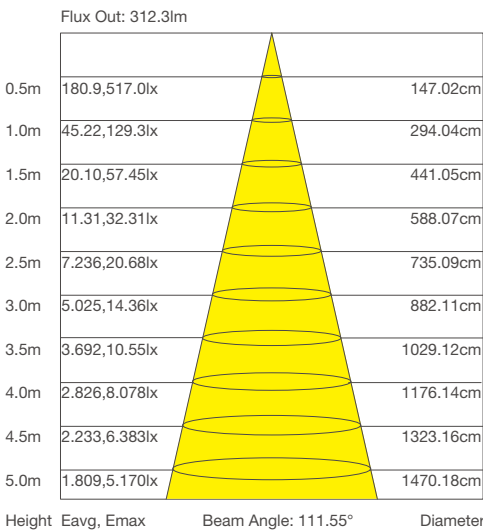

NDR1010

D-SERIES




FEATURES

- Color options: Single color
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor .
- Customization: multiple spec options, can be customized upon requirements.
- Single color support PWM, 0~10V, DALI, DMX dimming


PROFILE DRAWINGS

Unit: mm[inch]


Glue Process (IP67)



Sectional view



Bending Diameter




PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NDR1010- Single color	24V DC	90+	2400-6000K	897	98	9	168pcs/m	5m	35.71mm	5000*10*10mm
		/	Red	281	30					
			Green	1036	103					
			Blue	232	23					
			Yellow	201	22					
			Orange	309	35					

Note:
☐ The data of 2400K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

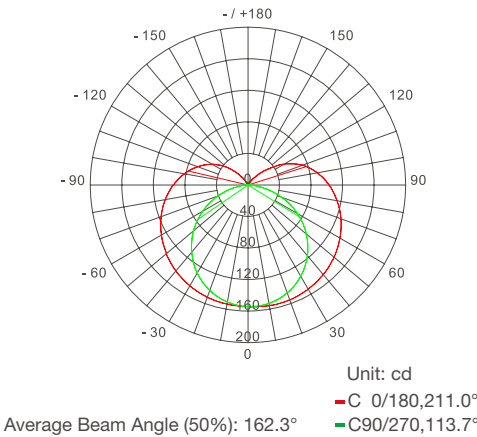

Note: The data is the test result of NDR1010-4000K. For other data, please consult sales rep.

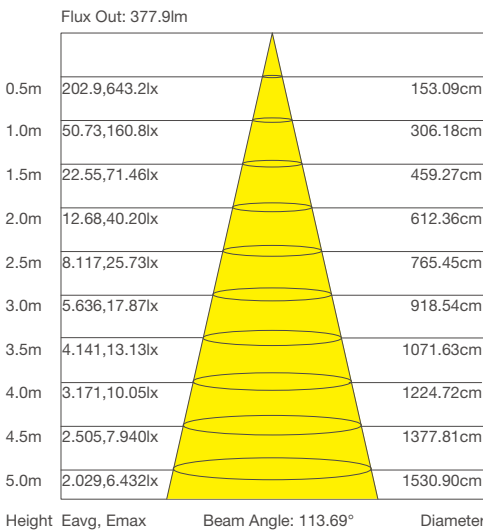

SIDE BENDING

NEON FLEX




NSF1617
NSF1617-RGB
NSF1212
NSF1220
NSF1017
NSF1010
NSF1010A
NSF0612
NSF0410

NDR1025
NDR0817
NDR0615
NDR0512
N2-4pro

Flame-retardant, environmental friendly
Wide range of applications and long life span


www.blueviewled.com

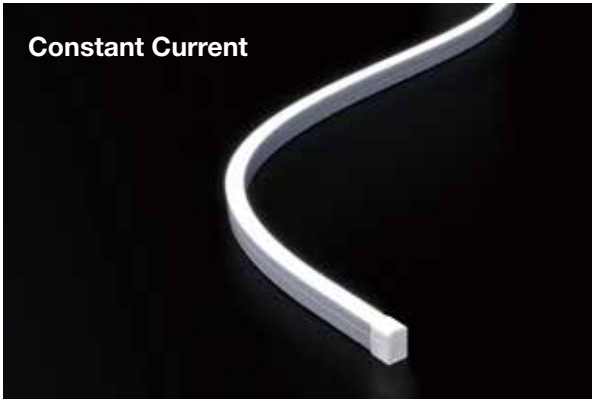

Constant Current

NSF1617

S-SERIES




FEATURES

- Color options: Single color, WN, and PIXEL.
- High quality components with stable performance.
- Designed with anti-wicking ferrule.
- Good flexibility, side bending.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

PROFILE DRAWINGS

Unit: mm[inch]

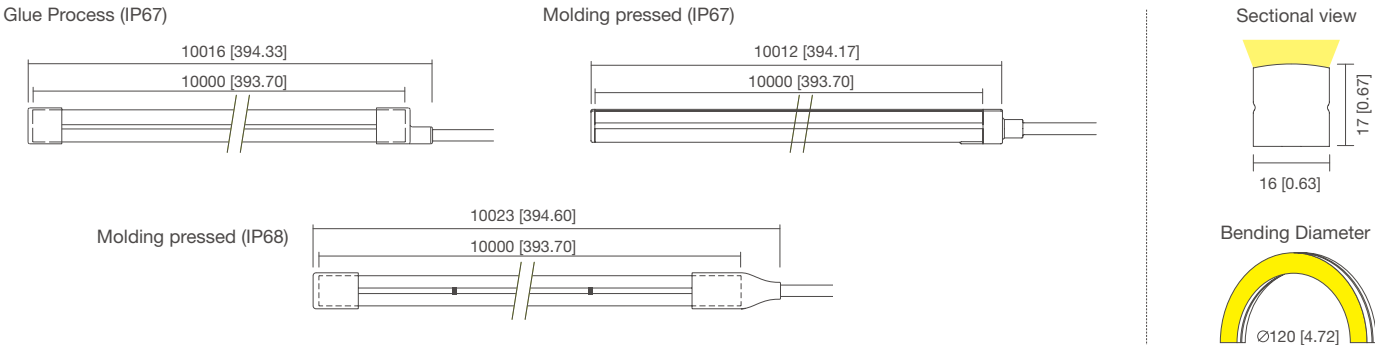


Note: Anti-wicking ferrule suitable for neon strips with molding pressed(IP67/IP68) end cap

PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSF1617-Single color-CC	24V DC	90+	2400-6500K	1229	69	17.2	140pcs/m	10m	50mm	10000*16*17mm
		\	Red	391	22					
			Green	1020	58					
			Blue	244	14					
			Yellow	268	15					
			Orange	460	26					

Note: ☐ The data of 2400K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

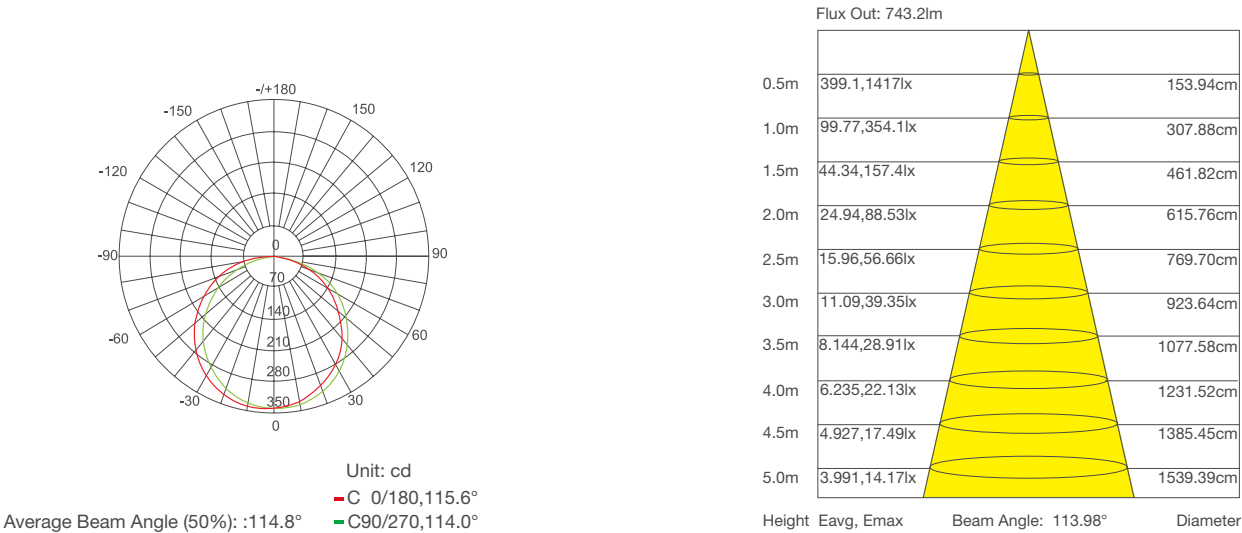


Note: The data is the test result of NSF1617-singer. For other data, please consult sales rep.

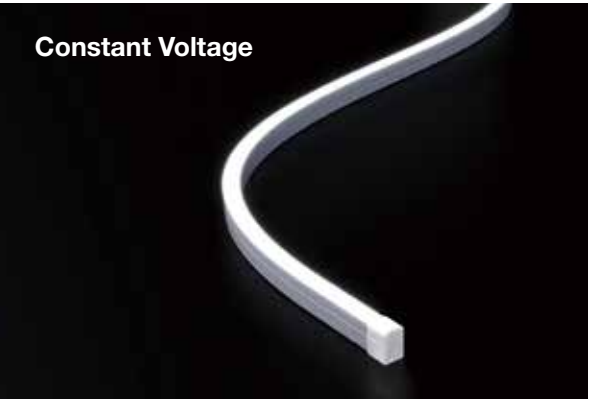

Constant Voltage

NSF1617

S-SERIES




FEATURES

- Color options: RGB, RGBW.
- High quality components with stable performance.
- Designed with anti-wicking ferrule.
- Good flexibility, side bending.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

PROFILE DRAWINGS

Unit: mm[inch]

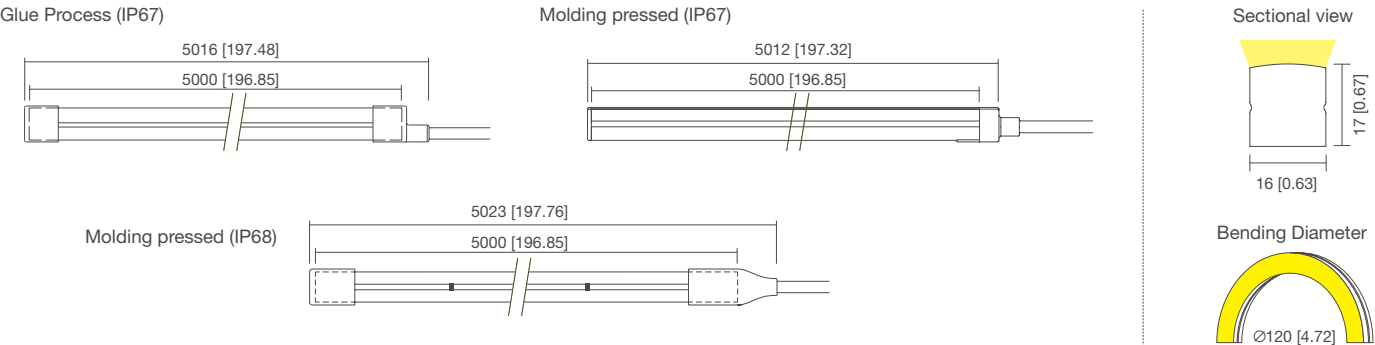


Note: Anti-wicking ferrule suitable for neon strips with molding pressed(IP67/IP68) end cap

PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSF1617-RGB-CV	24V DC	\	Red	94	17	5.7	120pcs/m	5m	50mm	5000*16*17mm
			Green	269	48	5.7				
			Blue	56	10	5.7				
			RGB	416	25	17.2				

Note: ☐ For more information, please contact our sales representative.


PHOTOMETRIC

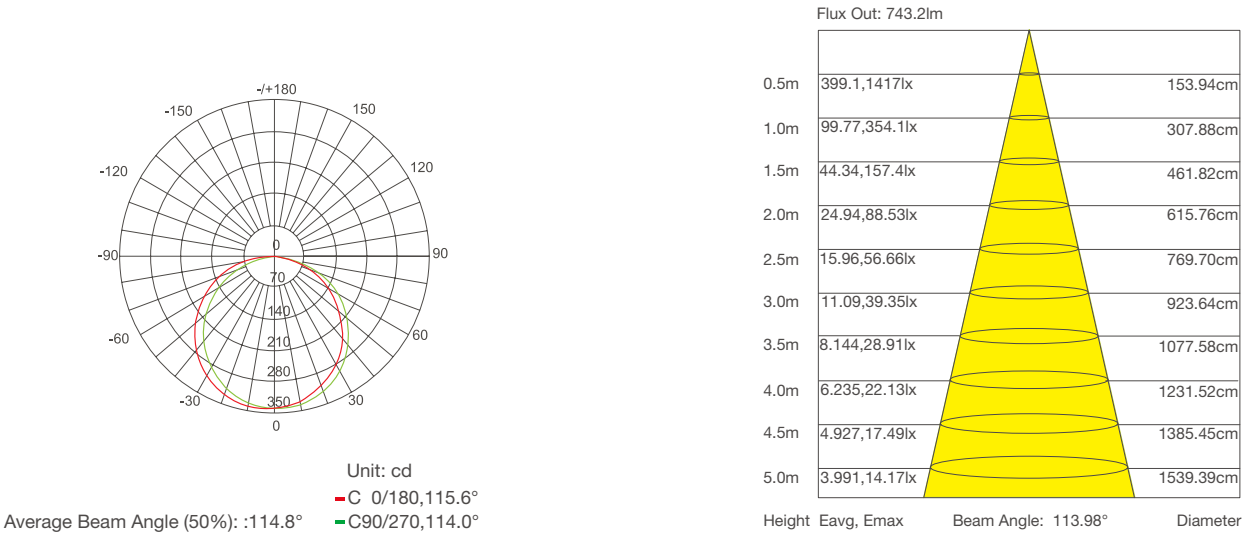

Note: The data is the test result of NSF1617-singer. For other data, please consult sales rep.

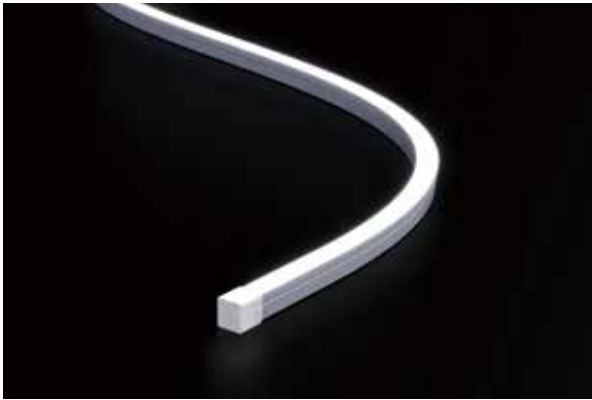

NSF1212 S-SERIES




FEATURES

- Color options: Single color, tunable white, and RGB
- Superior design with exquisite craftsmanship ensure stable and reliable performance
- Side bending and good flexibility
- Warranty: 5 years indoor, 3 years outdoor
- Customization: multiple spec options, can be customized upon requirements
- Single color supports PWM dimming within 1KHz

PROFILE DRAWINGS

Unit: mm[inch]

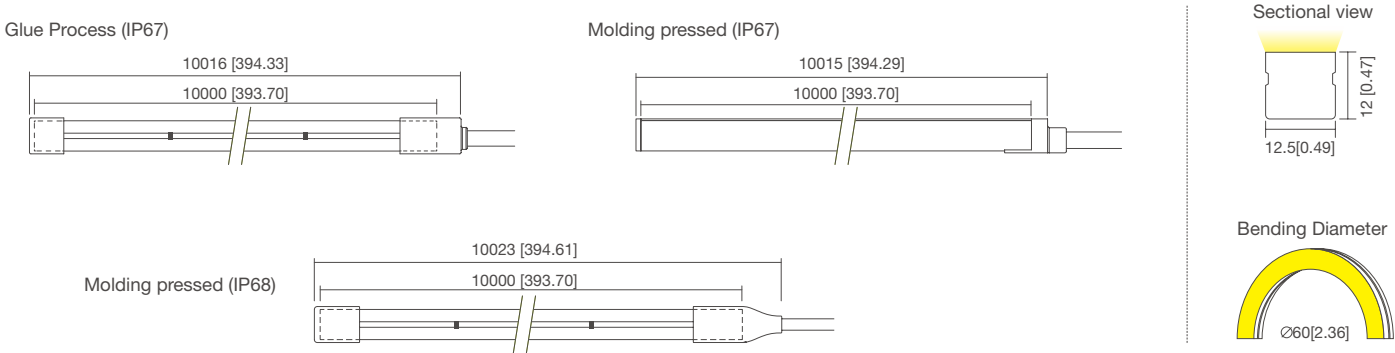


PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSF1212-Single color	24V DC	90+	2300-6500K	574	69	8.64	168pcs/m	10m	83.3mm	10000*12*12mm
		\	Red	190	23					
			Green	617	74					
			Blue	128	15					
			Yellow	98	12					
			Orange	212	25					

Note:

☐ The data of 2300K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.


PHOTOMETRIC

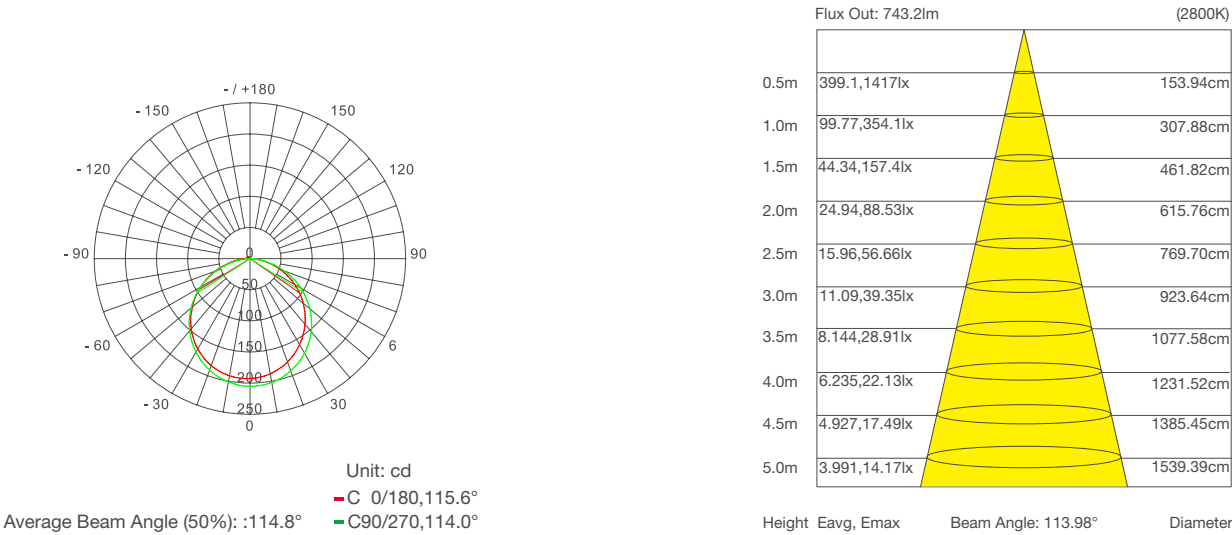

Note: the above two figures are tested with the sample 2800K, for other datas, please consult sales rep.



NSF1220 S-SERIES




FEATURES

- Color options: Single color, WN, RGBW, Pixel.
- Adopt high-quality components, with stable and reliable performance.
- Single color supports PWM dimming within 10KHz.
- Side bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.

PROFILE DRAWINGS

Unit: mm[inch]

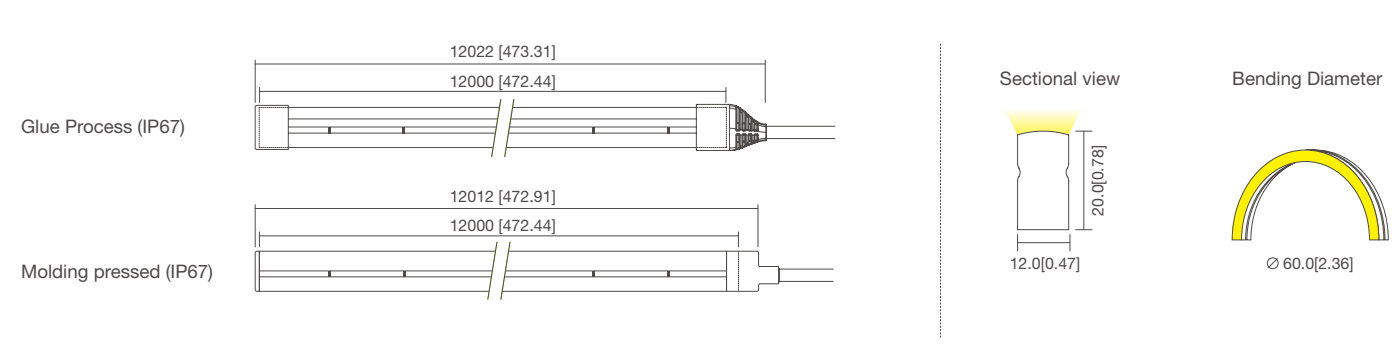


PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSF1220-Single color	24V DC	90+	2400-6000K	908	59	14.76	140pcs/m	12m	50mm	12000*12*20mm
		\	Red	232	15					
			Green	802	52					
			Blue	190	12					
			Yellow	136	9					

Note:

☐ The data of 2400K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.


PHOTOMETRIC

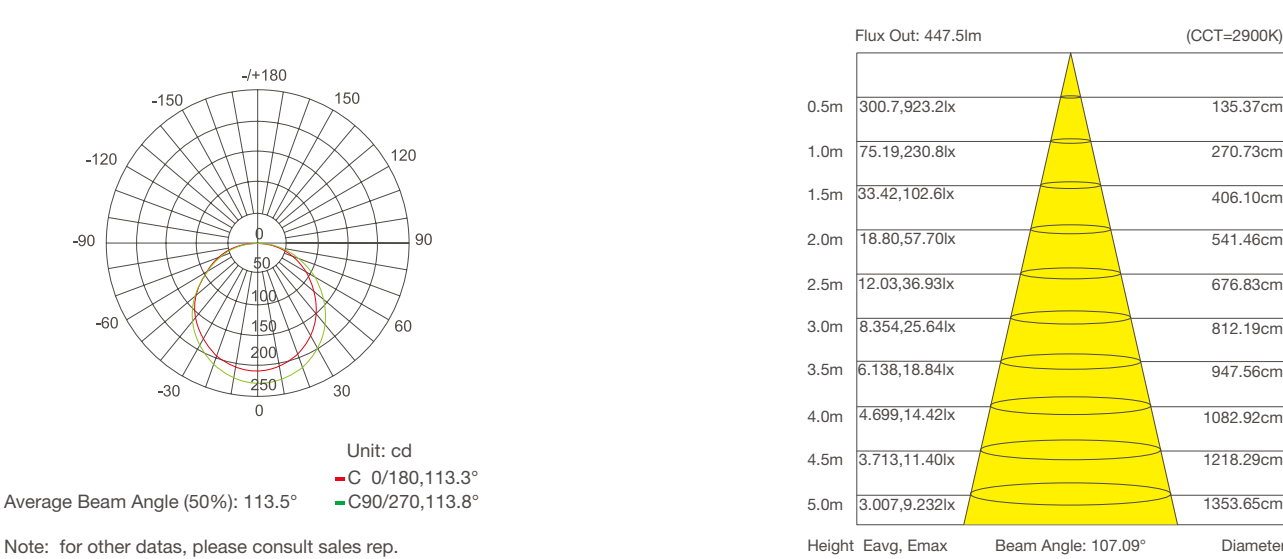



NSF1017

S-SERIES




FEATURES

- Color option: single color, WN, RGB, RGBW;
- Adopt high quality components with stable and reliable performance;
- Side bending, suitable for many shapes and good weather adaptability;
- Warranty: 5 years indoor, 3 years outdoor;
- Multiple specifications, support customization;

PROFILE DRAWINGS

Unit: mm[inch]


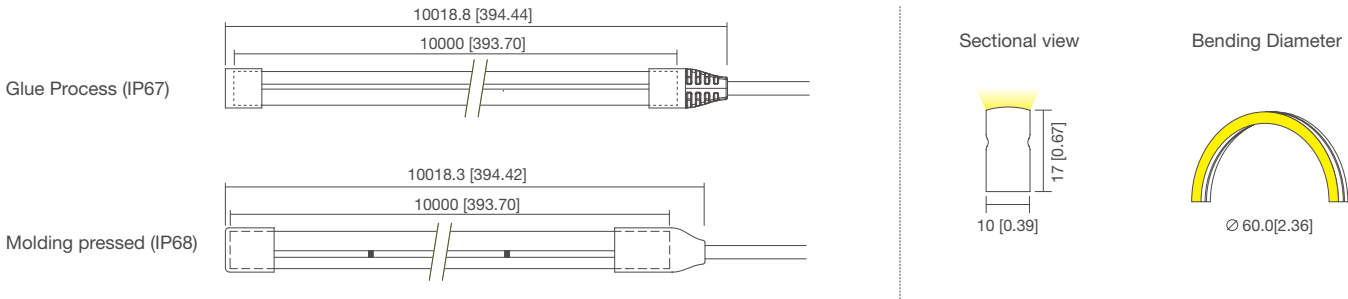


PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSF1017-Single color	24V DC	80+	2300-5000K	500	43.4	11.5	112pcs/m	10m	62.5mm	10000*10*17mm
		\	Red	146	12.2					
			Green	293	24.1					
			Blue	61	14.9					
			Yellow	291	24.0					
			Orange	122	10.8					


Note:
☐ The data of 2300K-5000K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

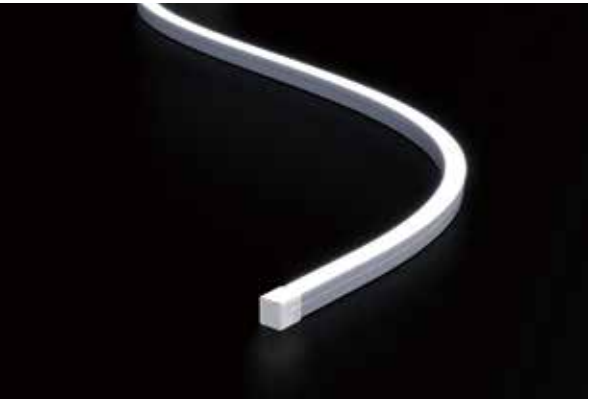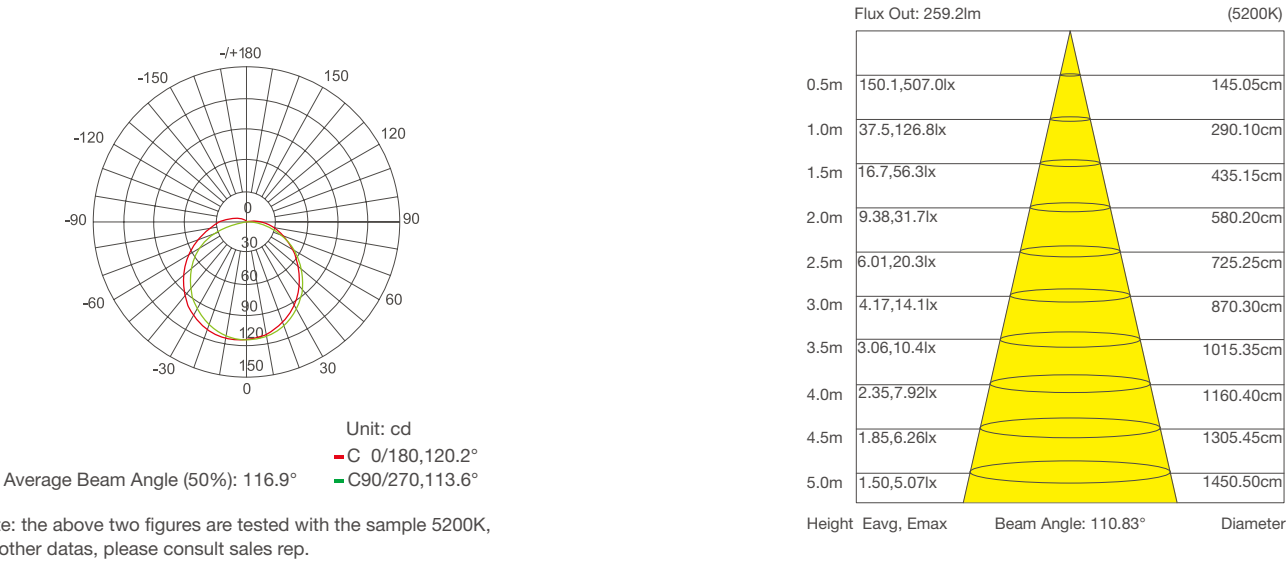

NSF1010

S-SERIES




FEATURES

- Color options: Single color
- Mini size, side bending with good flexibility
- Warranty: 5 years indoors, 3 years outdoors
- Single color supports PWM, 0-10V, DALI and DMX dimming
- Multiple spec options, can be customized upon requirements

PROFILE DRAWINGS

Unit: mm[inch]

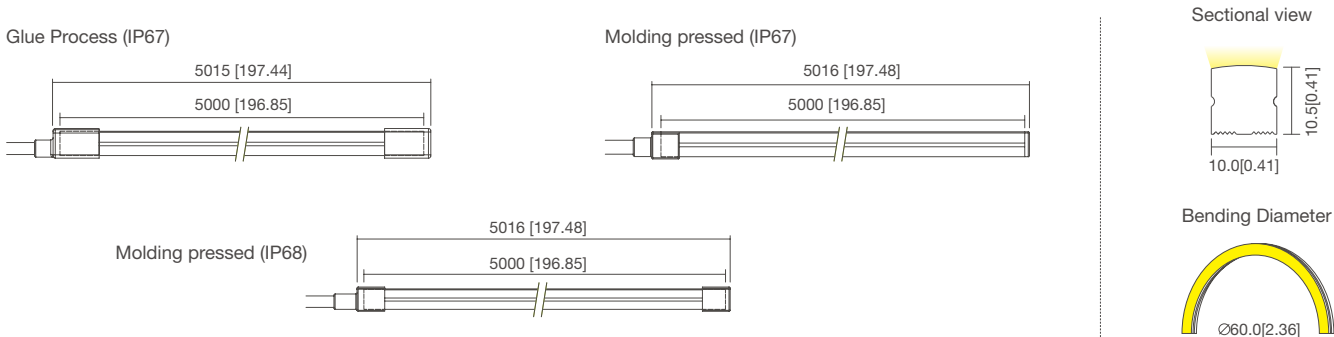



PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSF1010-Single color	24V DC	90+	2700-6000K	495	51	9.6	120pcs/m	5m	50mm	5000*10*10mm

Note:
☐ The data of 2700K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

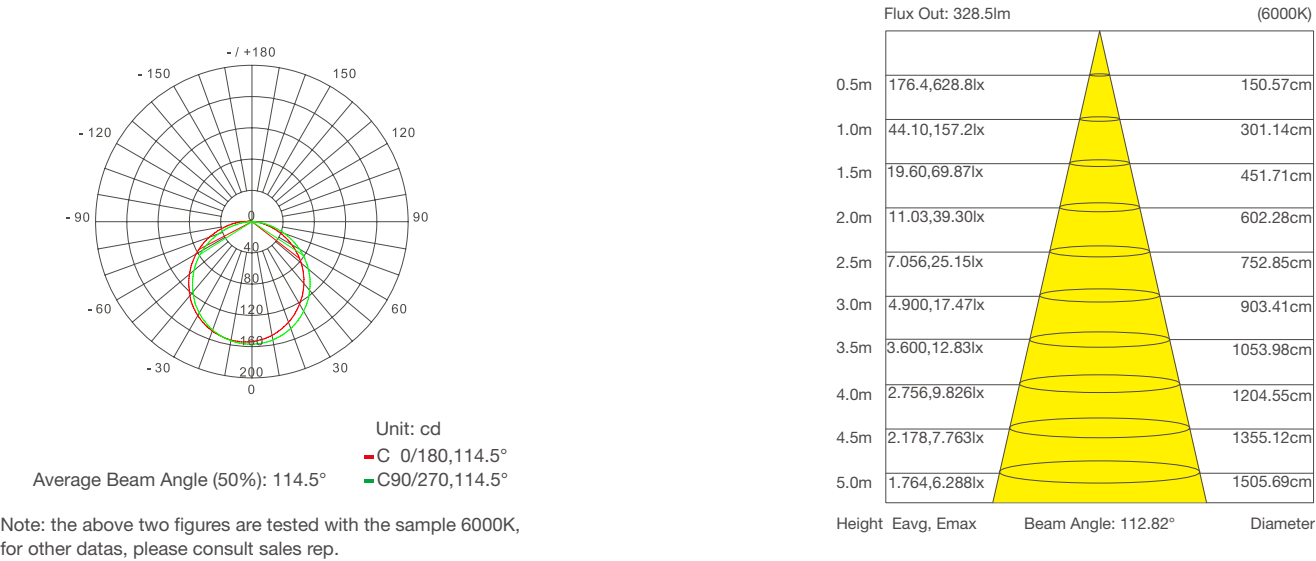

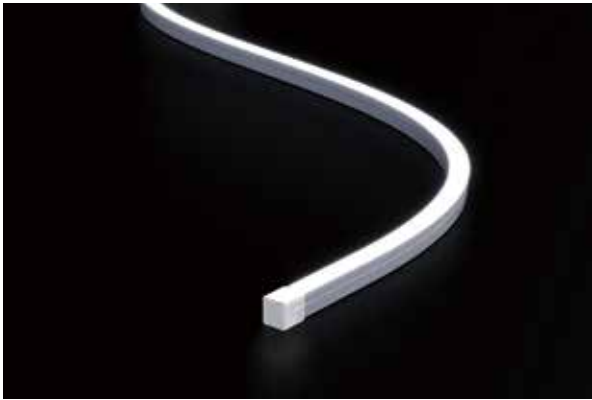

NSF1010A S-SERIES




FEATURES

- Color options: Single color
- Small size, side bending with good flexibility
- Mini cutting design, arbitrary cutting without large dark areas
- Warranty: 5 years indoors, 3 years outdoors
- Single color supports PWM, 0-10V, DALI and DMX dimming
- Multiple spec options, can be customized upon requirements

PROFILE DRAWINGS

Unit: mm[inch]

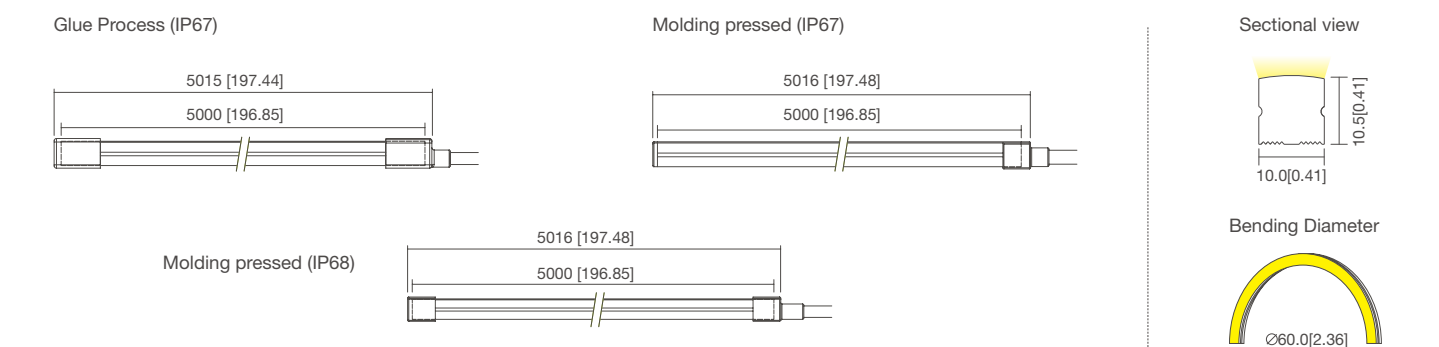


PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSF1010A-Single color	24V DC	90+	2500-5500K	341	43	8	168pcs/m	5m	5.95mm	5000*10*10mm

Note:
☐ The data of 2500-5500K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

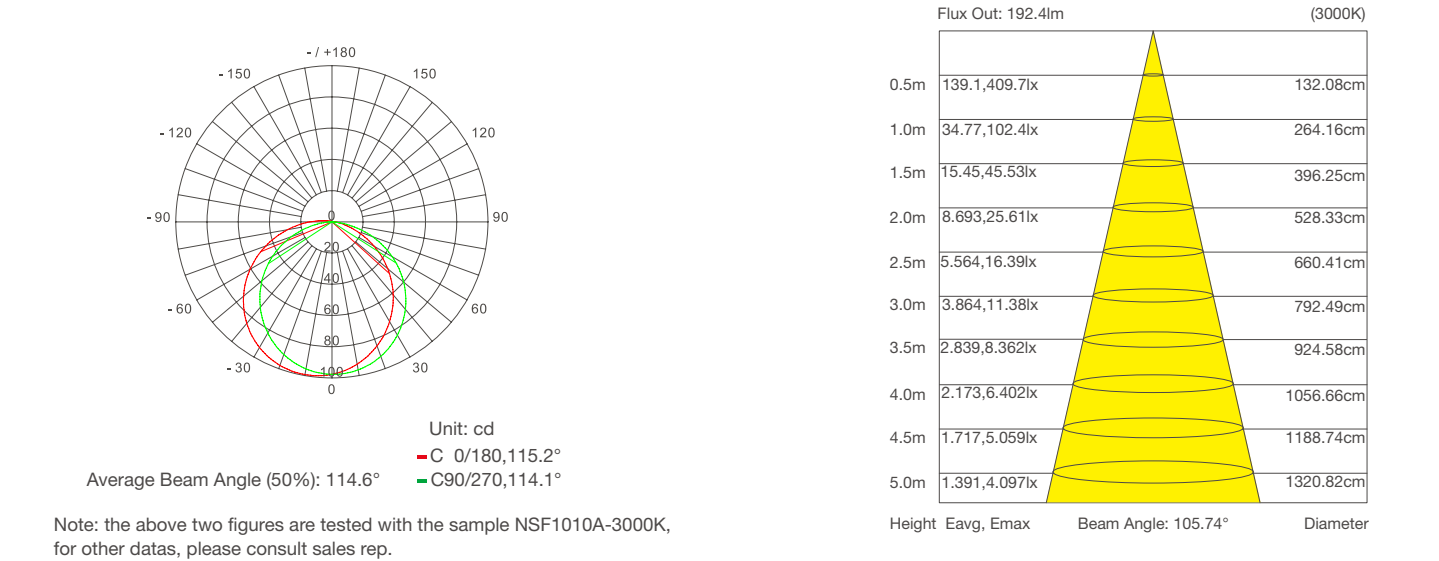

NSF0612 S-SERIES




FEATURES

- Color options: Single color, WN.
- Adopt high quality components with stable and reliable performance.
- Side bending, suitable for many shapes and good weather resistance.
- Support the use of a controller or a dimmer.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

PROFILE DRAWINGS

Unit: mm[inch]

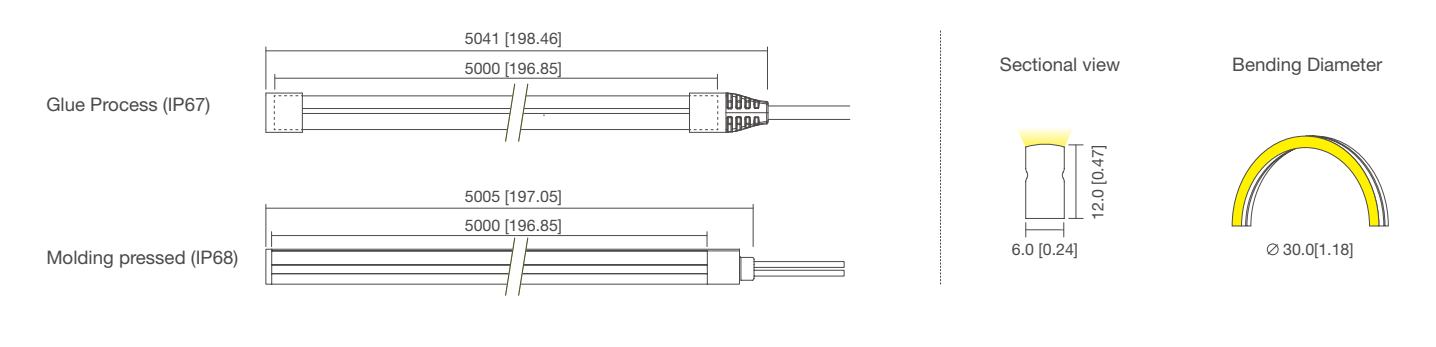


PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSF0612-Single color	12V DC	80+	2200-5800K	218	19.3	12	120pcs/m	5m	25mm	5000*6*12mm
			Red	86	7.2					
			Green	114	9.5					
			Blue	39	3.3					
			Yellow	201	16.8					

Note:
☐ The data of 2200K-5800K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

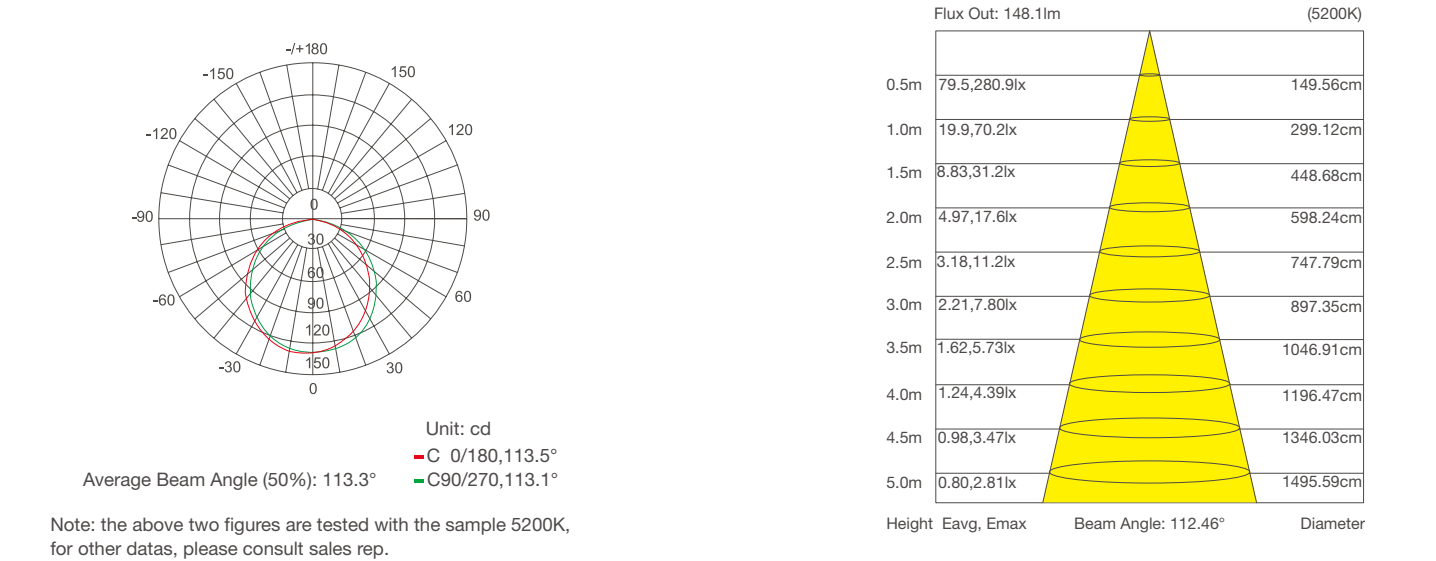



NSF0410 S-SERIES




FEATURES

- Color options: Single color.
- Adopt high quality components with stable and reliable performance.
- Side bending, suitable for many shapes and good environmental adaptability.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.
- Single color supports PWM, 0-10V, DALI and DMX dimming.


PROFILE DRAWINGS

Unit: mm[inch]


Glue Process (IP67)

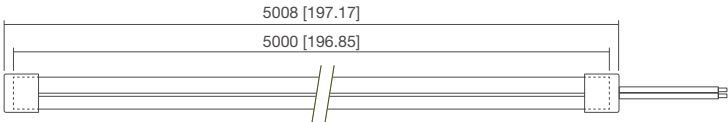

Sectional view



Bending Diameter




PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSF0410-Single color	24V DC	80+	2100-6100K	324	33.9	9.6	120pcs/m	5m	50mm	5000*4*10mm
		\	Red	79	8.6					
			Green	312	20.7					
			Blue	43	4.6					

Note: ☐ The data of 2100K-6100K is based on 4000K. ☐ For more information, please contact our sales representative.


PHOTOMETRIC

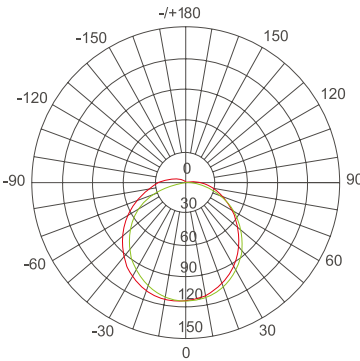

Note: the above two figures are tested with the sample 2700K, for other datas, please consult sales rep.

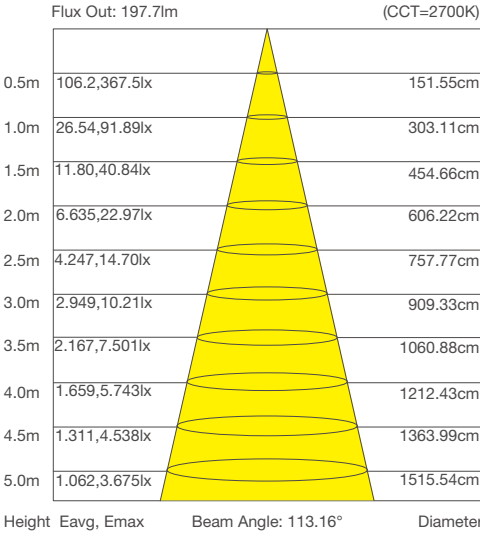

NSR1025 S-SERIES




FEATURES

- Color options: WN, RGB, RGBW and PIXEL.
- Silicone integrated extrusion shaping process, good weather adaptability.
- Good flexibility, side bending.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.


PROFILE DRAWINGS

Unit: mm[inch]


Glue Process (IP67)




Molding pressed (IP67)




Molding pressed (IP68)



Sectional view



Bending Diameter




PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSR1025-WN	24V DC	80+	5600K	297	41.4	7.2	240pcs/m	10m	50mm	10000*10*25mm
			3000K	280	39.4	7.2				
			W+N	565	39.5	14.4				

Note: for more information, please contact our sales representative.

PHOTOMETRIC

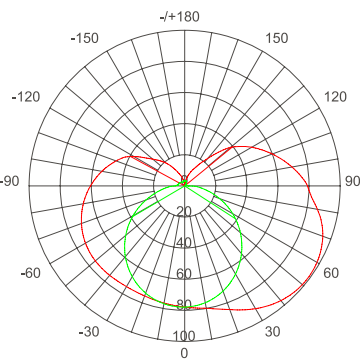

Note: The data is the test result of NSR1025-WN. For other data, please consult sales rep.

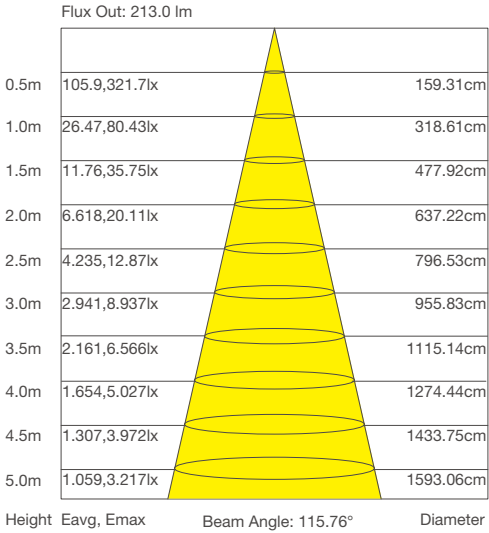



NSR0817

S-SERIES




FEATURES

- Color options: Single color/WN/RGB.
- High-quality constant current components with stable performance.
- Single color supports PWM dimming within 10KHz.
- Side bending with great flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

PROFILE DRAWINGS

Unit: mm[inch]

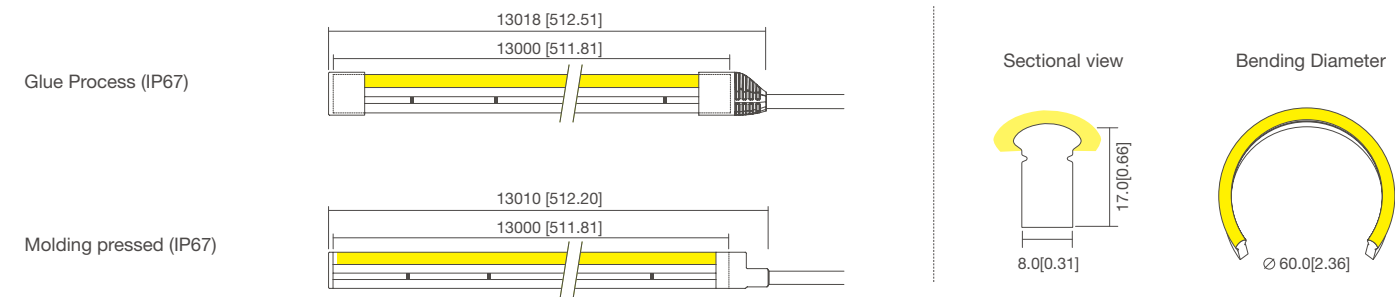


PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSR0817- Single color	24V DC	90+	2400-6000K	508	53	9.84	140pcs/m	13m	50mm	13000*8*17mm
			Red	164	17					
			Green	514	53					
			Blue	114	12					
			Yellow	98	10					

Note: ☐ The data of 2400K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

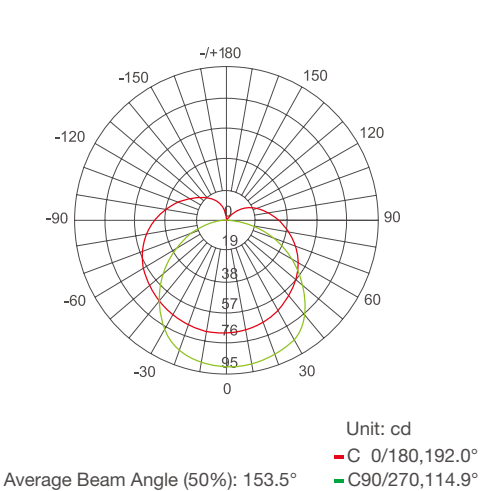


Note: for other datas, please consult sales rep.

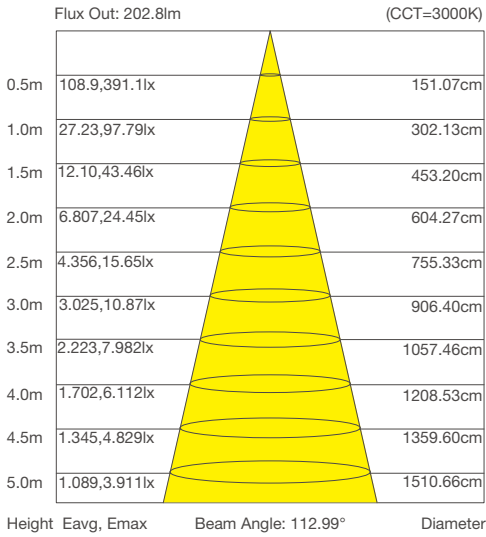

NSR0615

S-SERIES



FEATURES

- Color options: Single color and tunable white.
- Side bending with good flexibility.
- Adopt integrated silicone extrusion molding process, good weather resistance.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.
- Single color supports PWM, 0-10V, DALI and DMX dimming.

PROFILE DRAWINGS

Unit: mm[inch]




PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSR0615- Single color	12V DC	80+	2100-6000K	162.4	14.4	11.5	96pcs/m	5m	10.42mm	5000*6*15mm
			Red	36	2.9					
			Green	138	15					
			Blue	39	3.6					
			Yellow	62	5.6					
NSR0615- Single color	24V DC	80+	2900-25000K	284	23.6	12	120pcs/m	5m	50mm	5000*6*15mm
			Red	9	0.7					
			Green	210	17.8					
			Blue	14	2.2					
			Yellow	2	0.2					

Note: ☐ The data for 2100K-6000K and 2900K-25000K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

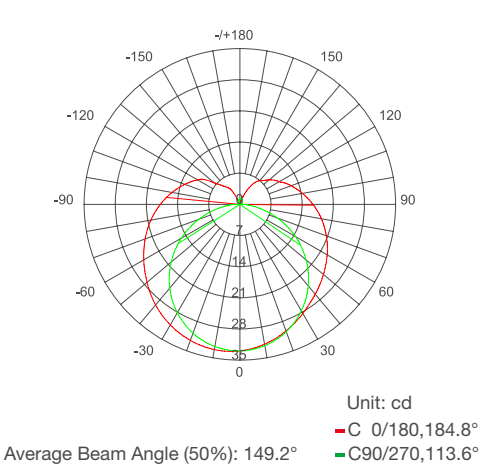

Note: the above two figures are tested with the sample 4000K, for other datas, please consult sales rep.

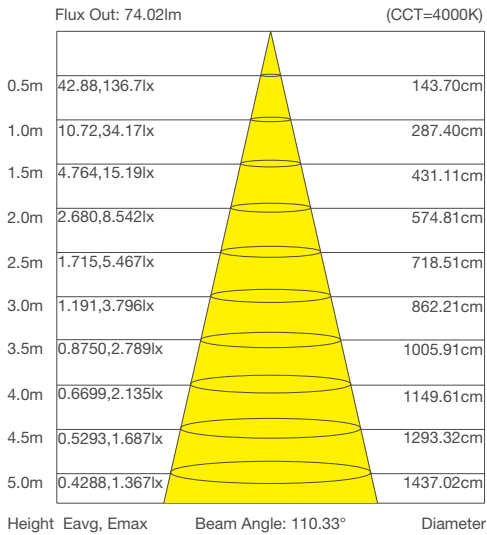



NSR0512

S-SERIES




FEATURES

- Color options: Single color.
- Design: Superior design with exquisite craftsmanship ensure stable and reliable performance.
- Warranty: 5 years indoor, 3 years outdoor.
- Side bending with good flexibility.
- Customization: multiple spec options, can be customized upon requirements.
- Single color supports PWM, 0-10V, DALI and DMX dimming.

PROFILE DRAWINGS

Unit: mm[inch]

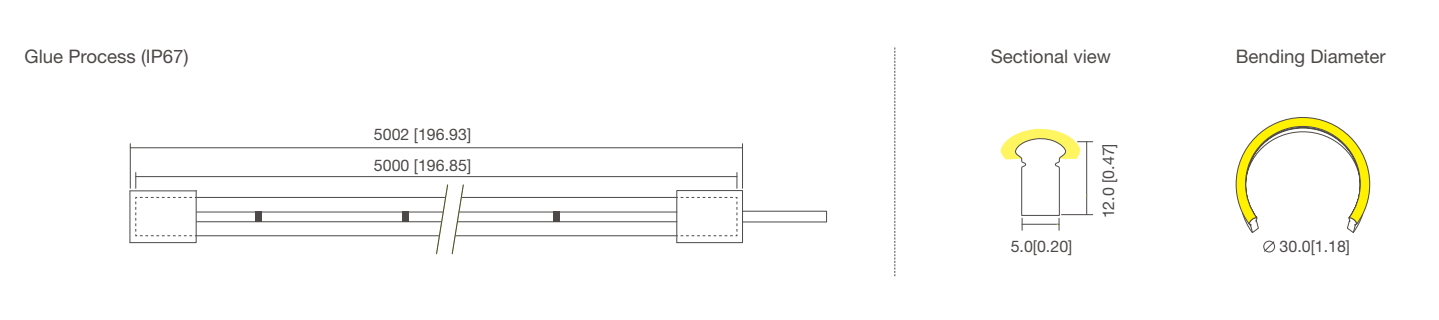


PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NSR0512-Single color	24V DC	80+	 2300-6000K	211	20.4	9.6	120pcs/m	5m	50mm	5000*5*12mm

Note:


☐ The data of 2300K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

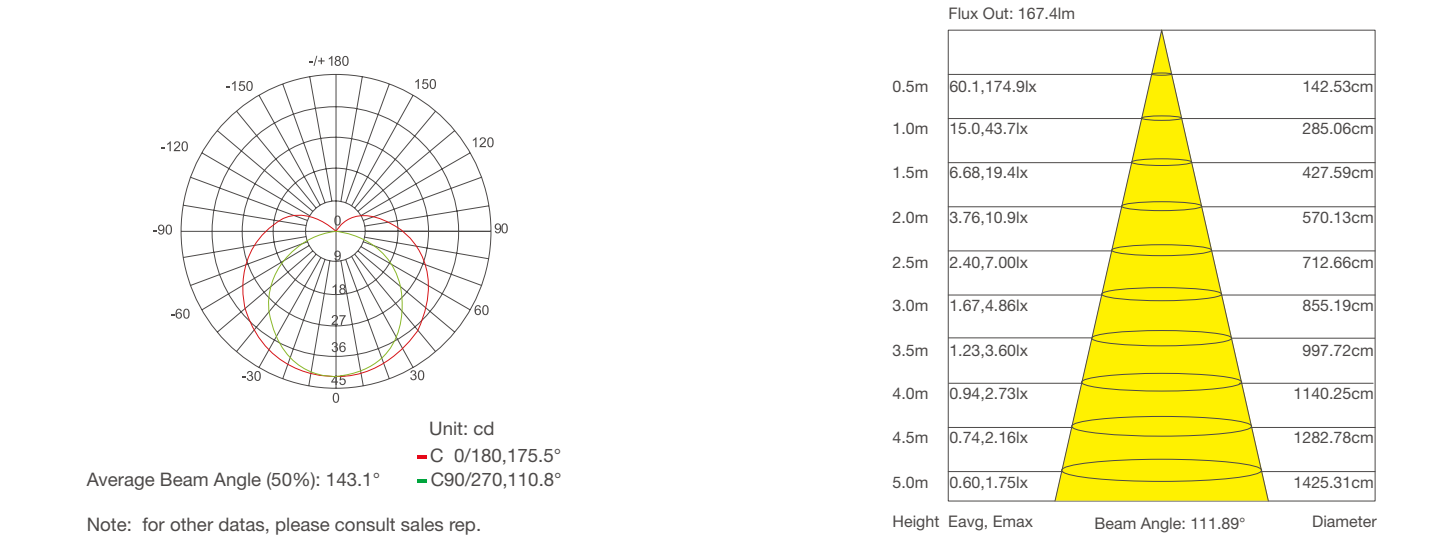

N2-4 pro

S-SERIES




FEATURES

- Color options: Single color ;
- Adopting lamp beads with strong anti-static ability;
- Side bending with good flexibility;
- Adopt integrated extrusion shaping technology, good weather resistance;
- 15m no brightness drop with single-end power supply;
- Warranty: 5 years indoors, 3 years outdoors;
- Various specifications are available, support customization;

PROFILE DRAWINGS

Unit: mm[inch]

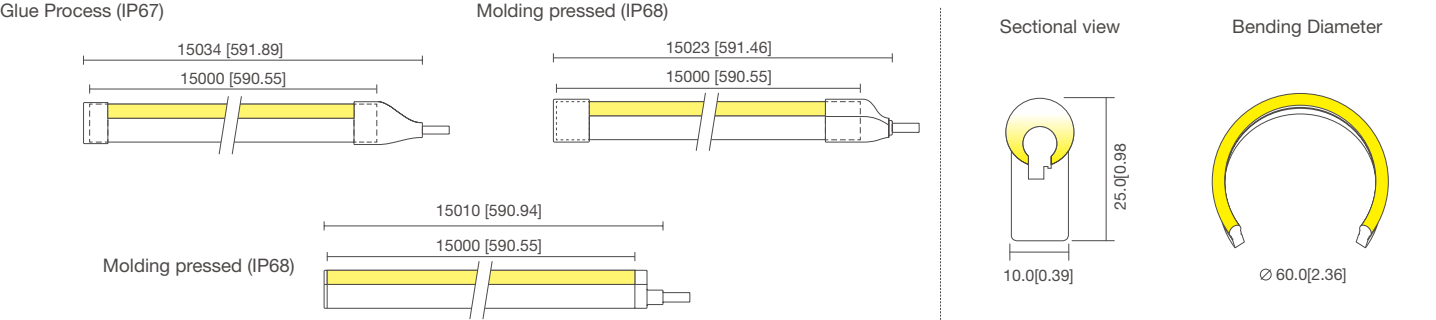


PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
N2-4 pro-Single color	24V DC	90+	 4000K	832	87	9.6	120pcs/m	15m	50mm	15000*10*25mm
		\	 Red	158	15					
			 Green	145	14					
			 Blue	25	2					
			 Yellow	138	13					
			 Orange	243	23					

Note: for more information, please contact our sales representative.

PHOTOMETRIC

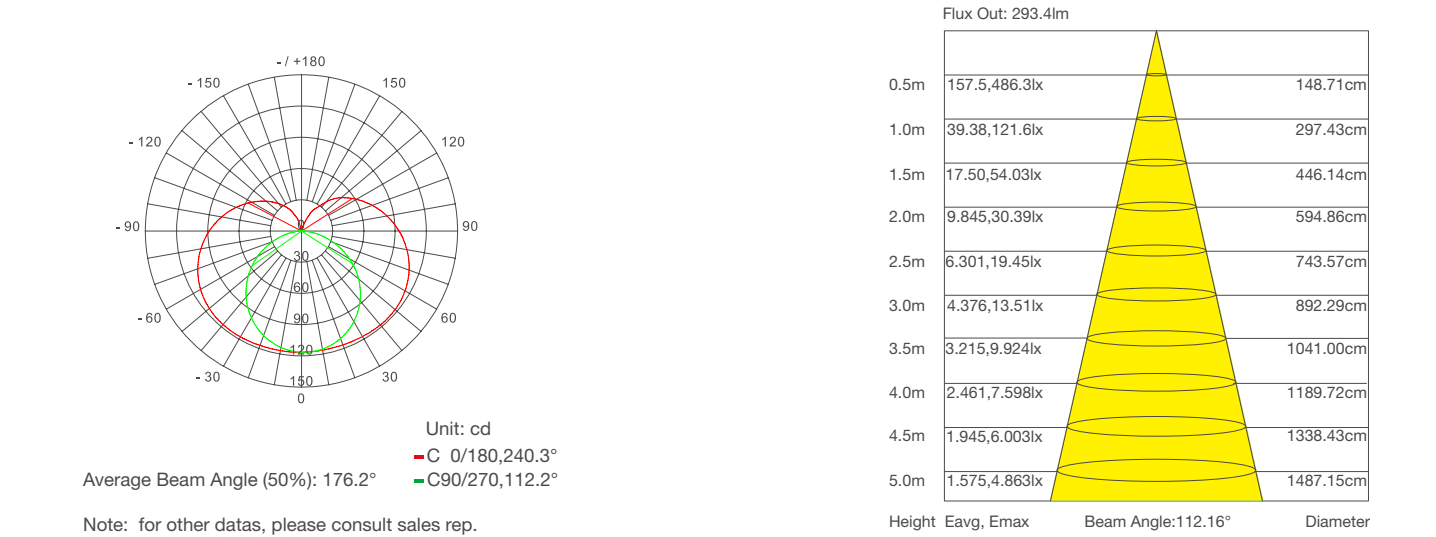

3D NEON FLEX


3D NEON FLEX




Max.30m
running length




High
brightness



Double extrusion
molding

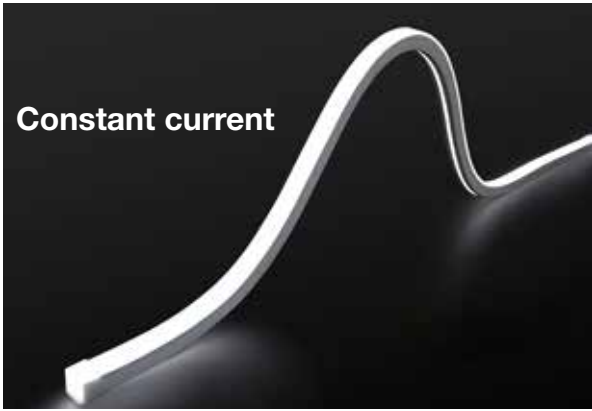

N2-8 Pro 3D-SERIES




FEATURES

- Color options: Single color;
- Strong weather resistance, stable performance;
- Two options: long run series and high brightness series;
- Available in both top and side bending, perfectly fixing for many irregular structures;
- PCB designed in parallel with function of skipping the broken cuttable unit;
- The constant current model does not support dimming;
- Warranty: 5 years indoors, 3 years outdoors;

PROFILE DRAWINGS

Unit: mm[inch]

Molding pressed (IP68)

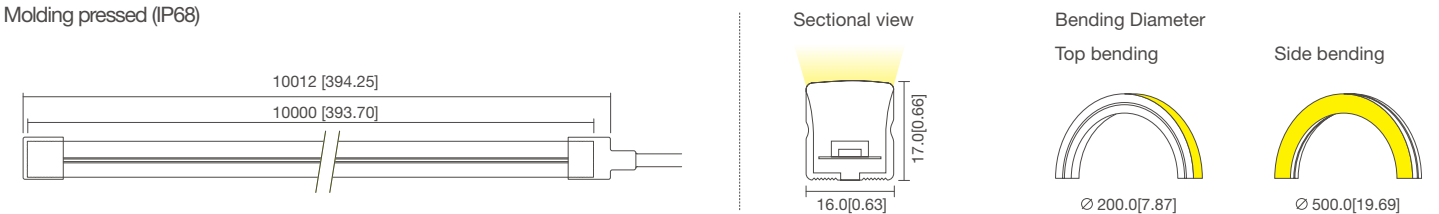



PRODUCT PARAMETERS

Constant Current


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
N2-8 Pro-(H)-Single color-CC	24V DC	80+	2700-6500K	866	56	15.36	96pcs/m	10m	62.5mm	10000*16*17mm
		\	Red	164	11					
			Green	357	23					
			Blue	72	5					
			Yellow	147	10					
			Orange	198	13					
N2-8 Pro-(L)-Single color-CC	24V DC	80+	2700-6000K	487	51	9.6	96pcs/m	30m	62.5mm	30000*16*17mm
		\	Red	101	11					
			Green	255	27					
			Blue	46	5					
			Yellow	104	11					
			Orange	137	14					

Note: ☐ The data for 2700-6000K and 2700-6500K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

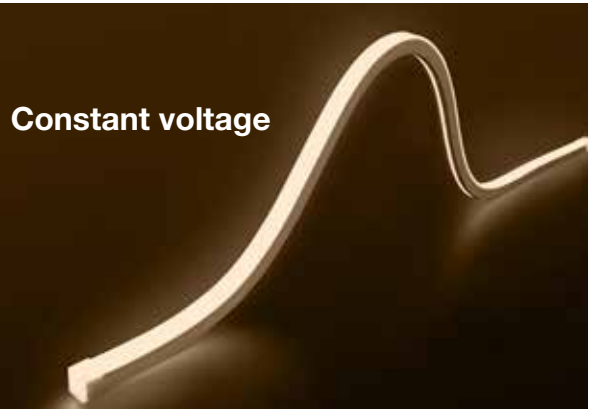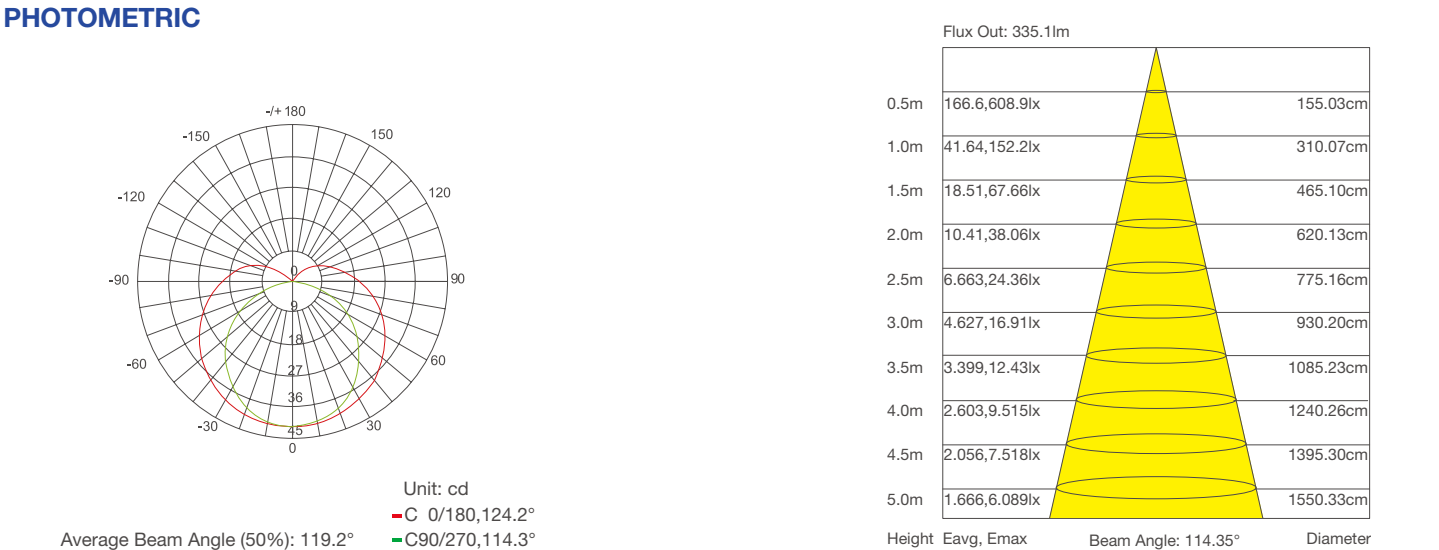

N2-8 Pro 3D-SERIES




FEATURES

- Color options: Single color;
- Strong weather resistance, stable performance;
- Two options: long run series and high brightness series;
- Available in both top and side bending, perfectly fixing for many irregular structures;
- PCB designed in parallel with function of skipping the broken cuttable unit;
- The constant voltage model supports PWM, 0-10V, DALI, and DMX dimming;
- Warranty: 5 years indoors, 3 years outdoors;

PROFILE DRAWINGS

Unit: mm[inch]

Molding pressed (IP68)

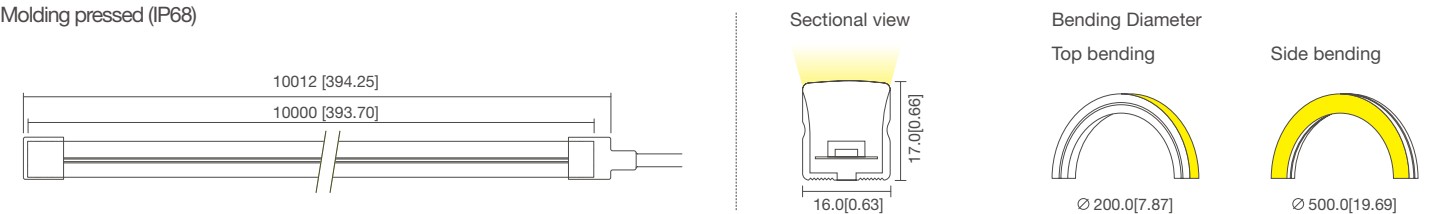

PRODUCT PARAMETERS


Constant Voltage

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
N2-8 Pro-(H)-Single color-CV	24V DC	80+	2700-6500K	850	55	15.36	96pcs/m	10m	62.5mm	10000*16*17mm

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
N2-8 Pro-(L)-Single color-CV	24V DC	80+	2700-6500K	545	56	9.6	96pcs/m	15m	62.5mm	15000*16*17mm

Note: ☐ The data for 2700-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

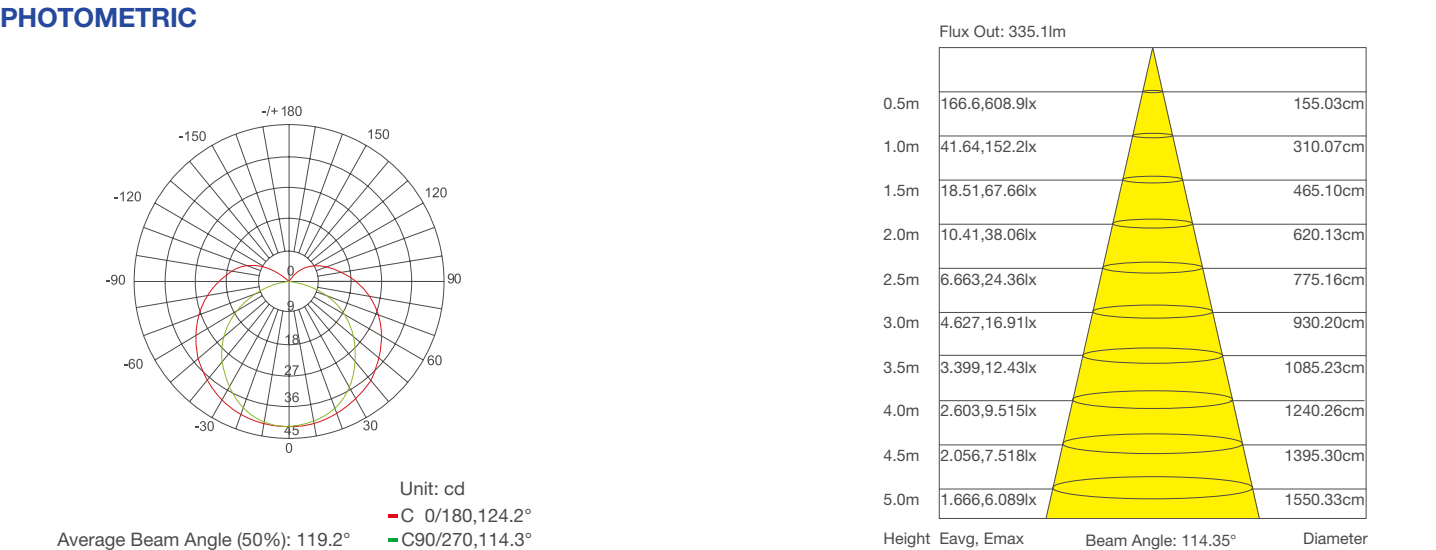


360° EMITTING LED NEON FLEX



With Designo
Polish



360° uniform
round-glowing



Pendant or
surface mounted



NCR32 360° NEON




FEATURES

- Color options: RGBW, Pixel
- 3in1 RGB+W, the CCT of white color is optional.
- 360° uniform light-emitting
- 3m running length with one end power feed.
- Can create rich light changes via a controller.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.


PROFILE DRAWINGS

Unit: mm[inch]


Glue Process (IP67)

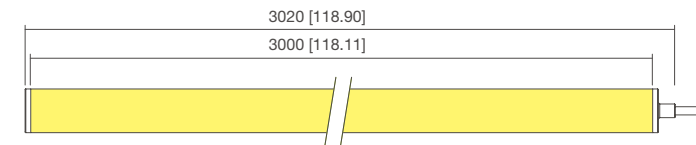

Sectional view



Bending Diameter




PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NCR32-RGBW	24V DC	>90	4000K	325	54	6.05	336pcs/m	3m	\	3000*32*32mm
			Red	103	17	6.05				
			Green	320	53	6.05				
			Blue	53	9	6.05				
			RGBW	783	32	24.2				
NCR32-RGBW_SPI	24V DC	>90	4000K	322	40	8.06	336pcs/m	3m	\	3000*32*32mm
			Red	96	12	8.06				
			Green	296	36	8.06				
			Blue	58	7	8.06				
			RGBW	740	29	25.2				


Note: for more information, please contact our sales representative.

PHOTOMETRIC

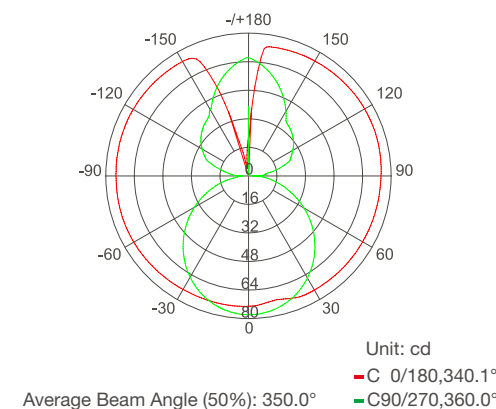

Note: for other datas, please consult sales rep.

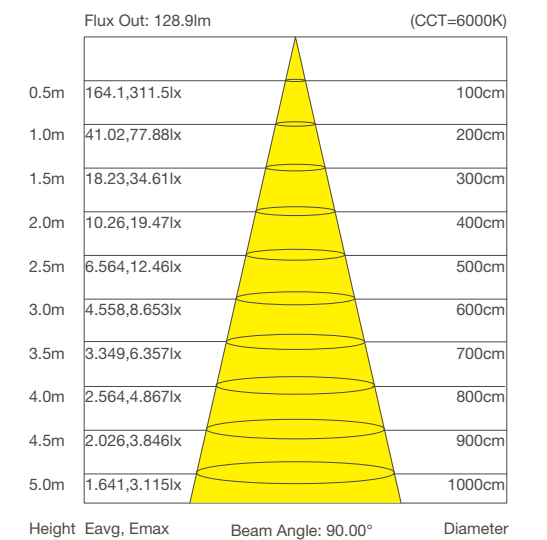

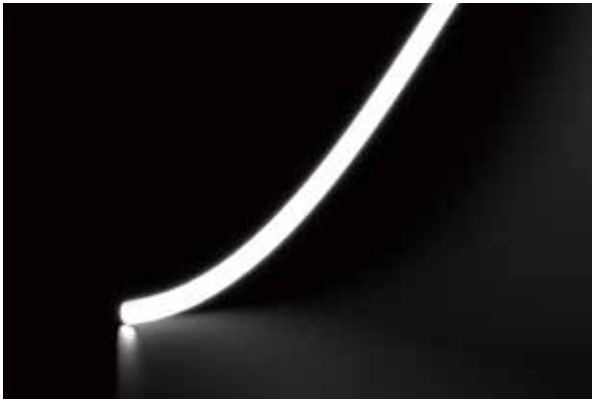

NCR23
360° NEON




FEATURES

- Color options: Single color RGB.
- Superior design with exquisite craftsmanship ensure stable and reliable performance.
- 360° uniform light-emitting.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.
- Single color supports PWM, 0-10V, DALI and DMX dimming.

PROFILE DRAWINGS

Unit: mm[inch]

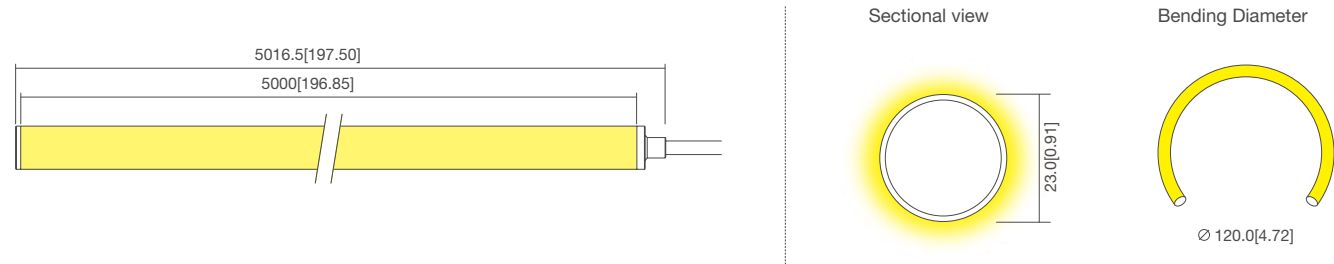


PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NCR23-Single color	24V DC	80+	2400-6500K	1466	90.5	16	336pcs/m	5m	35.71mm	5000*23*23mm
		/	Red	435	27.2					
			Green	1338	83.6					
			Blue	315	19.7					
			Yellow	201	12.6					
			Orange	393	24.6					

Note:
☐ The data of 2400K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.


PHOTOMETRIC

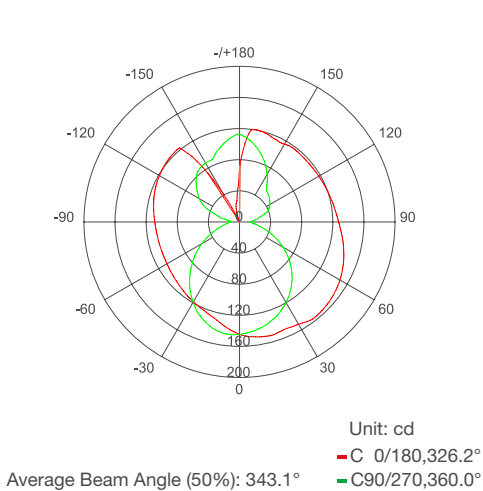

Note: for other datas, please consult sales rep.



NCR23S
360° NEON




FEATURES

- Color options: single color.
- Built-in styling strips, can be shaped freely.
- 360° light-emitting with good flexibility.
- Designo polish, eliminate the annoyance of dirt.
- Warranty: 5 years indoor, 3 years outdoor.
- Single color supports PWM, 0-10V, DALI and DMX dimming.

PROFILE DRAWINGS

Unit: mm[inch]

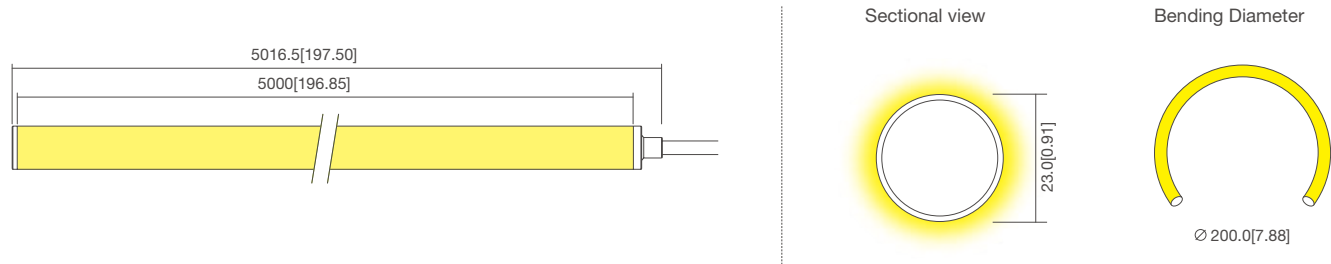


PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NCR23S-Single color	24V DC	80+	2400-6500K	1466	90.5	16	336pcs/m	3m	35.71mm	5000*23*23mm
		/	Red	435	27.2					
			Green	1338	83.6					
			Blue	315	19.7					
			Yellow	201	12.6					
			Orange	393	24.6					

Note:
☐ The data of 2400K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.

PHOTOMETRIC

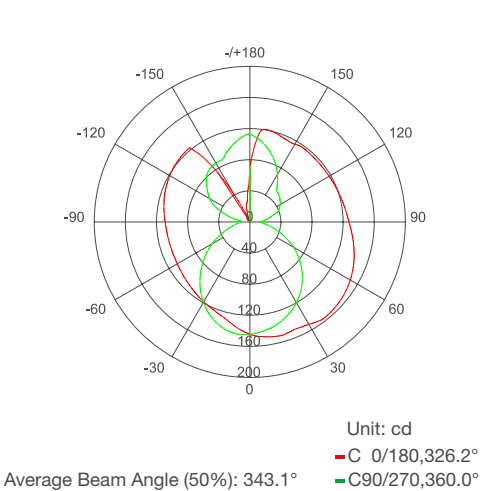

Note: for other datas, please consult sales rep.



NCR13-COB
360° NEON




FEATURES

- Color options: white
- Superior design with exquisite craftsmanship ensure stable and reliable performance.
- 360° light-emitting with uniform light.
- Bendable with good flexibility, strong weather resistance.
- Single color supports PWM, 0-10V, and DALI dimming.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.


PROFILE DRAWINGS

Unit: mm[inch]

Glue Process (IP67)

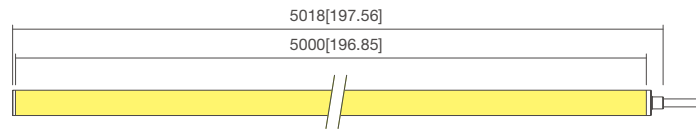

Sectional view



Bending Diameter




PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
NCR13-COB- Single color	24V DC	>90	2700K	1062	62	16	640pcs/m	5m	\	5000*13*13mm
			3500K	1158	68					
			6500K	1130	66					

Note: for more information, please contact our sales representative.


PHOTOMETRIC

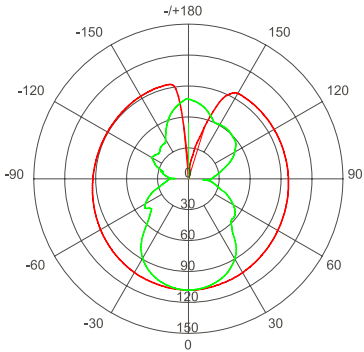

Unit: cd
- C 0/180,337.4°
- C90/270,360.0°

Average Beam Angle (50%): 348.7°

Note: the above two figures are tested with the sample 2700K, for other datas, please consult sales rep.

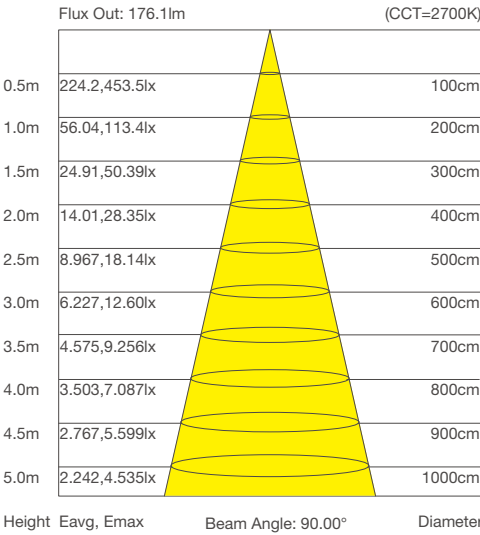


ErP passed



CE passed



High brightness

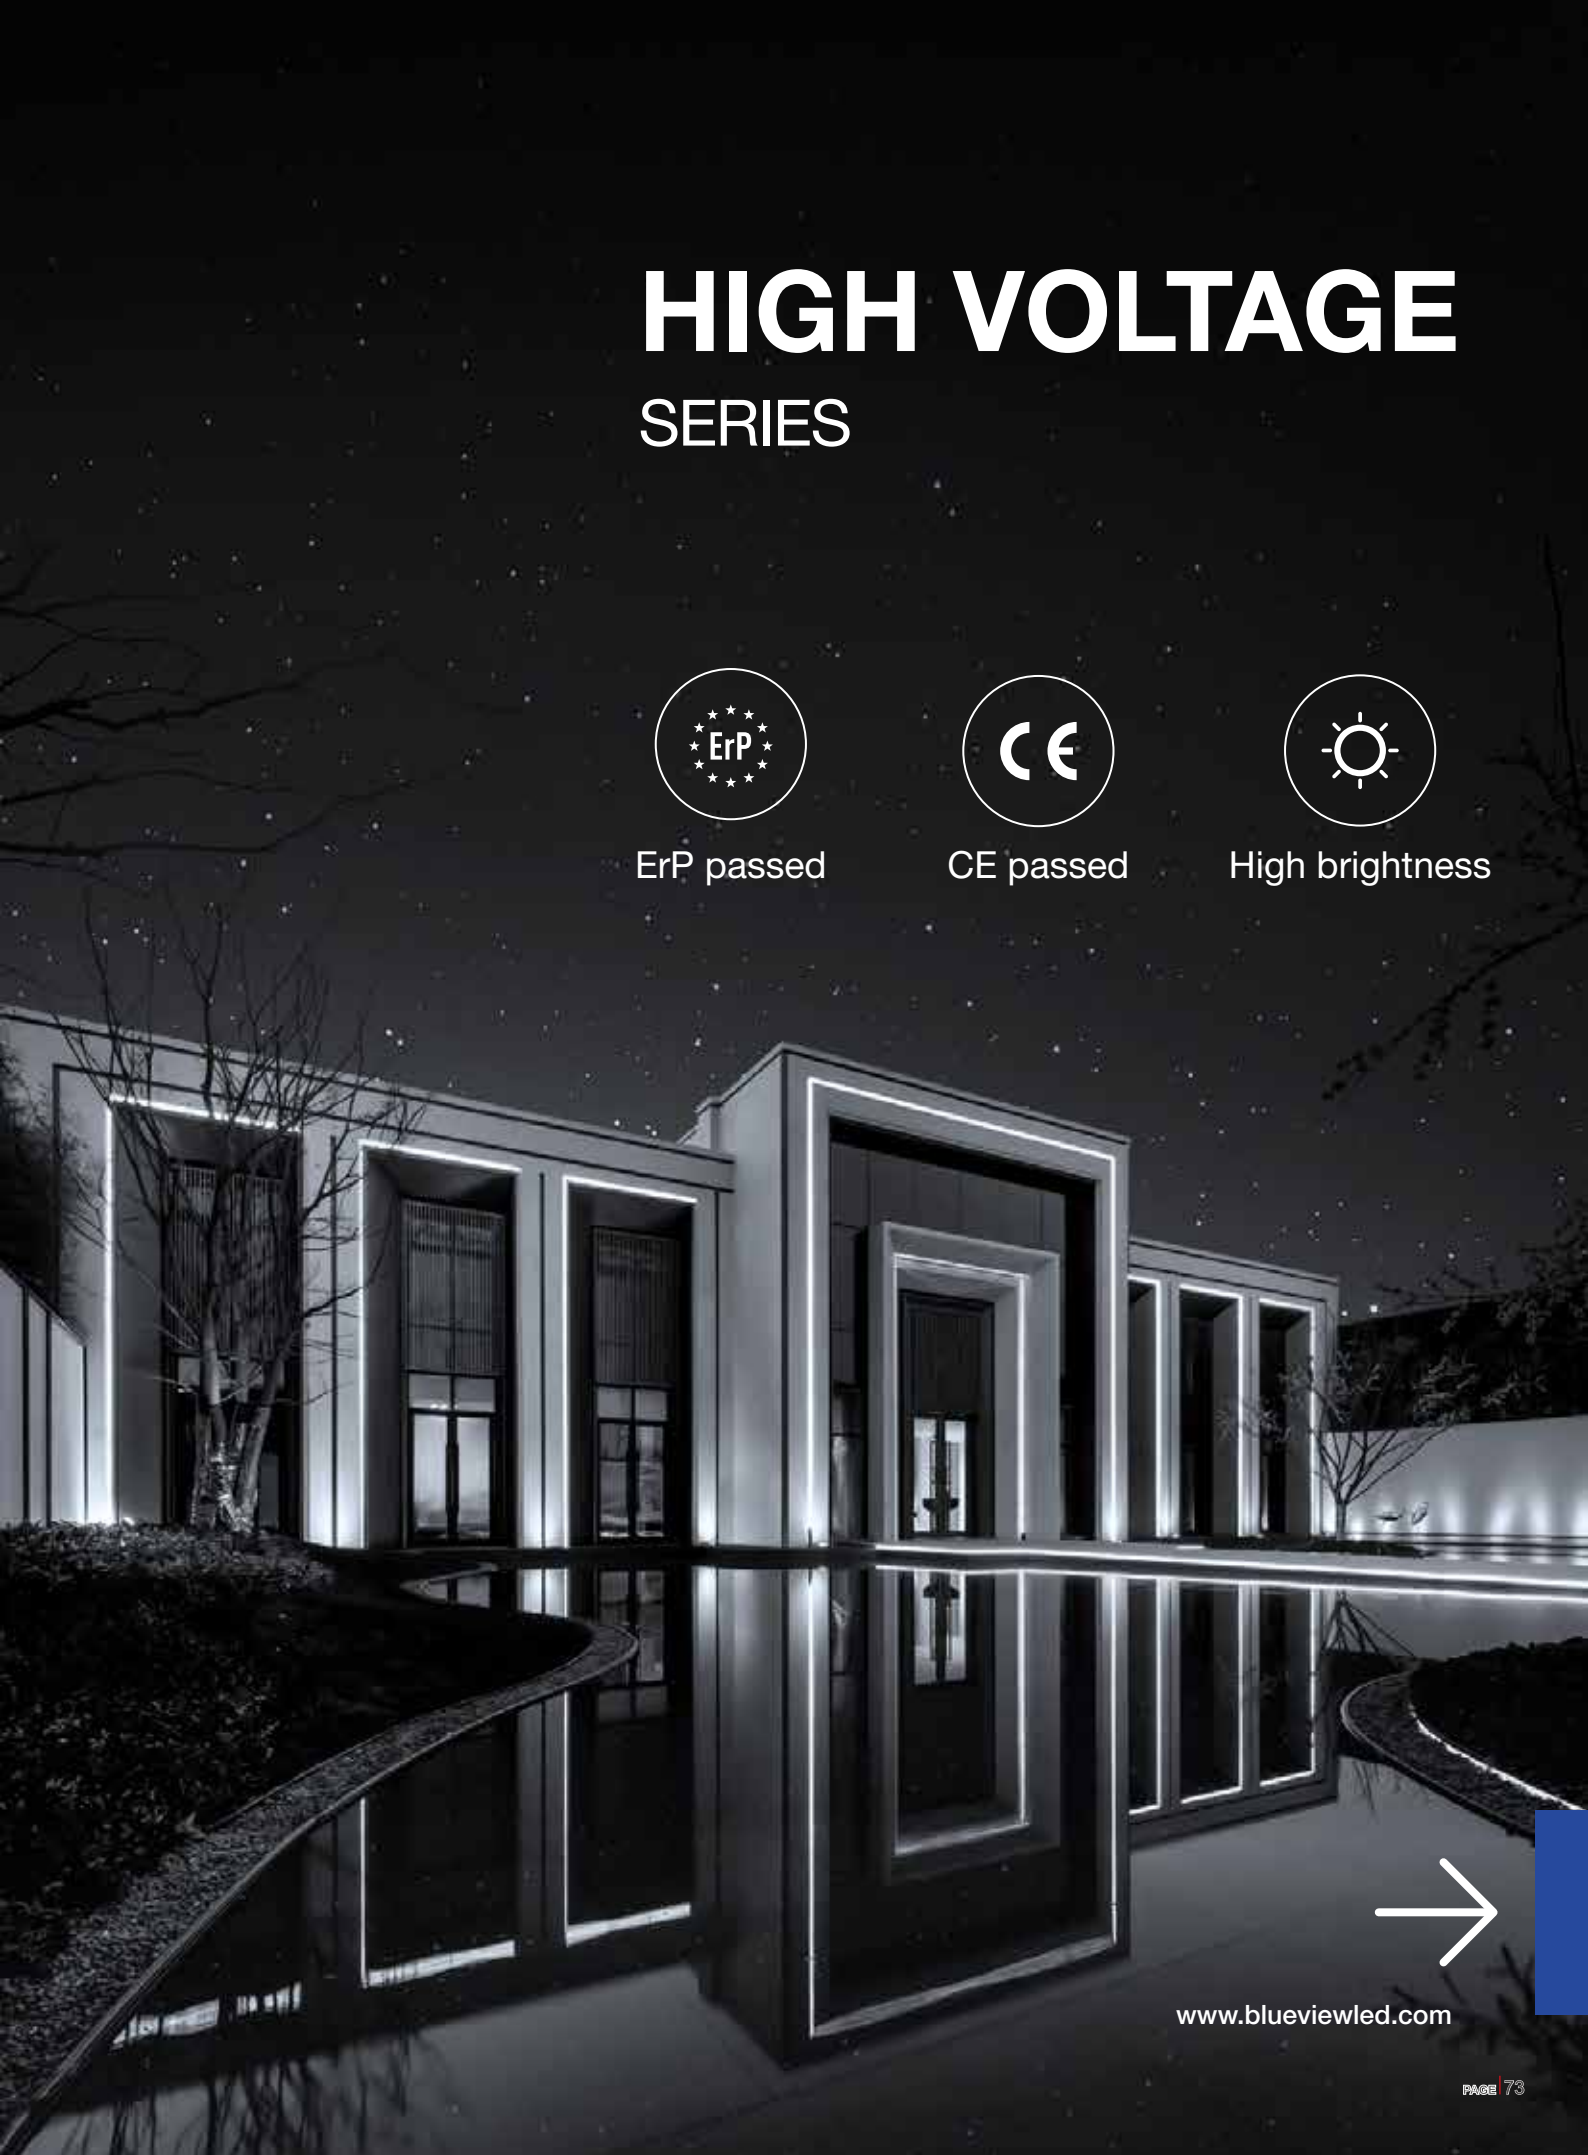

www.blueviewled.com



AWHE1608-D
HIGH VOLTAGE SERIES




FEATURES

- Color options: Single color
- High voltage neon with power supply kit
- AC176~264V input
- **ErP class-F, CE passed**
- High brightness, flicker free
- Single feed max run 40m
- Warranty: 5 years indoors, 3 years outdoors


PROFILE DRAWINGS

Unit: mm[inch]


Glue Process (IP67)

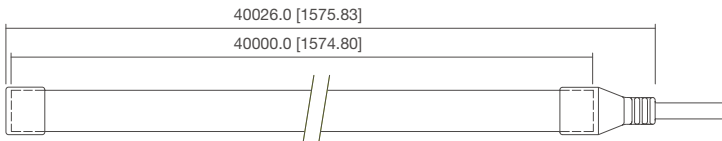

Sectional view



Bending Diameter




PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
AWHE1608-D- Single color	230V AC	80+	 2300-6500K	1011	110	8	88pcs/m	40m	500mm	40000*16*7.5mm
		/	 Red	133	14					
			 Green	828	89					
			 Blue	164	17					
			 Yellow	1102	118					
			 Orange	429	44					

Note:
☐ The data of 2300K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.


PHOTOMETRIC

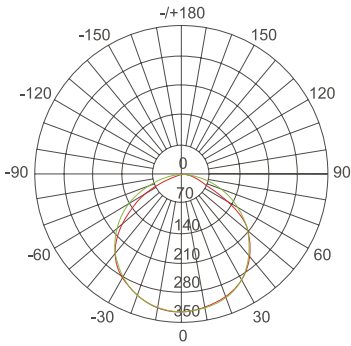


Unit: cd
- C 0/180,107.5°
- C90/270,114.0°

Average Beam Angle (50%): 110.8°

Note: above data tested with AWHE1608-D at 2300K , for other data,please consult sales rep.

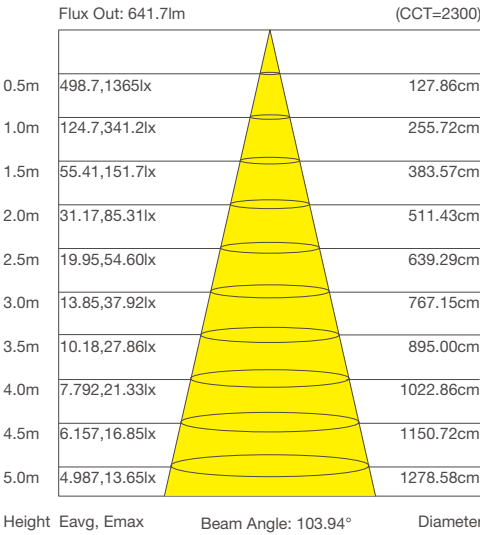

AN2-4
HIGH VOLTAGE SERIES




FEATURES

- Color options: single color
- Superior design with exquisite craftsmanship ensure stable and reliable performance
- Side bending with good flexibility
- Adopt silicone extrusion molding pressed
- Warranty: 5 years indoor, 3 years outdoor


PROFILE DRAWINGS

Unit: mm[inch]


Molding pressed (IP68)



Sectional view



Bending Diameter




PRODUCT PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Cuttable Length	Product Size L*W*H
AN2-4-Single color	220V AC	/	2800-9000K	510	52	10	120pcs/m	50m	500mm	50000*10*25mm
			Red	230	24					
			Green	420	44					
			Blue	90	9					
			Yellow	650	67					

Note: for more information, please contact our sales representative.


PHOTOMETRIC

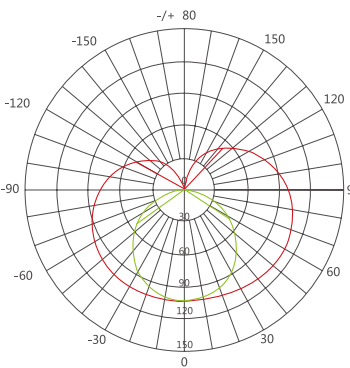

Unit: cd
- C 0/180,258.9°
- C90/270,113.0°

Average Beam Angle (50%): 184.0°

Note: The above figure is based on the test results of a 1m long product at CCT 7400k

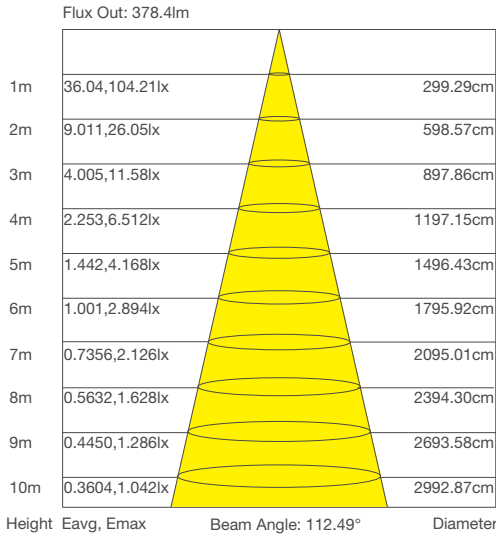

SWIMMING POOL SERIES



IP68 rating



Salt-resistant



Chlorine resistance



WE1405/1606 SWIMMING POOL SERIES




FEATURES

- Color options: W, WN, RGB, RGBW;
- Resistant to chlorine and salt corrosion;
- Silicone integrated extrusion shaping process;
- High quality FPC, suitable for many shapes;
- Can not be cut during mounting, support customization;


PROFILE DRAWINGS

Unit: mm[inch]


Glue Process (IP67)

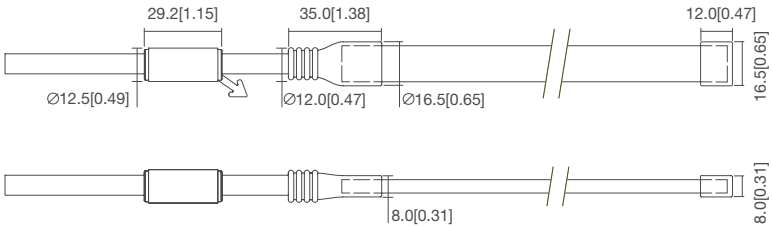

Sectional view



Bending Diameter



PRODUCT PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Standard Run	Product Size L*W*H
WE1405-60-5m-W	24V DC	80+	3000-15000K	1193	83	14.4	60pcs/m	5m	5000*13.5*5mm
WE1405-60-25m-W				314	65	4.8	60pcs/m	25m	25000*13.5*5mm
WE1405-120-W				628	65	9.6	120pcs/m	10m	10000*13.5*5mm
WE1606-WN	24V DC	90+	N:3000K	679	94	7.2	240pcs/m	5m	10000*13.5*5mm
			W:6000K	710	98	7.2			
			N+W: \	1369	95	14.4			

Note:


□ The data of 3000K-15000K is based on 4000K.

□ For more information, please contact our sales representative.

PHOTOMETRIC

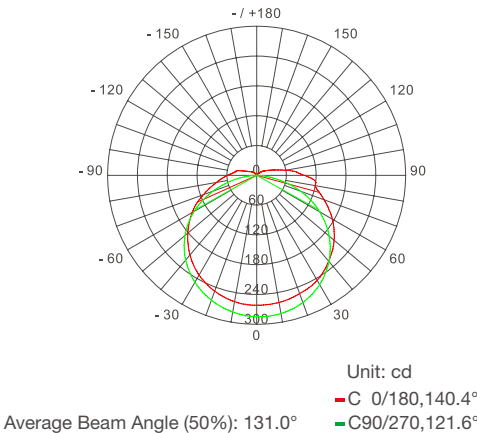

Unit: cd
- C 0/180,140.4°
- C90/270,121.6°

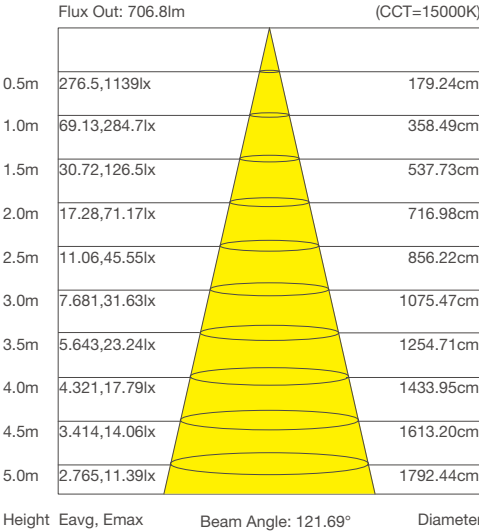

Note: above data tested with WE1405 at 15000K , for other data, please consult sales rep.

CRNEON SERIES




FEATURES

- Excellent shading and light transmission
- Attractive design, multiple colors optional
- Extrusion modeling with excellent weather resistance
- Multiple size optional, cuttable and customizable

APPLICATION

- Applied for advertising neon channel letters etc.

PROFILE DRAWINGS

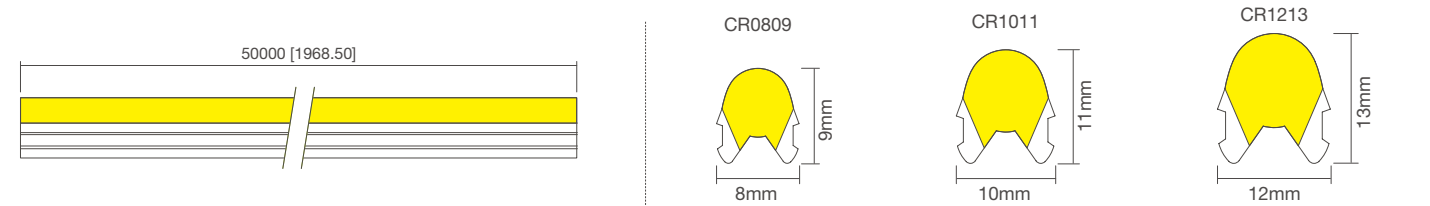

ACCESSORIES



PRODUCT PARAMETERS

Model No.	Voltage	CRI	LED + Cover	Color	CCT/Wavelength	Lm/m	Lm/W	Measured Power
CR0809	12V DC	80+	WW	W	6107K	291	78	7.2W/m (±10%)
			WR	R	620-625nm	18	5	
		/	WG	G	520-525nm	19	5	
			WB	B	465-470nm	20	5	
			WY	Y	587-589.5nm	62	17	
			WO	O	600-605nm	75	20	
			BW	B	465-470nm	55	14	
			GW	G	520-525nm	180	44	
			RW	R	620-625nm	69	20	
			OW	O	600-605nm	78	23	
			YW	Y	587-589.5nm	43	13	
			BB	B	465-470nm	8	2	
			GG	G	520-525nm	28	7	
			RR	R	620-625nm	28	8	
			OO	O	600-605nm	38	11	
			YY	Y	587-589.5nm	14	4	

Model No.	Voltage	CRI	LED + Cover	Color	CCT/Wavelength	Lm/m	Lm/W	Measured Power
CR1011	12V DC	80+	WW	W	6107K	248	66	7.2W/m (±10%)
			WR	R	620-625nm	9	2	
		/	WG	G	520-525nm	48	13	
			WB	B	465-470nm	16	4	
			WY	Y	587-589.5nm	2	1	
			WO	O	600-605nm	56	15	
			BW	B	465-470nm	61	18	
			GW	G	520-525nm	37	11	
			RW	R	620-625nm	155	38	
			OW	O	600-605nm	49	13	
			YW	Y	587-589.5nm	58	17	
			BB	B	465-470nm	20	6	
			GG	G	520-525nm	10	3	
			RR	R	620-625nm	22	5	
			OO	O	600-605nm	4	1	
			YY	Y	587-589.5nm	27	8	

Model No.	Voltage	CRI	LED + Cover	Color	CCT/Wavelength	Lm/m	Lm/W	Measured Power
CR1213	12V DC	80+	WW	W	6107K	270	72	7.2W/m (±10%)
			WR	R	620-625nm	7	2	
		/	WG	G	520-525nm	43	11	
			WB	B	465-470nm	11	3	
			WY	Y	587-589.5nm	3	1	
			WO	O	600-605nm	49	13	
			BW	B	465-470nm	68	20	
			GW	G	520-525nm	35	10	
			RW	R	620-625nm	160	13	
			OW	O	600-605nm	50	13	
			YW	Y	587-589.5nm	66	19	
			BB	B	465-470nm	18	5	
			GG	G	520-525nm	9	3	
			RR	R	620-625nm	20	5	
			OO	O	600-605nm	3	1	
			YY	Y	587-589.5nm	28	8	

TOP BENDING

NDF1617

Free

	ASY-NDF1617-N00NNH-EC Item: Front cap Size(L*W*H): 30*18*18mm Quantity(5/10m): 2-4pcs		ASY-NDF1617-N00NNX-EC Item: Closing End-cap Size(L*W*H): 18*19*18mm Quantity(5/10m): 2-4pcs
--	--	---	--

Optional

	ASY-NDF1617-N00NNS-EC Item: Front cap (side outlet) Size(L*W*H): 25*30*19mm		ASY-NDF1617-N00NNB-EC Item: Front cap (Bottom outlet) Size(L*W*H): 25*30*19mm		ASY-NDF1617-MNN0500-MT Item: Aluminum track Size(L*W*H): 35*21.2*19mm
	ASY-NDF1617-MNN0500-MT Item: S-type Track Size(L*W*H): 500*17.84*17.22mm		ASY-NDF1617-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*19.3*18.7mm		ASY-NDF1617-A4NN0035-MT Item: Aluminum clip (with metal spring) Size(L*W*H): 35*21.2*19mm
	ASY-NDF1617-A2NN1000-MT Item: Aluminum Channel(with metal spring) Size(L*W*H): 1000*21.2*19mm		ASY-1617-A6NN0035-MT Item: Aluminum Channel Size(L*W*H): 35*20*21mm		ASY-1617-A7NN0035-MT Item: Aluminum Channel (with wings) Size(L*W*H): 35*20*30mm
	WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm		

Indoor Use Only

	ASY-NDF1617-F00NNH-EC Item: Free welding end cap (straight outlet) Size(L*W*H): 49*22*23mm		ASY-NDF1617-F00NNX-EC Item: Free welding end cap Size(L*W*H): 45*22*23mm		ASY-NDF1617-F00NNL-EC Item: Free welding end cap (left outlet) Size(L*W*H): 53*25*23mm
	ASY-NDF1617-F00NNR-EC Item: Free welding end cap (right outlet) Size(L*W*H): 53*25*23mm		ASY-NDF1617-F00NNB-EC Item: Free welding end cap (bottom outlet) Size(L*W*H): 53*22*26mm		ASY-NDF1617-F01NNM-EC Item: Splicing connector 2 Size(L*W*H): 57*23*20mm

NDF1617-48V

Free



ASY-NDF1617-N00NNH-EC
Item: Front cap
Size(L*W*H): 30*18*18mm
Quantity (5/10m): 2-4pcs



ASY-NDF1617-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 18*19*18mm
Quantity (5/10m): 2-4pcs

Optional

	ASY-NDF1617-N00NNS-EC Item: Front cap (side outlet) Size(L*W*H): 25*30*19mm		ASY-NDF1617-A3NN0035-MT Item: Aluminum track Size(L*W*H): 35*21.2*19mm		ASY-NDF1617-MNN0500-MT Item: S-type Track Size(L*W*H): 500*17.2*17.8mm
	ASY-NDF1617-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*19.3*18.7mm		ASY-NDF1617-A4NN0035-MT Item: 3.5cm Aluminum track Size(L*W*H): 30*18*18mm		ASY-NDF1617-F00NNB-EC (IP65) Item: Aluminum Channel Size(L*W*H): 30*18*18mm
	WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm		

NDF1212

Free

	ASY-NDF1212-N00NNH-EC Item: Front cap Size(L*W*H): 27.5*14.9*14.4mm Quantity (5/10/15m): 3/6/9pcs		ASY-NDF1212-N00NNX-EC Item: Closing End-cap Size(L*W*H): 14*14.9*14.4mm Quantity (5/10/15m): 3/6/9pcs
---	--	---	--

Optional

	ASY-NDF1212-N00NNL-EC Item: Front cap(Left outlet) Size(L*W*H): 27.5*20.9*14.4mm Quantity (5/10/15m): 3/6/9pcs		ASY-NDF1212-N00NNR-EC Item: Front cap (Right outlet) Size(L*W*H): 27*20.4*14.4mm Quantity (5/10/15m): 3/6/9pcs		ASY-NDF1212-N00NNB-EC Item: Front cap (Bottom outlet) Size(L*W*H): 27*20.4*14.9mm Quantity (5/10/15m): 3/6/9pcs
	ASY-NDF1212-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*14.8*15mm Quantity (5/10/15m): 5/10/15pcs		ASY-NDF1212-MNN0500-MT Item: S-type Track Size(L*W*H): 500*13.5*13.6mm Quantity (5/10/15m): 3/6/9pcs		ASY-NDF1212-A3NN0025-MT Item: Aluminum Channel Size(L*W*H): 35*14.8*15mm Quantity (5/10/15m): 15/30/45pcs
	WR-7516 Item: Silicone Glue Quantity (5/10/15m): 1pcs Size: 45g/pc		PA3 Item: Screws Quantity (5/10/15m): 30/60/90pcs Size: PA3*10mm		

NDF1010

Free

	ASY-NSF1010-N00NH-EC Item: Front cap Size(L*W*H): 28*12.4*12.9mm Quantity (5m): 2pcs		ASY-NSF1010-N00NX-EC Item: Closing End-cap Size(L*W*H): 20*12.4*12.9mm Quantity (5m): 2pcs		ASY-NSF1010-N00NS-EC Item: Front cap (side outlet) Size(L*W*H): 24*18.4*12.9mm
	ASY-NSF1010-A1NN1000-MT Item: Aluminum channel 1000mm Size(L*W*H): 1000*12*12.5mm		ASY-NSF1010-A3NN0025-MT Item: Aluminum clip 25mm Size(L*W*H): 25*12*12.5mm		WR-7516 Item: Silicone Glue Size: 45g/pc
	PA3 Item: Screws Size: PA3*10mm				

NDF1005

Free

	ASY-NDF1005-N00NNH-EC Item: Front cap Size(L*W*H): 25.0*12.7*7.6mm Quantity (5m): 4pcs		ASY-NDF1005-N00NNX-EC Item: Closing End-cap Size(L*W*H): 11*12.7*6.6mm Quantity (5m): 4pcs
---	---	---	---

Optional					
	ASY-NDF1005-P1NN0020-MT Item: PC installation clip Size(L*W*H): 25*12*9mm Quantity (5m): 15pcs		ASY-NDF1005-A3NN0020-MT Item: Aluminum clip Size(L*W*H): 20*12.4*7mm Quantity (5m): 15pcs		ASY-NDF1005-P3NN1000-MT Item: PC channel Size(L*W*H): 1000*12*9mm Quantity (5m): 5pcs
	ASY-NDF1005-F00NNH-EC Item: Front connector set Size(L*W*H): 32.8*15.6*10.4mm Quantity (5m): 1pcs		WR-7516 Item: Silicone Glue Quantity (5m): 1pcs Size: 45g/pc		PA3 Item: Screws Quantity (5m): 30pcs Size: PA3*10mm

NDF1306-COB

Free



Item: Front cap

Size(L*W*H): 29*14.7*7.3mm

Quantity (5m): 2-4pcs



Item: Closing End-cap

Size(L*W*H): 12*14.7*6.8mm

Quantity (5m): 2-4pcs

Optional



Item: Plastic clip

Size(L*W*H): 20*15*6.5mm



WR-7516

Item: Silicone Glue

Dimensions: 45g/pc



PA3

Item: Screws

Dimensions: PA3*10mm

NDR2018

Free



ASY-NDR2018-N00NNH-EC
Item: Front cap
Size(L*W*H): 50*23.2*21.2mm
Quantity (10m): 2-4pcs



ASY-NDR2018-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 22.5*23.2*21.2mm
Quantity (10m): 2-4pcs

Optional



ASY-NDR2018-N00NNL-EC
Item: Front cap(Left outlet)
Size(L*W*H): 42*46*21mm



ASY-NDR2018-N00NNR-EC
Item: Front cap (Right outlet)
Size(L*W*H): 42*46*21mm



ASY-NDR2018-N00NNB-EC
Item: Front cap (Bottom outlet)
Size(L*W*H): 31.5*22.89*44.5mm



ASY-NDR2018-P1NN0020-MT
Item: Clip
Size(L*W*H): 20*25*10mm



ASY-NDR2018-P3NN1000-MT
Item: Plastic Channel
Size(L*W*H): 1220*25.5*10mm



ASY-NDR2018-A2NN1000-MT
Item: Front connector set
Size(L*W*H): 1000*24.47*10mm



ASY-NDR2018-A4NN0035-MT
Item: Aluminum track
Size(L*W*H): 25*24.1*10.8mm



WR-7516
Item: Silicone Glue
Size: 45g/pc



PA3
Item: Screws
Size: PA3*10mm

NDR1414

Free					
	ASY-NDR1414-N00NNH-EC Item: Front cap Size(L*W*H): 31*16*15mm Quantity (15m): 2-4pcs			ASY-NDR1414-N00NNX-EC Item: Closing End-cap Size(L*W*H): 10*17*16mm Quantity (15m): 2-4pcs	
Optional					
	ASY-NDR1414-P1NN0016-MT Item: Plastic Clip Size(L*W*H):			ASY-NDR1414-RNN0012-MT Item: PC channel Size(L*W*H):	
	ASY-NDR1414-A4NN0025-MT Item: Front connector set Size(L*W*H): 25*18*10mm				
	WR-7516 Item: Silicone Glue Quantity (15m): 1pcs Specifications: 45g/pc			PA3 Item: Screws Quantity (15m): 30pcs Specifications: PA3*10mm	

SIDE BENDING

NSF1617

Free					
	ASY-NSF1617-N00NNH-EC Item: Front cap Size(L*W*H): 30*18*18mm Quantity(5/10m): 2-4pcs		ASY-NSF1617-N00NNX-EC Item: Closing End-cap Size(L*W*H): 18*19*18mm Quantity(5/10m): 2-4pcs		
Optional					
	ASY-NSF1617-N00NNS-EC Item: Front cap (side outlet) Size(L*W*H): 25*30*19mm		ASY-NSF1617-N00NNB-EC Item: Front cap (Bottom outlet) Size(L*W*H): 25*30*19mm		ASY-NSF1617-MNN0500-MT Item: Aluminum track Size(L*W*H): 35*21.2*19mm
	ASY-NSF1617-MNN0500-MT Item: S-type Track Size(L*W*H): 500*17.84*17.22mm		ASY-NSF1617-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*19.3*18.7mm		ASY-NSF1617-A4NN0035-MT Item: Aluminum clip (with metal spring) Size(L*W*H): 35*21.2*19mm
	ASY-NSF1617-A2NN1000-MT Item: Aluminum Channel(with metal spring) Size(L*W*H): 1000*21.2*19mm		ASY-1617-A6NN0035-MT Item: Aluminum Channel Size(L*W*H): 35*20*21mm		ASY-1617-A7NN0035-MT Item: Aluminum Channel (with wings) Size(L*W*H): 35*20*30mm
	WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm		

Indoor Use Only

	ASY-NSF1617-F00NNH-EC Item: Free welding end cap (straight outlet) Size(L*W*H): 49*22*23mm		ASY-NSF1617-F00NNX-EC Item: Free welding end cap Size(L*W*H): 45*22*23mm		ASY-NSF1617-F00NNL-EC Item: Free welding end cap (left outlet) Size(L*W*H): 53*25*23mm
	ASY-NSF1617-F00NNR-EC Item: Free welding end cap (right outlet) Size(L*W*H): 53*25*23mm		ASY-NSF1617-F00NNB-EC Item: Free welding end cap (bottom outlet) Size(L*W*H): 53*22*26mm		ASY-NSF1617-F01NNM-EC Item: Splicing connector 2 Size(L*W*H): 57*23*20mm

NSF1212

Free



ASY-NSF1212-N00NNH-EC
Item: Front cap
Size(L*W*H): 27.5*14.9*14.4mm
Quantity (10m): 6pcs



ASY-NSF1212-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 14*14.9*14.4mm
Quantity (10m): 6pcs

Optional



ASY-NSF1212-N00NNL-EC
Item: Front cap(Left outlet)
Size(L*W*H): 27.5*20.9*14.4mm



ASY-NSF1212-N00NNR-EC
Item: Front cap (Right outlet)
Size(L*W*H): 27*20.4*14.4mm



ASY-NSF1212-N00NNB-EC
Item: Front cap (Bottom outlet)
Size(L*W*H): 27*20.4*14.9mm



ASY-NSF1212-A1NN1000-MT
Item: Aluminum Channel
Size(L*W*H): 1000*14.8*15mm



ASY-NSF1212-MNN1000-MT
Item: S-type Track
Size(L*W*H): 500*13.5*13.6mm



ASY-NSF1212-A3NN0025-MT
Item: Aluminum Channel
Size(L*W*H): 35*14.8*15mm



WR-7516
Item: Silicone Glue
Size: 45g/pc



PA3
Item: Screws
Size: PA3*10mm

NSR0615

Free



ASY-NSR0615-N00NNH-EC
Item: Front cap
Size(L*W*H): 30*9.57*16.4mm
Quantity (5m): 3pcs



ASY-NSR0615-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 14*10*16mm
Quantity (5m): 3pcs

Optional



ASY-NSR0615-N00NNL-EC
Item: Front cap(Left outlet)
Size(L*W*H): 19*28*17mm



ASY-NSR0615-N00NNR-EC
Item: Front cap (Right outlet)
Size(L*W*H): 19*9.5*28mm



ASY-NSR0615-N00NNB-EC
Item: Front cap (Bottom outlet)
Size(L*W*H): 26*18*19mm



ASY-NSR0615-P1NN0015-MT
Item: Plastic Clip
Size(L*W*H): 12*9*10mm
Quantity (5m): 10pcs



ASY-NSR0615-A1NN1000-MT
Item: Aluminum Channel
Size(L*W*H): 1000*7.8*13.5mm



ASY-NSR0615-A3NN0035-MT
Item: Aluminum track
Size(L*W*H): 35*7.8*13.5mm



WR-7516
Item: Silicone Glue
Dimensions: 45g/pc



PA3
Item: Screws
Dimensions: PA3*10mm

NSR0512

Free



ASY-NSR0512-N00NNH-EC
Item: Front cap
Size(L*W*H): 11*14*8mm
Quantity (5m): 3pcs



ASY-NSR0512-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 11*14*8mm
Quantity (5m): 3pcs

Optional



ASY-NSR0615-P1NN0015-MT
Model No.: Plastic Clip
Size(L*W*H): 12*9*10mm



WR-7516
Item: Silicone Glue
Dimensions: 45g/pc



PA3
Item: Screws
Dimensions: PA3*10mm

N2-4 Pro

Free



Item: Front cap
Size(L*W*H): 26.2*12.2*45mm



Item: Closing End-cap
Size(L*W*H): 26.2*12.2*16mm

Optional



Item: Front cap(Left outlet)
Size(L*W*H): 18*25*27mm



Item: Front cap (Right outlet)
Size(L*W*H): 18*25*27mm



Item: Front cap (Bottom outlet)
Size(L*W*H): 18*14*39mm



Item: Aluminum clip (with metal spring)
Size(L*W*H): 35*21*15.2mm



Item: Aluminum channel 1000mm
Size(L*W*H): 1000*21*15.2mm



Item: S-type Track
Size(L*W*H): 500*11*14.6mm



WR-7516
Item: Silicone Glue
Dimensions: 45g/pc



PA3
Item: Screws
Dimensions: PA3*10mm

N2-8pro

Free



ASY-N2-8 PRO-N00NNH-EC

Item: Front cap
Size(L*W*H): 30*18*18mm



SY-N2-8 PRO-N00NNX-EC

Item: Closing End-cap
Size(L*W*H): 18*18*19mm

Optional



ASY-N2-8 PRO-N00NNS-EC

Item: Front cap (side outlet)
Size(L*W*H): 25*30*19mm



ASY-N2-8 PRO-MNN1000-MT

Item: S-type Track
Size(L*W*H): 1000*17.4*16.7mm



ASY-N2-8 PRO-A6NN0035-MT

Item: Aluminum Channel 35mm
Size(L*W*H): 35*20*21mm



ASY-N2-8 PRO-A7NN0035-MT

Item: Aluminum Channel 35mm
Size(L*W*H): 35*20*30mm



ASY-N2-8 PRO-A6NN1000-MT

Item: Aluminum Channel 1000mm
Size(L*W*H): 1000*20*21mm



ASY-N2-8 PRO-A7NN1000-MT

Item: Aluminum Channel 1000mm
Size(L*W*H): 1000*20*30mm



ASY-N2-8 PRO-A4NN0035-MT

Item: Aluminum Channel (with metal spring)
Size(L*W*H): 35*21.2*19mm



ASY-N2-8 PRO-A2NN1000-MT

Item: Aluminum channel (with metal spring)
Size(L*W*H): 1000*21.2*19mm



PA3

Item: Screws
Dimensions: PA3*10mm



WR-7516

Item: Silicone Glue
Dimensions: 45g/pc

AWHE1608-D

Free



Item: Front cap
Size(L*W*H): 26*16*16mm



Item: Closing End-cap
Size(L*W*H): 16*16*16mm

Optional



Item: Plastic Clip
Size(L*W*H): 25*19*11.8mm



WR-7516
Item: Silicone Glue
Dimensions: 45g/pc



PA3
Item: Screws
Dimensions: PA3*10mm

AN2-4

Optional



Item: Installation set
Quantity (15/30m): 30/60pcs



WR-7516
Item: Silicone Glue
Dimensions: 45g/pc

Indoor Use Only



Item: Input connector (straight outlet)
Quantity (15/30m): 2/4pcs



Item: End caps
Quantity (15/30m): 1/2pcs



Item: L Connector
Quantity (15/30m): 1/2pcs



Item: End caps
Quantity (15/30m): 2/4pcs




Item: Bottom exit
Quantity (15/30m): 2/4pcs




Item: Right side exit
Quantity (15/30m): 2/4pcs




Item: Left side exit
Quantity (15/30m): 2/4pcs

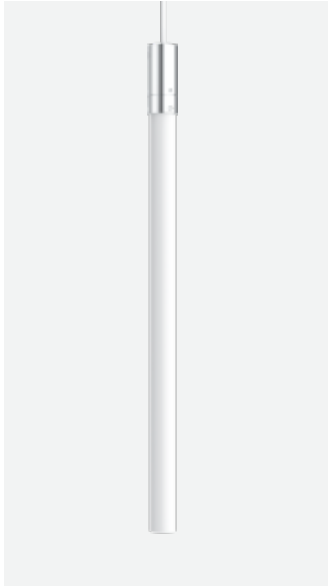


Pendant Kit - output wire two in one

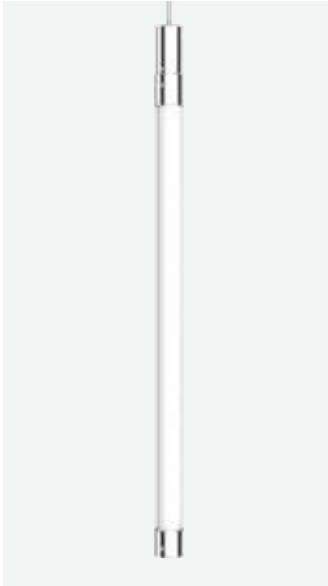

Pendant Kit - hardware and PC tube set

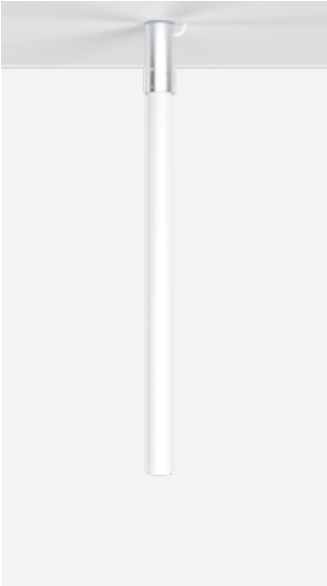

Ceiling Kit - hardware set

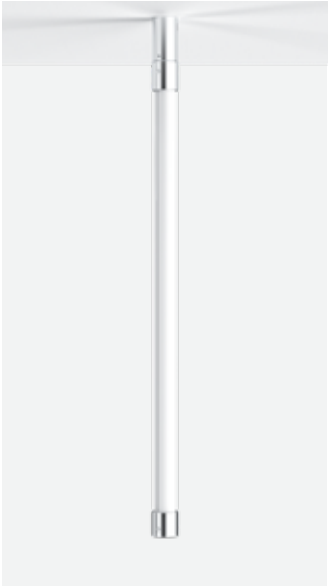

Ceiling Kit - hardware and PC tube set



Pendant Horizontal Kit-hardware and PC tube set



Pendant Kit-steel cable and PC groove



Pendant Kit-steel cable and hook



Ceiling Kit - PC groove



Plastic Clip



Splice set



Hardware end-cap set



Blueview Elec-Optic Tech Co., Ltd

Tel: +86-28-8148 0011

Fax: +86-28-8148 1258

Web: www.blueviewled.com

Email: sales@blueviewled.com

© No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Zone, Chengdu, Sichuan, China