

MODULE & RIGID BAR


SIGNAGE

CATALOG


BETTER LIGHT BETTER VIEW

◀ **2024** ▶

Blueview Elec-Optic Tech Co., Ltd

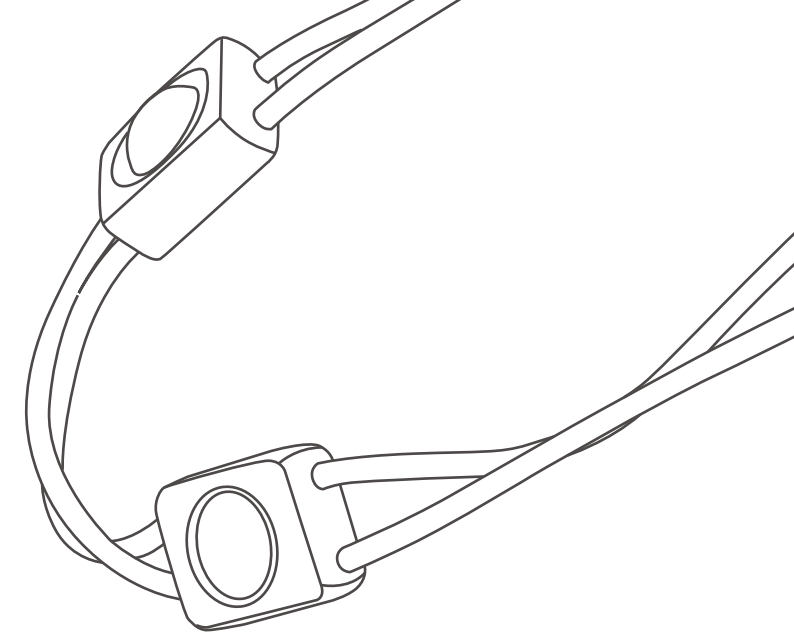

BETTER LIGHT BETTER VIEW

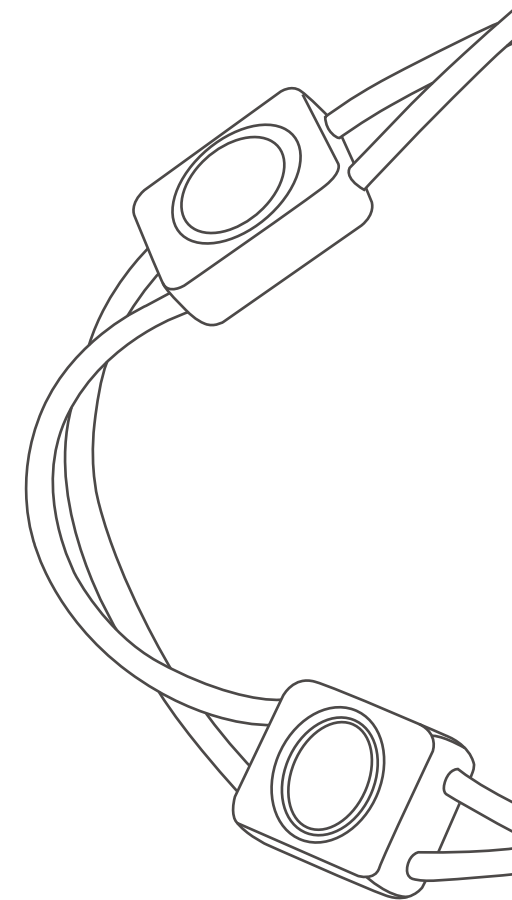

COMPANY PROFILE

BLUEVIEW ELEC-OPTIC TECH CO.,LTD. is a pioneer developer in China's LED signage lighting and linear lighting market, not only participating but also promoting the development of the entire LED industry.

Blueview has been offering professional integrated and ingenious solutions with abundant products including signage, lighting products and others since 2004.

To lead the innovation trend, Blueview introduced “Smart Control” to its products which triggered a major breakthrough for the whole LED industry. Blueview aims to provide customers with complete LED smart lighting system solutions, from lamps to systems to IOT, everything.

We always pursuit the faith that Better light could bring Better life and we never slow down the path for innovation&creation.

Missions

Lead the development for LED industry while shouldering the social responsibilities.
Bring the maximum profits to our consumers while maintaining the highest level of lighting solution services.

Strength

Meticulous Quality Control system
High reputation around the world
Seasoned and professional project experiences
Persistent Research&Development

Culture&Values

Perfectionism
We always treat every detail with rigorous and severe attitude.
Consumer Satisfaction
We always provide customization and circumspect lighting solution services for each individual project.
Innovation
We always challenge ourselves and exploit new path to “Blue Sea”.
High Performance Cost Ratio
We always require our products possessed with remarkable performance and reasonable cost.



COMPANY INTRODUCTION

**Scale**
40,000m²

**Employees**
1,200+

**Market Share**
Own the largest market shares for LED advertising signage lighting

**Management System**
Acquired international management system certification of TUV,ISO9001, ISO14001,ISO45001,quality,environment, occupational health and safety

**Certificates**
CE,UL,3C,FCC,ROHS etc.

**Product Lines**
LED Signage,LED Lightbox ,LED Smart Lighting System ,LED Commercial Lighting

**Global Business**
Domestic :55%,Overseas:45%

**Embranchment**
50 directly affiliated offices in China, 19 branches

**Revenue**
¥ 650 million in 2023

TOP TEN REASONS TO SELECT BLUEVIEW

Best-In-Class Services

Experience

One Of The 1St Movers For Led Tape Light

Strict Quality Control

Leading Industry Warranty Up To 10 Yrs


Reliable High Standard

ODM&OEM Capacity

High Efficient Leading Time

Wide Color Temperature Options In Only One Bin

Wide Products Options

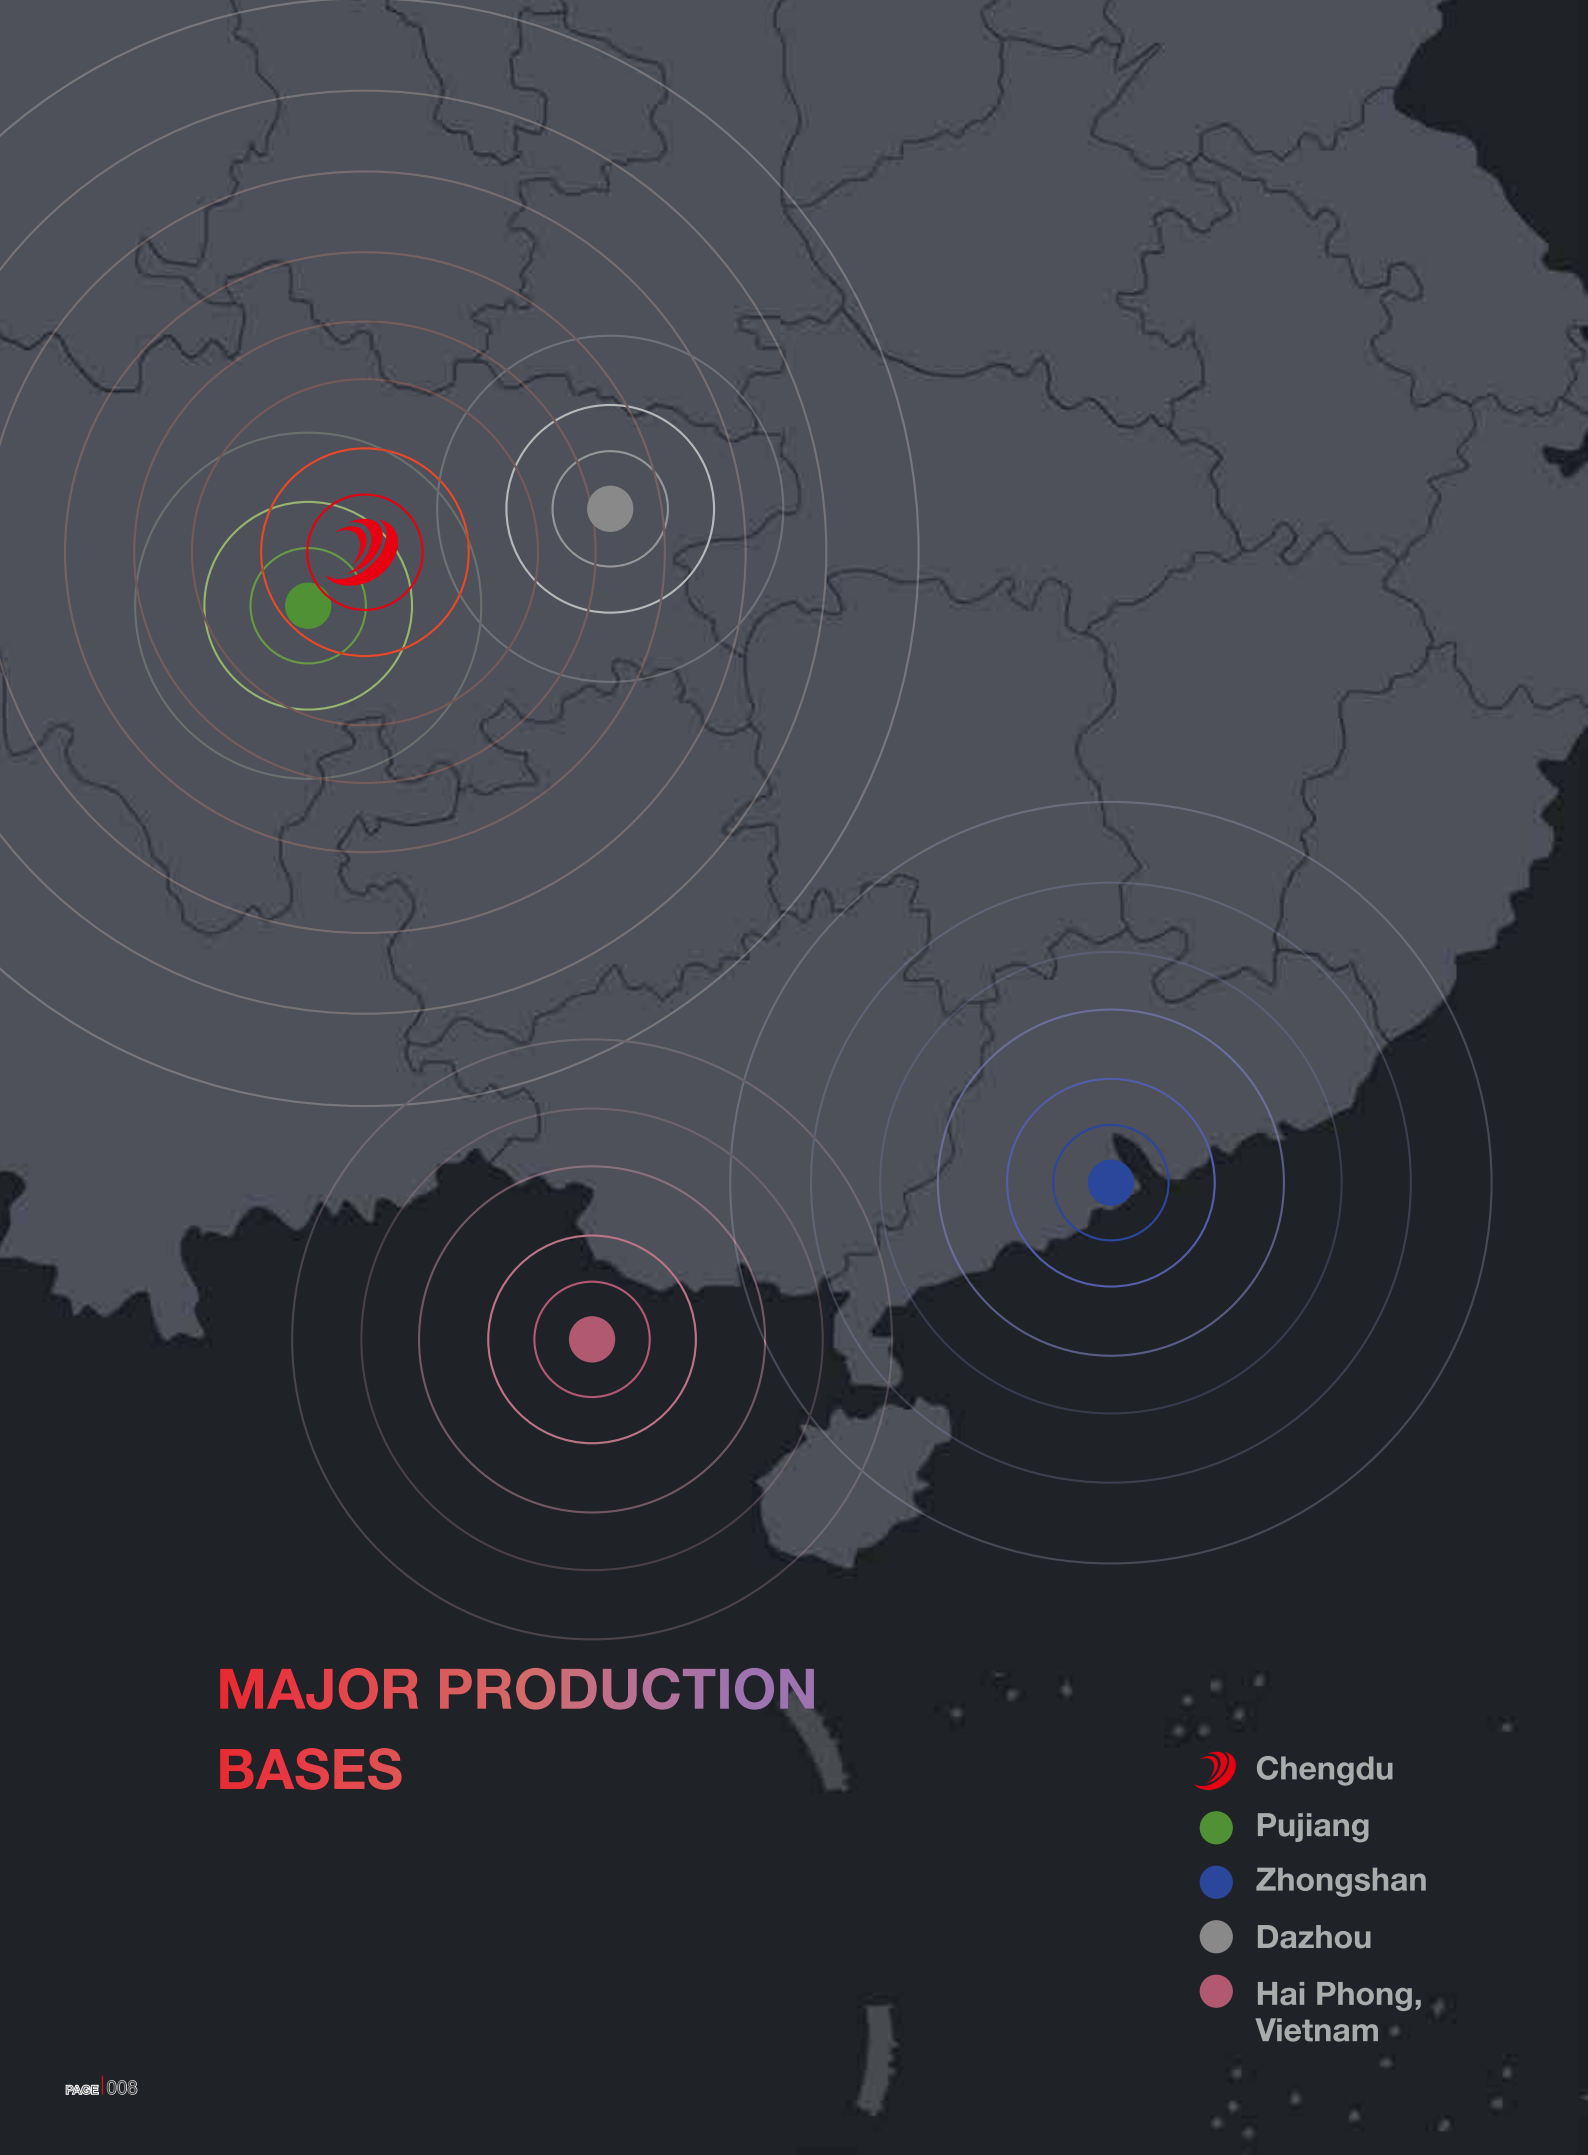

MAJOR PRODUCTION BASES

- Chengdu
- Pujiang
- Zhongshan
- Dazhou
- Hai Phong, Vietnam



Headquarters in
Chengdu, Sichuan



Production base in
Zhongshan, Guangdong



Production base in
Pujiang, Sichuan




Production base in
Dazhou, Sichuan



Production base in
Hai Phong, Vietnam

HISTORY & EVENTS

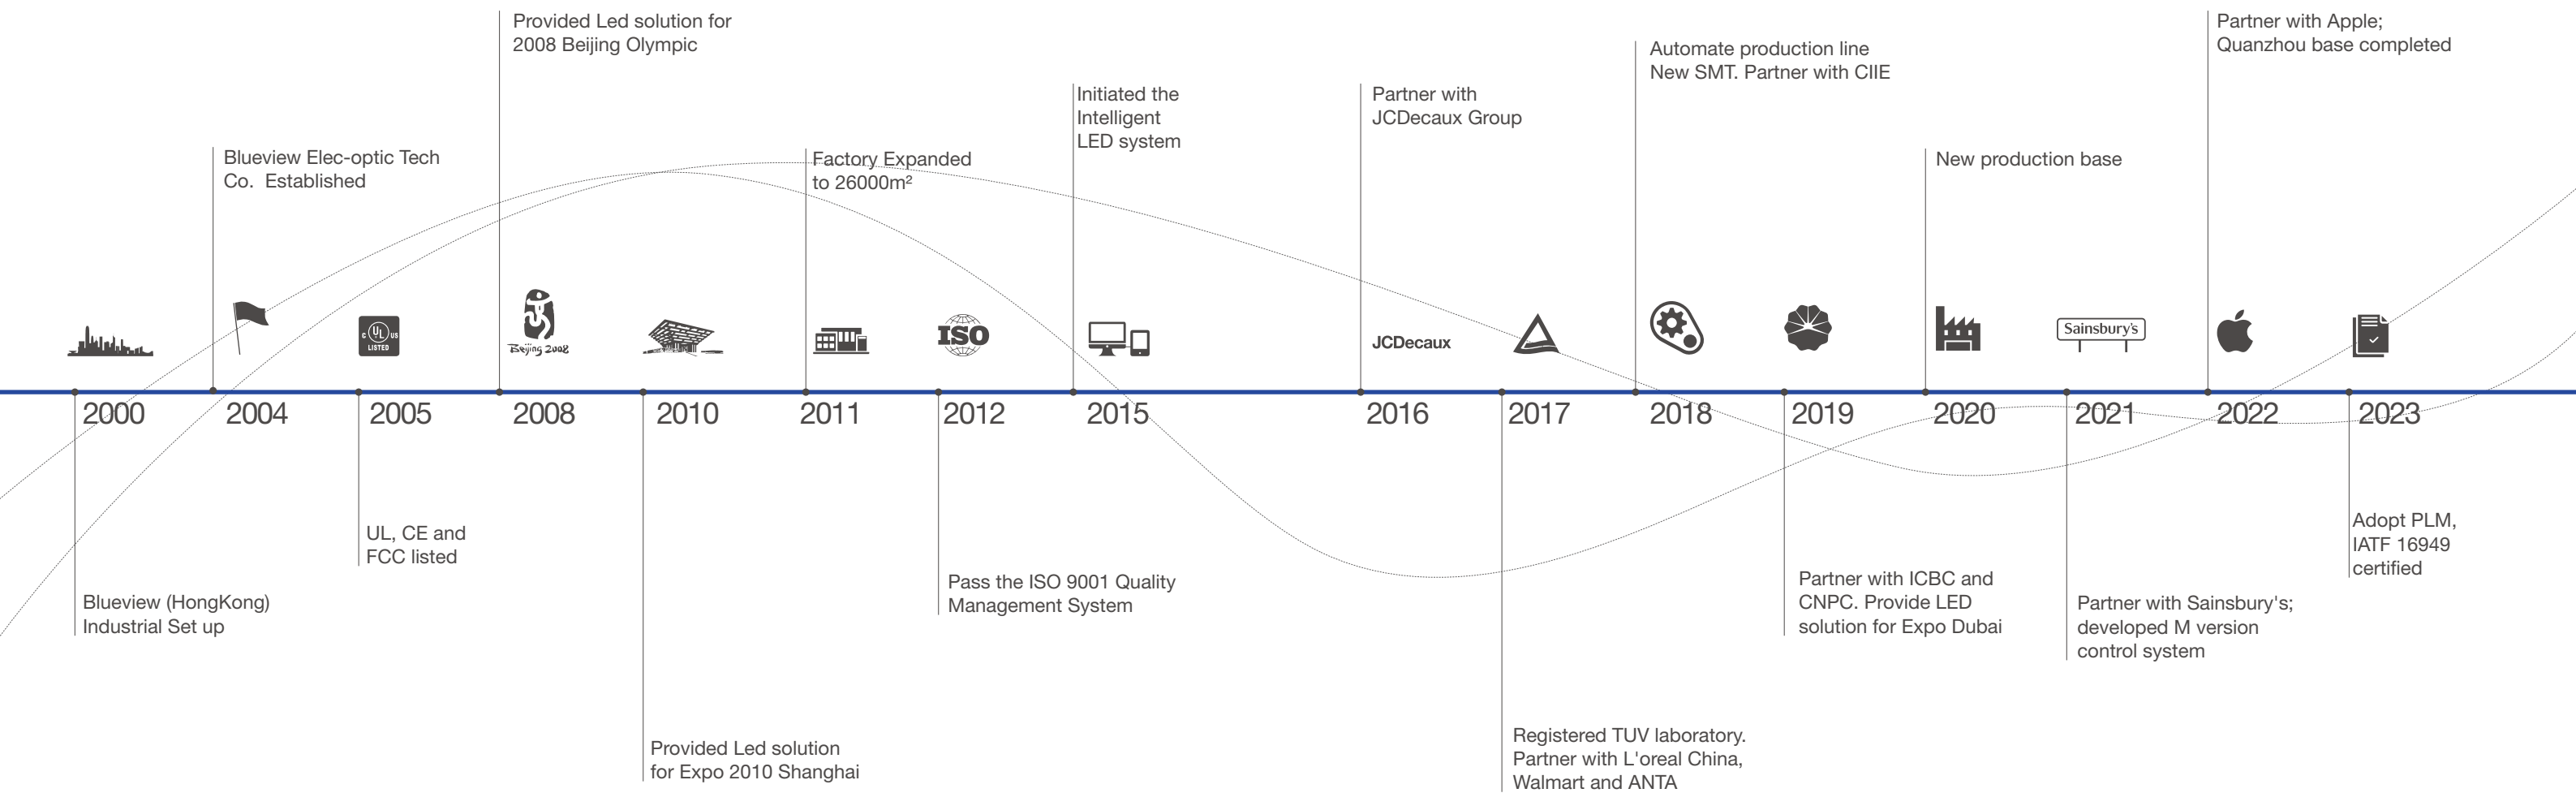



3
R&D Center

R&D INVESTMENT



76
R&D Engineer



◇◇ **Chengdu** ◇◇
R&D Center

◇◇ **Shenzhen** ◇◇
R&D Center

◇◇ **Zhongshan** ◇◇
R&D Center



5
Senior
Engineers


Developing the entire industry chain system, including smart systems and supporting devices.

Developing commercial lighting products

Developing linear lighting products

SGS AUTHORIZED FIRST-CLASS LABORATORY

It has a complete set of testing equipment, which can independently undertake products testings.

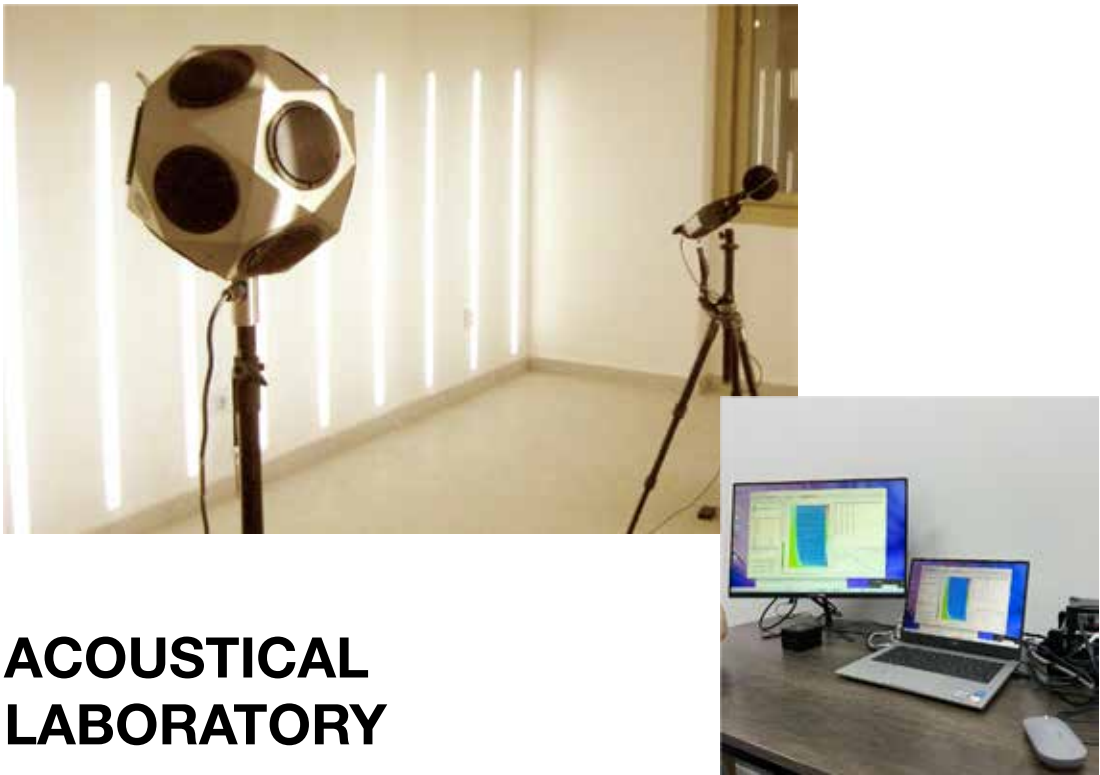

ACOUSTICAL LABORATORY

Our Acoustic Testing Facility is designed to comply with ISO 354 standards.
Our laboratory proudly carries accreditation from the China Inspection Body and Laboratory Mandatory Approval (CMA).

PATENT & CERTIFICATE



18 innovation patents [partly]



19 appearance design patents [partly]



Passed CE, ROHS, UL, FCC, 3C certification, SGS, TUV and UL official test laboratory certification.



79 utility model patents [partly]
Acquired international management system certification of energy saving, environment, occupational health and safety.

PATENT & CERTIFICATE



Domestic Certificates

CCC, CQC, energy-saving, environmental protection, explosion-proof, etc

International Certificates

UL、NA、ENEC、CE、CB、UKCA、BSCI、FCC、REACH、RoHS、ErP、TITLE 24, etc

MANAGEMENT SYSTEM

ISO 9001 QMS

ISO 14001 EMS

ISO 45001 OH&S

IATF 16949 Automotive Quality Management

ISO 14064 Greenhouse Gas

PAS 2060 Carbon-neutral

BSCI



120+ Reliability Tests

Including lifespan test, reliability test, safety test, IP test, optical test, material test etc., laying the foundation for the product quality.

60+ Test Equipment

We have high-precision and fast spectral analyzers, X-RAY testing equipment, RoHS testers, IP rating testers, lightning surge testers, drop testers, and twisting machines, among other testing equipment, to comprehensively assess product reliability.



Mechanical Strength
IEC60598 4.13




Temperature -40~80°C
336 hours



X-Ray Test
welding quality inspection



Xenon Lamp Test
336 hours

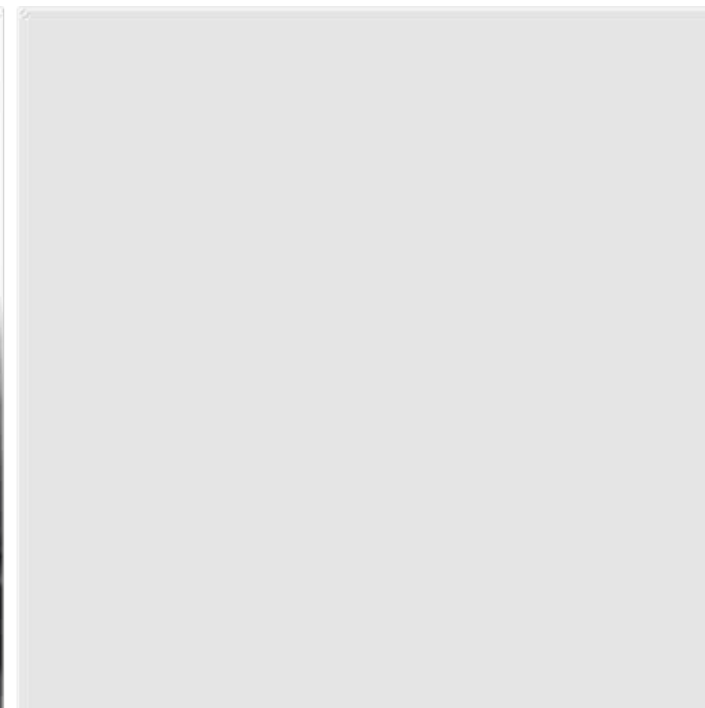

Water spray IPX5/6 standard
336 hours



Corrosion Resistance Test
72 hours



No-load/Load Capacity Test
within $\pm 0.5V$



Long-term indoor aging
8,500 hours

COMPREHENSIVE PRODUCTION LINE

Production environment meets ISO 7 standard of number of particles per cubic meter, temperature and humidity.



SMT Dust-free Workshop



Continuous Quality Improvement



Lead-free Workshop



INTERNATIONAL TRADE FAIR

Blueview attaches great importance to the development of the global market, so it has actively participated in foreign exhibitions for many years, including exhibitions in Dubai, the United States, the United Kingdom, Germany, India and other countries.



- 01 Germany · Frankfurt
- 02 India · LED Expo
- 03 Dubai · SGI
- 04 America · ISA
- 05 Guangzhou · GILE
- 06 Hong Kong · International lighting fair

MODULE SERIES

HIGH EFFICIENCY



STL-H(12V)	030
STL-H(24V)	031
QG05-H	032
QG10	033
PT10-12V	034
PT10-24V	035
STL	036
STL	037
M6	038
QG05	039
ST2-W 3.0	040
M10	041
PT9	042
ST2-J	043
SS10	044
SS208	045
SS308	046

SIGN CABINET / BOX




MZ18-W	047
Z18-C	048
Z18 2.0	049
Z20/Z20 PRO	050
Z18 4.0	051
Z19 4.0	052
ST2-T	053
ST12-B	054
ST13 2.0	055
BV-AL-3030	056
M8-C	057
M8-B	058

RGB/RGBW MODULE



PS5-B	059
BC6-S2	060
PS6	061
PZ5	062
PZ6	063

DIGITAL/ADDRESSABLE MODULE



CS6	064
CS7	065
PQ7	066
PQ8	067
CS8	068
CS8-A	069
PQ5-J	070
BC6-S1	071
PQ6	072
D20/30/50	073

RIGID BAR

YD SERIES (BACK-LIT)



YD7 3.0	076
WN-YD7 3.0	077
YD8 1.0	078
YD8 3.0	079
YD8-J	080
YD3-A	081
YD2-W	082
H3	083
H3 2.0 PRO	084
JYD7 3.0	085
JYD8 1.0	086
JYD3-A	087
JYD2-C	088
FYD7 3.0	089
FYD8	090
FYD3-A	091
FYD2-E	092
JFYD7 3.0	093
JFYD8	094
JFYD3-A	095
FB-X	096

SIDE LIGHTING



BPS300-C	097
BPS300-S	098
BPS1-S	099
BP2-W	100
BP2-J	101
YZ9	102

RGB/RGBW




QYD8	103
BQ5-A	104
RGBW-YD8	105
QBPS	106
QBPS-C	107

AC RIGID BARS



A1 2.0	108
A2 2.0	109
A4-W	110
A4-FW	111

DYNAMIC PANEL



NW-B	112
NF-B	113


MODULE SERIES

Blueview Modules are suitable for indoor and outdoor light boxes, channel letters, etc.

Designs include through hole series, mini series, digital series, etc.

STL-H HIGH EFFICIENCY

- Self designed lens with 170° beam angle for uniform lighting
- High efficacy up to 160lm/W
- Adopts full enclosure injection molding
- Single module cuttable

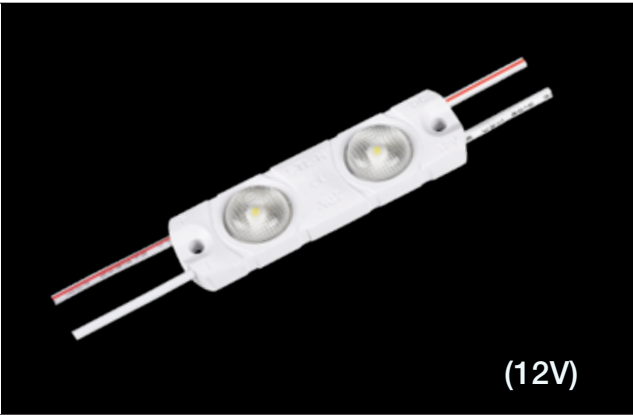


(12V)




PROFILE DRAWINGS

Unit:mm/inch

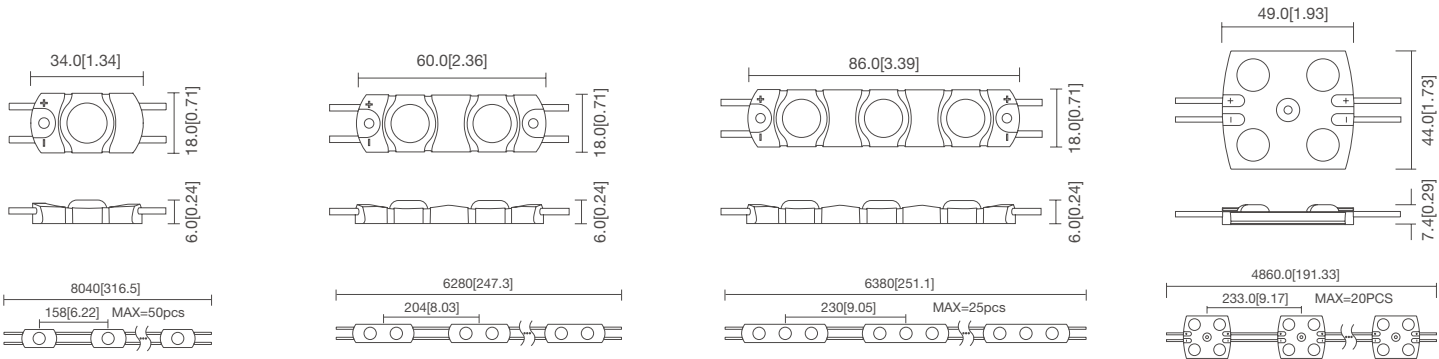

PHOTOMETRIC

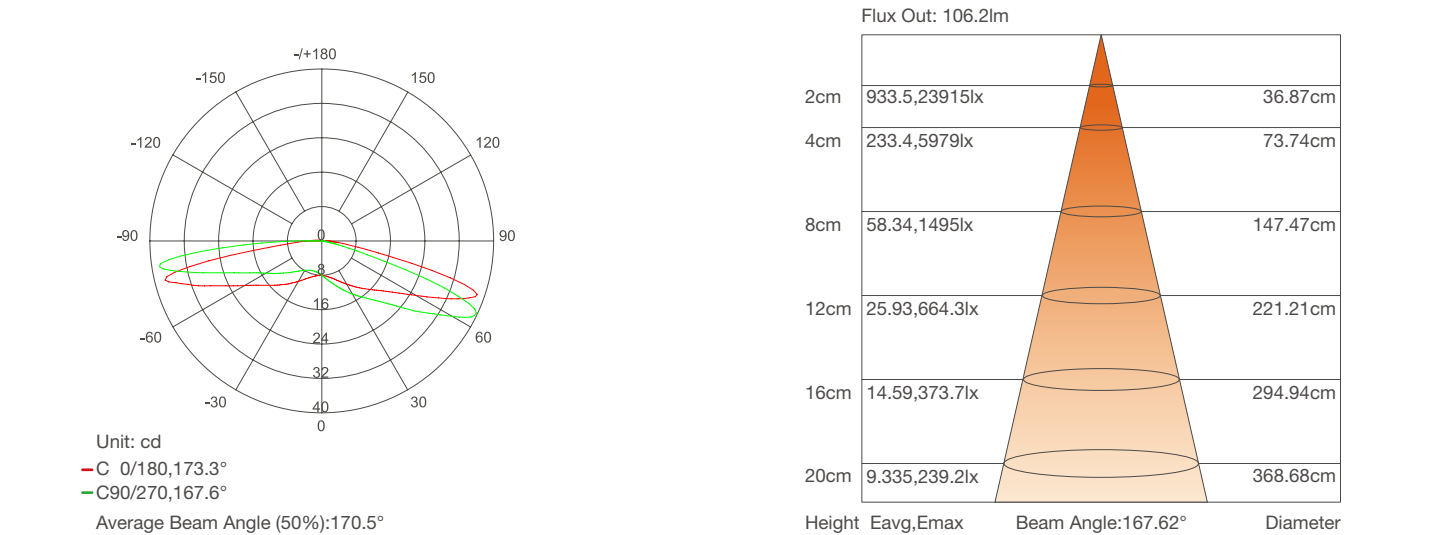

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-H-1	12V DC	6000-7000K	58	160	0.36	1	50pcs
STL-H-2	12V DC	6000-7000K	115	160	0.72	2	30pcs
STL-H-3	12V DC	6000-7000K	173	160	1.08	3	25pcs
STL-4(square)	12V DC	6000-7000K	223	155	1.44	4	20pcs

STL-H HIGH EFFICIENCY

- Self designed lens with 170° beam angle for uniform lighting
- High efficacy up to 160lm/W
- Adopts full enclosure injection molding
- Single module cuttable




(24V)




PROFILE DRAWINGS

Unit:mm/inch

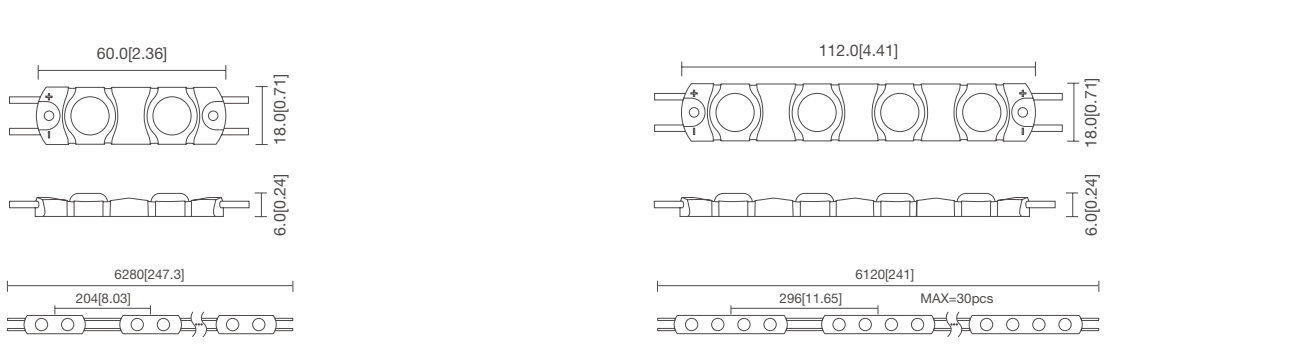

PHOTOMETRIC

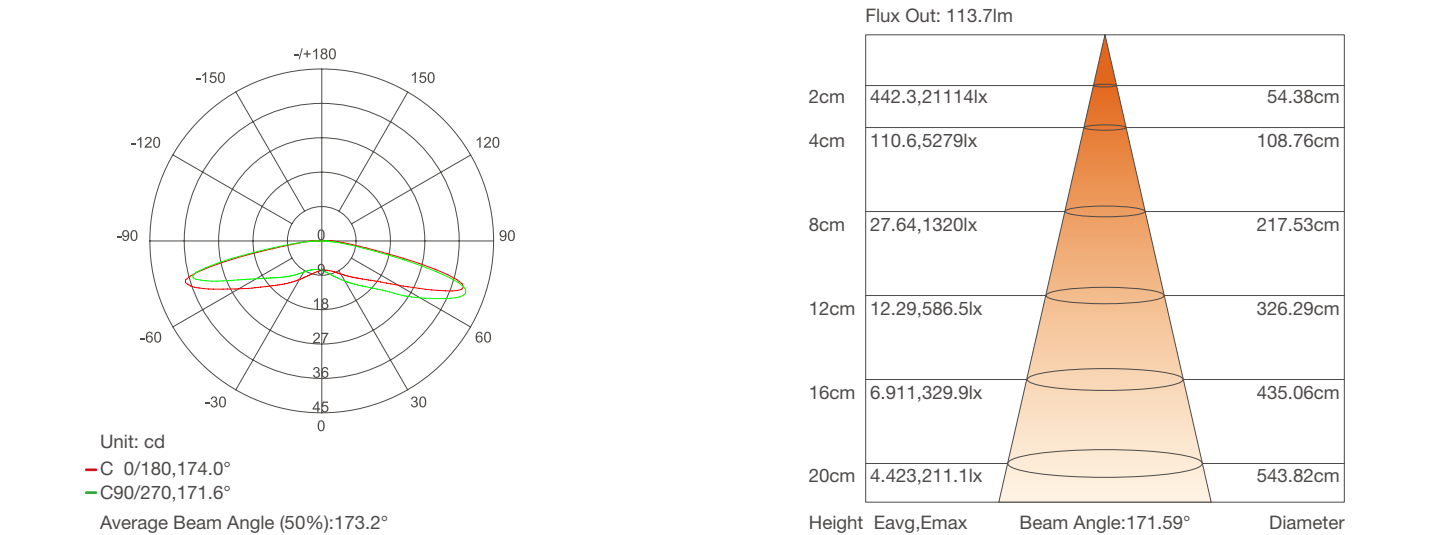

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-H-2	24V DC	6000-7000K	115	160	0.72	2	50pcs
STL-H-4	24V DC	6000-7000K	230	160	1.44	4	30pcs

QG05-H


HIGH EFFICIENCY

- High luminous efficiency
- Constant current design, long run series
- Adopt integrated lens
- Full injection molding, suitable for outdoor use
- Single module can be cut, customization available




PROFILE DRAWINGS

Unit:mm/inch

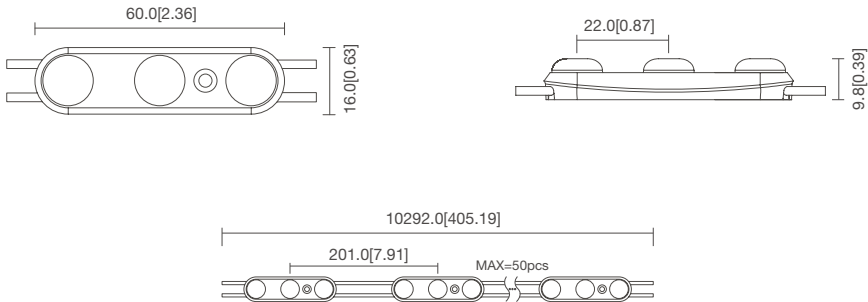

PHOTOMETRIC

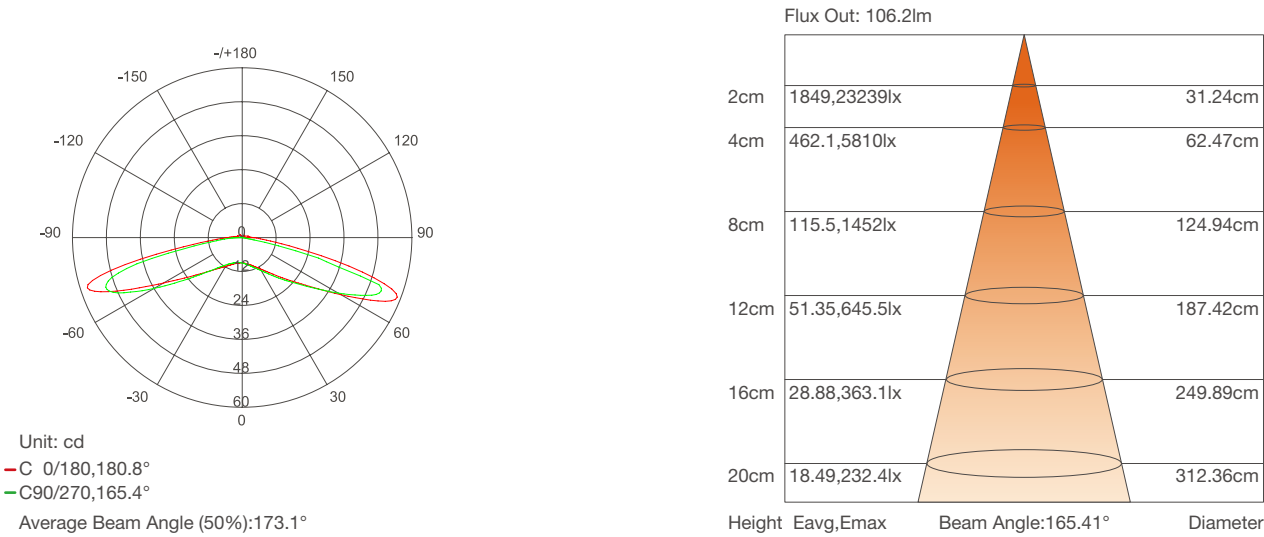


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QG05-H	12V DC	6000-7000K	175	175	1.0	3	50pcs

QG10


HIGH EFFICIENCY

- High luminous efficiency
- Adopt integrated lens
- Full injection molding, suitable for outdoor use
- Single module can be cut

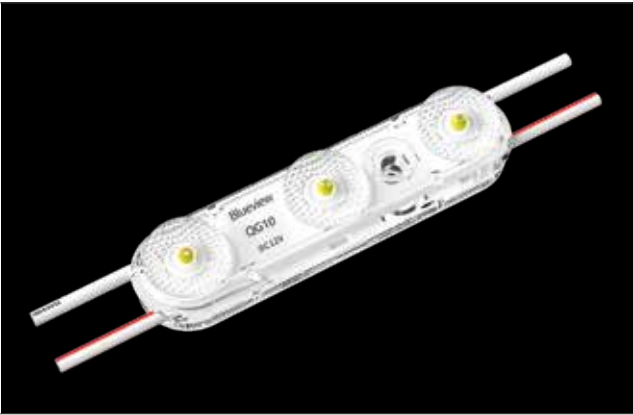


PROFILE DRAWINGS

Unit:mm/inch

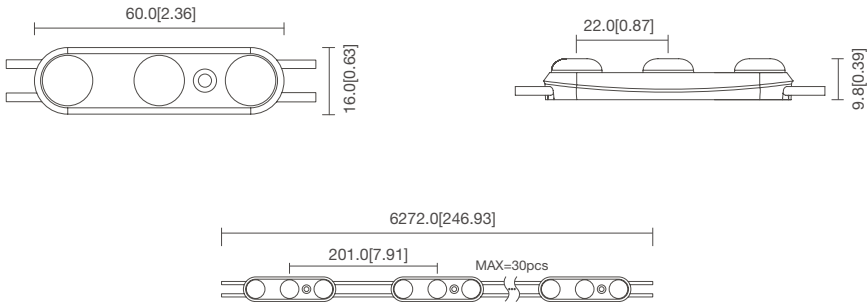

PHOTOMETRIC

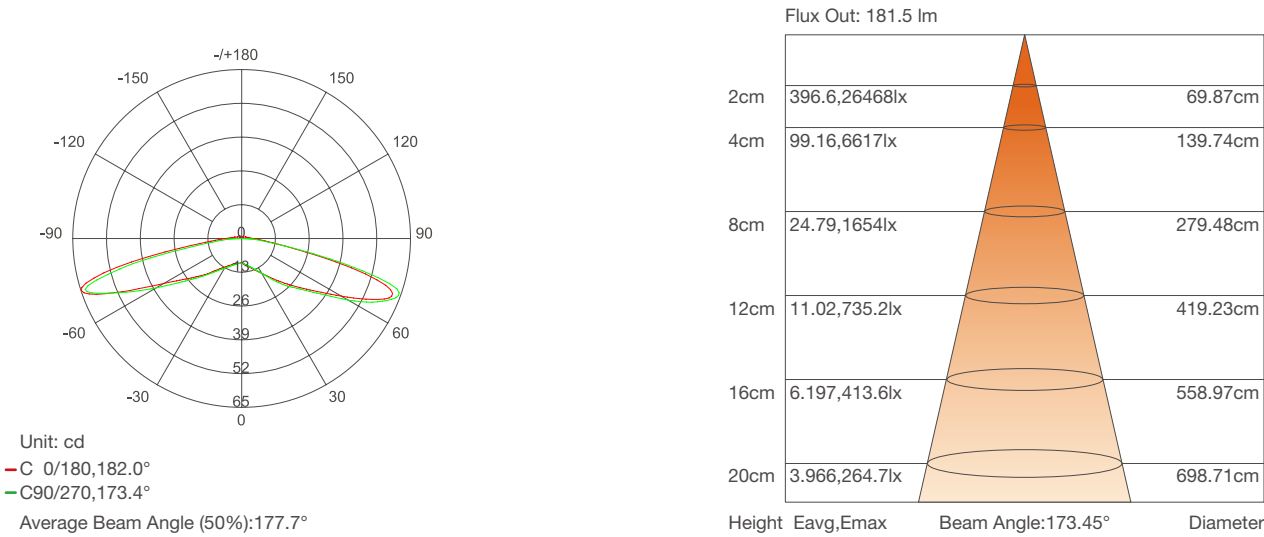

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QG10	12V DC	5900-6100K	192	160	1.2	3	30pcs

PT10-12V

HIGH EFFICIENCY

- Adopt integrated optical lens, super cost-effective;
- Special ultrasonic technology, IP66;
- High luminous efficiency;
- Single module cuttable, support customization;
- Support PWM, 0-10V, DALI and DMX dimming



CRI
70


175°

DC12V



5Years

PROFILE DRAWINGS

Unit:mm/inch

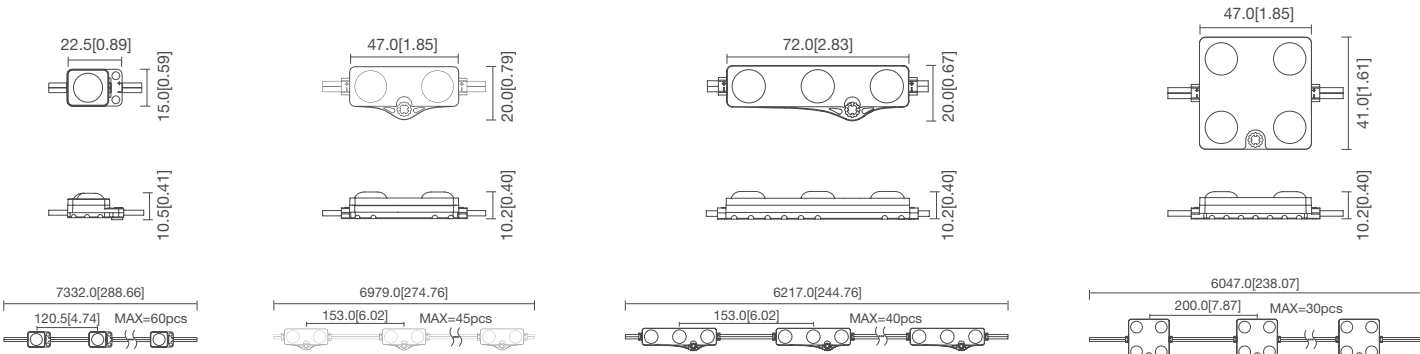

PHOTOMETRIC

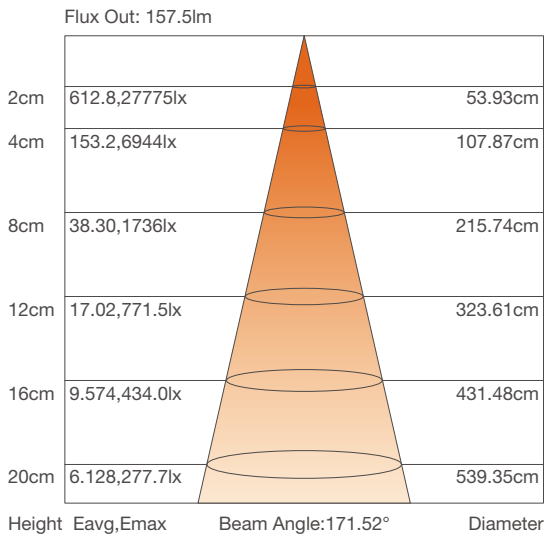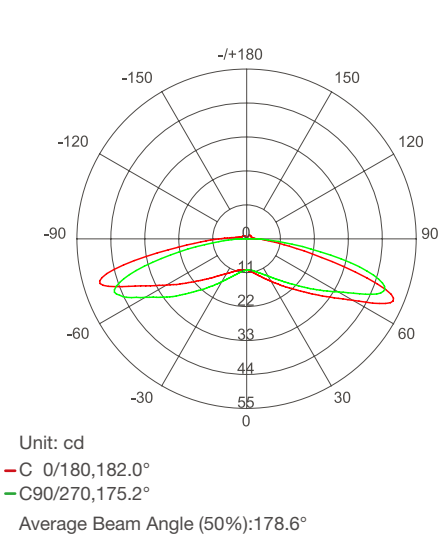

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PT10-1	12V DC	4000K	54	150	0.36	1	60pcs
PT10-2	12V DC	4000K	104	145	0.72	2	45pcs
PT10-3	12V DC	4000K	160	145	1.10	3	40pcs
PT10-4	12V DC	4000K	209	145	1.44	4	30pcs

PT10-24V

HIGH EFFICIENCY

- Adopt integrated optical lens, super cost-effective;
- Special ultrasonic technology, IP66;
- High luminous efficiency
- Single module cuttable, support customization;



CRI
70


175°

DC24V



5Years

PROFILE DRAWINGS

Unit:mm/inch

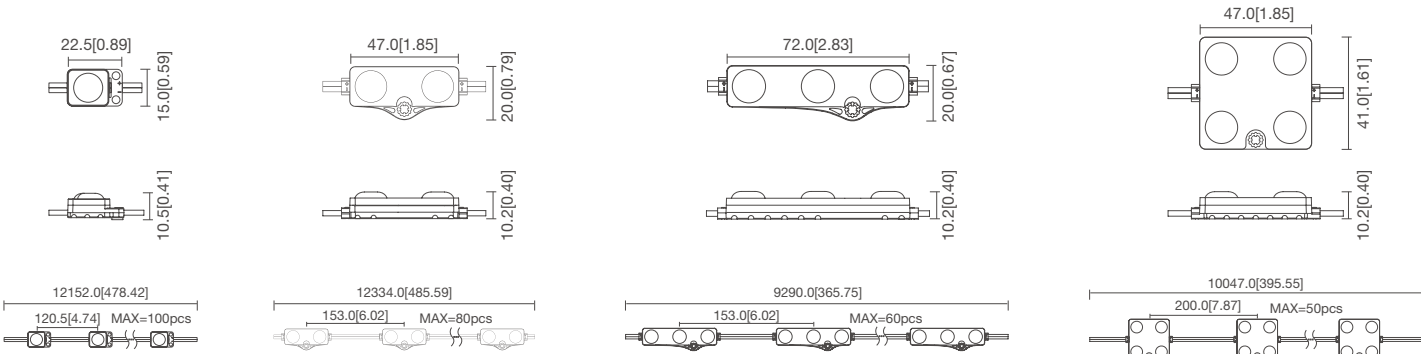

PHOTOMETRIC

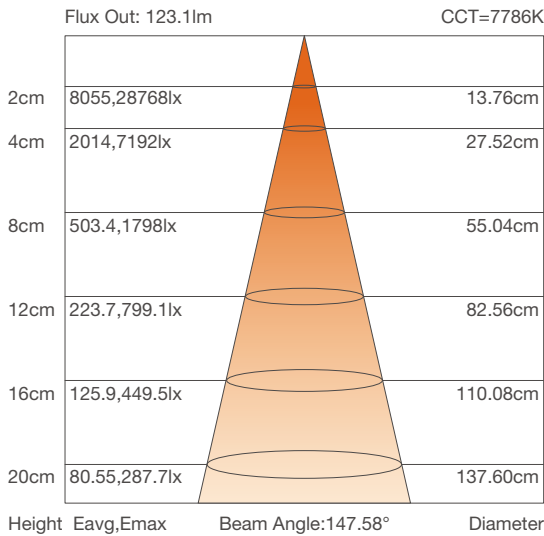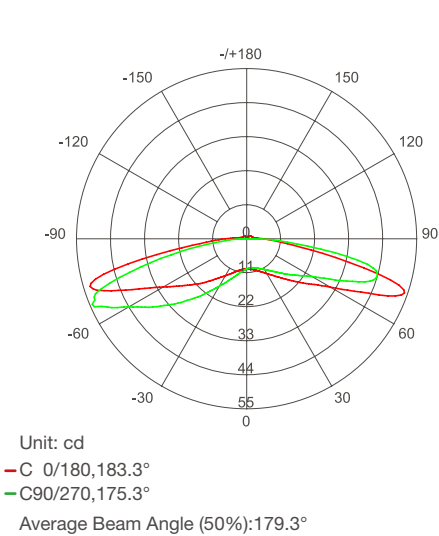

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PT10-1	24V DC	4000K	54	150	0.36	1	100pcs
PT10-2	24V DC	4000K	104	145	0.72	2	80pcs
PT10-3	24V DC	4000K	162	150	1.08	3	60pcs
PT10-4	24V DC	4000K	216	150	1.44	4	50pcs

STL LARGE BEAM ANGLE

- Self designed lens with 170° beam angle
- Adopts full enclosure injection molding
- Single module cuttable



CRI
80


170°

DC12V



5Years

PROFILE DRAWINGS

Unit:mm/inch

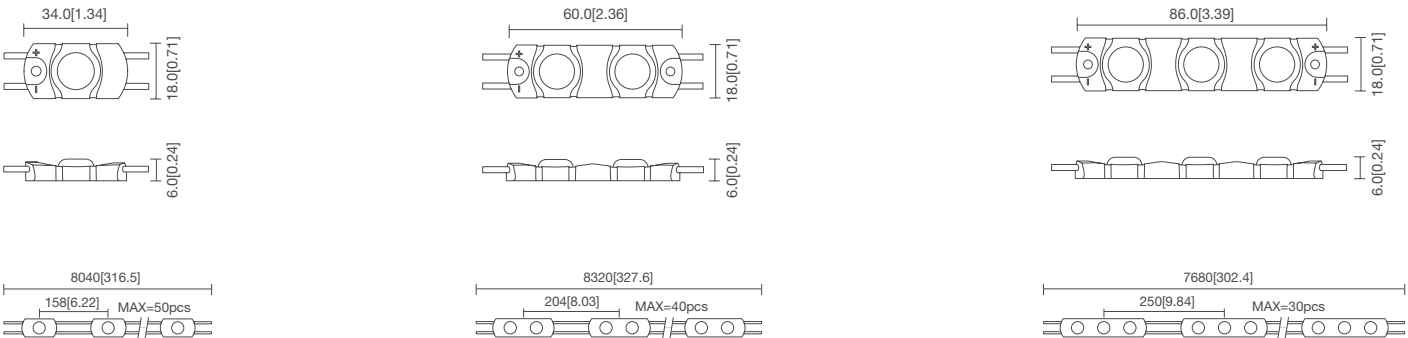

PHOTOMETRIC

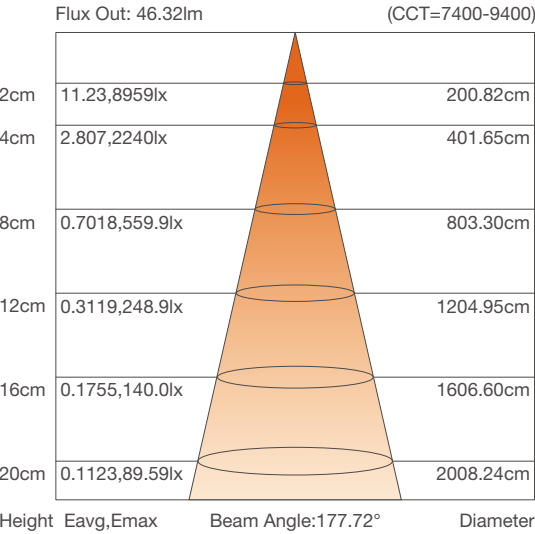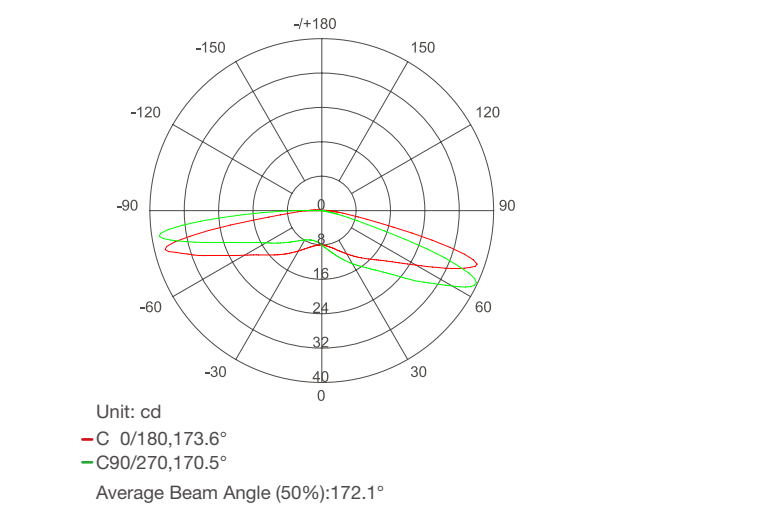

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-1	12V DC	2800-10000K	49	98	0.5	1	50pcs
STL-2	12V DC	2800-10000K	98	98	1.0	2	40pcs
STL-3	12V DC	2800-10000K	150	100	1.5	3	30pcs

STL LARGE BEAM ANGLE

- Self designed lens with 170° beam angle
- Adopts full enclosure injection molding
- Single module cuttable



CRI
80


170°

DC12V



5Years

PROFILE DRAWINGS

Unit:mm/inch

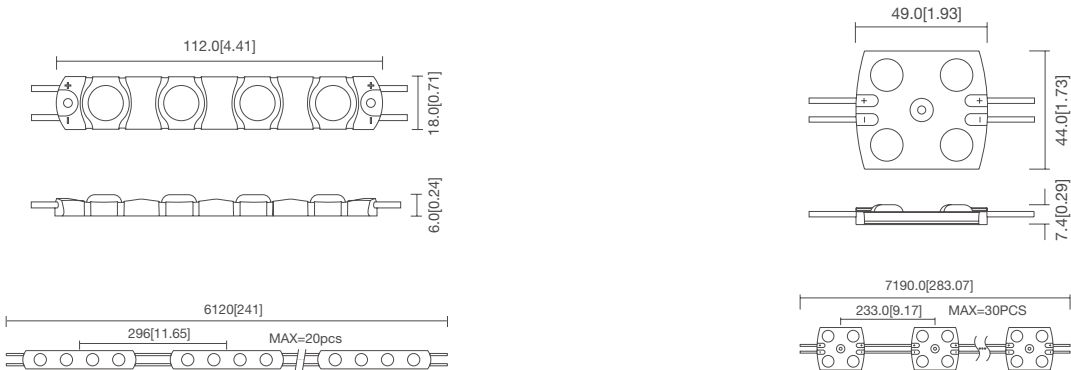

PHOTOMETRIC

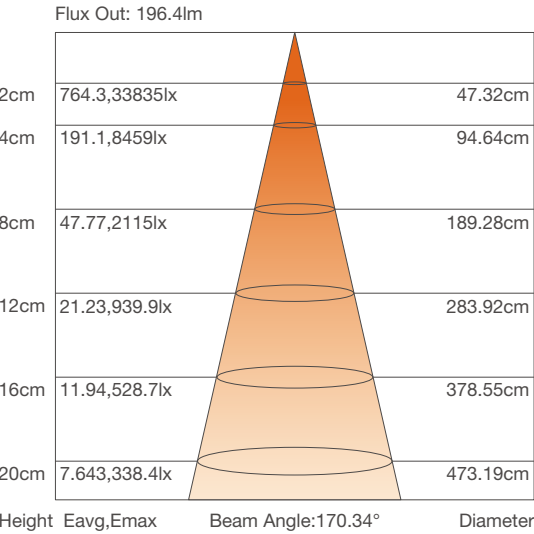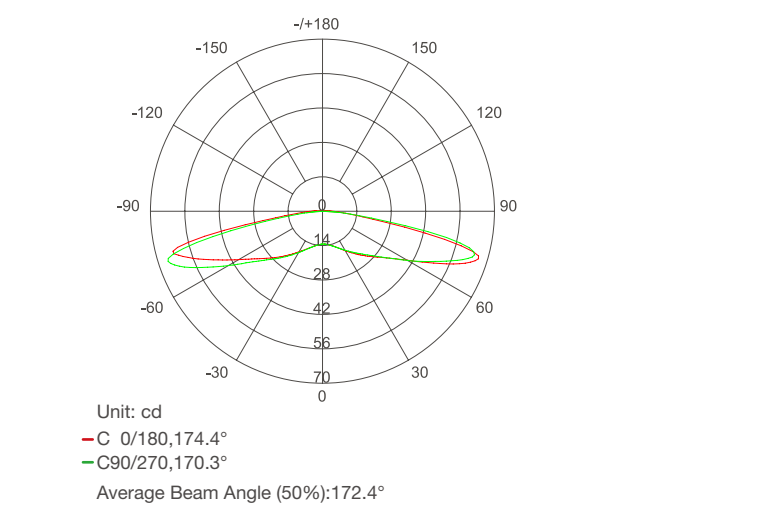

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-4	12V DC	2800-10000K	200	100	2.0	4	20pcs
STL-4(square)	12V DC	2800-10000K	200	100	2.0	4	30pcs

M6


LARGE BEAM ANGLE

- Constant current design
- Self-designed integrated lens with 175° beam angle
- High brightness, stable performance
- Single module cuttable





PROFILE DRAWINGS

Unit:mm/inch

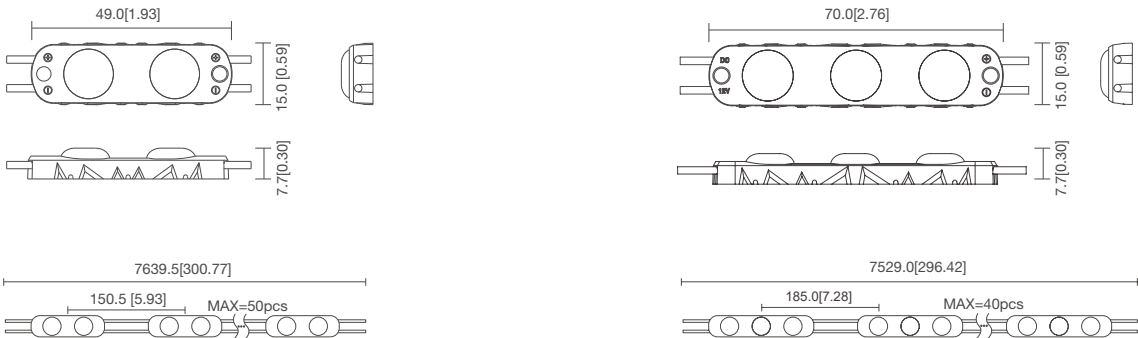

PHOTOMETRIC

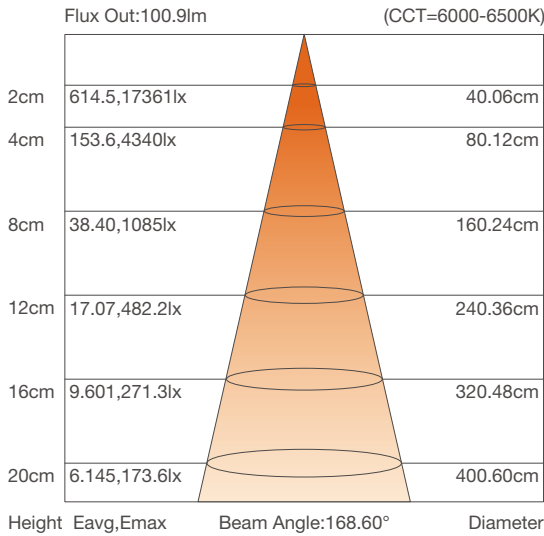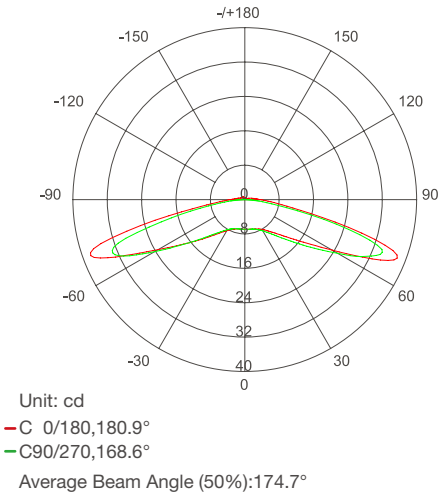


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M6-2	12V DC	6000-6500K	72	100	0.72	2	50pcs
M6-3	12V DC	6000-6500K	110	100	1.1	3	40pcs

QG05


LARGE BEAM ANGLE

- Adopt integrated lens with 180° beam angle
- High efficiency
- Full injection molding, suitable for outdoor use
- Single module cuttable


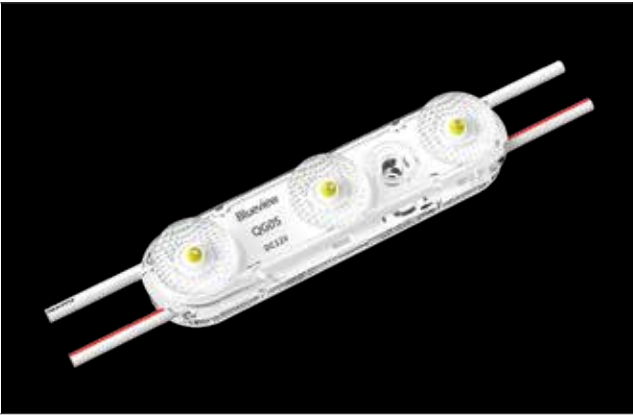


PROFILE DRAWINGS

Unit:mm/inch

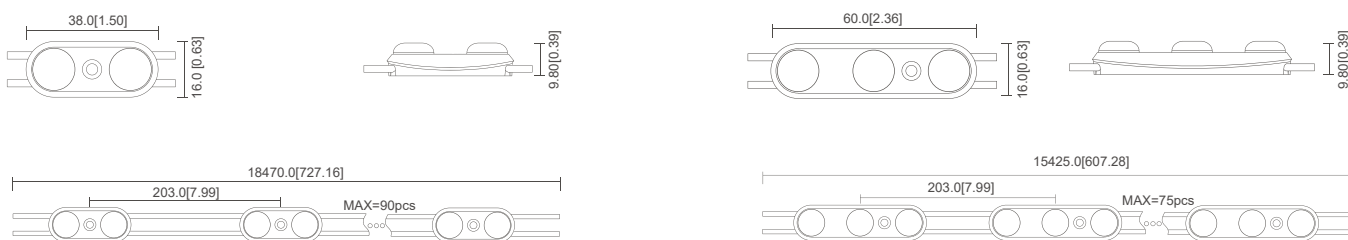

PHOTOMETRIC

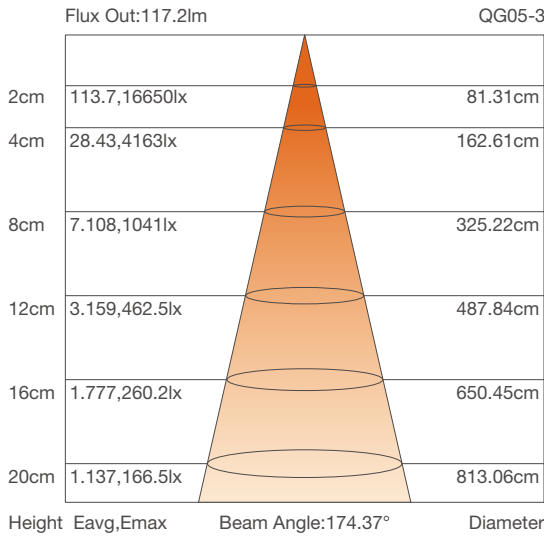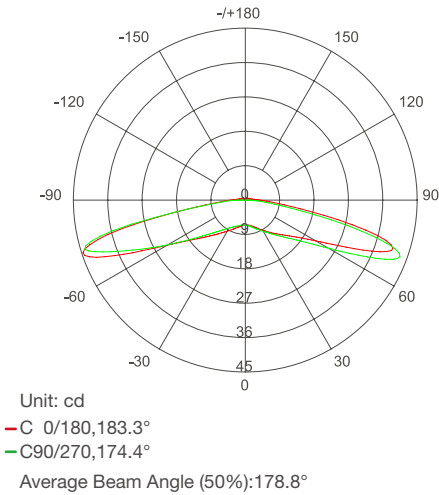

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QG05-2	12V DC	7400-9400K	81	101	0.8	2	90pcs
QG05-3	12V DC	7400-9400K	132	110	1.2	3	75pcs

ST2-W 3.0

ECO-SERIES

- High quality 2835 LEDs
- Full injection molding for perfect outline
- IP65 perfect for indoor and outdoor
- Single module cuttable



E318168

ONE BIN ONLY

IP65

LED2835

CRI80


160°

DC12V


3Years

PROFILE DRAWINGS

Unit:mm/inch

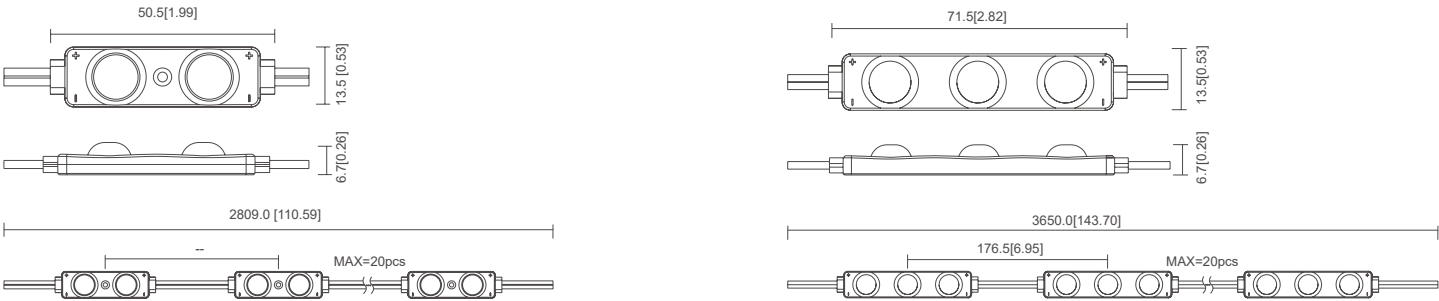

PHOTOMETRIC

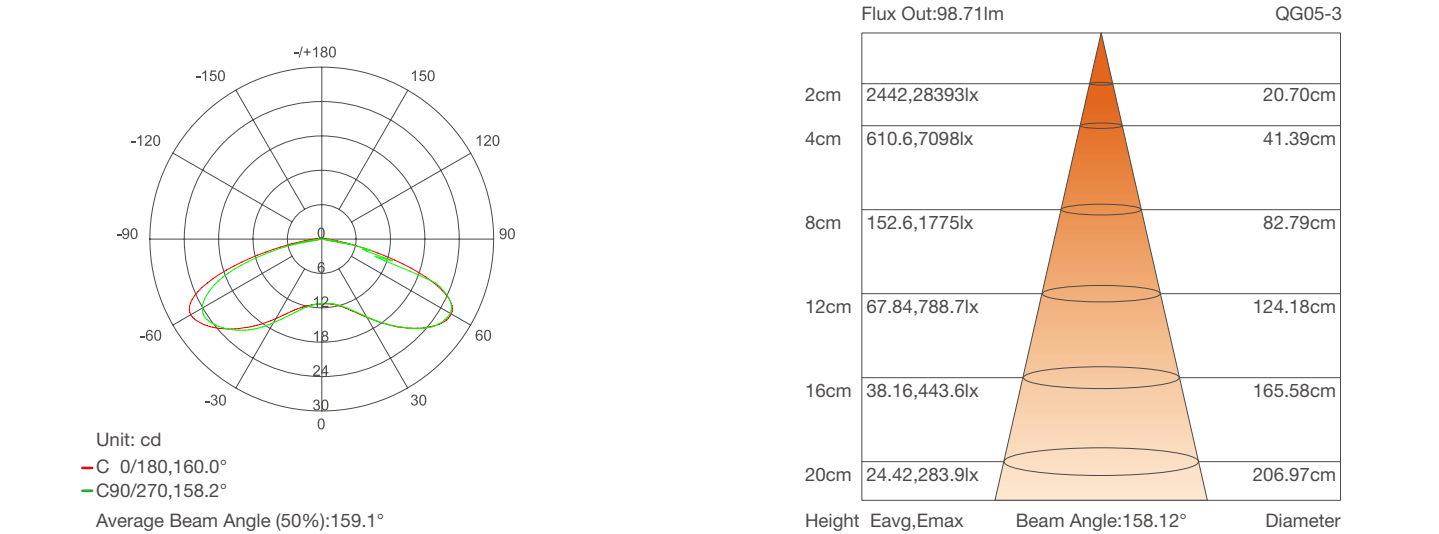

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST2W 3.0-2	12V DC	W	6000-12000K	66	100	0.66	2	20pcs
ST2W 3.0-3	12V DC	W	6000-12000K	100	100	1.0	3	20pcs
		R	620-625nm	12	25	0.48		
		G	465-470nm	39	54	0.72		
		B	520-525nm	6	16	0.36		
		Y	570-757nm	38	80	0.48		

M10

ECO-SERIES

- Ultra high cost performance
- Adopt integrated lens
- Single module can be cut
- Support customization



DIMMABLE

LM-80

IP65

LED2835

CRI80


160°

DC12V


5Years

PROFILE DRAWINGS

Unit:mm/inch

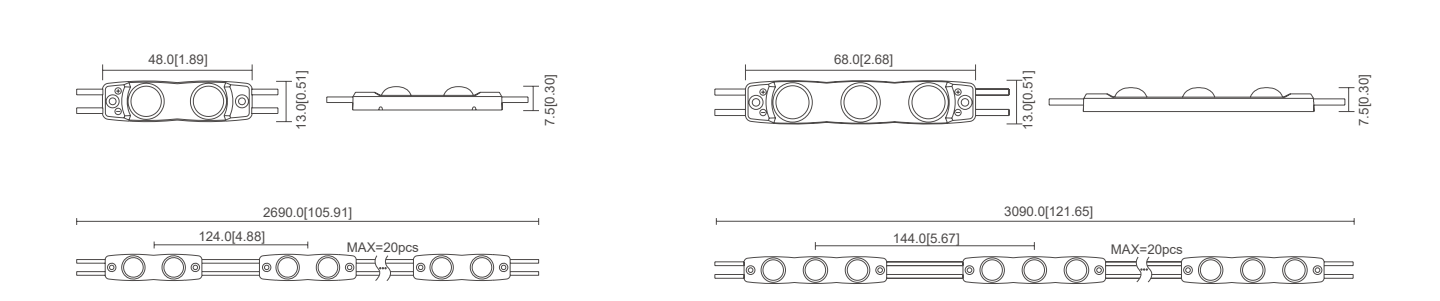

PHOTOMETRIC

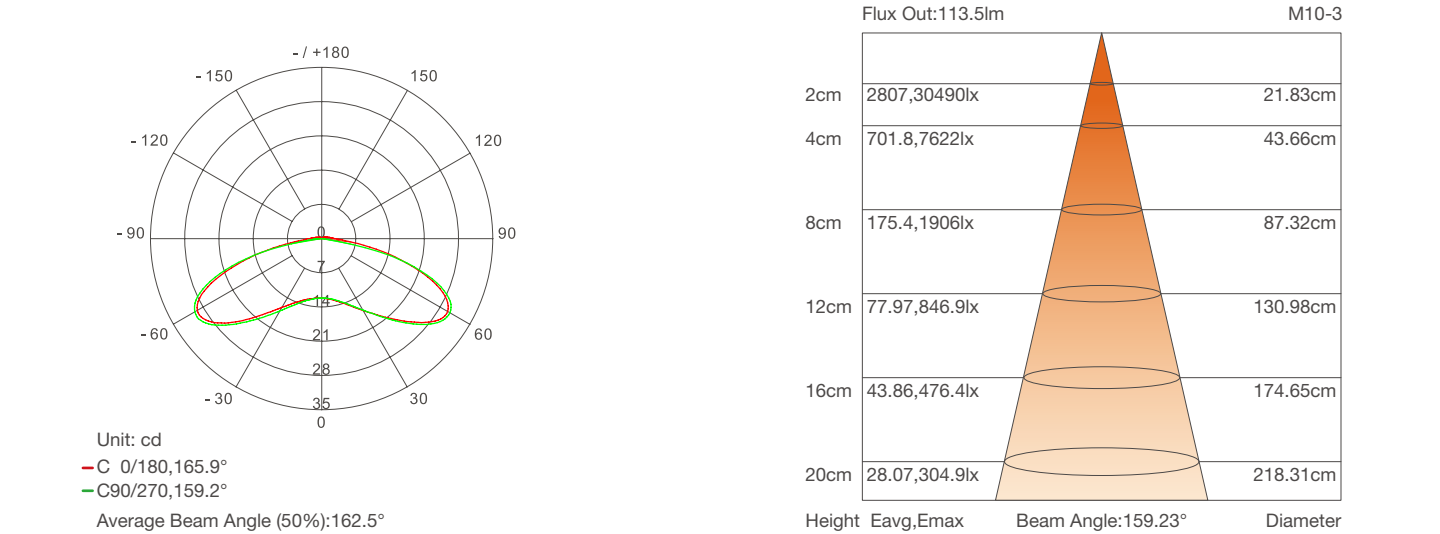

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M10-2	12V DC	9000-12000K	81	97	0.8	2	20pcs
M10-3	12V DC	9000-12000K	118	98	1.2	3	20pcs

PT9 ECO-SERIES

- Adopt integrated optical lens, exquisite appearance, super cost-effective;
- Using ultrasonic waterproof technology;
- A single module can be cut, easy to install;
- Support customization;



CE

IP66

LED2835

CRI80


165°

DC12V


5Years

PROFILE DRAWINGS

Unit:mm/inch

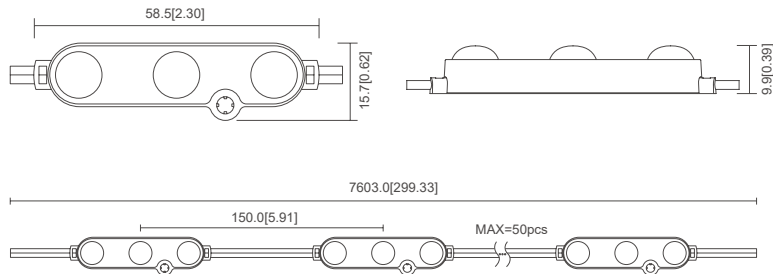

PHOTOMETRIC

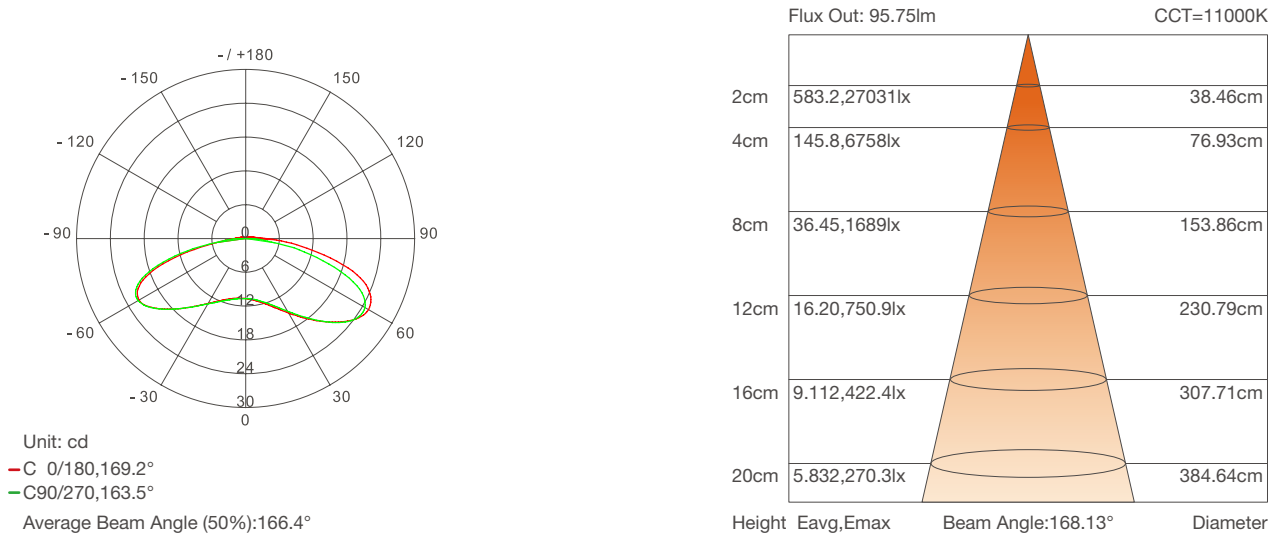

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PT9-3	12V DC	6000-6500K	100	100	1.0	3	50pcs

ST2-J ECO-SERIES

- Super cost-effective;
- Adopted diffusion lens, reduced the installation quantity and density;
- Full injection molding for perfect outline;
- Single module cuttable, support customization;
- Support PWM, 0-10V, DALI and DMX dimming.



DIMMABLE

CE

IP65

LED2835

CRI80


160°

DC12V


3Years

PROFILE DRAWINGS

Unit:mm/inch

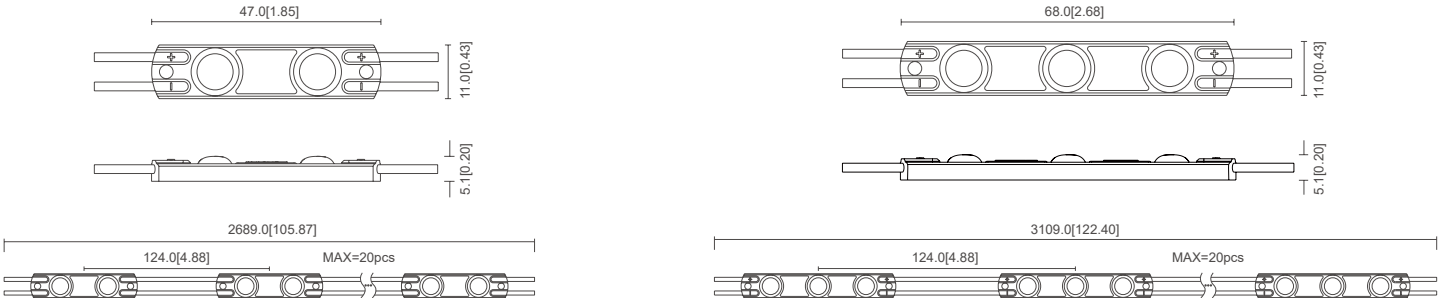

PHOTOMETRIC

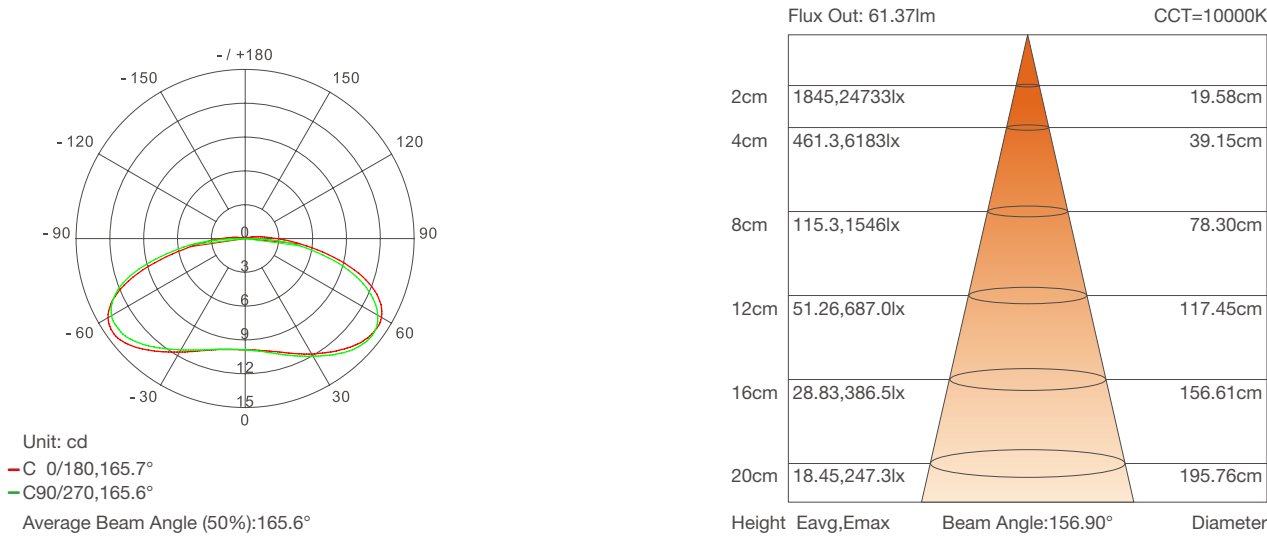


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST2-J-2	12V DC	6000-6500K	47	97	0.48	2	20pcs
ST2-J-3	12V DC	6000-6500K	70	98	0.72	3	20pcs


SS10 MINI SERIES

- SDCM < 5, high Rg,Rf value
- Tiny 2835 LED, suitable for mini letters and light box
- Full injection molding, strong weather resistance
- Adopt integrated diffuse lens
- IP68, suitable for outdoor use
- Single module cuttable

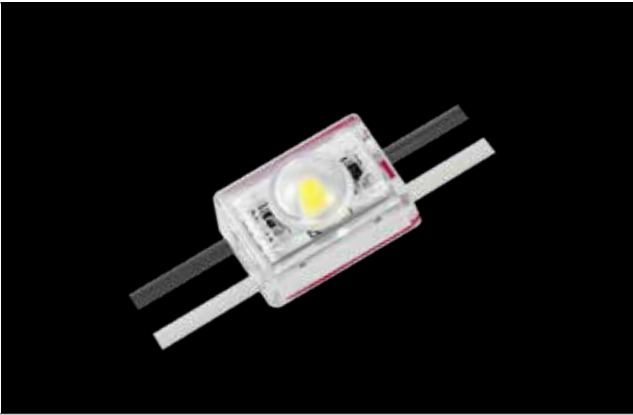


PROFILE DRAWINGS

Unit:mm/inch

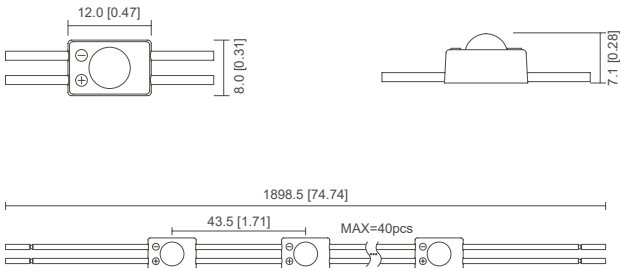

PHOTOMETRIC

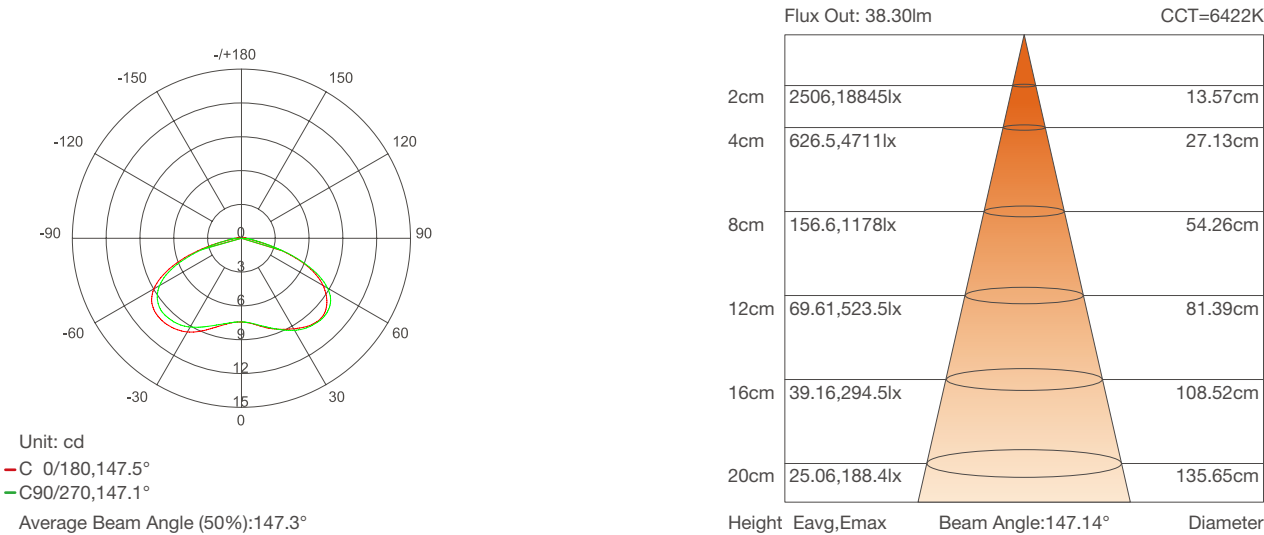

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
SS10	12V DC	2000-12000K	40	110	0.36	1	40pcs


SS208 MINI SERIES

- Tiny 2835 LED, small and delicate in appearance
- Fully integrated glue filling process, strong weather resistance
- Single module cuttable
- Support PWM, 0-10V, DALI and DMX dimming




PROFILE DRAWINGS

Unit:mm/inch

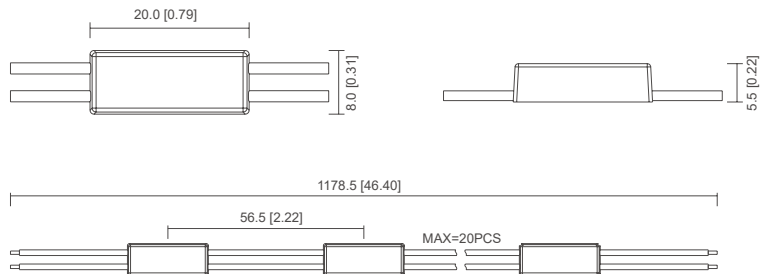

PHOTOMETRIC

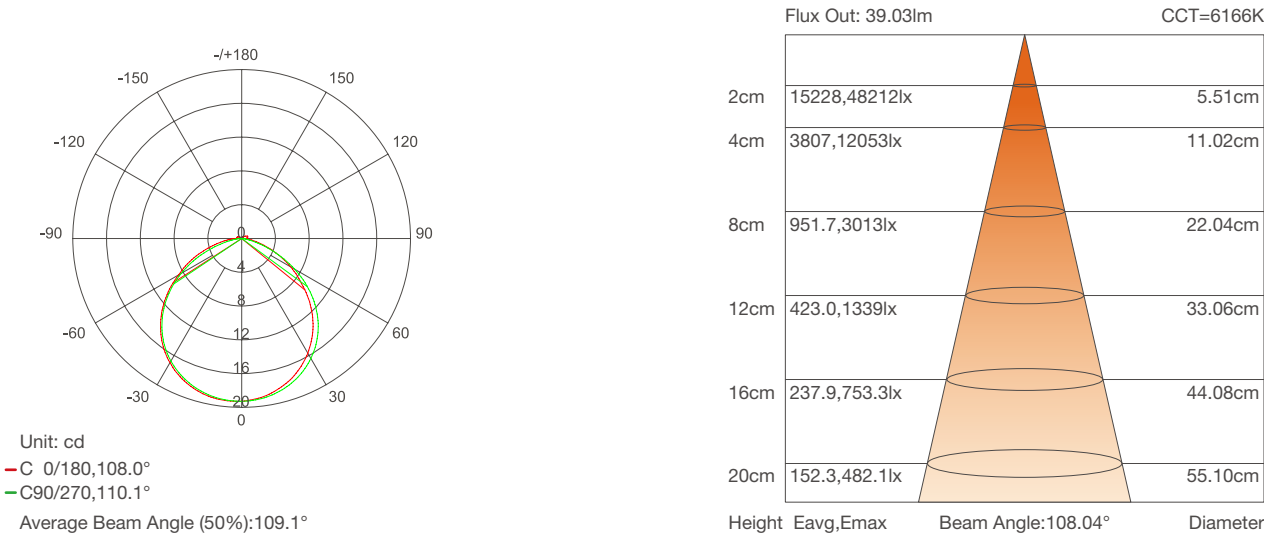

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
SS208	12V DC	6000-7000K	48	100	0.48	2	20pcs

SS308

MINI SERIES

- Adopt integrated lens;
- Use optical grade transparent PC material;
- A single module can be cut
- Support customization;



CRI
80


145°

DC12V


3Years

PROFILE DRAWINGS

Unit:mm/inch

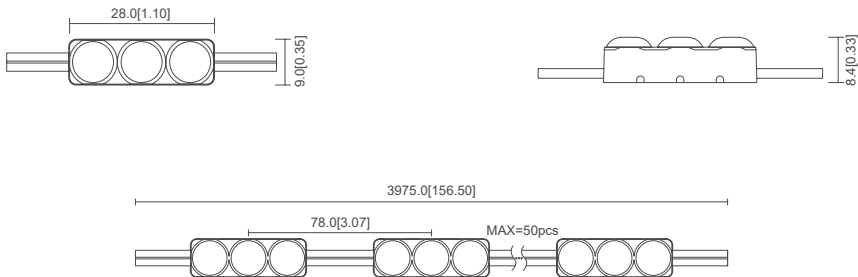

PHOTOMETRIC

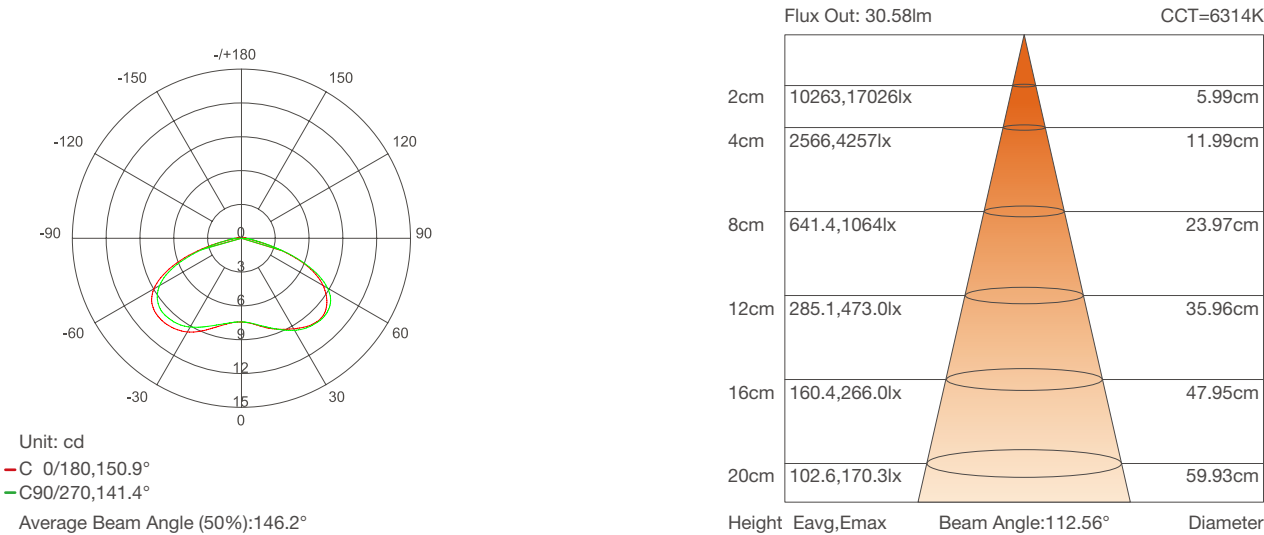

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
SS308	12V DC	3800-4200K	51	106	0.48	3	50pcs

MZ18-W

GUIDE SIGN BOX EDGE-LIT

- Edge-lit optical lens
- Adopt aluminum PCB injection molding process
- Single module cuttable



CRI
80


20°30°

DC12V


3Years

PROFILE DRAWINGS

Unit:mm/inch

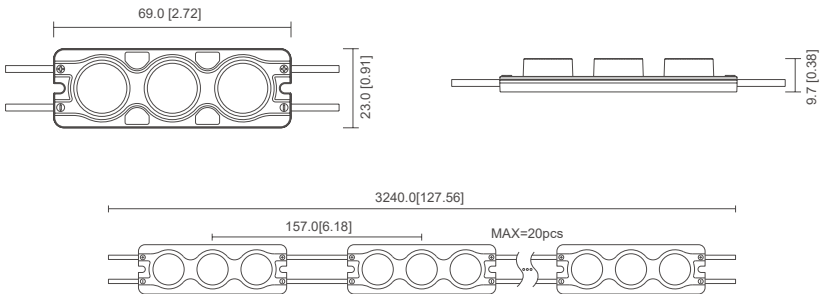

PHOTOMETRIC

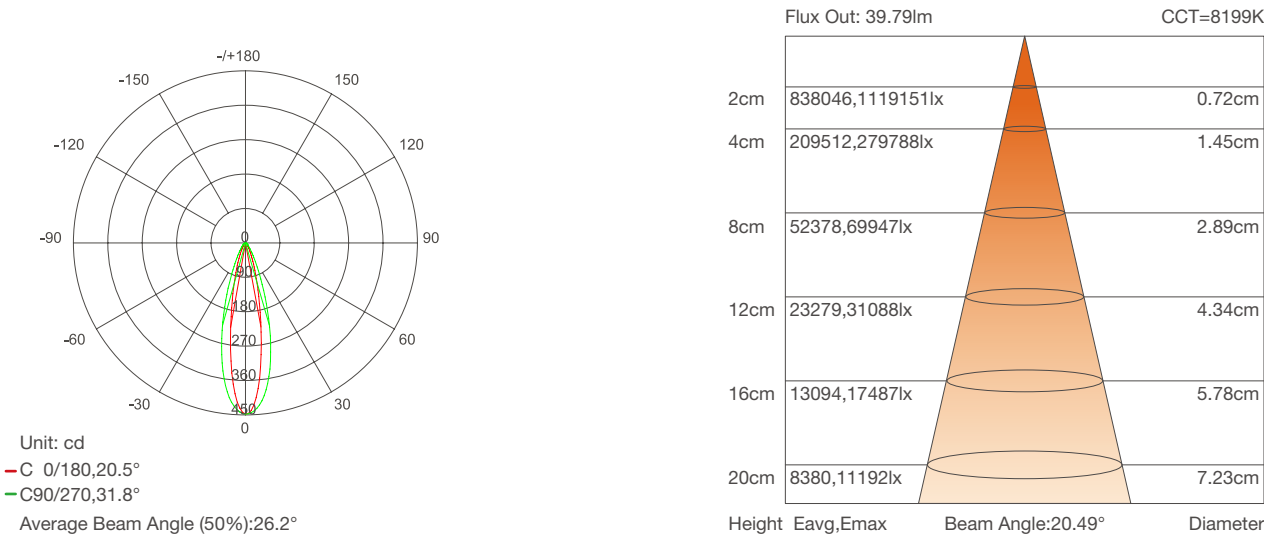

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
MZ18-W	12V DC	7800-9000K	135	90	1.5	3	20pcs

Z18-C POSTER BOX EDGE-LIT

- High efficacy 3030 LED
- Injection molding with IP65 water-proof
- Aluminum PCB with excellent heat dissipation
- Special lens with 10°28 deg beam angle
- Each module can be cut




CRI
70


10°28°

PROFILE DRAWINGS

Unit:mm/inch

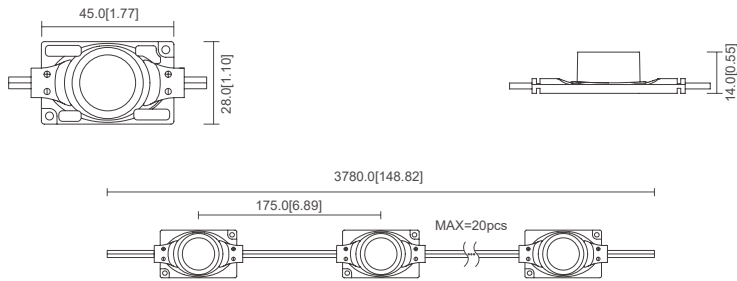

PHOTOMETRIC

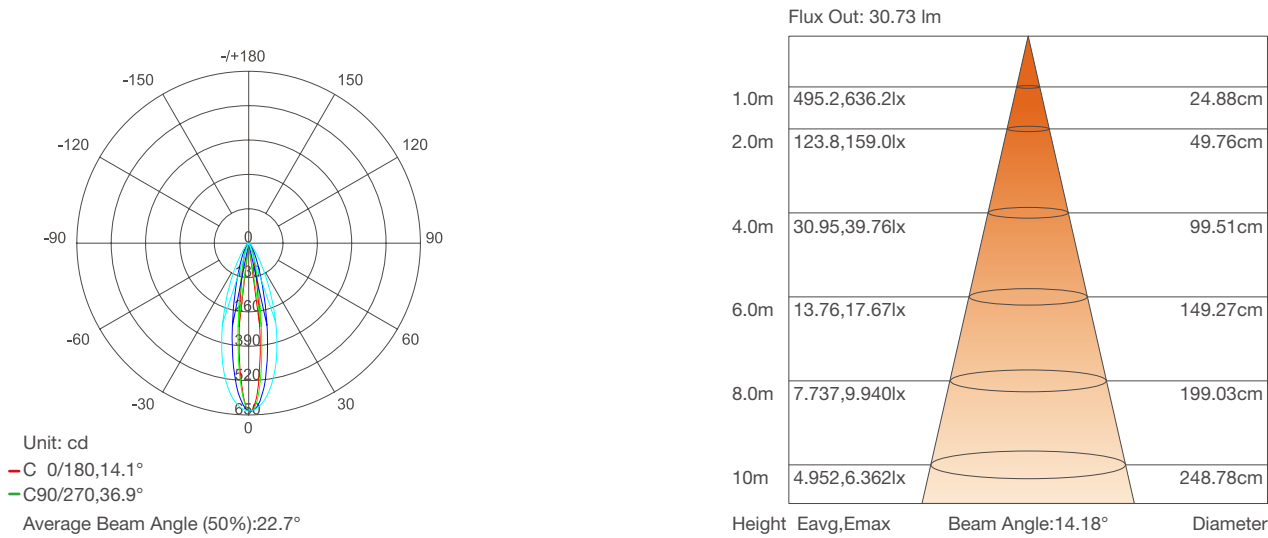

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z18-C	12V DC	6500K	184	92	2	1	20pcs

Z18 2.0 POSTER BOX EDGE-LIT

- Adopt Epistar/Sanan LEDs
- DC 12V constant voltage input
- Long run length, 20pcs/string with one end power feed
- Adopt UV resistant and flame retardant materials
- Injection molding process, IP65




CRI
70/80


10°45°

PROFILE DRAWINGS

Unit:mm/inch

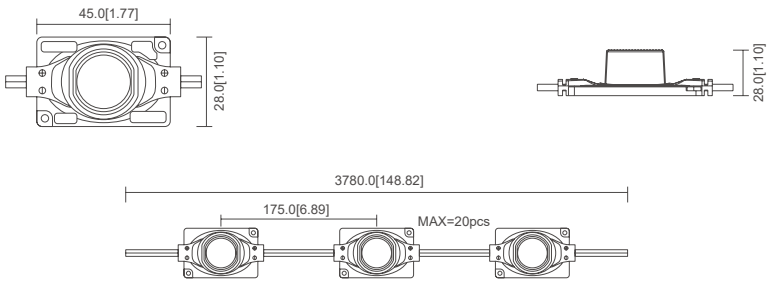

PHOTOMETRIC

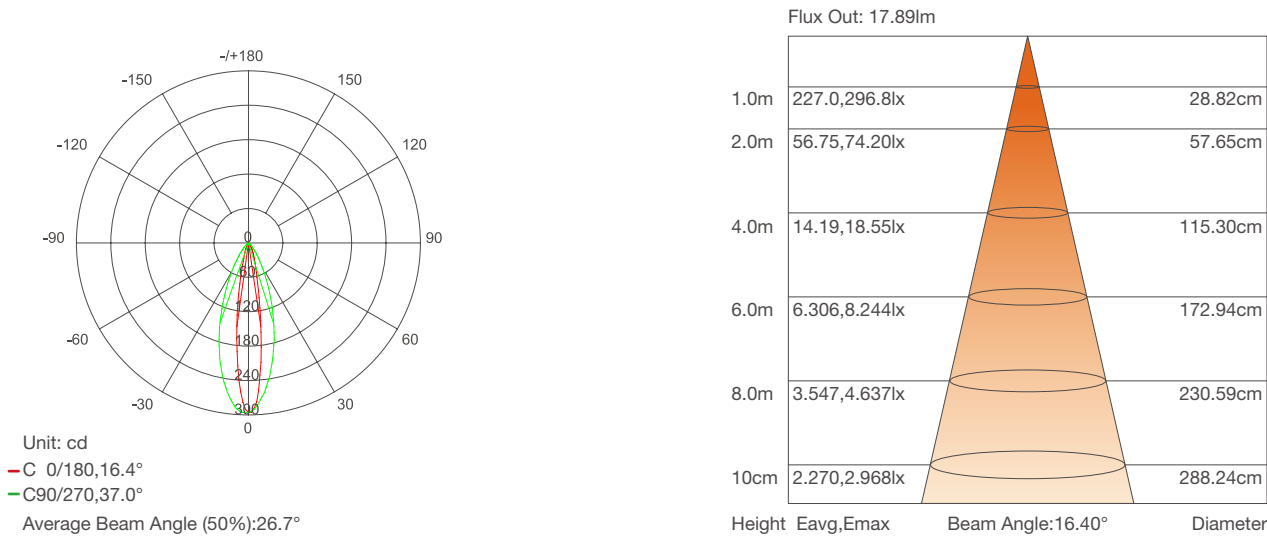


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z18 2.0	12V DC	6020-6530K	93-98	93	1	1	20pcs


Z20/Z20 PRO POSTER BOX EDGE-LIT

- Specially designed side-emitting lens, uniform lighting;
- Adopting aluminum substrate with good heat dissipation effect;
- Injection molding technology, good waterproof performance.
- Single module cuttable, support customization;

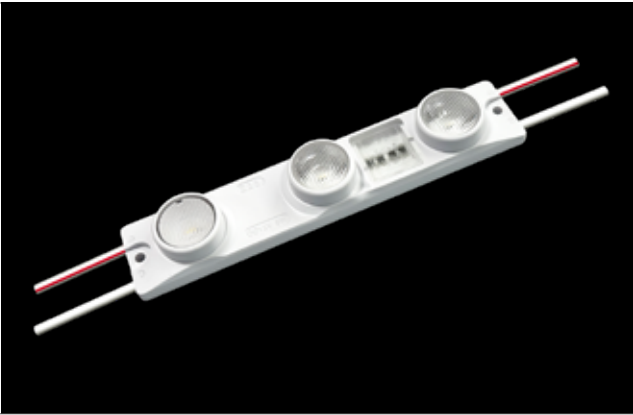


PROFILE DRAWINGS

Unit:mm/inch

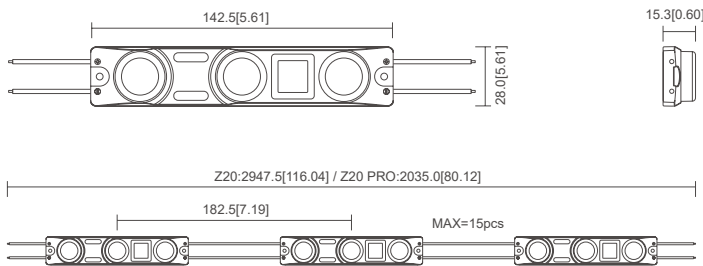

PHOTOMETRIC

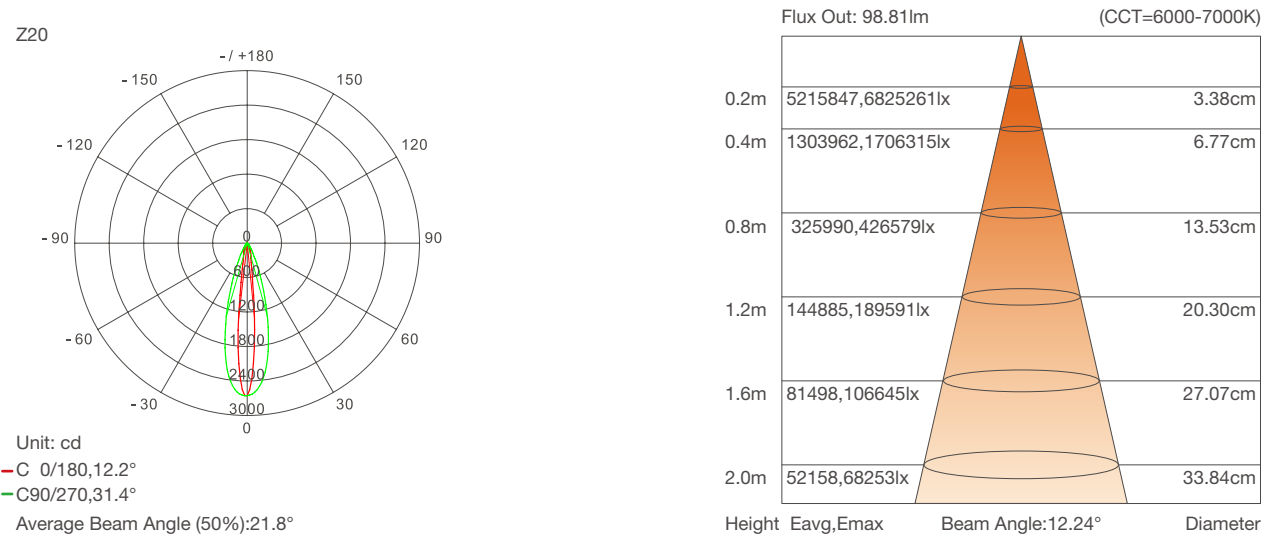

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z20	12V DC	6000-7000K	502	93	5.4	3	15pcs
Z20 Pro	12V DC	6000-7000K	666	111	6.0	3	10pcs


Z18 4.0 POSTER BOX EDGE-LIT

- Edge-lit module with high cost-performance
- Half-encapsulated injection molding design
- Aluminum PCB with excellent heat dissipation
- Support PWM, 0-10V, DALI, DMX dimming
- Single module cuttable and support customization




PROFILE DRAWINGS

Unit:mm/inch

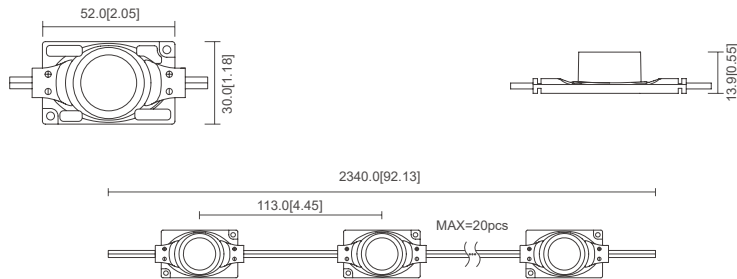

PHOTOMETRIC

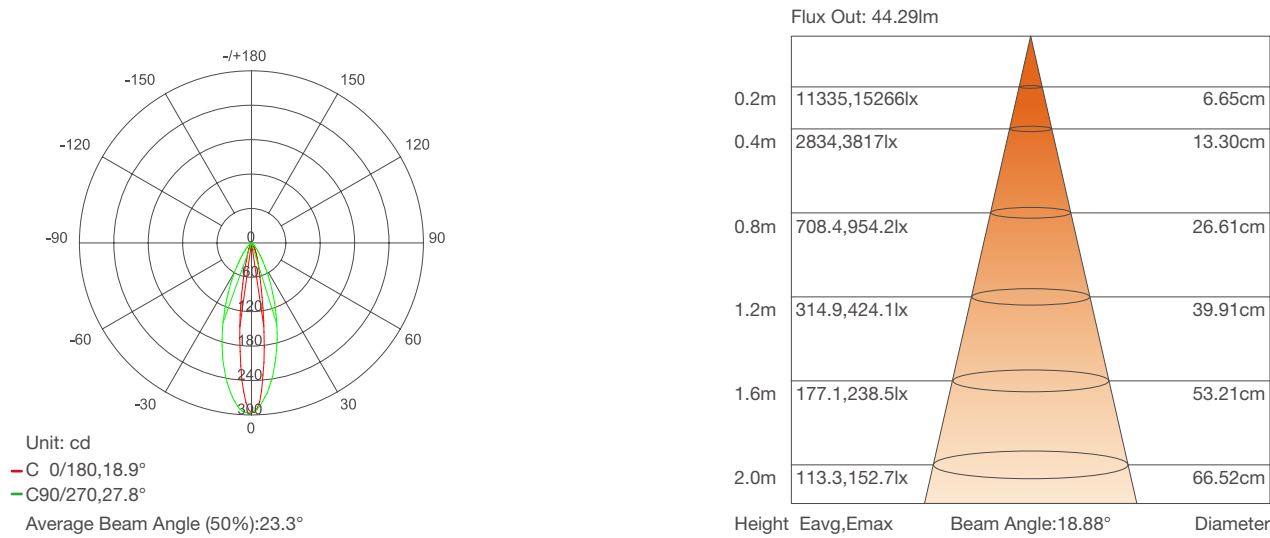

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z18 4.0	12V DC	6000-7000K	187	104	1.8	1	20pcs


Z19 4.0 POSTER BOX EDGE-LIT

- High light efficiency
- Every 3 modules can be cut;
- Match with aluminum profile can help heat dissipation
- Uniform effect within 3M of the reaching distance
- Support customization




PROFILE DRAWINGS

Unit:mm/inch

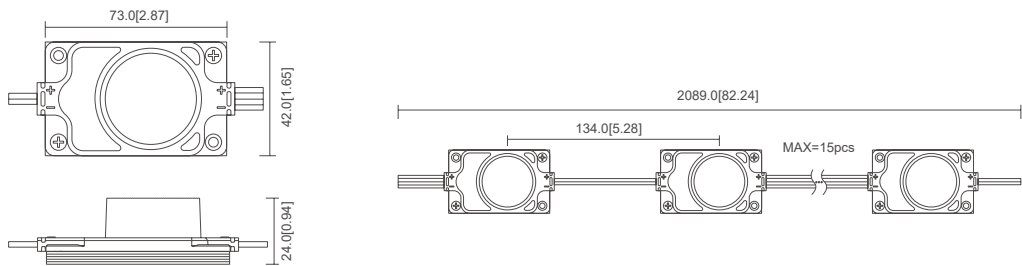

PHOTOMETRIC

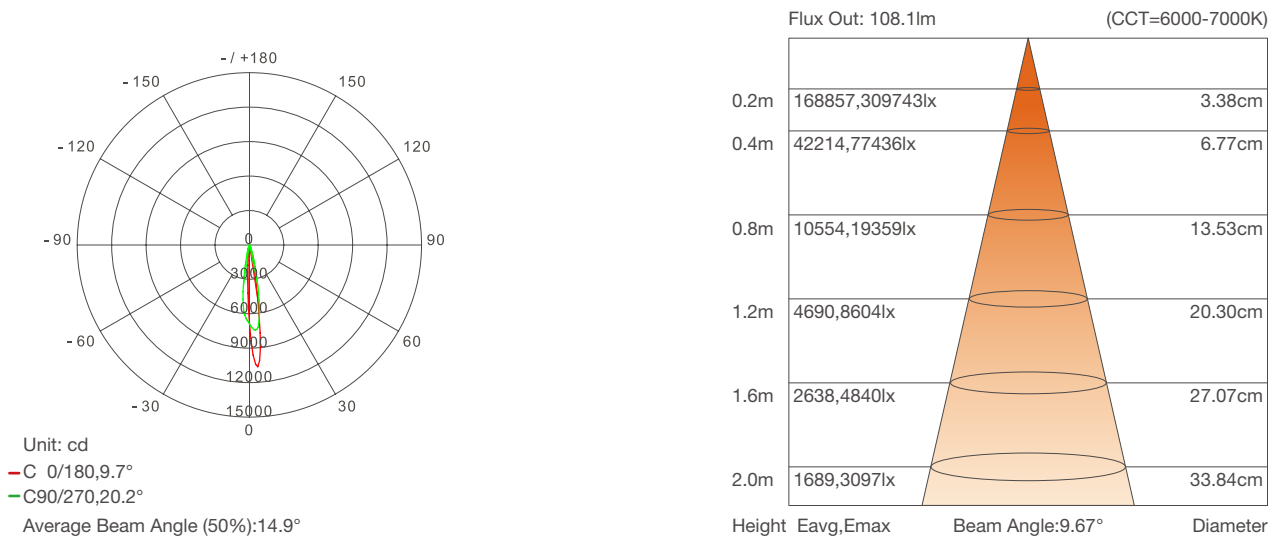

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z19 4.0	12V DC	6000-7000K	380	95	4	1	15pcs


ST2-T POSTER BOX BACK-LIT

- High CRI and dual color temperature
- Aluminum PCB injection molding for better outline
- Brightness and color temperature adjustable via controller
- Single module cuttable, support customization




PROFILE DRAWINGS

Unit:mm/inch

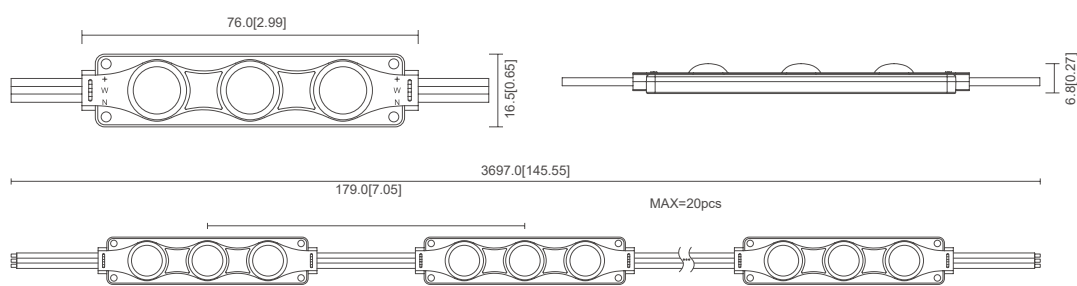

PHOTOMETRIC

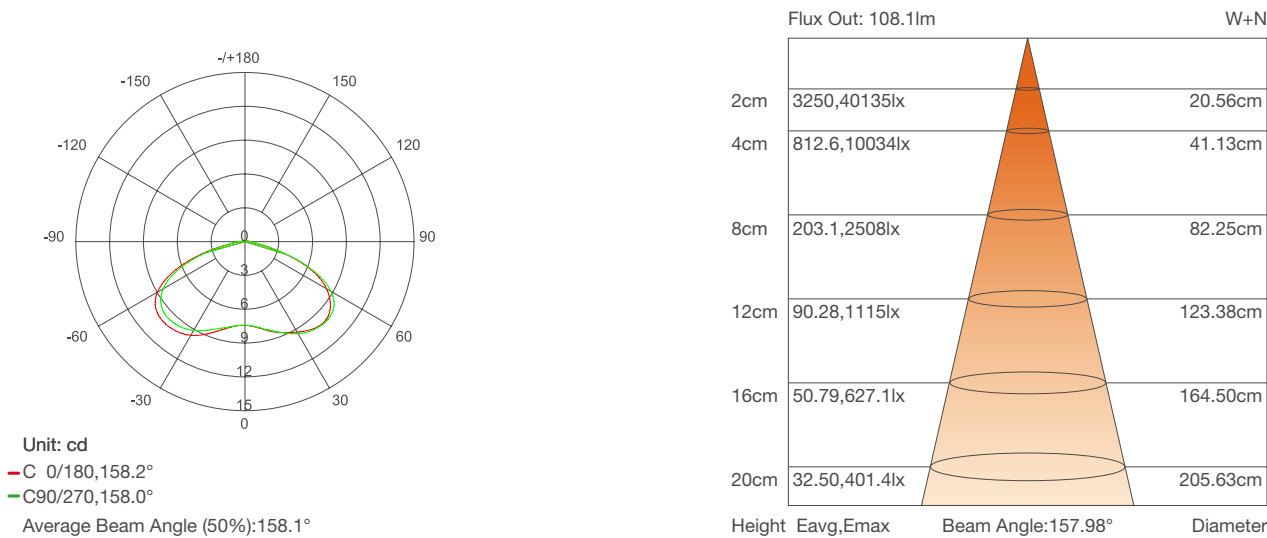

BASIC PARAMETERS

Model No.	Voltage	Light Color	CRI	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST2-T	12V DC	W	85	2800-3100K	47	87	0.54	3	20pcs
		N	85	6000-6500K	54	99	0.54		
		W+N	90	4100-4400K	101	93	1.08		

ST12-B POSTER BOX BACK-LIT


- High brightness
- Great lumen maintenance
- 170°beam angle, uniform lighting
- Excellent heat dissipation, long life span
- 40pcs/string with one end power feed
- Single module cuttable, easy to install




				Ra 80			
--	--	--	--	-----------------	--	--	--

PROFILE DRAWINGS

Unit:mm/inch

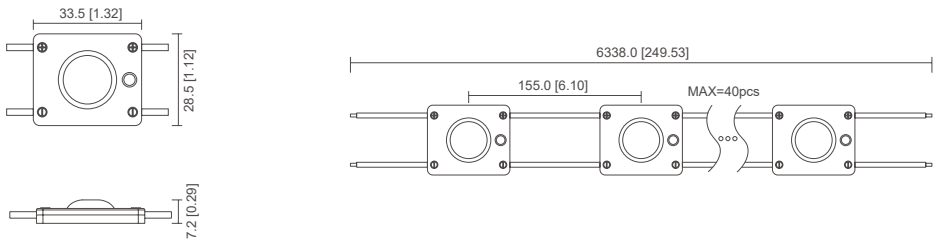

PHOTOMETRIC

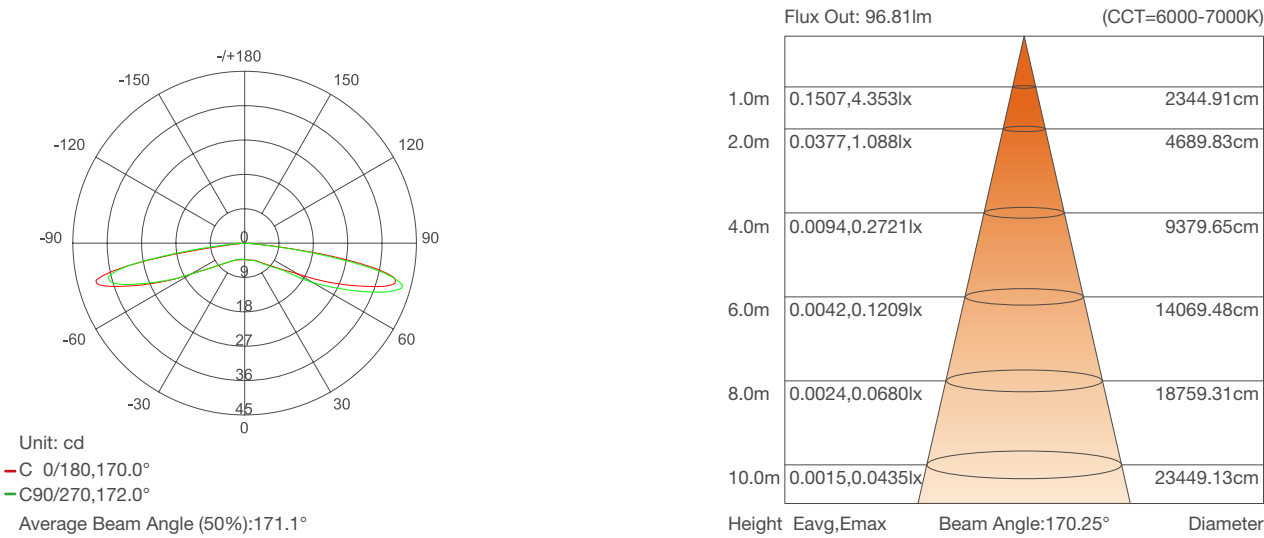

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST12-B	12V DC	9000-12000K	108-112	90	1.2	1	40pcs

ST13 2.0 POSTER BOX BACK-LIT


- Adopt Epistar/Sanan LEDs
- 160° beam angle, transmittance up to 97%
- Aluminum PCB is beneficial for heat dissipation of high-power LEDs
- Max run 20pcs with one end power feed
- Great lumen maintenance, IP65 rating
- Support PWM, 0-10V, DALI, DMX dimming




				CRI 70/80			
--	--	--	--	---------------------	--	--	--

PROFILE DRAWINGS

Unit:mm/inch

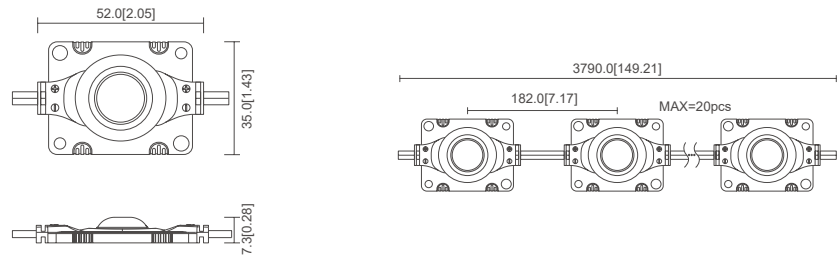

PHOTOMETRIC

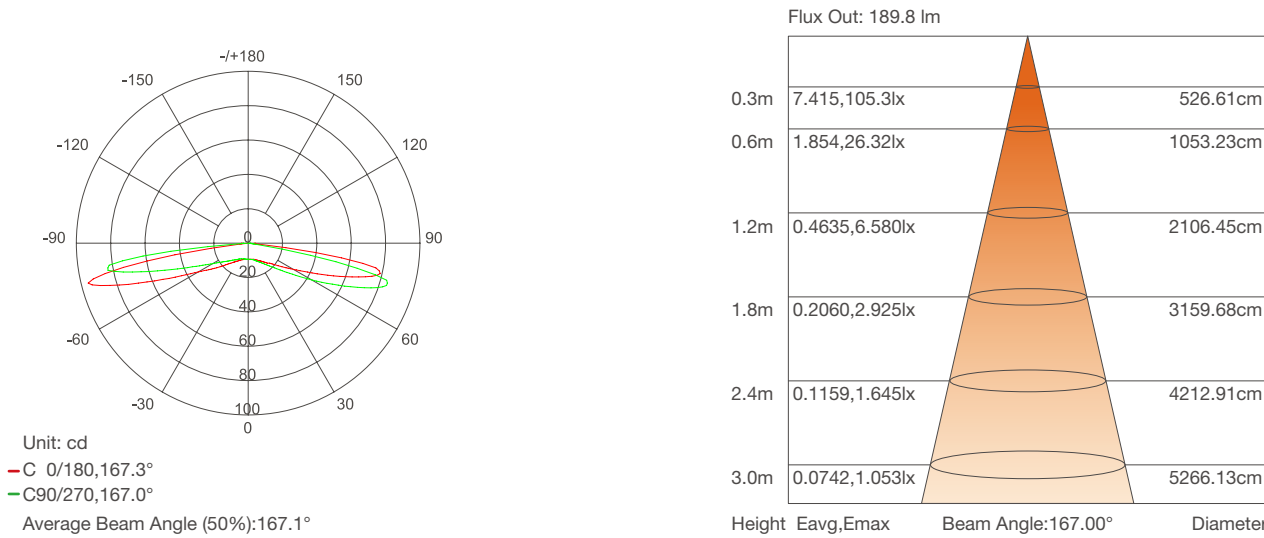

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST13 2.0-2W	12V DC	6500-7040K	189-194	90	2.1	1	20pcs

BV-AL-3030

POSTER BOX BACK-LIT

- Adopt high quality Nichia SMD3030 LED
- 160° beam angle
- Waterproof, IP65 rating
- Aluminum PCB for better heat dissipation




CRI


80

PROFILE DRAWINGS

Unit:mm/inch

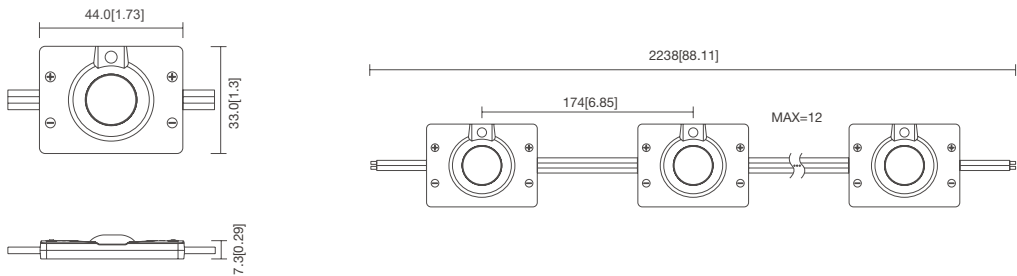

PHOTOMETRIC

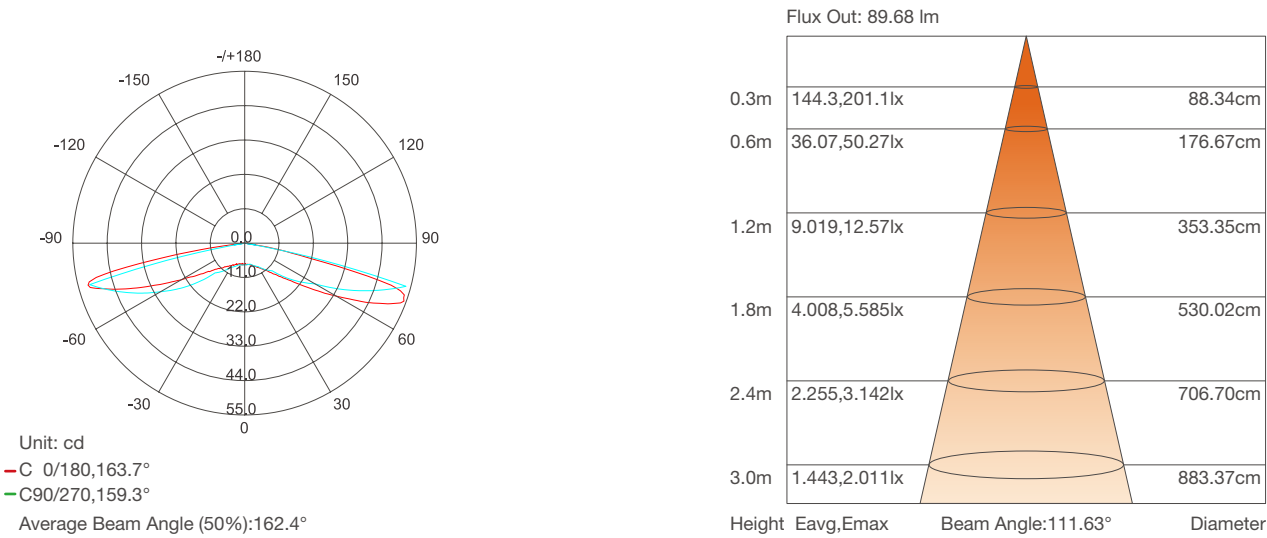


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BV-AL-3030	24V DC	6500-7000K	130	86	1.5	1	12pcs

M8-C

OUTDOOR STRETCH CEILING /
OTHER OUTDOOR LIGHTING

- Single module cuttable
- Good waterproof performance

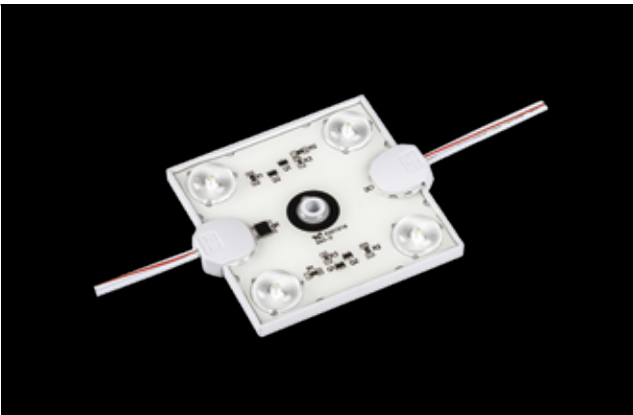


CRI


80

PROFILE DRAWINGS

Unit:mm/inch

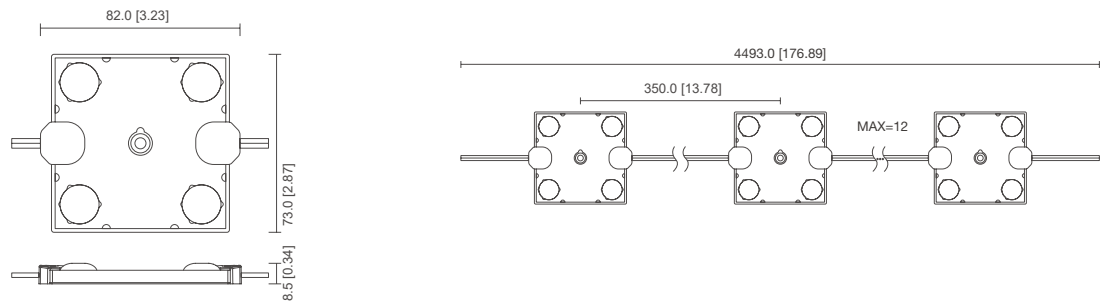

PHOTOMETRIC

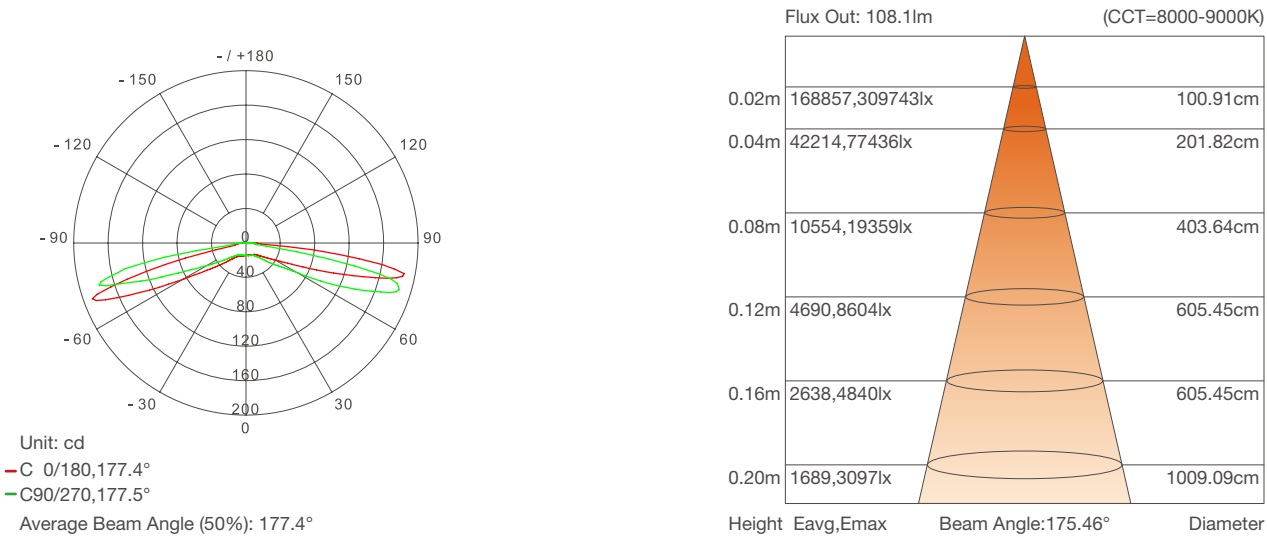


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M8-C	12V DC	8000-9000K	380	95	4	4	12pcs

M8-B

INDOOR STRETCH CEILING /
OTHER INDOOR LIGHTING

- Adopt 2835 LED
- Self designed lens with 170° beam angle for uniform lighting
- High-end design, requiring fewer products per unit area
- Single module cuttable

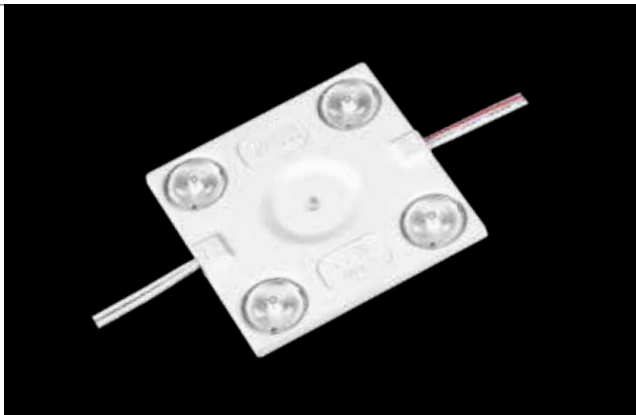


CRI
80


DC12V

PROFILE DRAWINGS

Unit:mm/inch

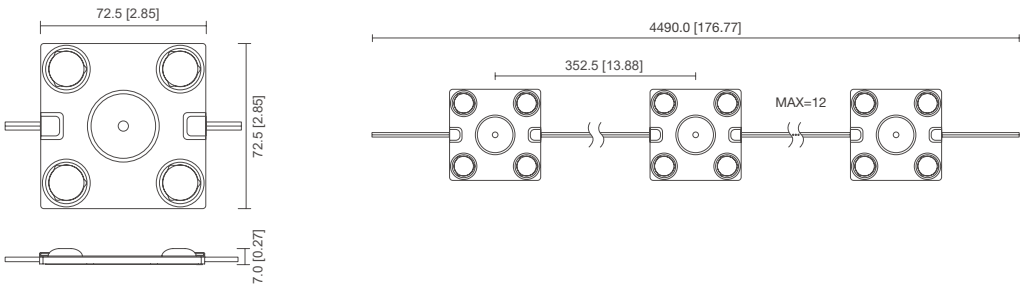

PHOTOMETRIC

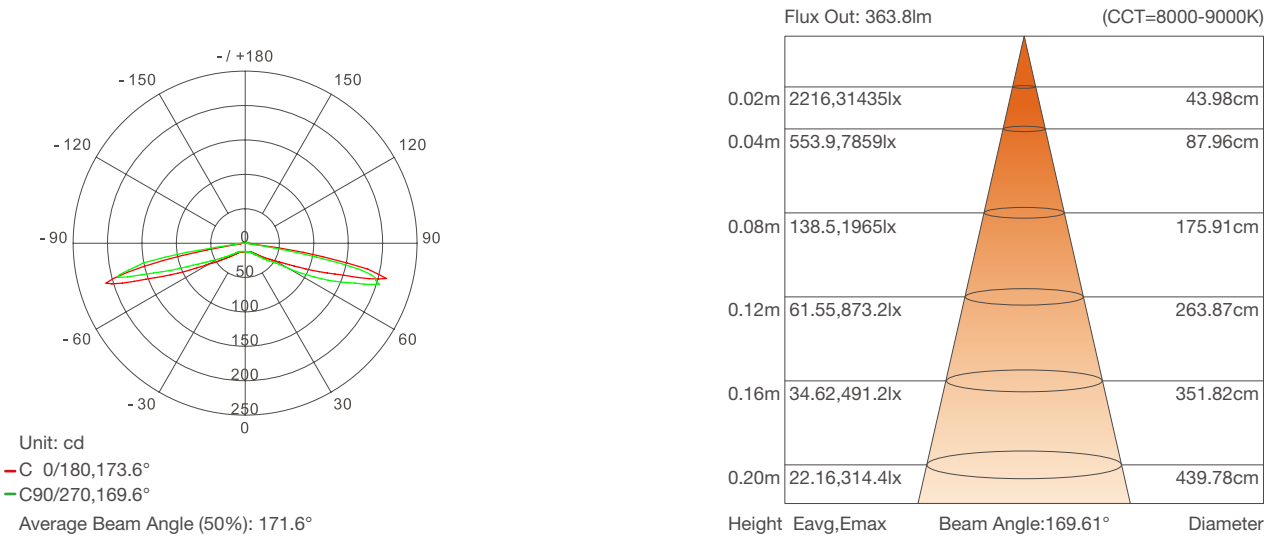


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M8-B	12V DC	8000-9000K	388	97	4	4	12pcs

PS5-B

RGB MODULE

- Adopt high quality 5050RGB SMD
- Waterproof IP66 for perfect outdoor use
- Single module cuttable for easier installation

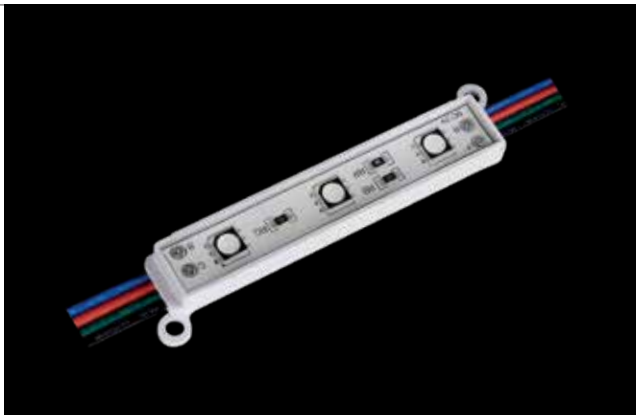


EPISTAR

120°


DC12V

PROFILE DRAWINGS

Unit:mm/inch

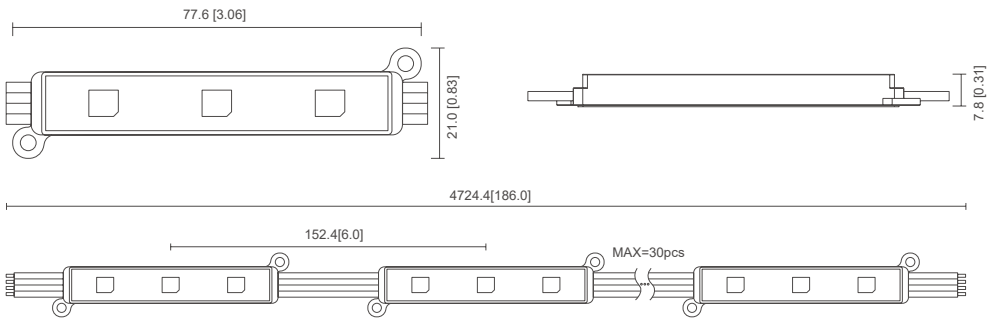

PHOTOMETRIC

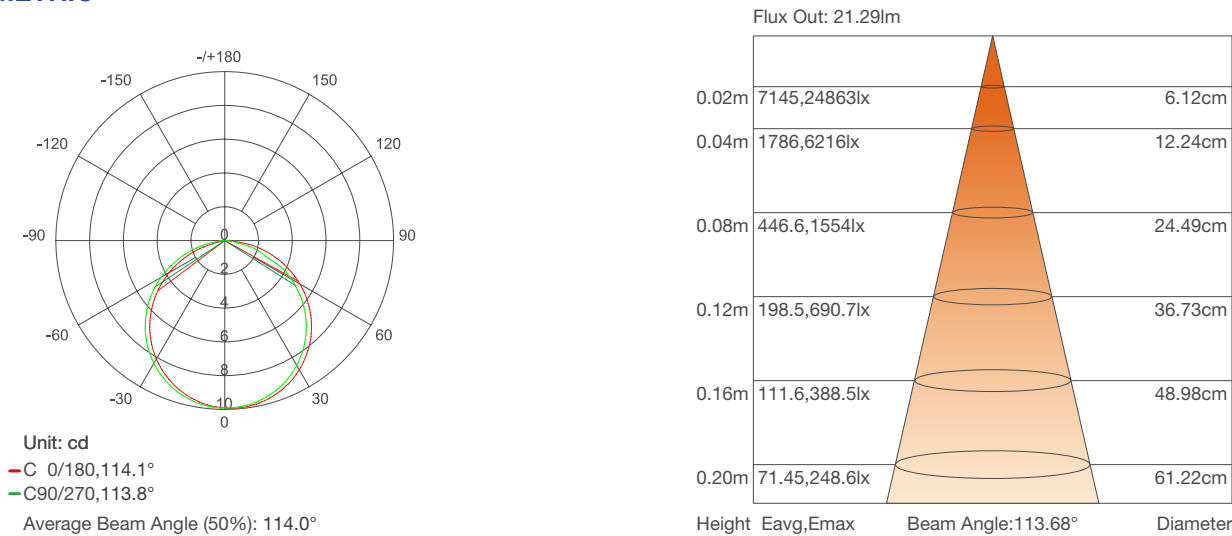


BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PS5-B	12V DC	R	620-625nm	7	27	0.24	3	20pcs
		G	525-530nm	13	52	0.24		
		B	465-470nm	3	13	0.24		
		R+G+B	100000K+	22	30	0.72		


BC6-S2 RGBW MODULE

- Large beam angle;
- Superior weather and UV resistance;
- External controller can be connected to realize rich color changes;
- Single module cuttable, support customization;


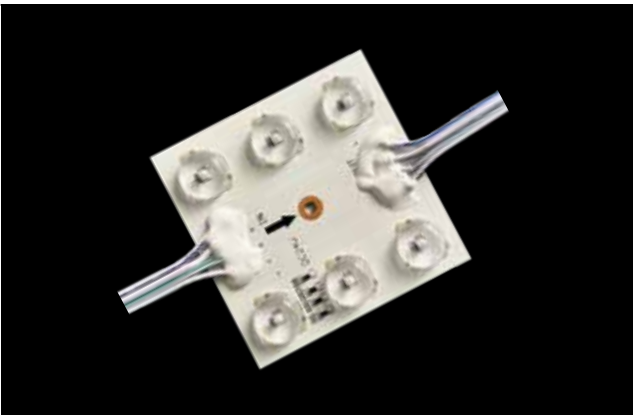


PROFILE DRAWINGS

Unit:mm/inch

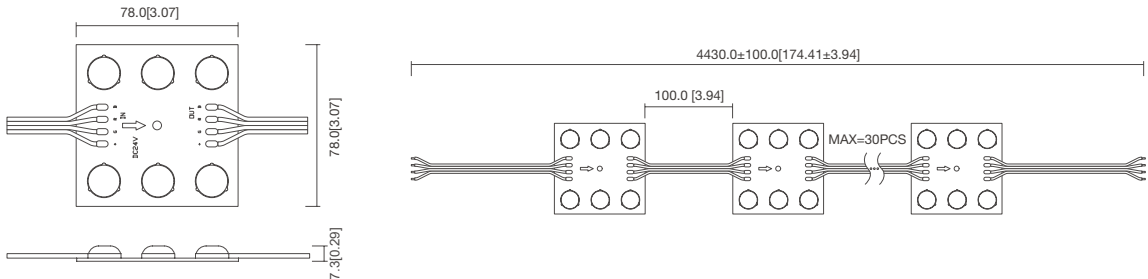

PHOTOMETRIC

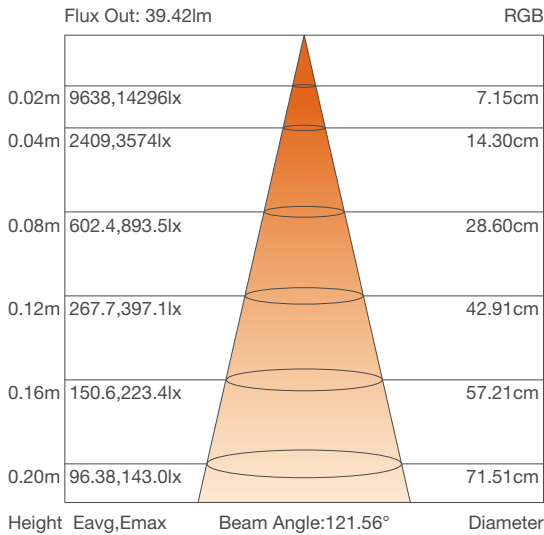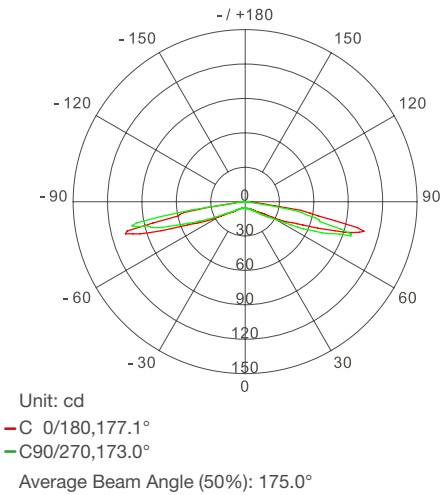

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BC6-S2	24V DC	R	620-625nm	46	36	1.24	6	30pcs
		G	515-530nm	119	78	1.51		
		B	465-470nm	26	19	1.35		
		RGB	\	188	45	4.12		


PS6 RGB MODULE

- Adopt integrated lens
- Full injection molding, super environmental adaptability
- Can create reach lighting effects via a controller
- Single module cuttable





PROFILE DRAWINGS

Unit:mm/inch

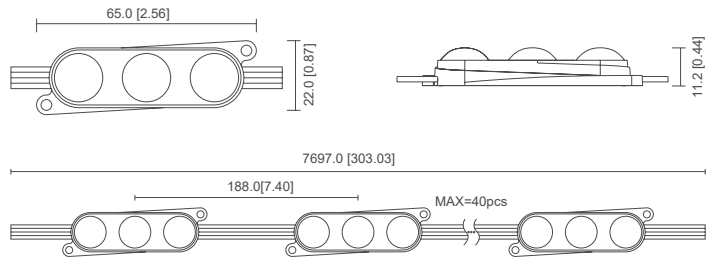

PHOTOMETRIC

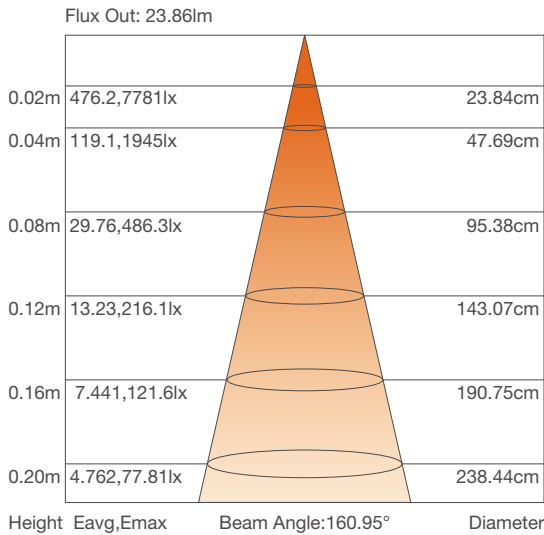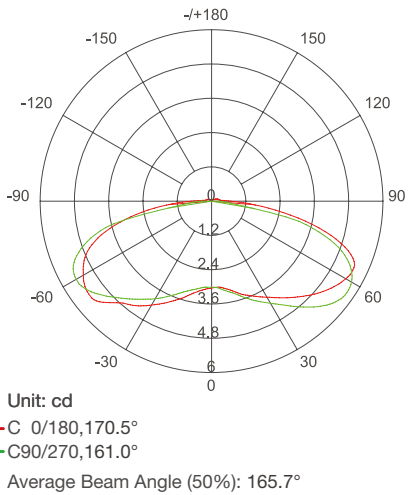

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PS6	12V DC	R	620-625nm	7	30	0.24	3	40pcs
		G	520-525nm	16	68	0.24		
		B	465-470nm	9	15	0.24		
		RGB	100000K+	25	35	0.72		


PZ5 RGBW MODULE

- Strong anti-pulls ability
- Can create reach lighting effects via a controller
- Long run design, 50pcs/string
- Single module cuttable for easier installation




PROFILE DRAWINGS

Unit:mm/inch

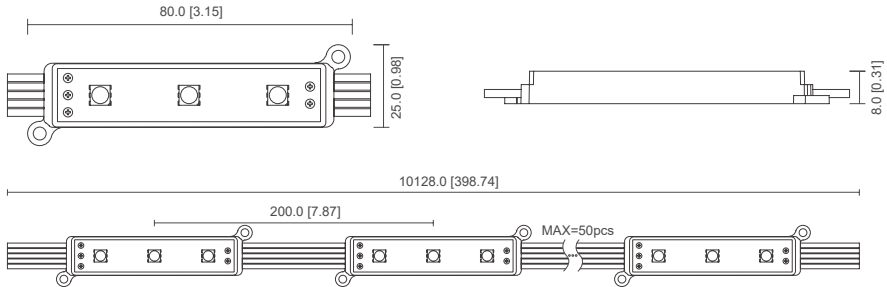

PHOTOMETRIC

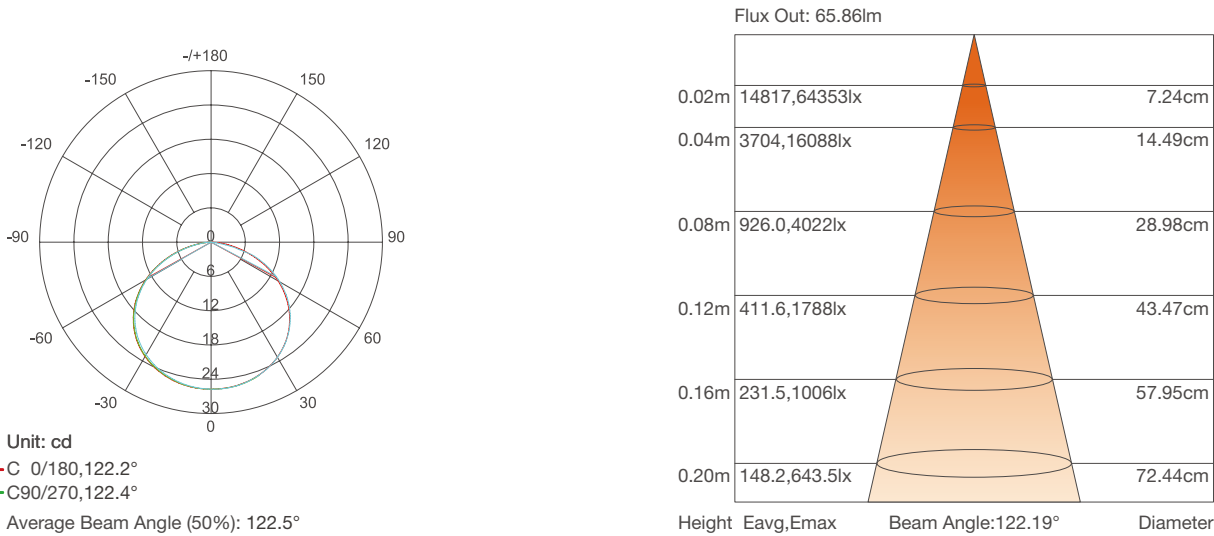

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PZ5	12V DC	R	620-625nm	/	/	0.24	3	50pcs
		G	515-530nm	/	/	0.24		
		B	465-470nm	/	/	0.24		
		RGB+W	100000K+	36	40	0.96		


PZ6 RGBW MODULE

- Adopt integrated optical lens
- Great environmental adaptability and UV resistance
- Can create reach lighting effects via a controller
- Single module cuttable, customization available




PROFILE DRAWINGS

Unit:mm/inch

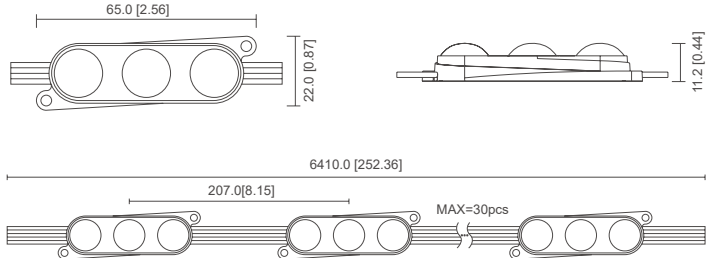

PHOTOMETRIC

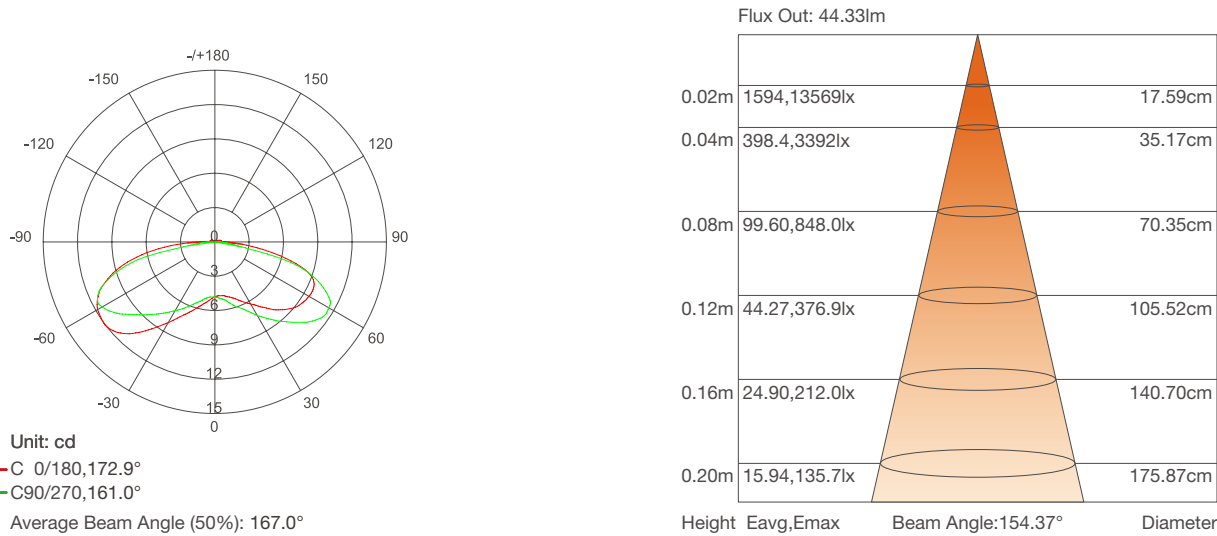


BASIC PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PZ6	12V DC	>80	W	6500K	19	90	0.21	3	30pcs
			R	620-625nm	7	30	0.21		
			G	520-530nm	15	67	0.21		
			B	465-470nm	3	15	0.21		
			RGBW	/	48	55	0.86		

CS6

DIGITAL/ADDRESSABLE MODULE | SPI

- Adopt Fresnel lens
- Digital control, constant current drive
- Long run with no brightness drop and signal attenuate
- Signal never rip even foregoing led error
- Single module can be cut, easy to install

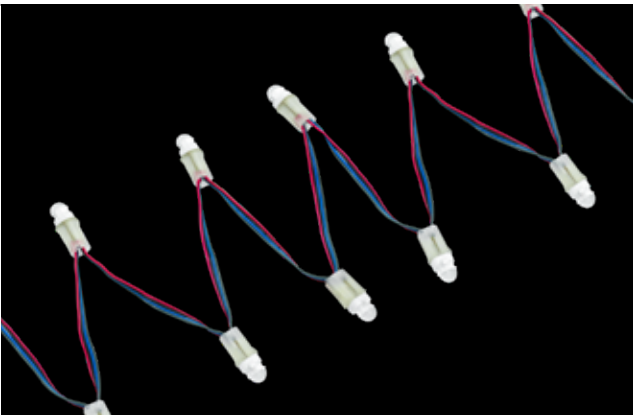

IP67

LED5050


45°

DC5V



3Years

PROFILE DRAWINGS

Unit:mm/inch

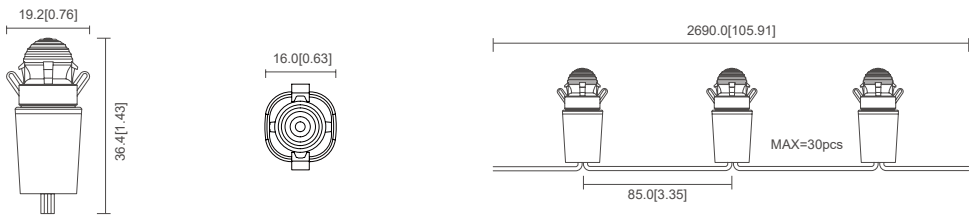

PHOTOMETRIC

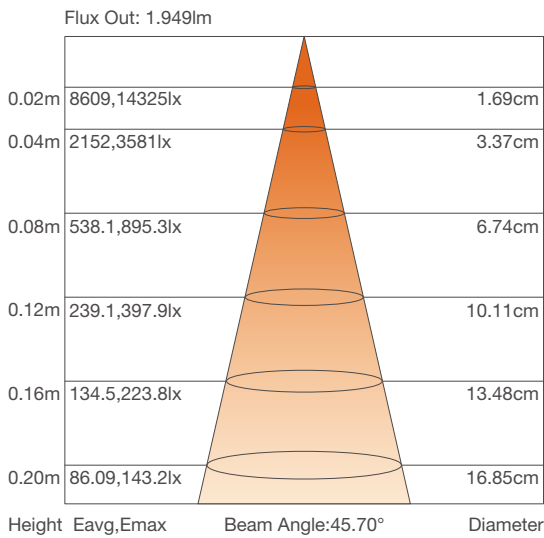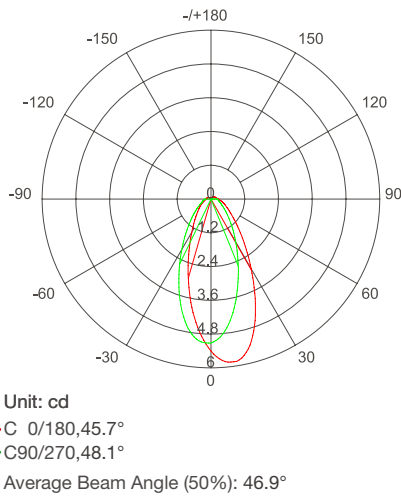


BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS6	5V DC	R	620-630nm	2	18	/	1	30pcs
		G	520-530nm	4	35	/		
		B	460-470nm	1	9	/		
		RGB	100000K+	7	25	0.27		

CS7

DIGITAL/ADDRESSABLE MODULE | SPI

- High quality Fresnel Lens
- Constant current driving
- Uniform lighting with no brightness drop and signal attenuate
- Signal never rip even foregoing led error
- Single module can be cut, easy to install

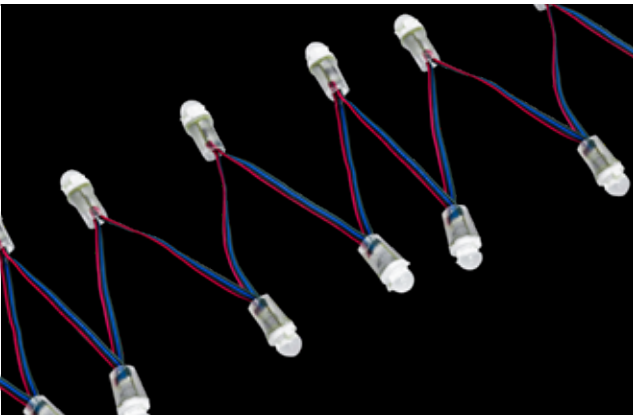

IP67

LED5050


50°

DC5V



3Years

PROFILE DRAWINGS

Unit:mm/inch

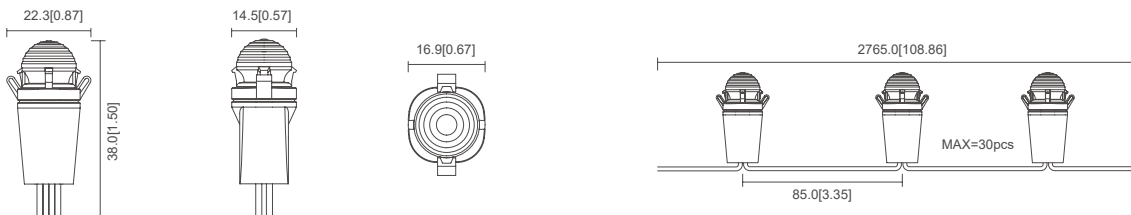

PHOTOMETRIC

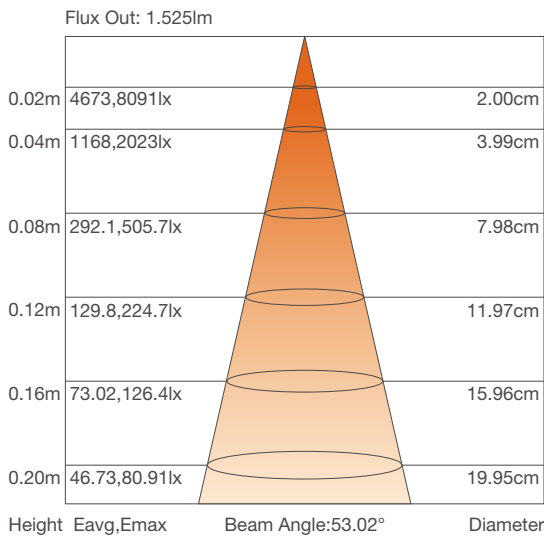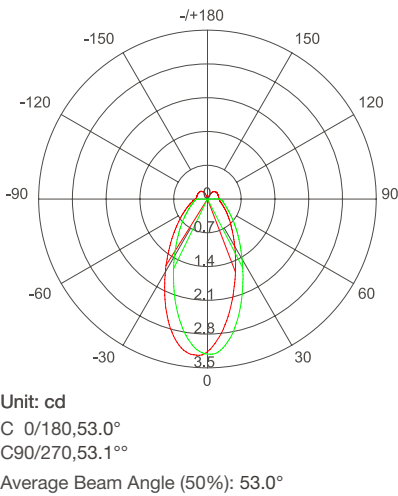

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS7	5V DC	R	620-625nm	2	16	/	1	30pcs
		G	525-530nm	4	34	/		
		B	465-470nm	1	8	/		
		RGB	100000K+	6	20	0.27		


PQ7 DIGITAL/ADDRESSABLE MODULE | SPI

- Adopt integrated lens
- Double glue feeding process, IP68 rating
- Continuous transmission even 1 LED broken
- Great environmental adaptability and UV resistance
- Can create reach lighting effects via a controller, such as SP105E controller
- Single module can be cut





PROFILE DRAWINGS

Unit:mm/inch

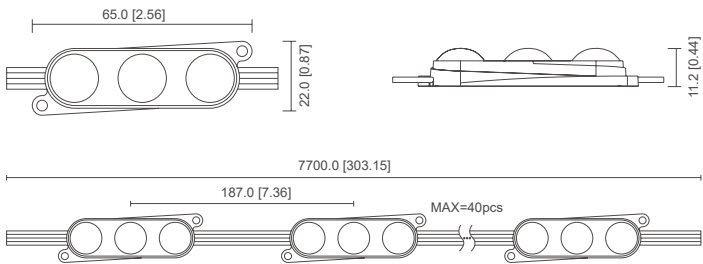

PHOTOMETRIC

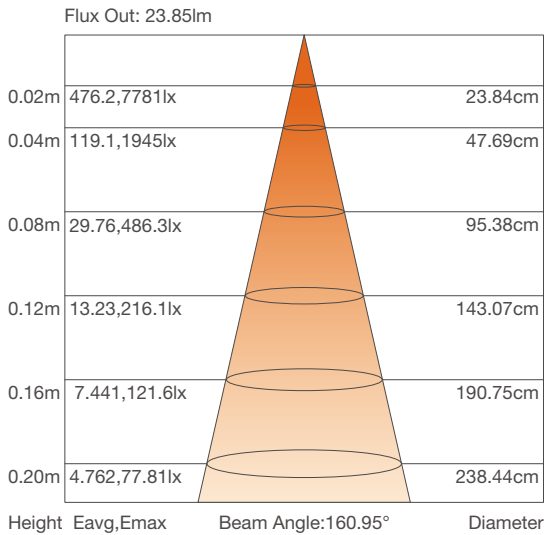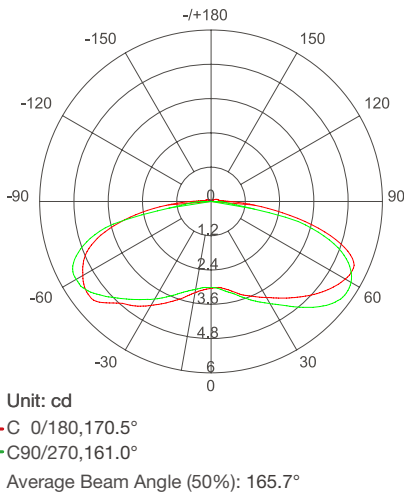

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ7	12V DC	R	620-625nm	6	18	0.21	3	40pcs
		G	520-530nm	14	42	0.21		
		B	460-470nm	3	8	0.21		
		RGB	/	22	23	0.64		


PQ8 DIGITAL/ADDRESSABLE MODULE | SPI

- Adopt integrated lens
- Great environmental adaptability and UV resistance
- Can create reach lighting effects via a controller, such as MR-502 controller
- Single module can be cut





PROFILE DRAWINGS

Unit:mm/inch

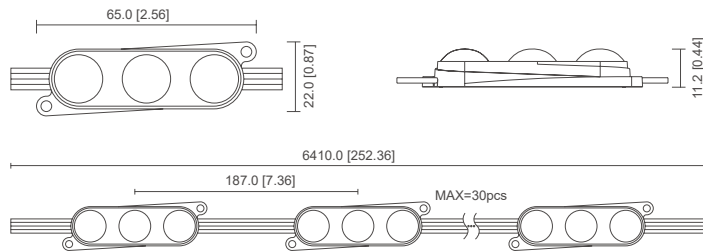

PHOTOMETRIC

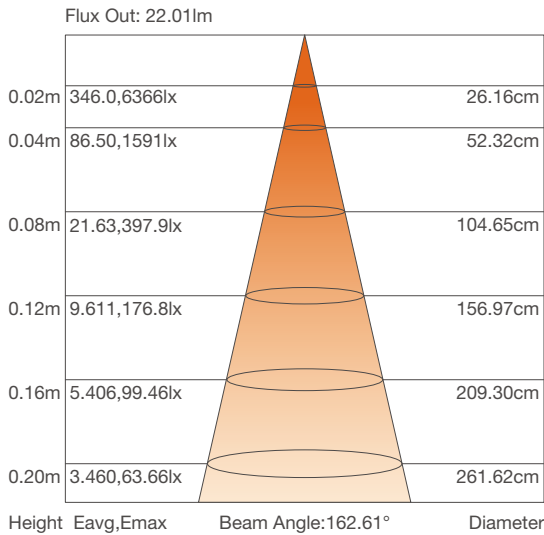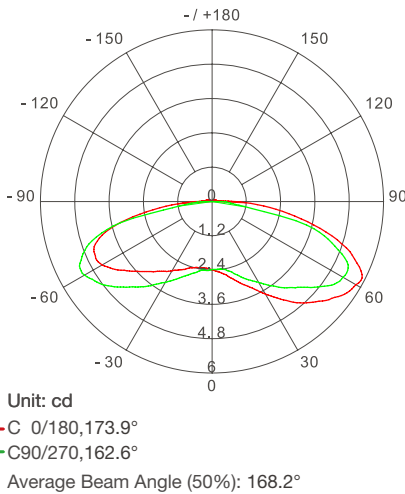

BASIC PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ8	12V DC	>80 /	W	6500K	10	50	0.2	3	30pcs
			R	620-630nm	2	10	0.2		
			G	520-530nm	6	30	0.2		
			B	460-470nm	1	6	0.2		
			RGBW	/	18	30	0.6		

CS8


DIGITAL/ADDRESSABLE MODULE | SPI

- Application for outdoor building decoration, large programmed logos or signage,etc
- 3LEDS RGB SMD5050 powered
- Lens with optic function, specially for large logos
- Signal never rip even foregoing led error
- Complied with controller such as BV-T1000\T4000\T8000\MR-318A





PROFILE DRAWINGS

Unit:mm/inch

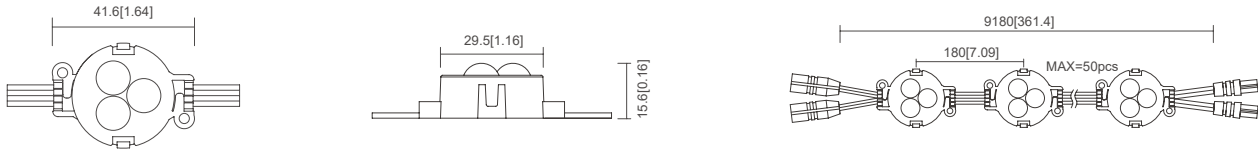

PHOTOMETRIC

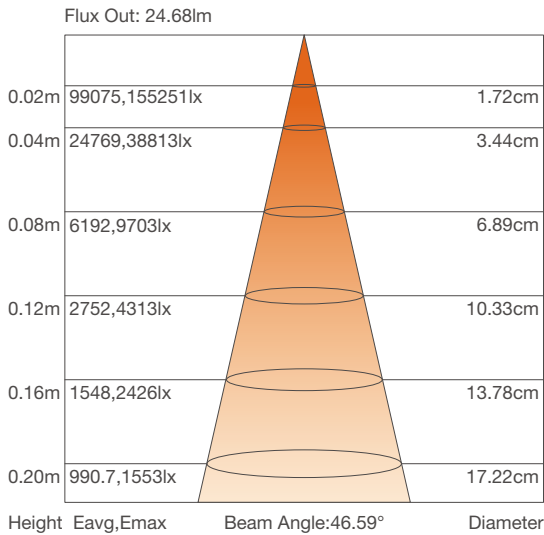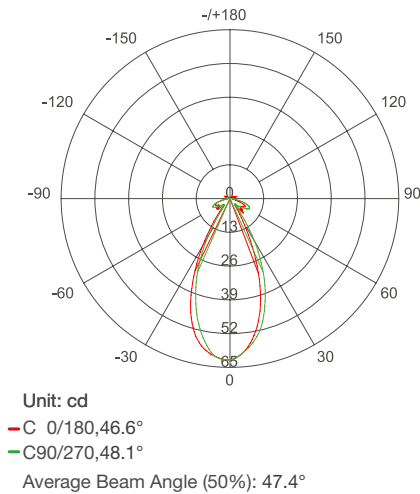

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS8	12V DC	R	620-625nm	19	29	0.65	3	50pcs
		G	525-530nm					
		B	465-470nm					

CS8-A


DIGITAL/ADDRESSABLE MODULE | SPI

- Glue sealing process, IP67 rating
- Adopt auto integer forwarding technology
- Long run design and the signals will not distort and attenuate
- Signal never rip even foregoing led error
- Support multiple controllers to realize various lighting effects





PROFILE DRAWINGS

Unit:mm/inch

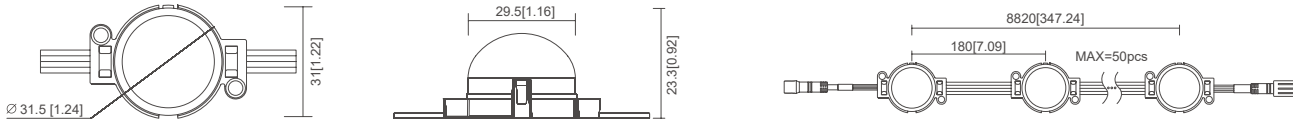

PHOTOMETRIC

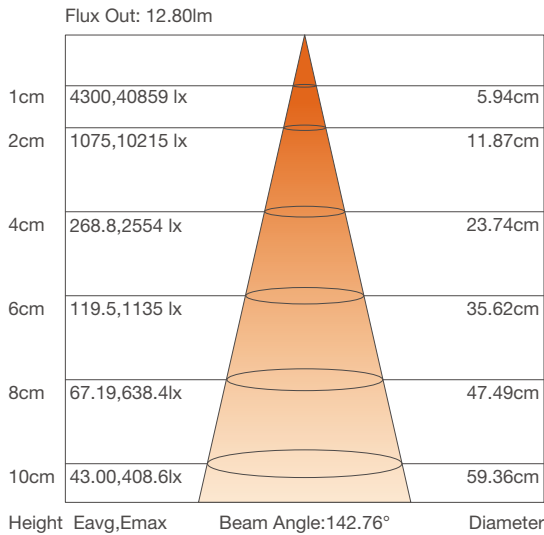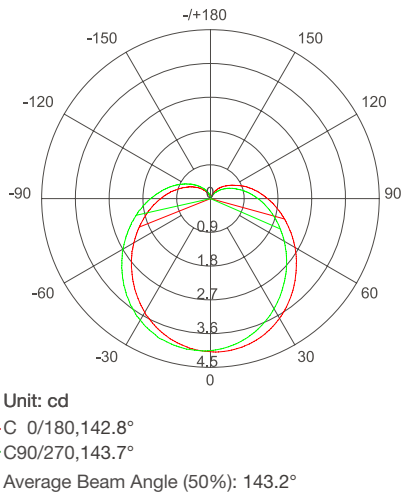


BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS8-A	12V DC	R	620-625nm	/	/	0.22	3	50pcs
		G	520-525nm	/	/	0.22		
		B	465-470nm	/	/	0.22		
		RGB	100000K+	17	25	0.65		

PQ5-J

DIGITAL/ADDRESSABLE MODULE | SPI

- Signal never rip even foregoing led error
- Support multiple controllers to realize various light effects
- Do not support PWM dimming

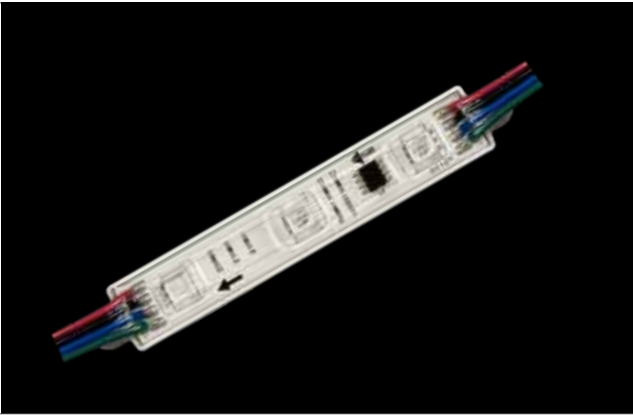

LM-80

IP66

LED5050


120°

DC12V



3Years

PROFILE DRAWINGS

Unit:mm/inch

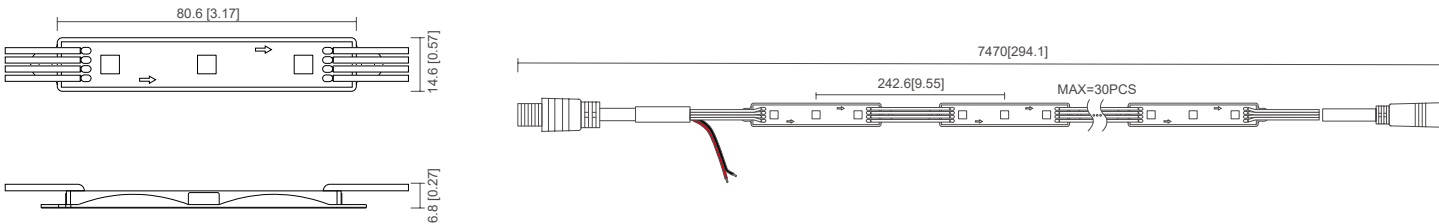

PHOTOMETRIC

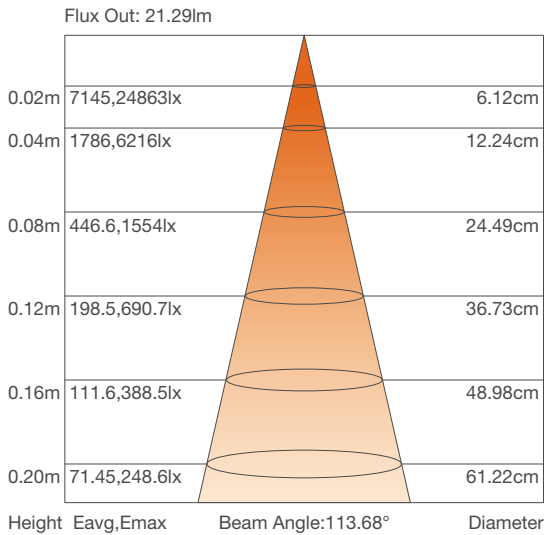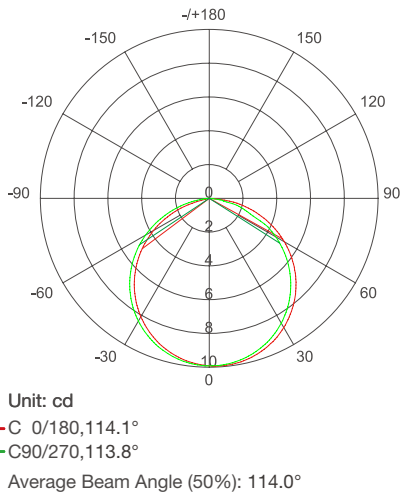


BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ5-J-RGB	12V DC	R	620-625nm	5-7	≥24	0.2	3	30pcs
		G	525-530nm	10-12	≥49	0.2		
		B	465-470nm	2-3	≥9	0.2		
		RGB	100000K+	19-21	≥24.5	0.65		
PQ5-J-W	12V DC	W	6500K	19-21	≥95	0.2	3	30pcs

BC6-S1

DIGITAL/ADDRESSABLE MODULE | SPI

- Large beam angle;
- Superior weather and UV resistance;
- External controller can be connected to realize rich color changes;
- Single module cuttable, support customization;

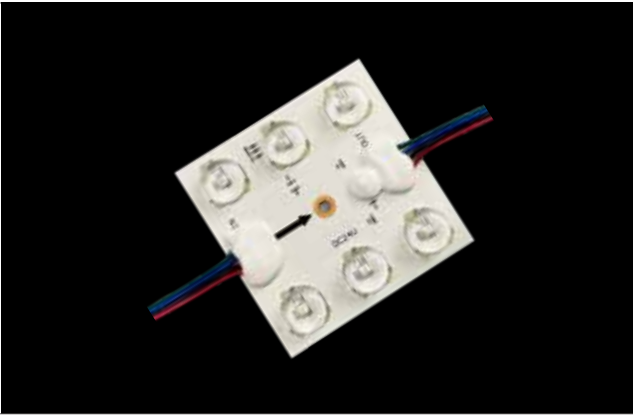

LM-80

IP20

LED3030


170°

DC24V



3Years

PROFILE DRAWINGS

Unit:mm/inch

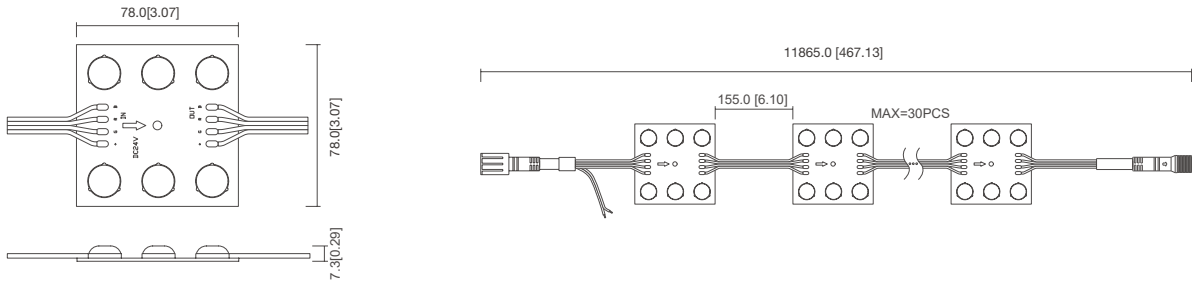

PHOTOMETRIC

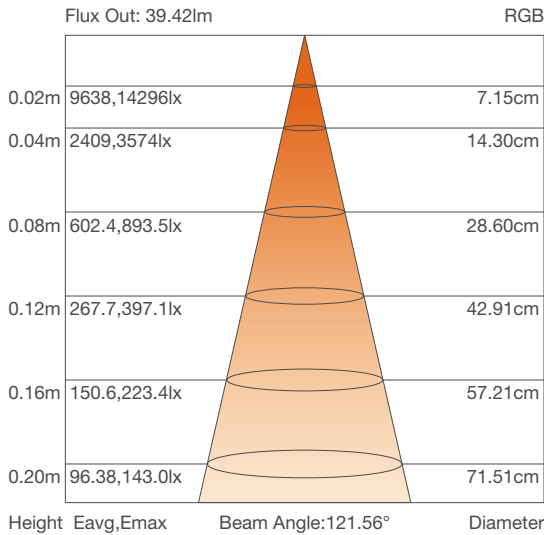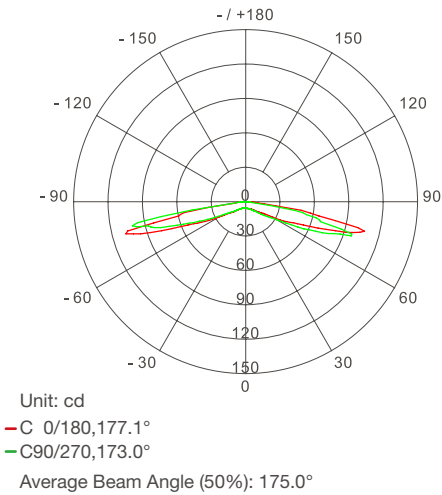

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BC6-S1	24V DC	R	620-625nm	11	16	0.69	6	30pcs
		G	515-530nm	27	39	0.69		
		B	465-470nm	7	10	0.69		
		RGB+W	100000K+	44	29	1.55		

PQ6 DIGITAL/ADDRESSABLE MODULE | DMX


- Adopt integrated optical lens
- Great weather and UV resistance
- Support DMX512
- Can use external controller to achieve multiple color changes
- Single module can be cut, customization available





				CRI 80			
	E318168	IP68	LED5050		160°	DC12V	3Years

PROFILE DRAWINGS

Unit:mm/inch

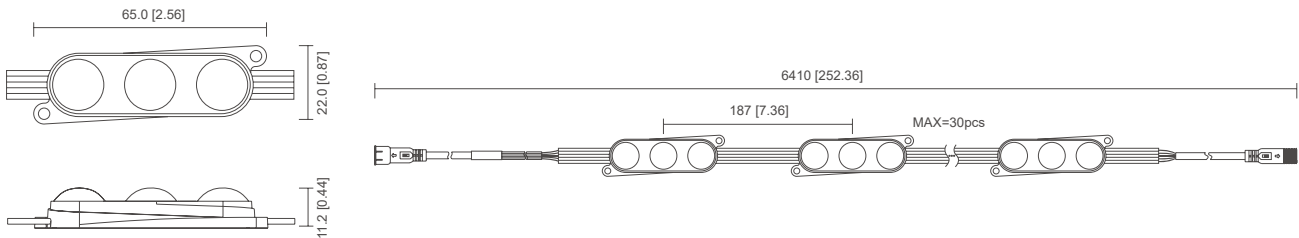

PHOTOMETRIC

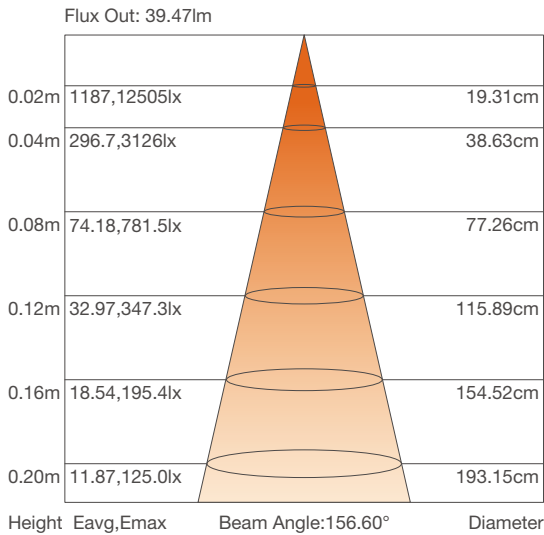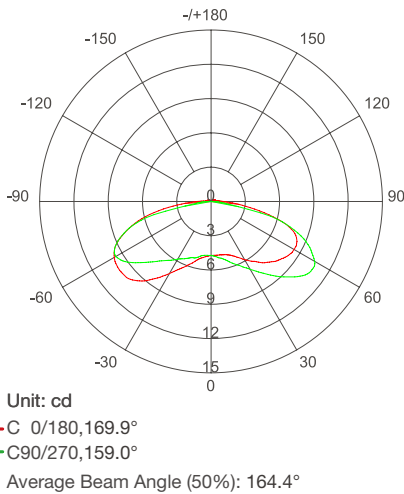

BASIC PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ6	12V DC	>80	W	6500K	17	50	0.33	3	30pcs
			R	620-630nm	3	10	0.33		
			G	520-530nm	11	30	0.33		
			B	460-470nm	4	12	0.33		
			RGBW	/	40	40	0.98		

D20/30/50 DIGITAL/ADDRESSABLE MODULE | DMX


- Using imported chips with high brightness and long life span
- Adopt wire and cover of cold-resistant, anti-UV, flame retardant
- IP67 rating, perfect for outdoor use
- Beautiful appearance and cost-effective
- Multiple mounting methods



IP67	LED3535	LM-80	120°	DC5V	DC12V	DC24V	3Years

PROFILE DRAWINGS

Unit:mm/inch

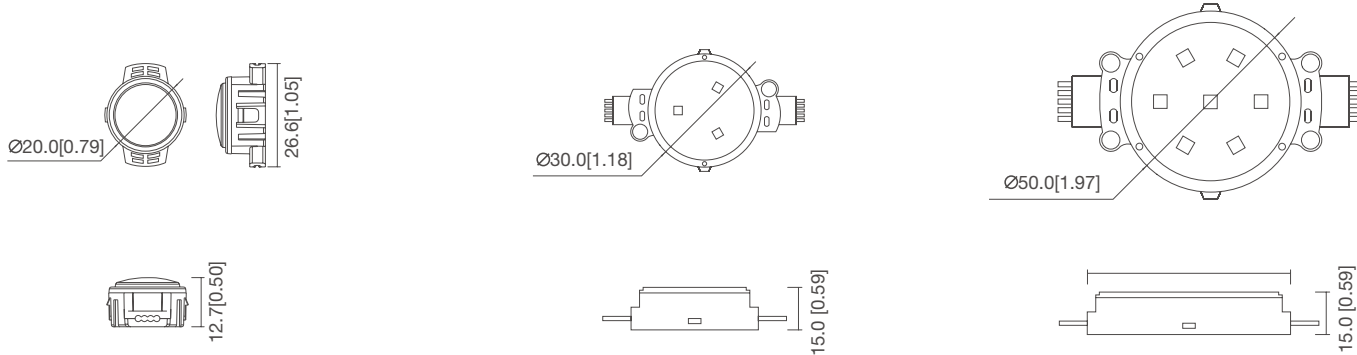

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	Gray Level	W/pcs	LED/pc	Max Run
D202-Y	5V DC	Y	2000±200K	18	/	0.26	1	30pcs
D202-W	5V DC	W	2800-6500K	20	/			
D204-RGB	5V DC	RGB	100000K	7	256			

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	Gray Level	W/pcs	LED/pc	Max Run
D302-Y	12V DC	Y	2000±200K	5	/	0.66	3	40pcs
D302-G	12V DC	G	520-525nm	14	/			
D302-B	12V DC	B	465-470nm	3	/			
D302-W	12V DC	W	2800-6500K	42	/			
D302-RGB	12V DC	R+G+B	100000K	22	256			
D302-RGB	12V DC	R+G+B	100000K	22	256/65536			

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	Gray Level	W/pcs	LED/pc	Max Run
D502-Y	24V DC	Y	2000±200K	84	/	1.3	7	20pcs
D502-G	24V DC	G	520-525nm	32	/			
D502-B	24V DC	B	465-470nm	7	/			
D502-W	24V DC	W	2800-6500K	98	/			
D502-RGB	24V DC	R+G+B	100000K	49	256			
D502-RGB	24V DC	R+G+B	100000K	49	256/65536			

RIGID BAR SERIES


Back-lit light box, double sided
Edge-lit light box

Back-Lit
Edge-lit
RGB/RGBW
Ac Rigid Bar
Dynamic panel



www.blueviewled.com

YD7 3.0 SINGLE BAR

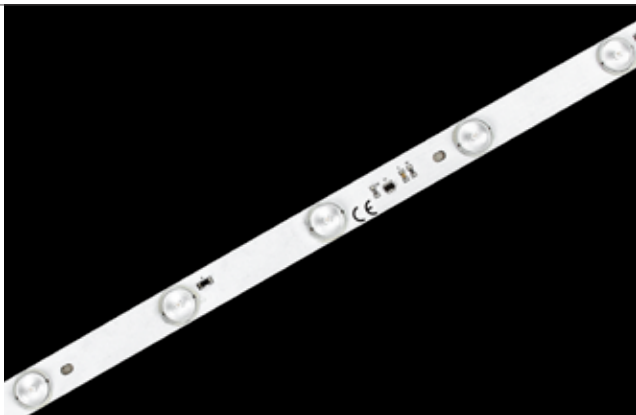


- Adopt LUMILEDS 3030SMD
- Aluminum PCB for better heat dissipation
- Back-lit, high brightness, and uniform lighting
- It can be protective when connect the wire inversely or wrong
- Constant current driving with same brightness from end to end




PROFILE DRAWINGS

Unit:mm/inch

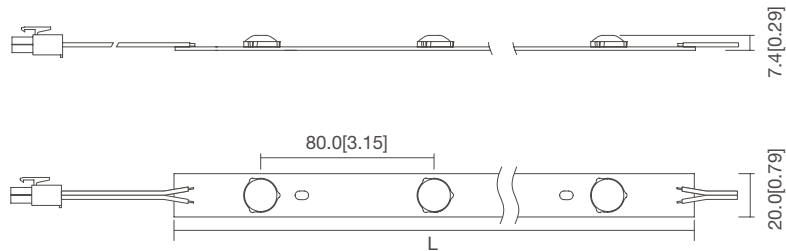

Model No.	L:mm/inch
YD7 3.0-0303	240[9.45]
YD7 3.0-0506	480[18.9]
YD7 3.0-1012	960[37.8]

PHOTOMETRIC

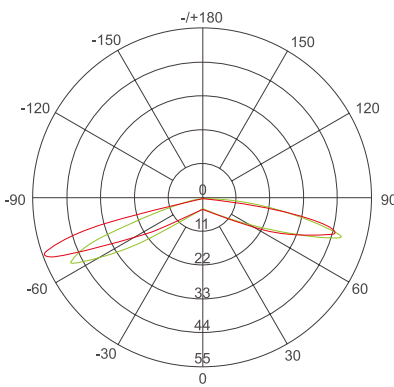


Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

Height	Eavg,Emax	Beam Angle:175.16°	Diameter
1cm	4388,3548lx		47.29cm
2cm	1097,88708lx		94.59cm
4cm	274.2,22177lx		189.18cm
6cm	121.9,9856lx		283.77cm
8cm	68.56,5544lx		378.35cm
10cm	43.88,3548lx		472.94cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD7 3.0-0303	24V DC	3000-6500K	333-357	90	3.7	3	8pcs
YD7 3.0-0506	24V DC	3000-6500K	333-357	90	7.5	6	4pcs
YD7 3.0-1012	24V DC	3000-6500K	333-357	90	15	12	2pcs

WN-YD7 3.0 SINGLE BAR

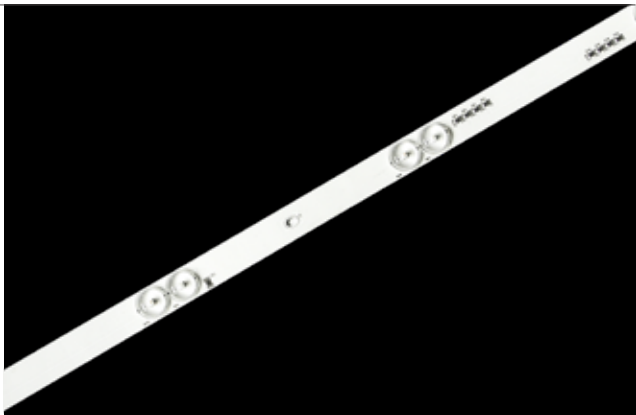


- Adopt high quality 3030 LED
- Self-designed lens with 170° beam angle, suitable for slim lightbox
- Aluminum PCB for direct and quick heat dissipation
- Create rich color changing effects via controller




PROFILE DRAWINGS

Unit:mm/inch

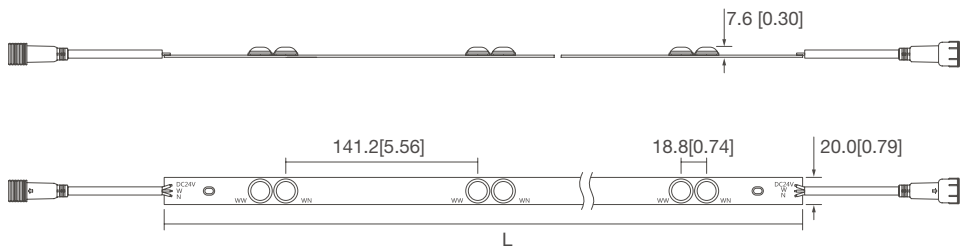

Model No.	L:mm/inch
WN-YD7 3.0-3204	320[12.60]
WN-YD7 3.0-4806	480[18.89]
WN-YD7 3.0-9612	960[37.80]

PHOTOMETRIC

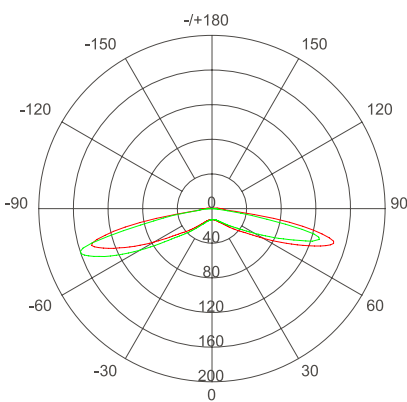

Unit: cd
- C 0/180,188.7°
- C90/270,171.4°
Average Beam Angle (50%):180.0°

Height	Eavg,Emax	Beam Angle:171.15°	Diameter
1cm	5608,138544lx		25.83cm
2cm	1402,34636lx		51.67cm
4cm	350.5,8659lx		103.34cm
6cm	155.8,3848lx		155.01cm
8cm	87.62,2165lx		206.68cm
10cm	56.08,1385lx		258.35cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
WN-YD7 3.0-3204	24V DC	2500-6500K	260	70	3.72	4	8pcs
WN-YD7 3.0-4806	24V DC	2500-6500K	335	90	3.72	6	5pcs
WN-YD7 3.0-9612	24V DC	2500-6500K	670	90	7.44	12	3pcs


YD8 1.0 SINGLE BAR

- Adopt 3V NICHIA 3030LED
- Secondary light distribution lens, uniform lighting
- Aluminum PCB for better heat dissipation
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

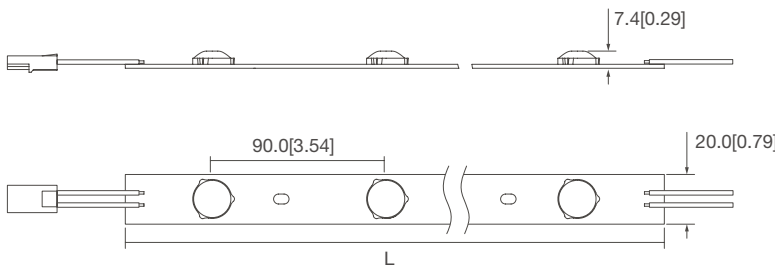


Model No.	L:mm/inch
YD8 1.0-0303	270[10.63]
YD8 1.0-0404	360[14.17]
YD8 1.0-0707	630[24.80]

PHOTOMETRIC

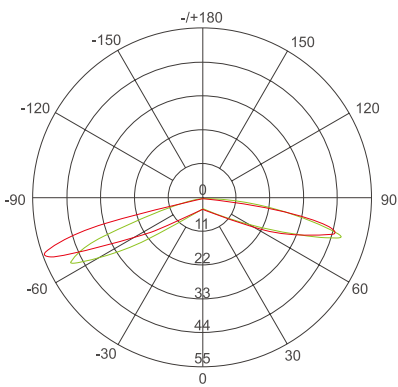

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

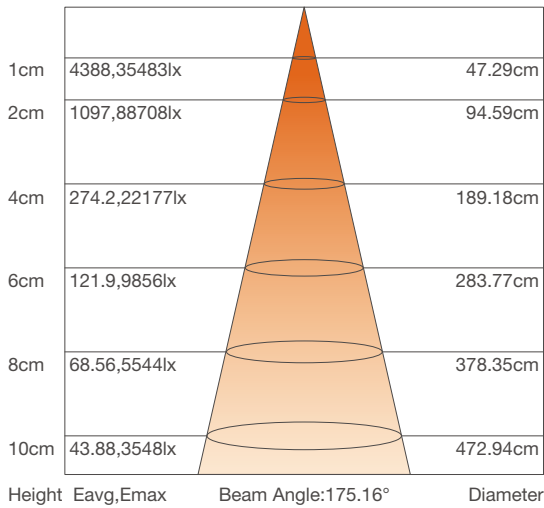

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD8 1.0-0303	24V DC	3000-6500K	158	50	3.1	3	8pcs
YD8 1.0-0404	24V DC	3000-6500K	210	60	3.1	4	8pcs
YD8 1.0-0707	24V DC	3000-6500K	370	116	3.1	7	8pcs


YD8 3.0 SINGLE BAR

- Adopt 3V NICHIA 3030SMD
- Back-lit, high brightness, uniform lighting
- It can be protective when connect the wire inversely or wrong
- Adopt SA2-01 connector
- Constant current driving with same brightness from end to end




PROFILE DRAWINGS

Unit:mm/inch

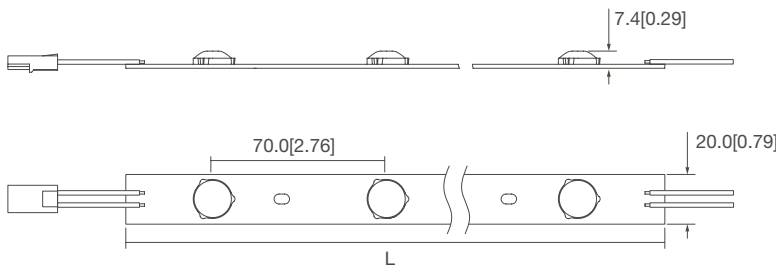


Model No.	L:mm/inch
YD8 3.0-0507	490[19.29]
YD8 3.0-1014	980[38.58]

PHOTOMETRIC

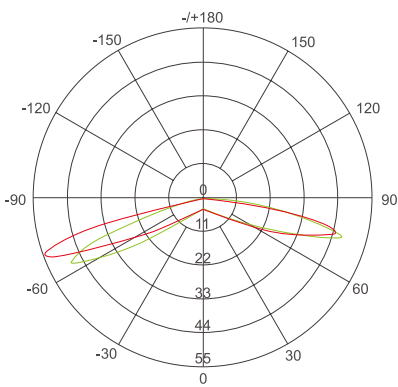

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

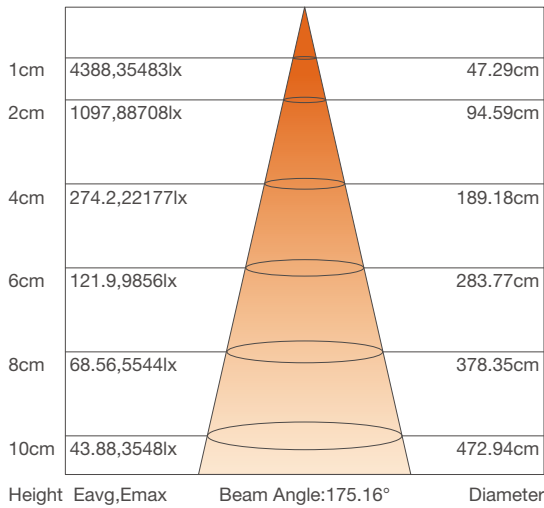


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD8 3.0-0507	24V DC	3000-6500K	341	110	3.1	7	8pcs
YD8 3.0-1014	24V DC	3000-6500K	703	110	6.3	14	4pcs

- High light efficacy, up to 140lm/w
- Adopt secondary light distribution lens, uniform lighting
- Aluminum PCB for direct heat dissipation
- Multiple specifications available, support customization




Unit:mm/inch

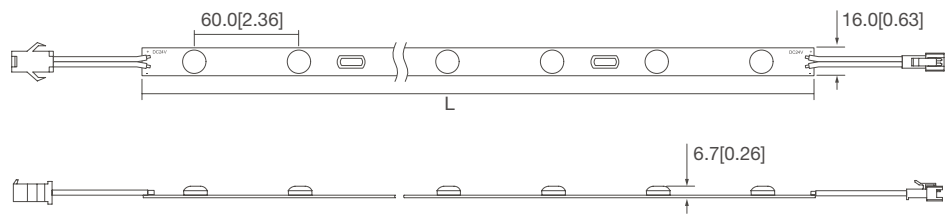

Model No.	L:mm/inch
YD8-J-4808	480[18.90]
YD8-J-9616	960[37.80]

Unit: cd
 C 0/180,184.9°
 C90/270,175.6°
 Average Beam Angle (50%):180.2°

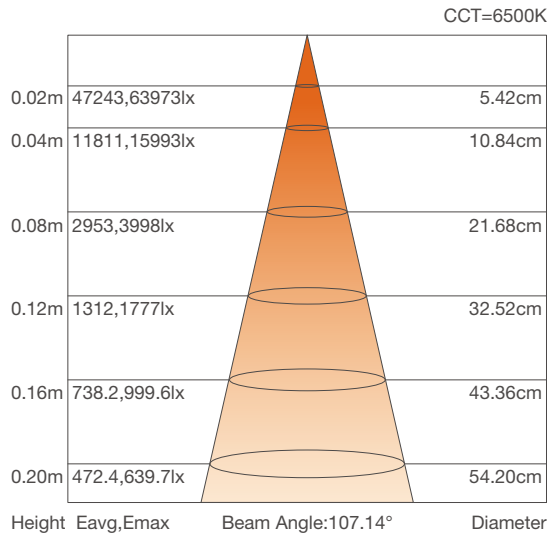


Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD8-J-4808	24V DC	2200-6500K	330	140	2.4	8	6pcs
YD8-J-9616	24V DC	2200-6500K	670	140	4.8	16	3pcs


- High quality SMD 3030LED
- Adopt secondary light distribution lens, uniform lighting
- Aluminium PCB for better heat dissipation
- 180° wide beam angle helps eliminate wasted light
- Single LED cuttable, customization available



Unit:mm/inch

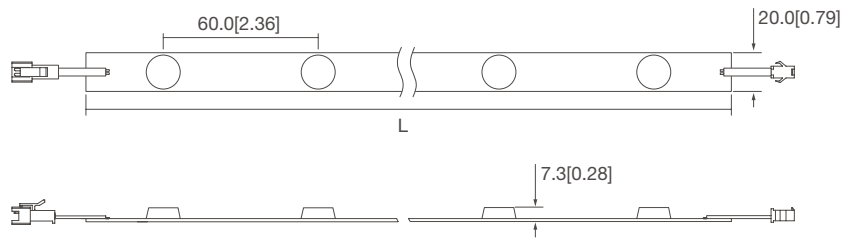

Model No.	L:mm/inch
YD3-A-4806	480[18.90]
YD3-A-9612	960[37.80]

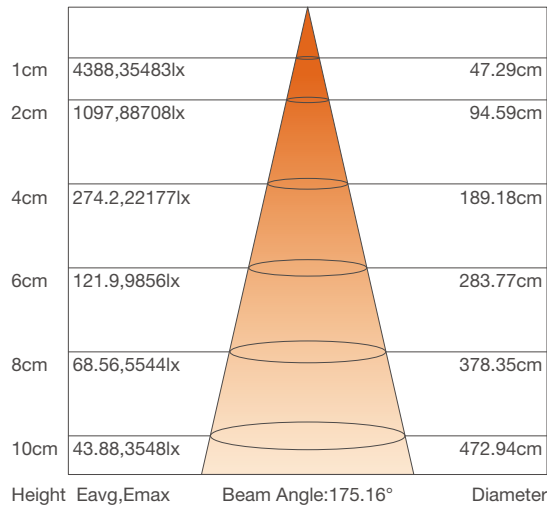


Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD3-A-4806	12V DC	3000-9000K	648	90	7.2	6	8pcs
YD3-A-9612	12V DC	3000-9000K	1296	90	14.4	12	4pcs

- Adopt high quality 2835 LED
- High efficacy up to 90lm/W
- Self-designed secondary light distribution lens with 170° beam angle
- Curtain style for easy mounting
- Multiple specification available




Unit:mm/inch

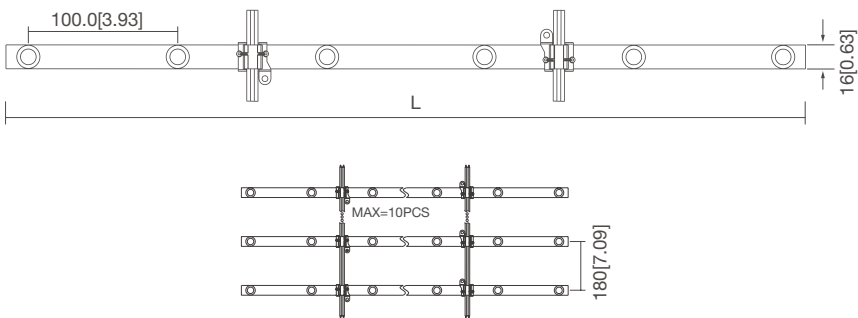

Model No.	L:mm/inch
YD2-W-4305	430[16.93]
YD2-W-5306	530[20.87]
YD2-W-9310	930[36.61]
YD2-W-1212	1130[44.49]

Unit: cd
- C 0/180,177.0°
- C90/270,175.7°
Average Beam Angle (50%):176.4°

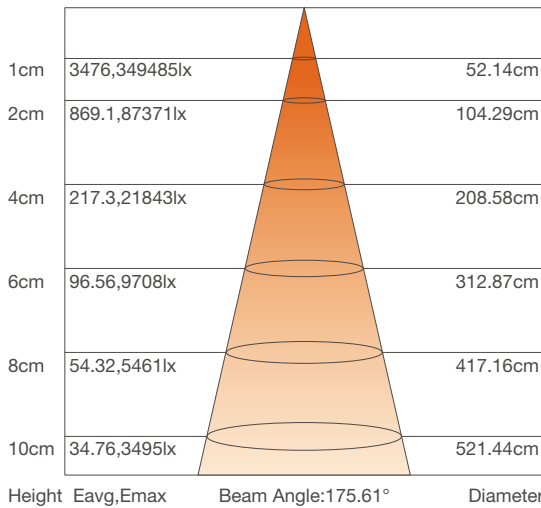


Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD2-W-4305	12V DC	3000-9000K	432	90	4.80	5	10pcs
YD2-W-5306	12V DC	3000-9000K	518	90	5.76	6	10pcs
YD2-W-9310	12V DC	3000-9000K	864	90	9.60	10	10pcs
YD2-W-1212	12V DC	3000-9000K	1037	90	11.52	12	10pcs

- Adopt secondary light distribution lens, uniform lighting
- Curtain style for easy mounting
- Single LED can be cut
- Multiple specifications, customization available




Unit:mm/inch

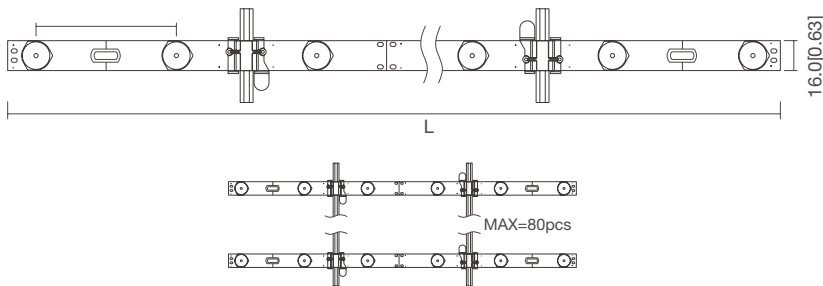

Model No.	L:mm/inch
H3-4807	480[18.90]
H3-5208	515[20.28]
H3-9313	930[36.61]
H3-9314	930[36.61]

Unit: cd
- C 0/180,187.8°
- C90/270,175.6°
Average Beam Angle (50%):181.7°

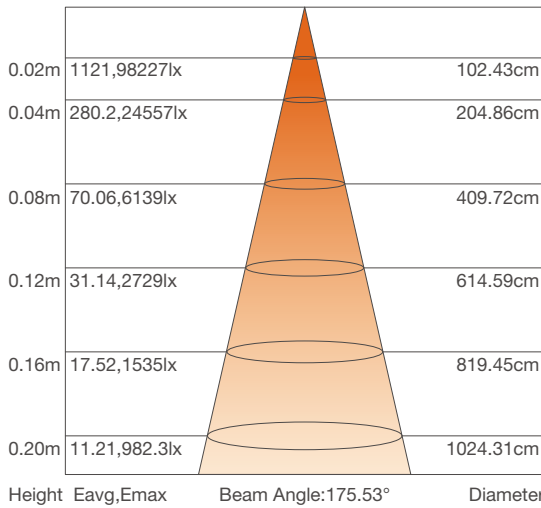

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
H3-4807	12V DC	3000-9000K	780	130	6	7	10pcs
H3-5208	24V DC	3000-9000K	910	130	7	8	10pcs
H3-9313	12V DC	3000-9000K	1430	130	11	13	10pcs
H3-9314	24 V DC	3000-9000K	1560	130	12	14	10pcs

H3 2.0 PRO CURTAIN STYLE




- Self-designed secondary lens for uniform light.
- Aluminum PCB for direct and quick heat dissipation.
- Curtain style for easy mounting.
- Exclusive designed clips for easy installing.
- Multi specifications, support customization.

		CRI 80			
--	--	------------------	--	--	--


PROFILE DRAWINGS

Unit:mm/inch

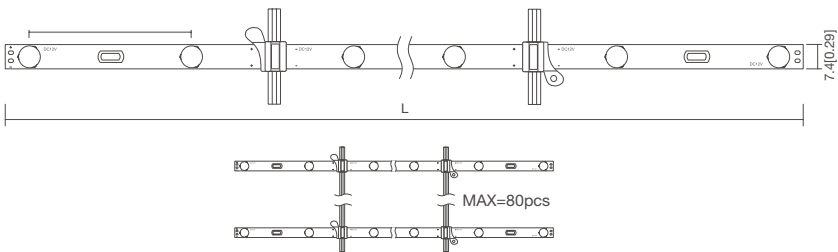


Model No.	L:mm/inch
H3 2.0 Pro-4807	480[18.90]
H3 2.0 Pro-9313	930[36.61]

PHOTOMETRIC

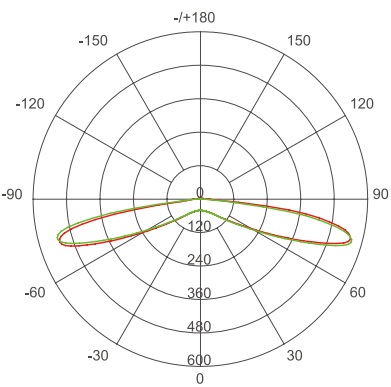


Unit: cd
- C 0/180,187.7°
- C90/270,176.6°
Average Beam Angle (50%): 182.1°

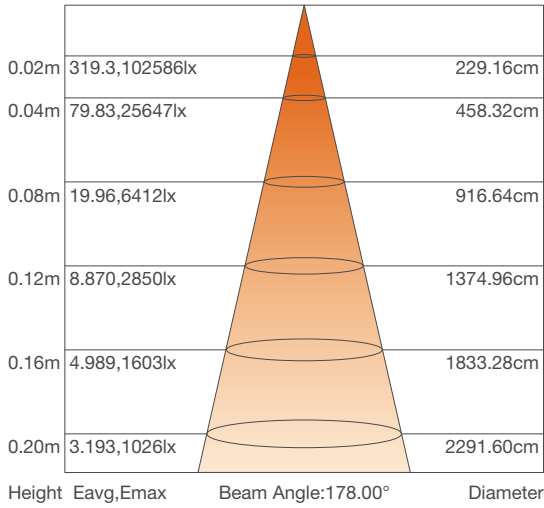

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
H3 2.0 Pro-4807	12V DC	3000-9000K	882	150	5.88	7	10pcs
H3 2.0 Pro-9313	12V DC	3000-9000K	1638	150	10.92	15	10pcs

JYD7 3.0 CURTAIN STYLE

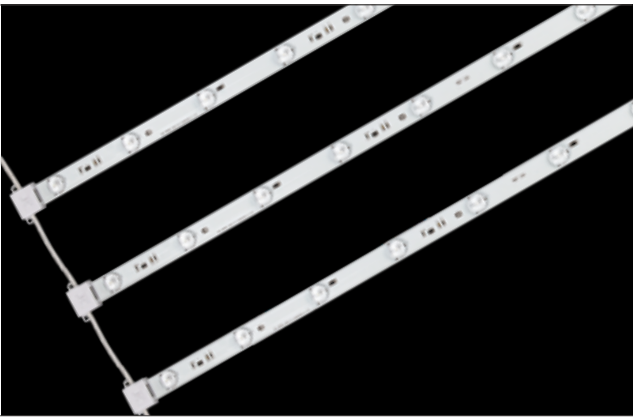


- Adopt 3V Samsung 2323LED
- Specially designed secondary light distribution lens, 172 ° beam angle
- Curtain style for easy mounting
- Multiple specifications available

		NICHIA	CRI 80			
--	--	---------------	------------------	--	--	--


PROFILE DRAWINGS

Unit:mm/inch

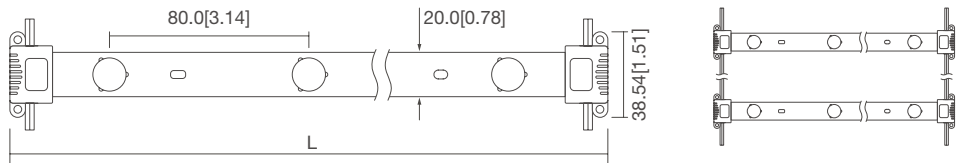


Model No.	L:mm/inch
JYD7 3.0-3030	244[9.60]
JYD7 3.0-0506	484[19.05]
JYD7 3.0-1012	964[37.95]

PHOTOMETRIC

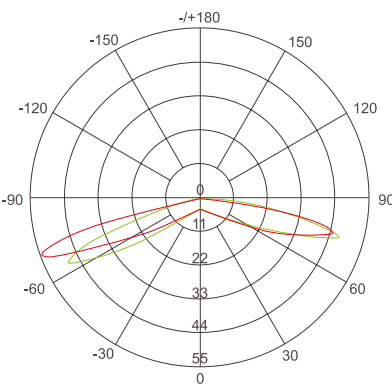

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

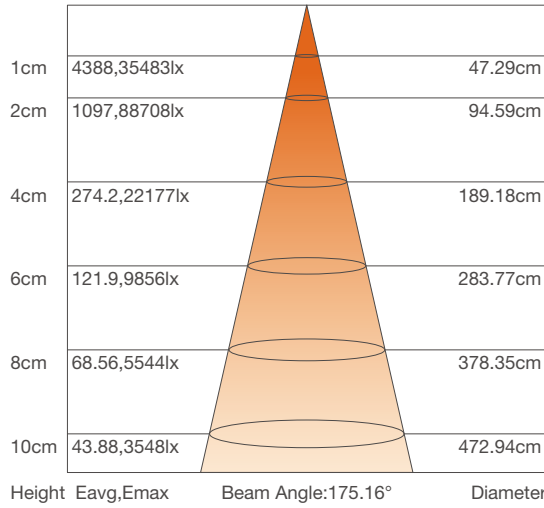

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD7 3.0-0303	24V DC	3000-6500K	333	90	3.7	3	/
JYD7 3.0-0506	24V DC	3000-6500K	666	90	7.5	6	/
JYD7 3.0-1012	24V DC	3000-6500K	1332	90	15	12	/



JYD8 1.0 CURTAIN STYLE

- Adopt 3V NICHIA 3030 LED
- Uniform lighting, suitable for lightbox with depth of 5-10cm
- Curtain style for easy mounting
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

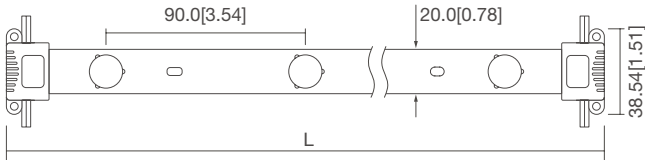


Model No.	L:mm/inch
JYD8 1.0-3030	270[10.63]
JYD8 1.0-0404	360[14.17]
JYD8 1.0-0707	630[24.80]

PHOTOMETRIC

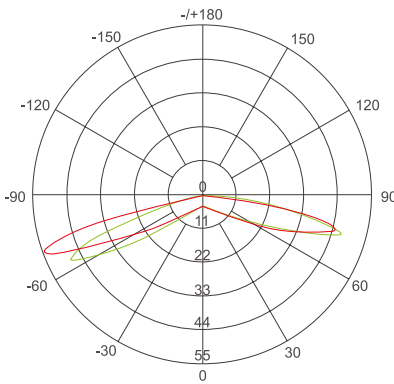

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

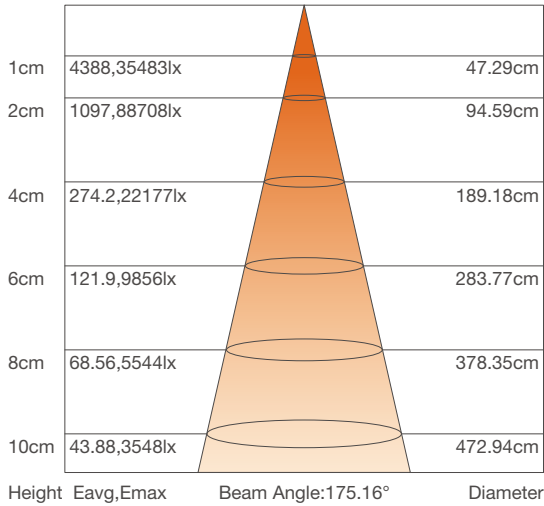


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD8 1.0-0303	24V DC	3000-6500K	158	50	3.1	3	8pcs
JYD8 1.0-0404	24V DC	3000-6500K	210	60	3.1	4	8pcs
JYD8 1.0-0707	24V DC	3000-6500K	370	116	3.1	7	8pcs


JYD3-A CURTAIN STYLE

- Adopt 9V 3030 LED
- Specially designed secondary light distribution lens, uniform lighting
- Curtain style for easy mounting
- Support PWM, 0-10V, DALI, DMX dimming
- Multiple specifications available

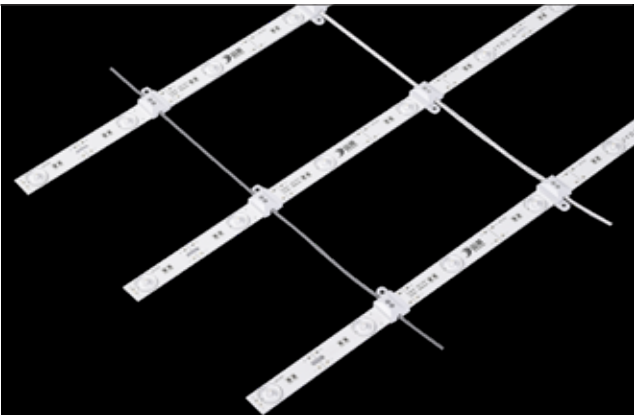


PROFILE DRAWINGS

Unit:mm/inch

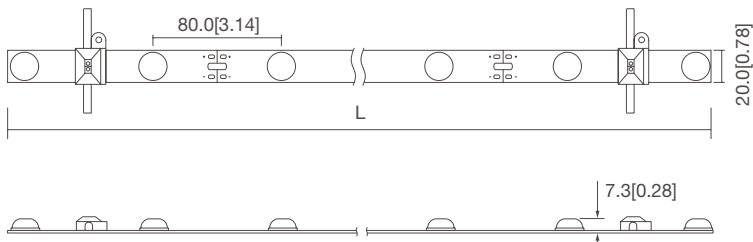


Model No.	L:mm/inch
JYD3-A-2604	260[10.23]
JYD3-A-4206	420[16.53]
JYD3-A-5808	580[22.83]
JYD3-A-9012	900[35.43]

PHOTOMETRIC

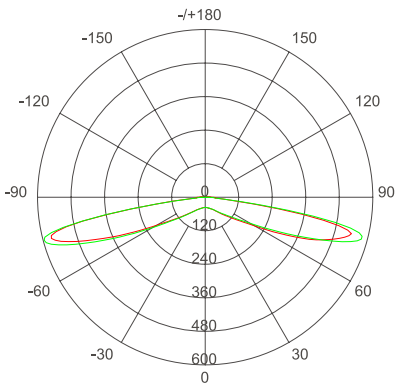

Unit: cd
- C 0/180,186.9°
- C90/270,176.2°
Average Beam Angle (50%):181.6°

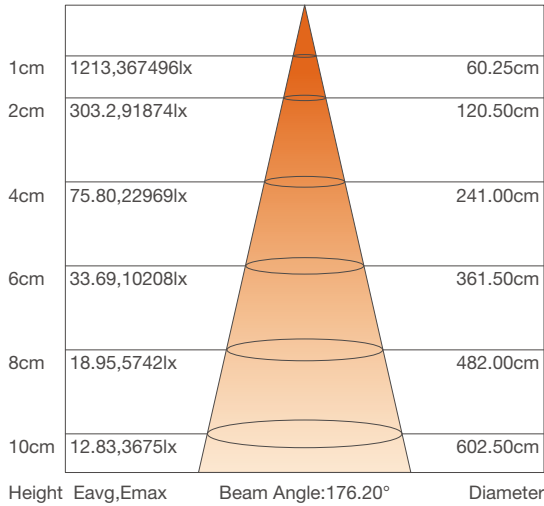


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD3-A-2604	24V DC	7800-9000K	408	85	4.8	4	10pcs
JYD3-A-4206	24V DC	7800-9000K	612	85	7.2	6	10pcs
JYD3-A-5808	24V DC	7800-9000K	816	85	9.6	8	10pcs
JYD3-A-9012	24V DC	7800-9000K	1224	85	14.4	12	10pcs


JYD2-C CURTAIN STYLE

- Adopt 2835 LED
- Uniform lighting
- Curtain style for easy mounting
- Multiple specifications available

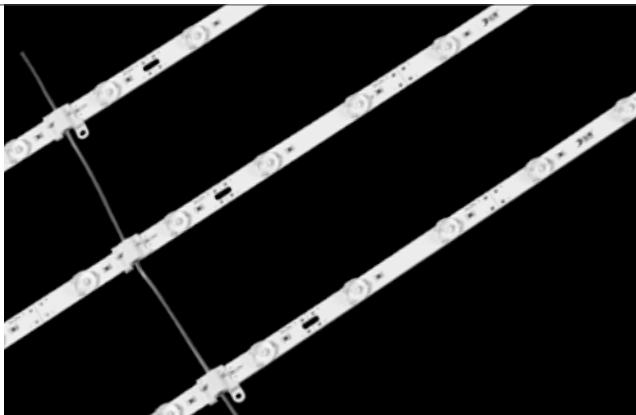



PROFILE DRAWINGS

Unit:mm/inch

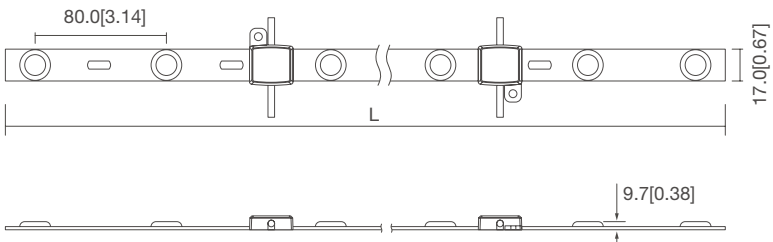

Model No.	L:mm/inch
JYD2-C-4305	430[16.92]
JYD2-C-9310	930[36.61]

PHOTOMETRIC

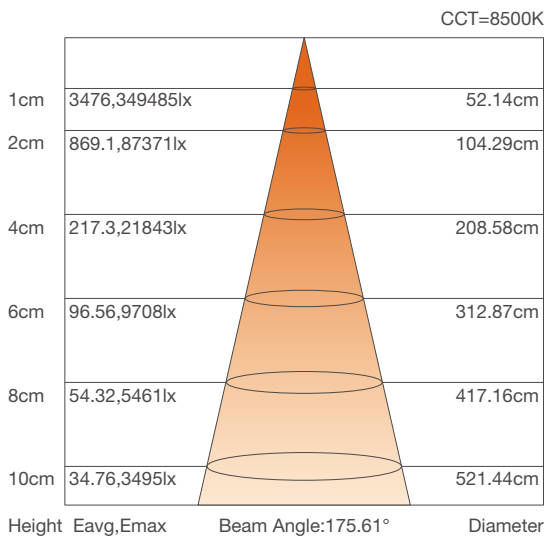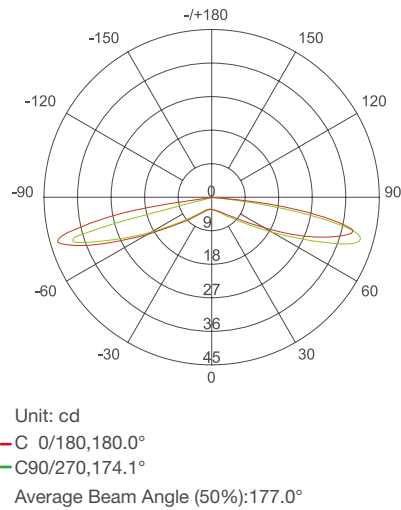

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD2-C-4305	12V DC	3000-9000K	456-460	98.46	4.8	5	/
JYD2-C-9310	12V DC	3000-9000K	858-912	98.07	9.6	10	/


FYD7 3.0 SINGLE BAR WATERPROOF

- Aluminum PCB & glue filled aluminum channel, better heat dissipation
- High brightness, uniform lighting
- Constant current driving with same brightness from end to end
- Reverse connection of the wire will be protected





PROFILE DRAWINGS

Unit:mm/inch

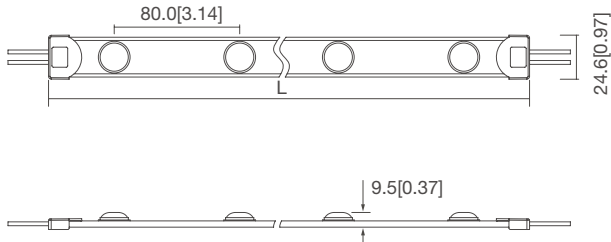

Model No.	L:mm/inch
FYD7 3.0-0303	/
FYD7 3.0-0506	/
FYD7 3.0-1012	/

PHOTOMETRIC

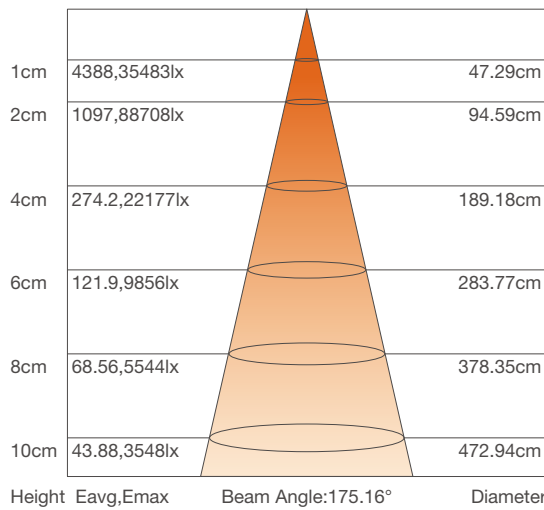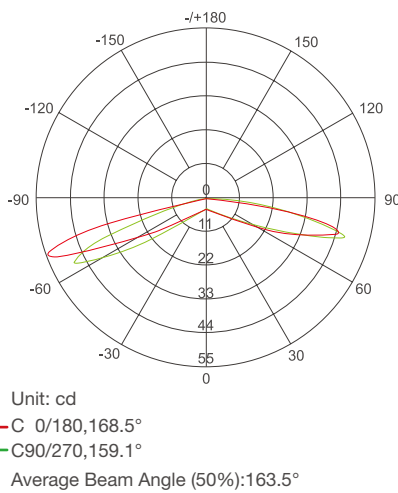

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD7 3.0-0303	24V DC	3000-6500K	333	90	3.7	3	/
FYD7 3.0-0506	24V DC	3000-6500K	666	90	7.5	6	/
FYD7 3.0-1012	24V DC	3000-6500K	1332	90	15	12	/


FYD8 SINGLE BAR WATERPROOF

- Adopt 3V NICHIA 3030LED
- Aluminum PCB & glue filled aluminum channel, better heat dissipation
- Constant current driving with same brightness from end to end




PROFILE DRAWINGS

Unit:mm/inch

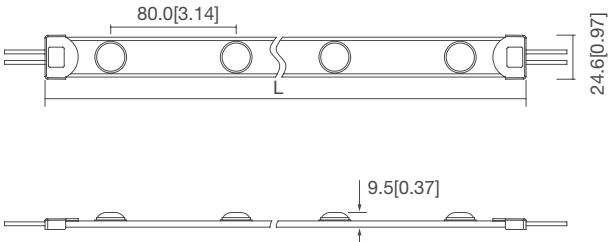


Model No.	L:mm/inch
FYD8-0303	282[11.10]
FYD8-0303	372[14.65]
FYD8-0707	642[25.28]

PHOTOMETRIC

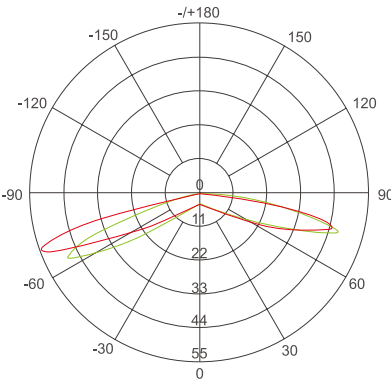

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

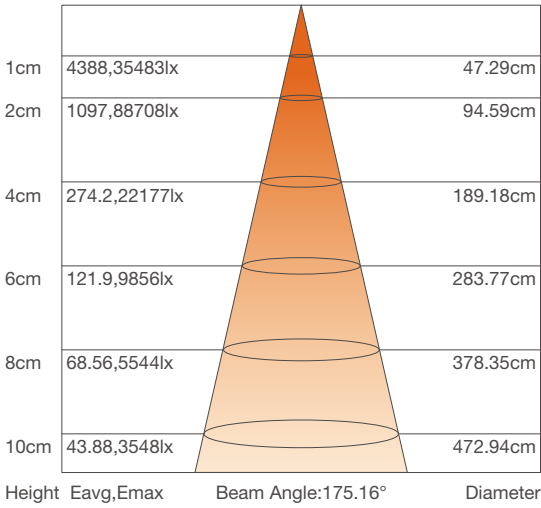

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD8-0303	24V DC	3000-6500K	158	50	3.1	3	10pcs
FYD8-0404	24V DC	3000-6500K	210	60	3.1	4	8pcs
FYD8-0707	24V DC	3000-6500K	370	116	3.1	7	5pcs


FYD3-A SINGLE BAR WATERPROOF

- Adopt 9V 3030 LED
- Specially designed secondary light distribution lens, uniform lighting
- Adopt aluminum PCB & aluminum channel for better heat dissipation
- Support PWM, 0-10V, DALI, DMX dimming
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

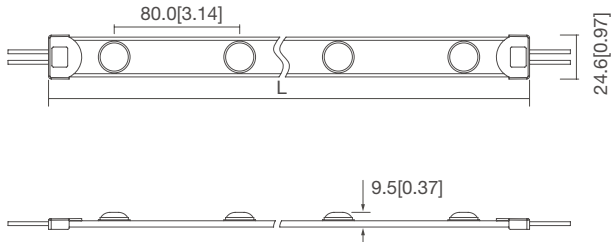


Model No.	L:mm/inch
FYD3-A-2503	970[38.19]
FYD3-A-5006	490[19.29]
FYD3-A-1012	250[9.84]

PHOTOMETRIC

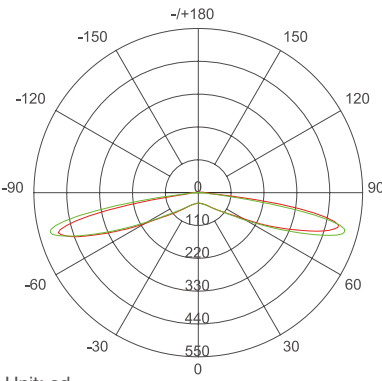

Unit: cd
- C 0/180,185.5°
- C90/270,175.2°
Average Beam Angle (50%):180.3°

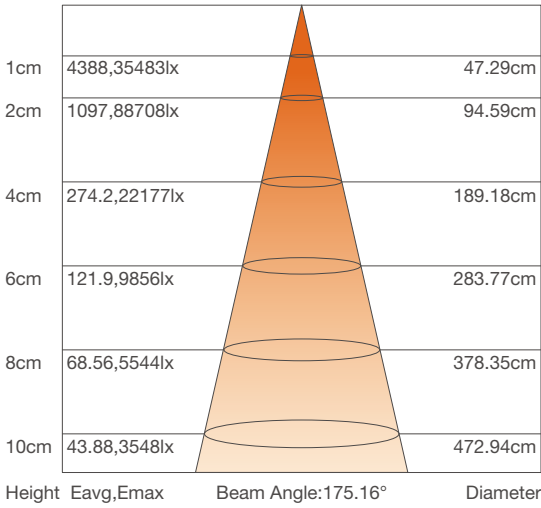


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD3-A-2503	24V DC	3000-9000K	324	90	3.6	12	10pcs
FYD3-A-5006	24V DC	3000-9000K	648	90	7.2	6	8pcs
FYD3-A-1012	24V DC	3000-9000K	1296	90	14.4	3	4pcs


FYD2-E CURTAIN STYLE WATERPROOF

- High efficacy 2835LED
- Special optical lens for uniform lighting
- Aluminium PCB for excellent heat dissipation
- 170° wide beam angle helps eliminate wasted light
- Multiple specifications available

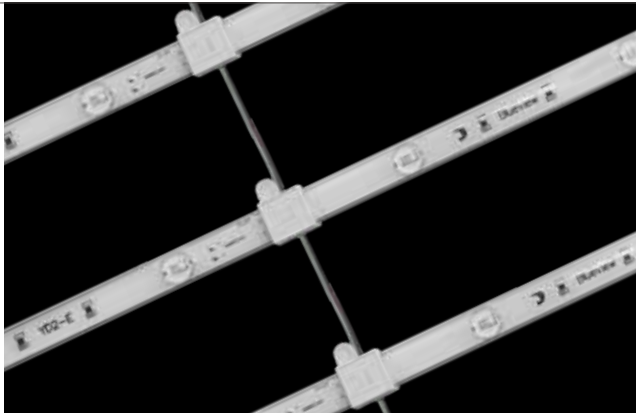


PROFILE DRAWINGS

Unit:mm/inch

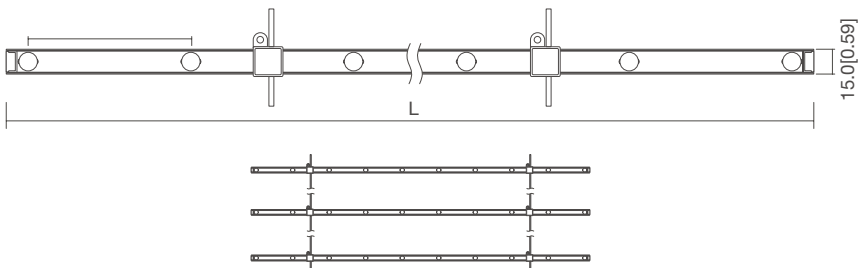


Model No.	L:mm/inch
FYD2-E-0506	520[20.47]
FYD2-E-0910	910[35.83]
FYD2-E-1112	1110[43.70]

PHOTOMETRIC

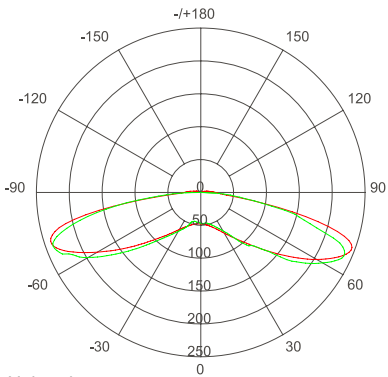

Unit: cd
- C 0/180,179.9°
- C90/270,176.2°
Average Beam Angle (50%):178.0°

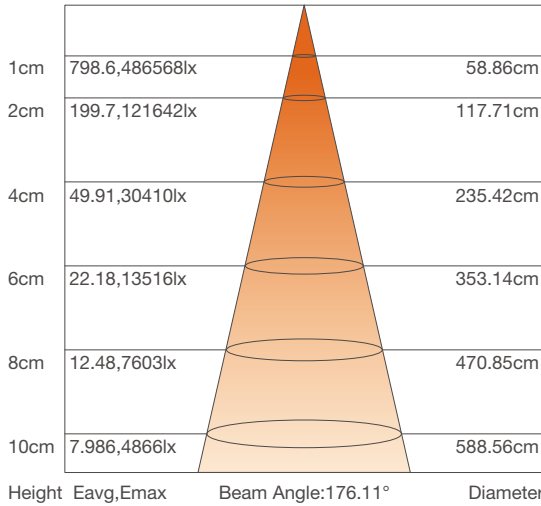

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD2-E-0506	24V DC	7836-9000K	432	85	5	6	10pcs
FYD2-E-0910	24V DC	7836-9000K	714	85	8.4	10	8pcs
FYD2-E-1112	24V DC	7836-9000K	850	85	10	12	4pcs


JFYD7 3.0 CURTAIN STYLE WATERPROOF

- Adopt high quality 3030 LED
- Secondary light distribution lens, uniform lighting
- Aluminum PCB for better heat dissipation
- Curtain style + clips, easy to install




PROFILE DRAWINGS


Unit:mm/inch

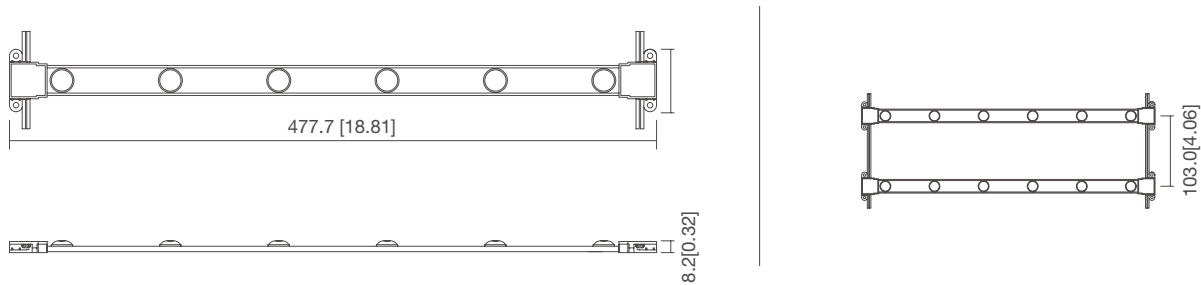

PHOTOMETRIC

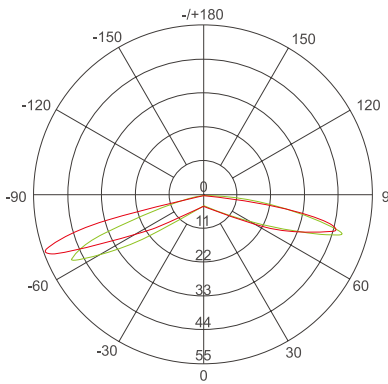

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

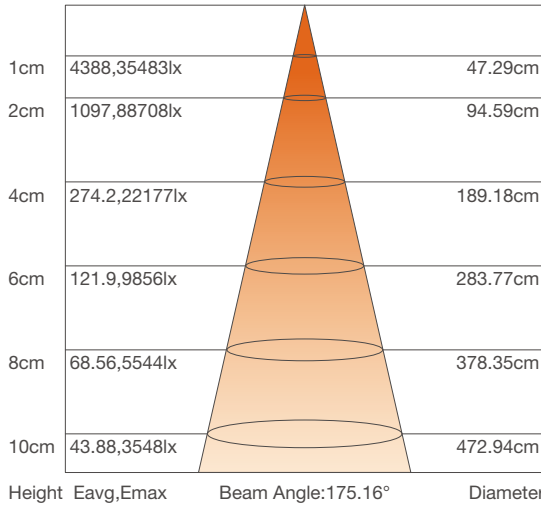


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JFYD7 3.0-0303	24V DC	3000-6500K	333	90	3.7	3	10pcs
JFYD7 3.0-0506	24V DC	3000-6500K	666	90	7.5	6	10pcs
JFYD7 3.0-1012	24V DC	3000-6500K	1332	90	15	12	8pcs

JFYD8



CURTAIN STYLE WATERPROOF

- Adopt high quality 3030 LED
- 160° wide beam angle
- Secondary light distribution lens, uniform lighting
- Aluminum PCB for better heat dissipation
- Curtain style, easy to install

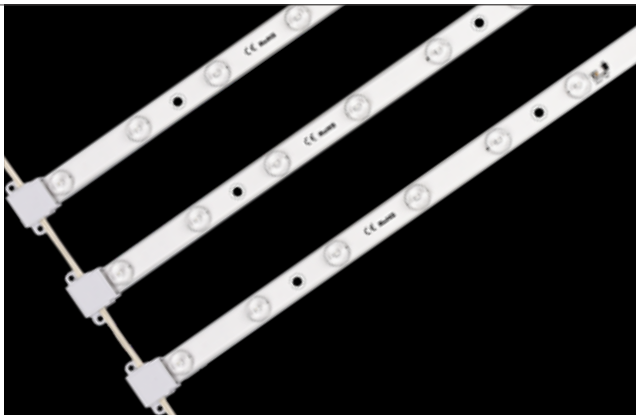



PROFILE DRAWINGS

Unit:mm/inch

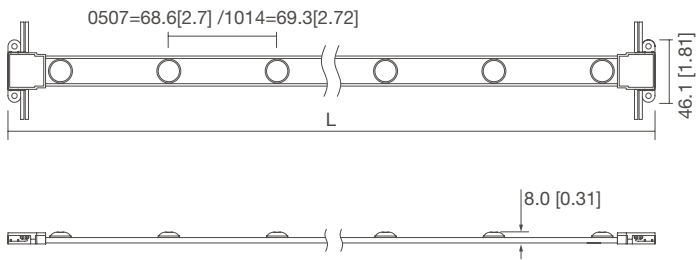

Model No.	L:mm/inch
JFYD8-0507	492[19.4]
JFYD8-1014	982[38.7]

PHOTOMETRIC

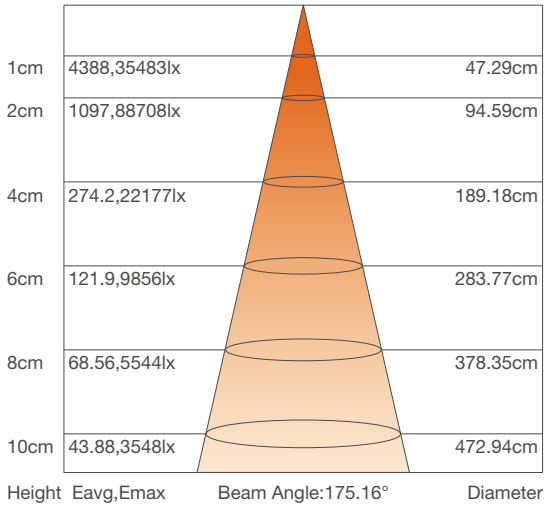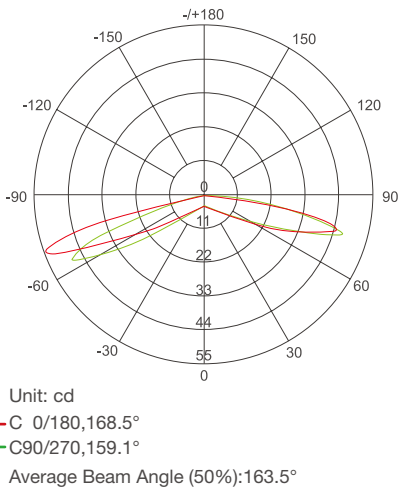

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JFYD8-4907	24V DC	3000-6500K	352	110	3.2	7	/
JFYD8-9814	24V DC	3000-6500K	704	110	6.4	14	/

JFYD3-A



CURTAIN STYLE WATERPROOF

- Adopt 9V 3030 LED
- Secondary light distribution lens, uniform lighting
- Aluminum PCB + metal channel, better heat dissipation
- Curtain style for easy mounting
- Support PWM, 0-10V, DALI, DMX dimming





PROFILE DRAWINGS

Unit:mm/inch

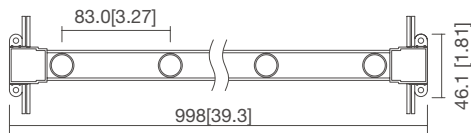

PHOTOMETRIC

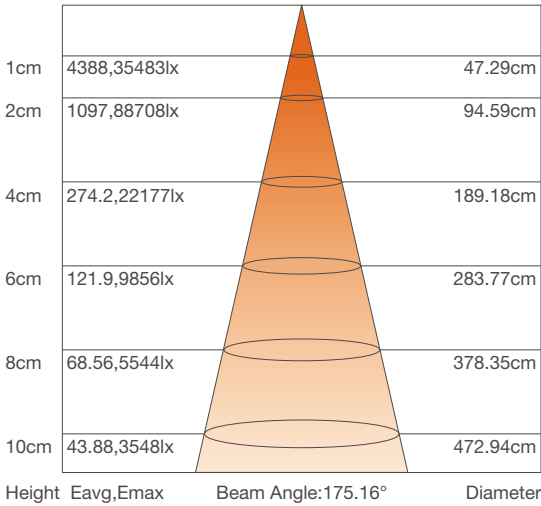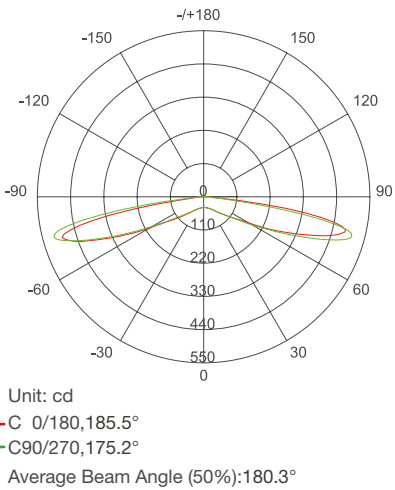

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JFYD3-A-1012	24V DC	3000-7800K	1296	90	14.4	12	10pcs

FB-X EXPLOSION-PROOF



- Using PC frosted cover, the light is uniform;
- Adopt 2835LED;
- A variety of specifications are optional, support customization;

Ex

CQC

IP66

LED2835

180°


CRI
80

⚡
DC24V

5Years



PROFILE DRAWINGS

Unit:mm/inch

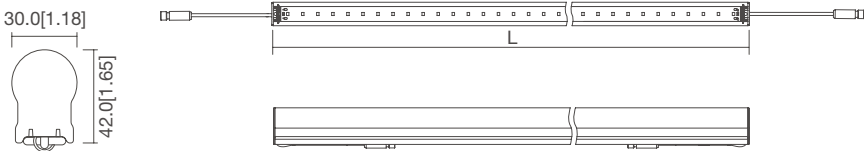

Model No.	L:mm/inch
FB-X-05028	500[19.69]
FB-X-10056	1000[39.37]
FB-X-14084	1400[55.12]
FB-X-27161	2700[106.30]

PHOTOMETRIC

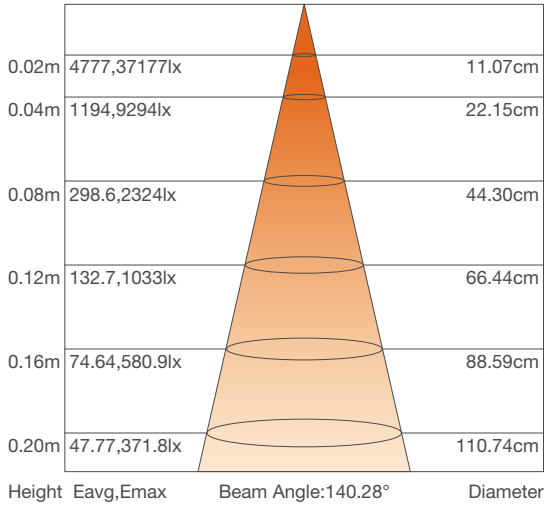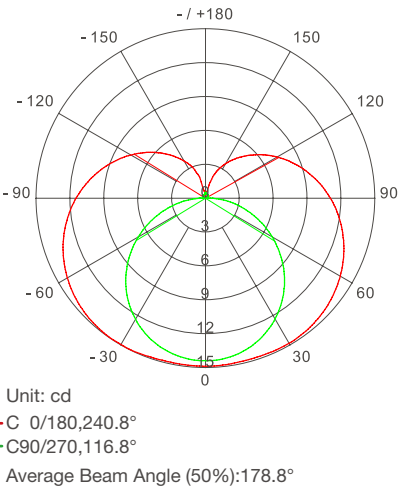

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FB-W-05028	24V DC	W:6700K	319	83	3.84	28	1pcs
FB-R-05028	24V DC	R:620-625nm	134	19			
FB-G-05028	24V DC	G:525-545nm	65	17			
FB-B-05028	24V DC	B:465-470nm	19	5			
FB-Y-05028	24V DC	Y:579-590nm	223	58			

BPS300-C NON-WATERPROOF



- Adopt high quality 3535 LED
- High brightness up to 1944lm/pcs with competitive price
- Secondary light distribution lens,no dark area
- Stable and reliable performance, easy to install

CE

RoHS

C_{UL} US
E318168

IP20

LED3535

ONE BIN ONLY

8°15°


CRI
70

⚡
DC24V

4Years



PROFILE DRAWINGS

Unit:mm/inch

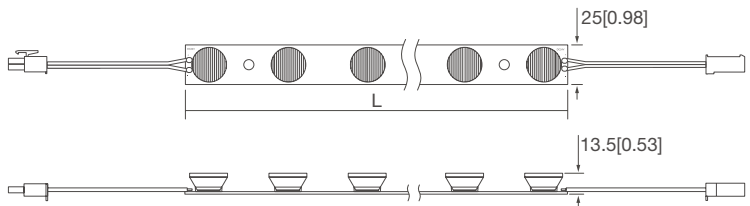

Model No.	L:mm/inch
BPS300-C-0205	250[9.84]
BPS300-C-0510	480[18.90]

PHOTOMETRIC

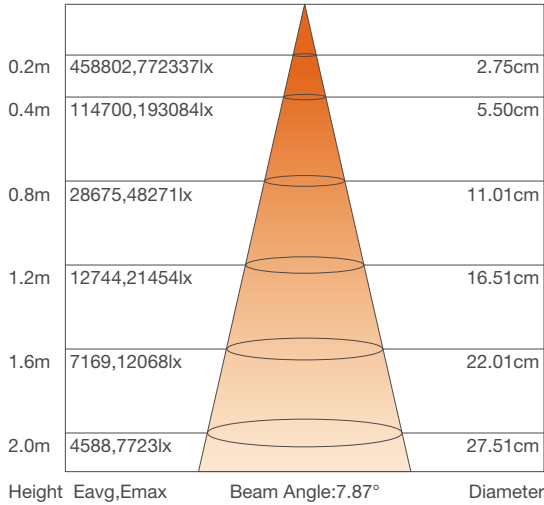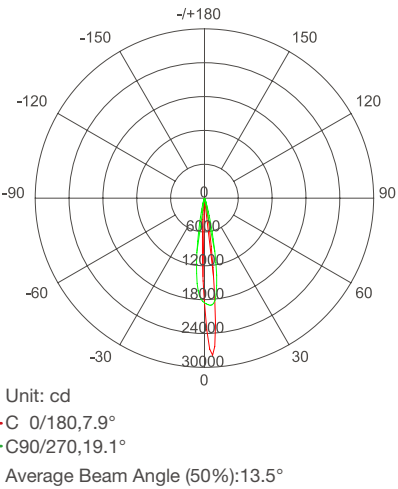

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BPS300-C-0205	24V DC	3000-6500K	972	90	10.8	5	4pcs
BPS300-C-0510	24V DC	3000-6500K	1944	90	21.6	10	3pcs

BPS300-S

NON-WATERPROOF

- Imported high-power SMD 3535Led
- Adopt special secondary light distribution lens
- Uniform light distribution, no dark spots or stripes




CONSTANT VOLTAGE

CRI 80


PROFILE DRAWINGS

Unit:mm/inch

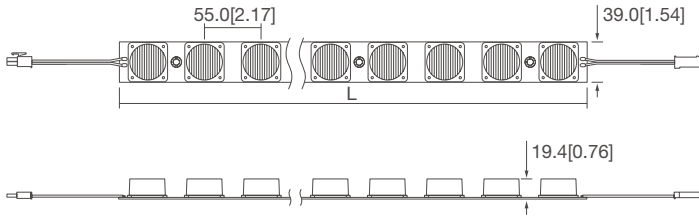


Model No.	L:mm/inch
BPS300-S5	275[10.83]
BPS300-S10	550[21.65]

PHOTOMETRIC

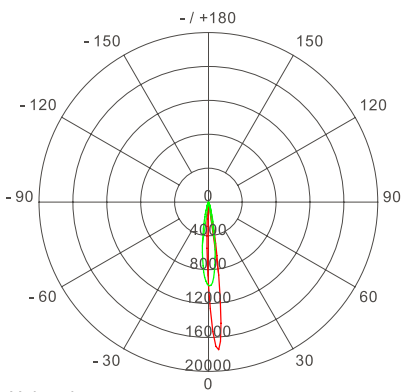

Unit: cd
- C 0/180,8.4°
- C90/270,17.2°
Average Beam Angle (50%):12.8°

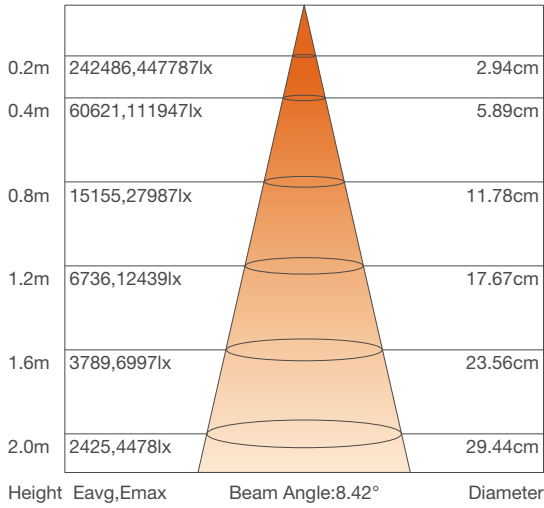

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BPS300-S5	24V DC	6000-7000K	1188	110	10.8	5	5pcs
BPS300-S10	24V DC	6000-7000K	2376	110	21.6	10	3pcs

BPS1-S

NON-WATERPROOF

- High efficacy up to 120 lm/W
- High brightness and small voltage drop of single bar, radiation-free
- Stable and reliable performance, easy to install
- Multiple specifications available




INDOOR USE

SAMSUNG

CRI 70


PROFILE DRAWINGS

Unit:mm/inch

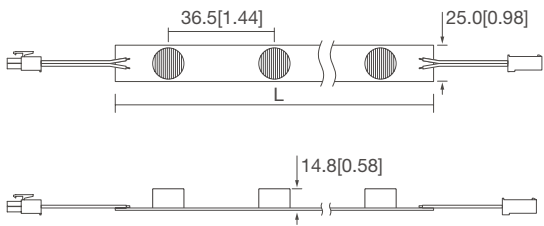


Model No.	L:mm/inch
BPS1-S3	219[8.62]
BPS1-S5	365[14.37]
BPS1-S6	438[17.24]
BPS1-S8	360[14.17]

PHOTOMETRIC

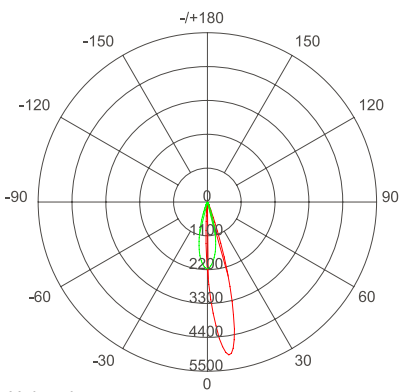

Unit: cd
- C 0/180,15.0°
- C90/270,27.6°
Average Beam Angle (50%):21.3°

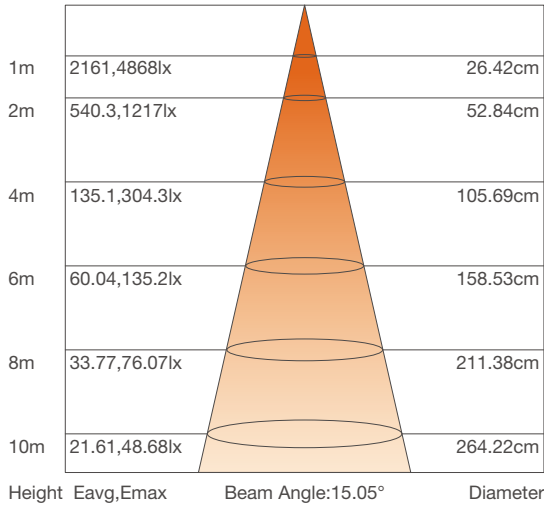

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BPS1-S3	24V DC	>6400K	984	120	8.2	3	10pcs
BPS1-S5	24V DC	>6400K	1620	120	13.5	5	6pcs
BPS1-S6	24V DC	>6400K	1872	120	15.6	6	5pcs
BPS1-S8	24V DC	>6400K	1920	120	16	8	4pcs

BP2-WNON-WATERPROOF




- Suitable for edge-lit lightbox with width less than 2m
- Secondary light distribution lens, uniform lighting
- Cuttable and easy to install
- Multiple specifications, support customization

CRI

70



PROFILE DRAWINGS

Unit:mm/inch

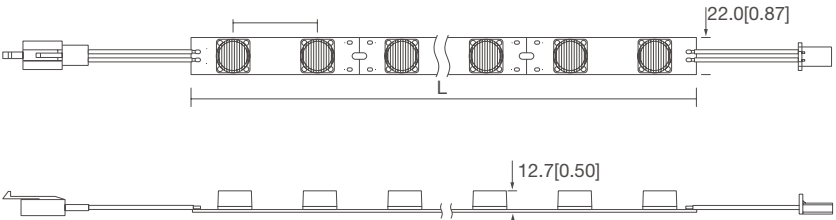

Model No.	L:mm/inch
BP2-W-0510	550[21.65]
BP2-W-0918	900[35.43]


PHOTOMETRIC

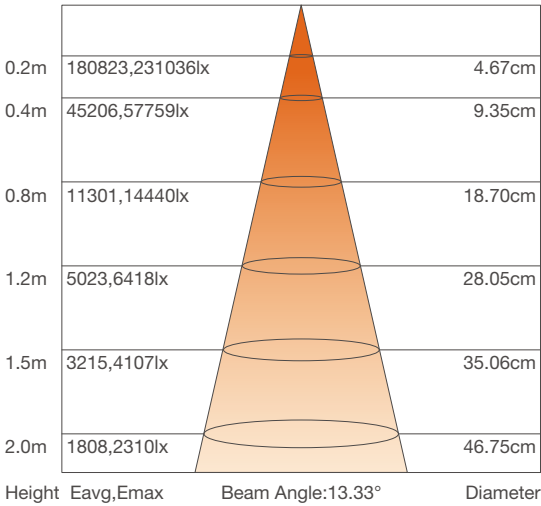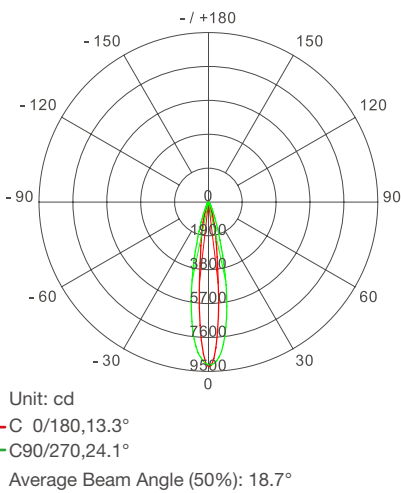

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BP2-W-0510	24V DC	3000-9000K	1530	85	18	10	4pcs
BP2-W-0918	24V DC	3000-9000K	2760	85	32	18	2pcs

BP2-JNON-WATERPROOF

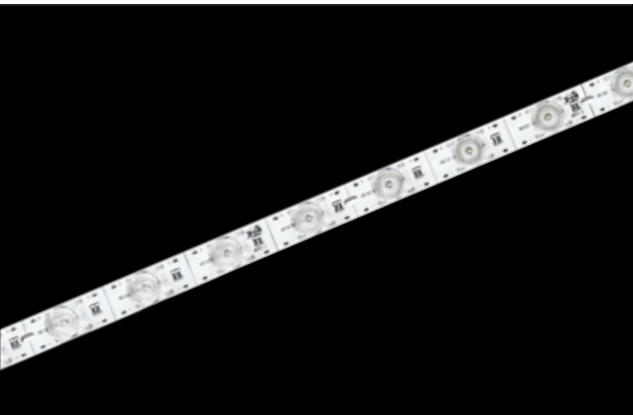


- Adopt secondary light distribution lens.
- Single LED cuttable.
- Support PWM, 0-10V, DALI and DMX dimming.
- Multiple specifications, support customization.

CRI

80



PROFILE DRAWINGS

Unit:mm/inch

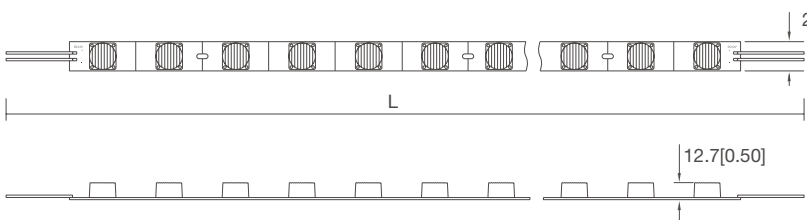

Model No.	L:mm/inch
BP2-J-0510	500[19.69]
BP2-J-0918	900[35.43]


PHOTOMETRIC

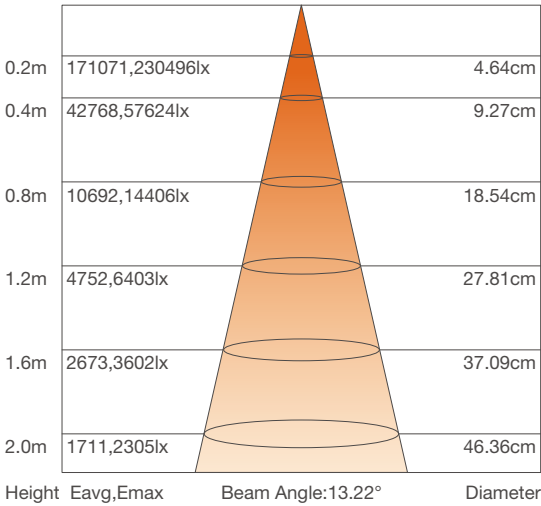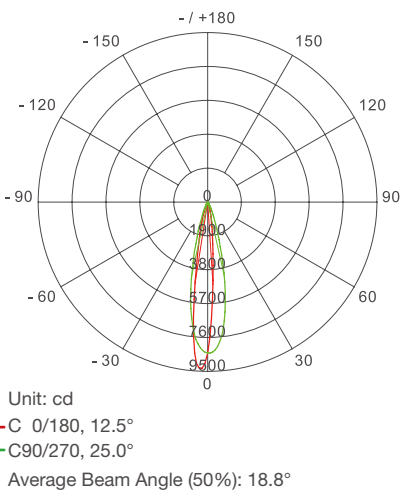

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BP2-J-0510	12V DC	3500-9000K	860	90	9.60	10	3pcs
BP2-J-0918	12V DC	3500-9000K	1550	90	17.28	18	2pcs



YZ9 WATERPROOF

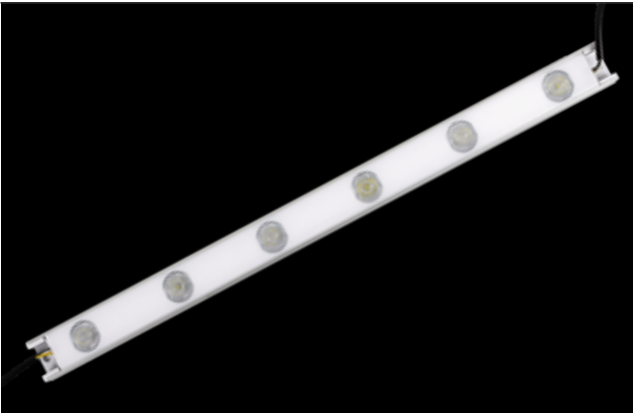

- Support dimming
- Use aluminum cover, better heat dissipation
- Adopt secondary light distribution lens
- Multiple specifications, support customization


PROFILE DRAWINGS

Unit:mm/inch

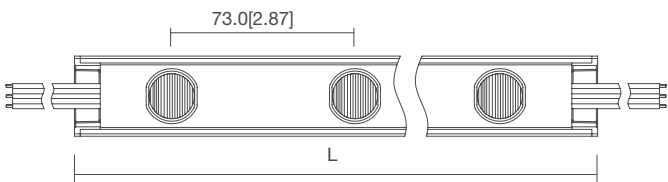


Model No.	L:mm/inch
YZ9-3	223.6[8.80]
YZ9-5	369.6[14.55]
YZ9-6	442.6[17.43]

PHOTOMETRIC

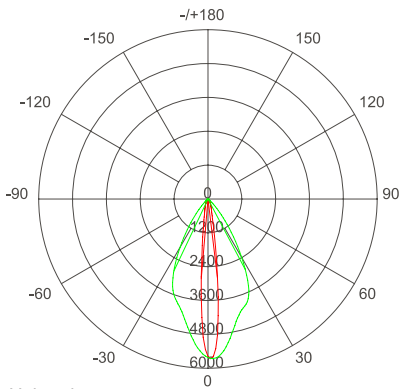

Unit: cd
- C 0/180,11.8°
- C90/270,53.3°
Average Beam Angle (50%): 32.5°

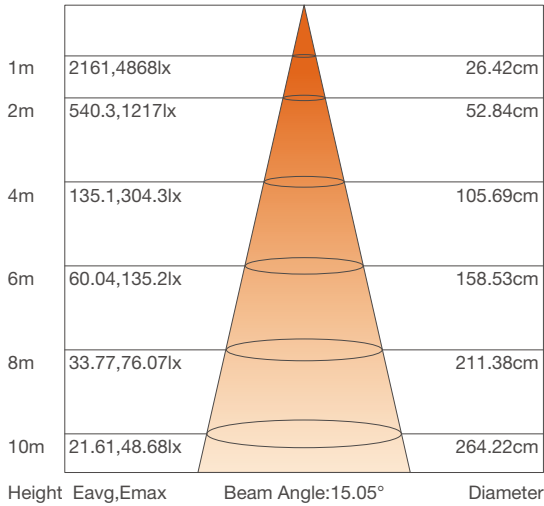

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YZ9-3	24V DC	3000-6500K	704	96	7.92	3	7pcs
YZ9-5	24V DC	3000-6500K	1176	100	13.2	5	5pcs
YZ9-6	24V DC	3000-6500K	1389	104	15.02	6	4pcs


QYD8 BACK-LIT LIGHT SOURCES



- Adopt OSRAM LED with high stability
- 170 ° beam angle, suitable for thin lightbox
- Aluminum PCB for better heat dissipation


PROFILE DRAWINGS

Unit:mm/inch

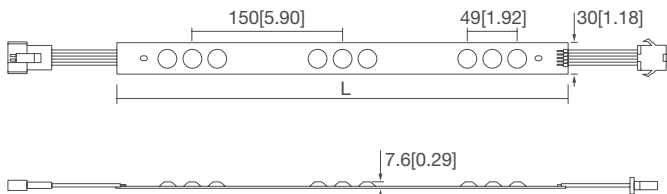


Model No.	L:mm/inch
QYD8-0509	450[17.71]

PHOTOMETRIC

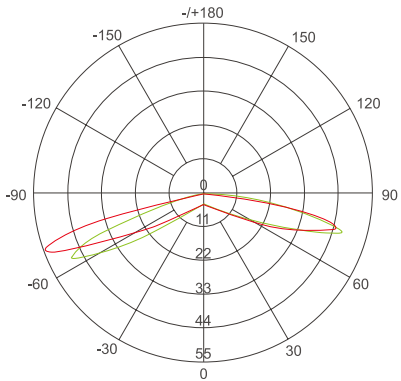

Unit: cd
- C 0/180,168.5°
- C90/270,159.1°
Average Beam Angle (50%):163.5°

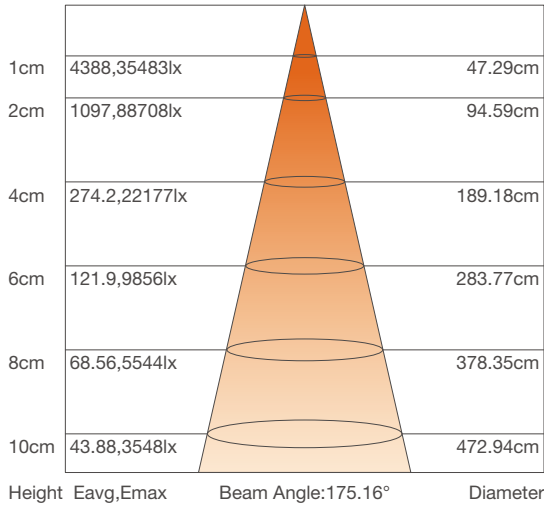

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QYD8-0509	24V DC	R:620nm G:540nm B:450nm	500	42	12	8	8pcs

BQ5-A

BACK-LIT LIGHT SOURCES

- Adopt RGB 3in1 2830 LED
- Good color-mixing effect and stability
- Special lens with 170° beam angle, suitable for thin light box
- Create rich color changing effects via controller
- Adopt standard terminals for easy mounting



NICHIA

LM-80

IP20

LED2830


170°

DC24V

3Years


PROFILE DRAWINGS

Unit:mm/inch

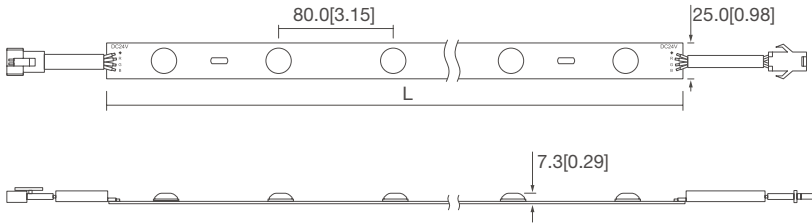

Model No.	L:mm/inch
BQ5-A	480[18.90]

PHOTOMETRIC

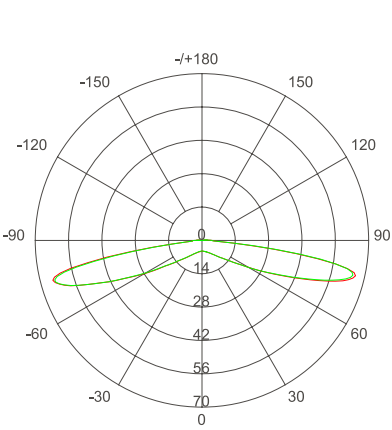

Unit: cd
- C 0/180,187.7°
- C90/270,187.6°
Average Beam Angle (50%): 187.7°

Height	Eavg,Emax	Beam Angle: 90.00°	Diameter
0.01m	2161,4868lx		2.00cm
0.02m	540.3,1217lx		4.00cm
0.04m	135.1,304.3lx		8.00cm
0.06m	60.04,135.2lx		12.0cm
0.08m	33.77,76.07lx		16.0cm
0.10m	21.61,48.68lx		20.0cm

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BQ5-A	24V DC	R:620nm	48	30.0	1.92	6	3pcs
		G:540nm	77	48.2	1.92		
		B:450nm	25	15.7	1.92		
		RGB:100000K	142	29.6	5.76		

RGBW-YD8

BACK-LIT LIGHT SOURCES

- Adopt high quality 3030LED
- 170° large beam angle
- Create rich color changing effects via controller



NICHIA

LM-80

IP20

LED3030

CRI 70


170°

DC24V

3Years


PROFILE DRAWINGS

Unit:mm/inch

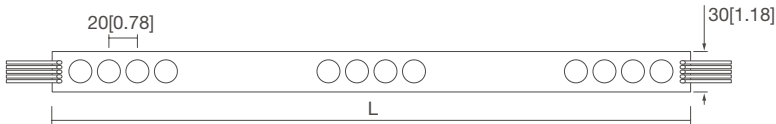

Model No.	L:mm/inch
RGBW-YD8	450[17.71]

PHOTOMETRIC

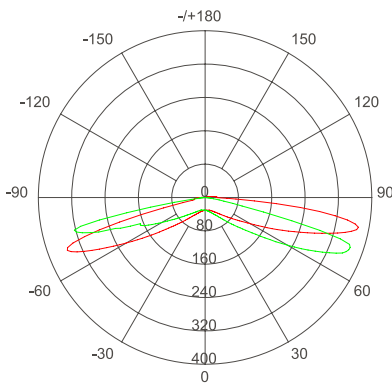

Unit: cd
- C 0/180,187.3°
- C90/270,164.4°
Average Beam Angle (50%):175.9°

Height	Eavg,Emax	Beam Angle:164.54°	Diameter
0.1m	383.2,3566lx		147.29cm
0.2m	95.80,891.5lx		294.59cm
0.4m	23.95,222.9lx		589.18cm
0.6m	10.64,99.05lx		883.77cm
0.8m	5.987,55.72lx		1178.36cm
1.0m	3.832,35.66lx		1472.95cm

BASIC PARAMETERS

Model No.	Voltage	CRI	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
RGBW-YD8	24V DC	/	R:620nm	500	42	≤15	12	3pcs
		/	G:540nm	500	42			
		/	B:450nm	500	42			
		>80	W:6500K	162	90			

QBPS

EDGE-LIT LIGHT SOURCES

- Adopt CREE LEDs with good stability
- Great lighting effect, long reach distance
- Aluminum PCB for better heat dissipation
- Create rich color changing effects via controller



CREE

LM-80

IP20

LED2525

ONE BIN ONLY


10°60°

DC24V

3Years



PROFILE DRAWINGS

Unit:mm/inch

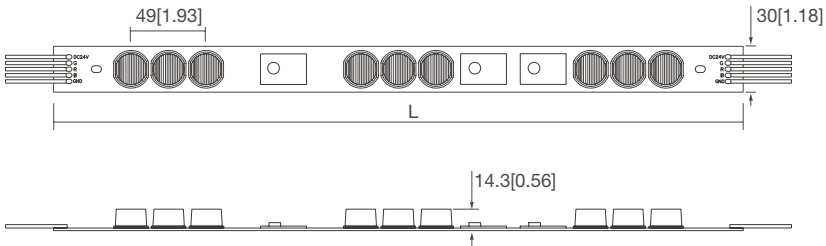

Model No.	L:mm/inch
QBPS-0509	450[17.72]

PHOTOMETRIC

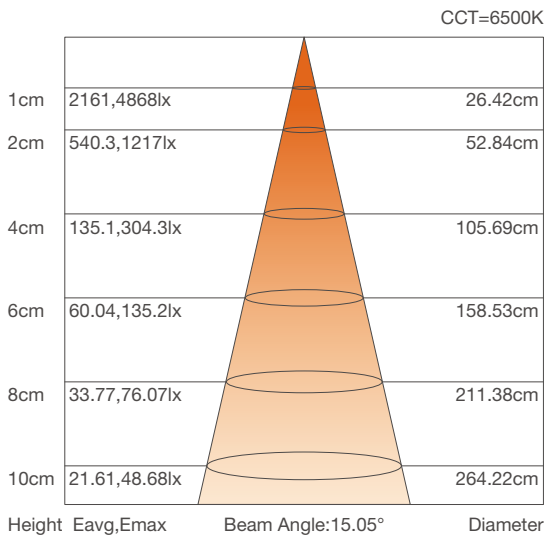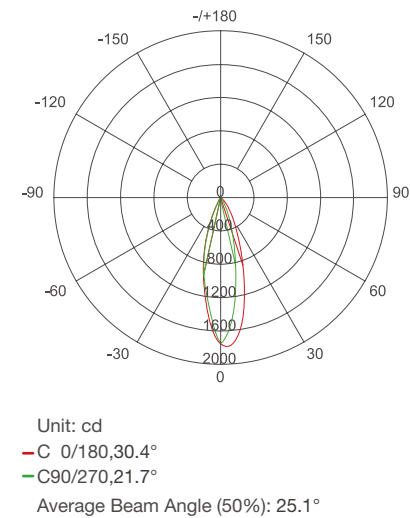

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QBPS-0509	24V DC	R:620-625nm G:520-525nm B:465-470nm	800	42	≤19	9	4pcs

QBPS-C

EDGE-LIT LIGHT SOURCES

- Special optical lens is used
- Adopt aluminum PCB for better heat dissipation
- Create rich color changing effects via controller
- Multiple specifications, support customization



LM-80

IP20

LED3535

10°20°


CRI
70

DC24V

3Years



PROFILE DRAWINGS

Unit:mm/inch

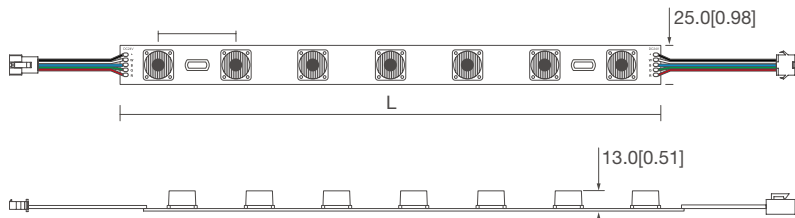

Model No.	L:mm/inch
QBPS-C	350[13.78]

PHOTOMETRIC

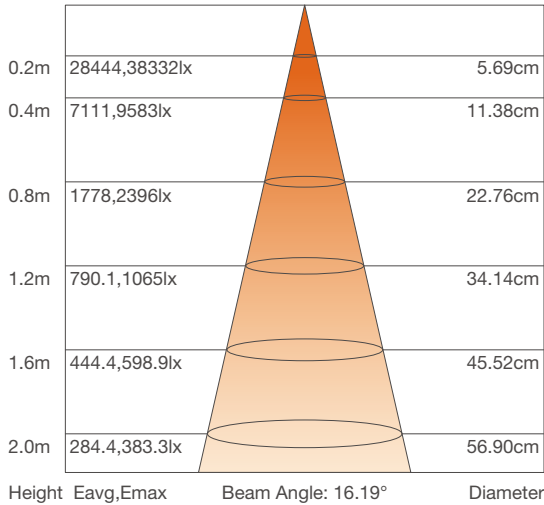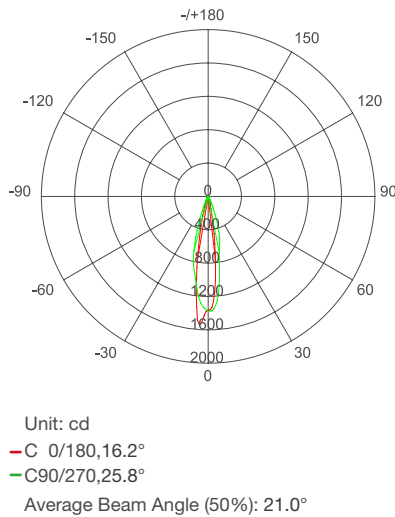

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QBPS-C	24V DC	W:6500K R:615-625nm G:515-530nm B:450-460nm RGB:100000K RGBW:100000K	243 138 247 38 409 630	86 45 83 14 46 53	3 3 3 3 9 12	7	2pcs

A1 2.0

AC RIGID BAR

- Aluminum PCB with PC cover, IP66 suitable for outdoor use.
- High efficiency & high power factor with PF>0.9, η>90%.
- Wide input voltage range from 85-240VAC
- Four lengths available





CRI

70


PROFILE DRAWINGS

Unit:mm/inch

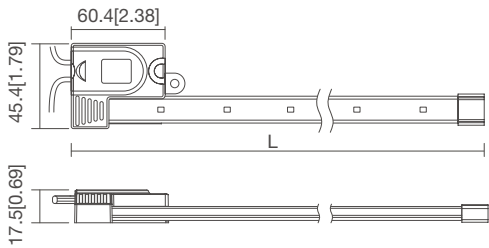


Model No.	L:mm/inch
A1 2.0-0626	595[23.43]
A1 2.0-07534	740[29.13]
A1 2.0-0940	900[35.43]
A1 2.0-1252	1180[46.46]

PHOTOMETRIC

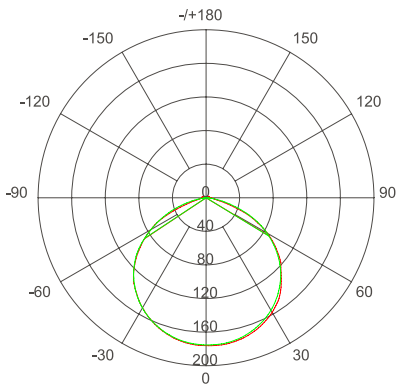

Unit: cd
- C 0/180,115.2°
- C90/270,115.3°
Average Beam Angle (50%): 115.2°

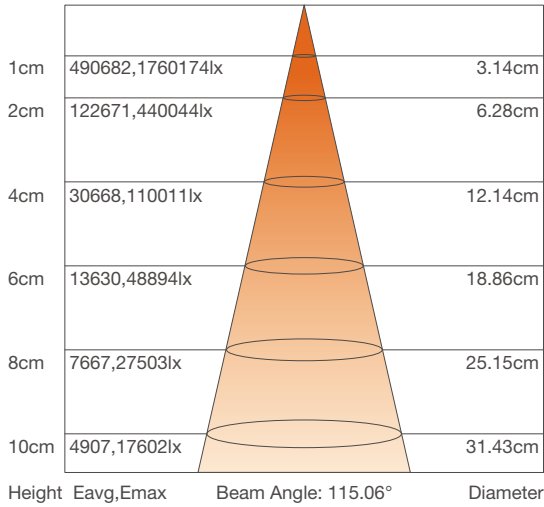

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A1 2.0-0626	90-265V AC	2700-10000K	515	106	5	26	6pcs
A1 2.0-07534	90-265V AC	2700-10000K	729	105	7	34	
A1 2.0-0940	90-265V AC	2700-10000K	813	105	8	40	
A1 2.0-1252	90-265V AC	2700-10000K	1078	105	10	52	

A2 2.0

AC RIGID BAR

- Wide input voltage range from 90-265V AC
- High power factor with PF≥ 0.9
- Curtain style for easy mounting
- Aluminum PCB for better heat dissipation





CRI

70


PROFILE DRAWINGS

Unit:mm/inch

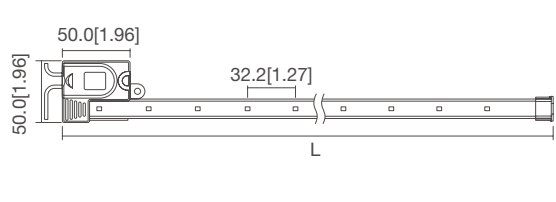


Model No.	L:mm/inch
A2 2.0-0309	306[12.05]
A2 2.0-0618	596[23.46]
A2 2.0-0927	886[34.88]
A2 2.0-1236	1176[46.30]

PHOTOMETRIC

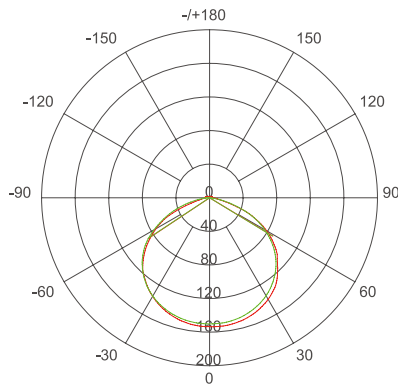

Unit: cd
- C 0/180,114.4°
- C90/270,111.8°
Average Beam Angle (50%): 112.5°

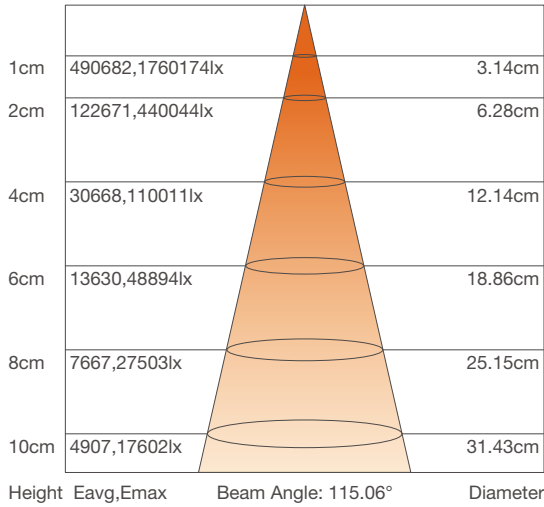

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A2 2.0-0309	90-265V AC	9000-11000K	225	75	3	9	6pcs
A2 2.0-0618	90-265V AC	9000-11000K	450	75	6	8	
A2 2.0-0927	90-265V AC	9000-11000K	675	75	9	27	
A2 2.0-1236	90-265V AC	9000-11000K	900	81	11	36	

A4-W AC RIGID BAR



- AC 220V input
- Self-designed optical lens for uniform lighting
- Do not support PWM dimming
- Multiple specifications, support customization

INDOOR

LM-80

IP20

LED2835

180°



CRI
80

AC198-265V

3Years


PROFILE DRAWINGS

Unit:mm/inch

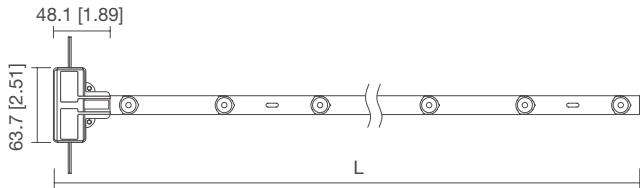


Model No.	L:mm/inch
A4-W-0606	590[23.23]
A4-W-0909	890[35.04]
A4-W-1212	1190[46.85]

PHOTOMETRIC

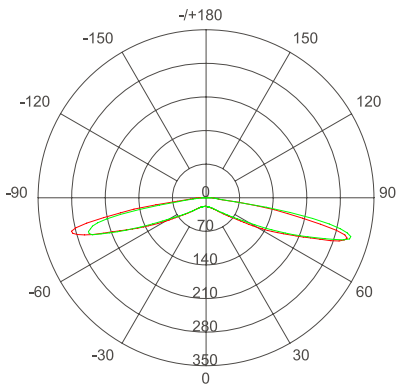

Unit: cd
- C 0/180,186.5°
- C90/270,176.0°
Average Beam Angle (50%): 181.2°

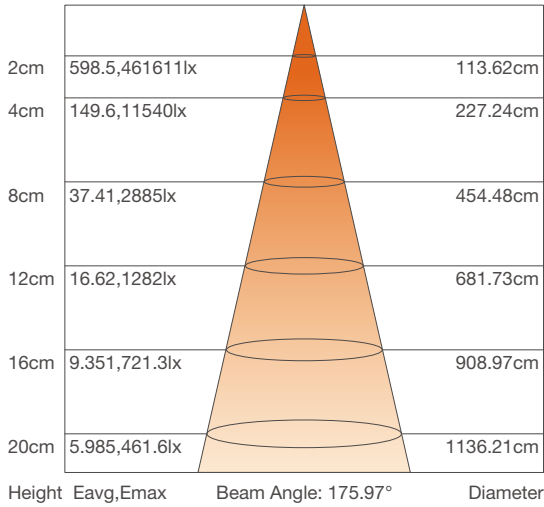

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A4-W-0606	198-265V AC	2700-12000K	599	106	6	6	6pcs
A4-W-0909	198-265V AC	2700-12000K	890	101	9	9	
A4-W-1212	198-265V AC	2700-12000K	1108	102	11	12	

A4-FW AC RIGID BAR



- 220V AC input
- Self-designed 170° wide beam angle for uniform lighting
- IP67 suitable for outdoor use
- Carton style ,6pcs/string for easy installation
- Four length for option,customization available

LM-80

IP66

LED2835

170°



CRI
80

AC220V

4Years


PROFILE DRAWINGS

Unit:mm/inch

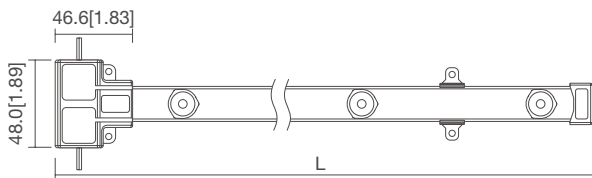


Model No.	L:mm/inch
A4-FW-0303	285[11.22]
A4-FW-0606	570[22.44]
A4-FW-0909	855[33.66]
A4-FW-1212	1150[45.28]

PHOTOMETRIC

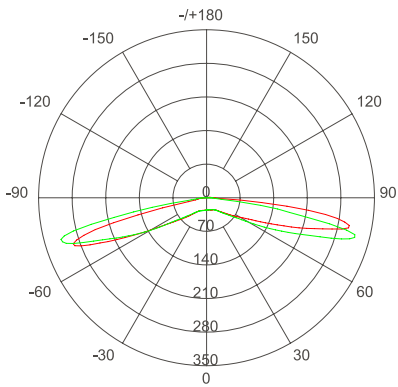

Unit: cd
- C 0/180,176.4°
- C90/270,174.8°
Average Beam Angle (50%): 175.6°

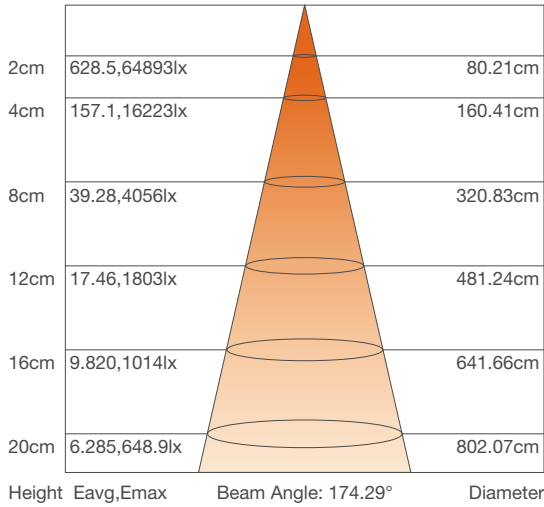


BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A4-FW-0303	220V AC	9000-12000K	309	99	3	3	6pcs
A4-FW-0606	220V AC	9000-12000K	608	104	6	6	
A4-FW-0909	220V AC	9000-12000K	906	104	9	9	
A4-FW-1212	220V AC	9000-12000K	1188	105	12	12	

NW-B^{WHITE}

- Can play various media files smoothly
- To get better picture quality than display screen with less cost
- Low-power consumption with timing control
- Suitable for lightbox with a depth of 6cm or more
- Highly modular, easy to install and maintain

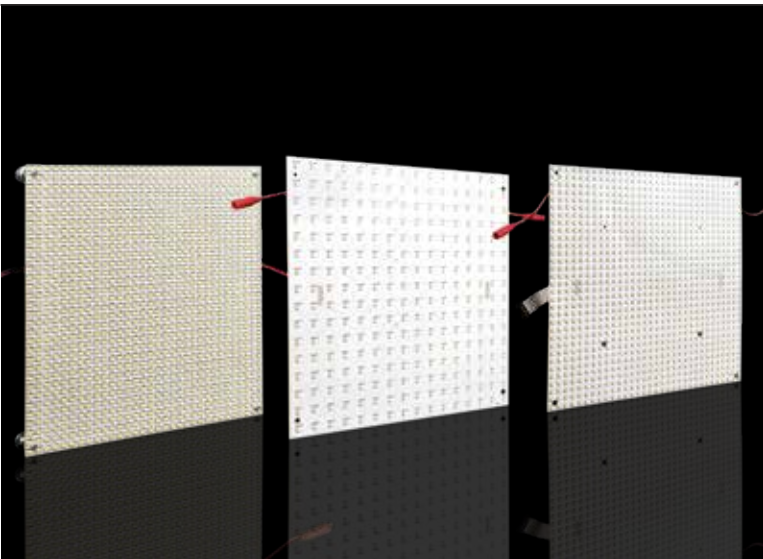

LM-80

ONE BIN ONLY

IP20


LED2835

DC5V

3Years

PROFILE DRAWINGS

Unit:mm/inch

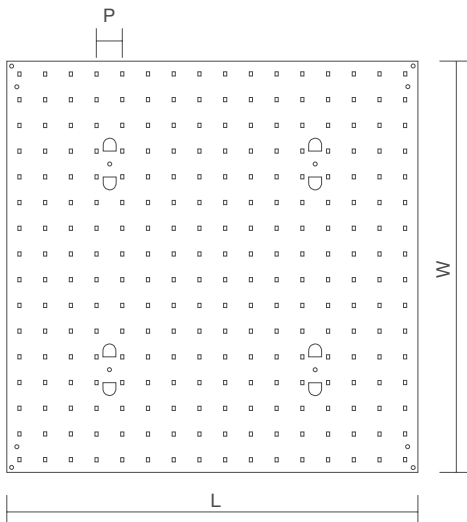


Model No.	L :mm/inch	W :mm/inch	P :mm/inch
NW128-B-P20-A1	320[12.90]	320[12.90]	20[0.79]
NW260-B-P10-A1	320[12.90]	320[12.90]	10[0.39]
NW260-B-P12-A1	384[15.12]	384[15.12]	12[0.47]
NW260-B-P6.5-A1	384[15.12]	384[15.12]	6.5[0.26]

BASIC PARAMETERS

Model No.	Voltage	Light Color	LM/pcs	Max. Current	Max.Power	LED-to-Canvas Distance
NW128-B-P20-A1	5V DC	W	1000	2.56 A/piece	12.8 W/piece	30-40mm
NW260-B-P10-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	25-30mm
NW260-B-P12-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	25-35mm
NW260-B-P6.5-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	20-25mm

NF-B^{RGB}

- This system could play various media files smoothly
- Various expressions and vivid contents with powerful visual impact
- To get better picture quality than display screen with less cost
- Low-power consumption with timing control
- Suitable for light boxes with a depth of 6CM or more
- Highly modular, easy to install and maintain

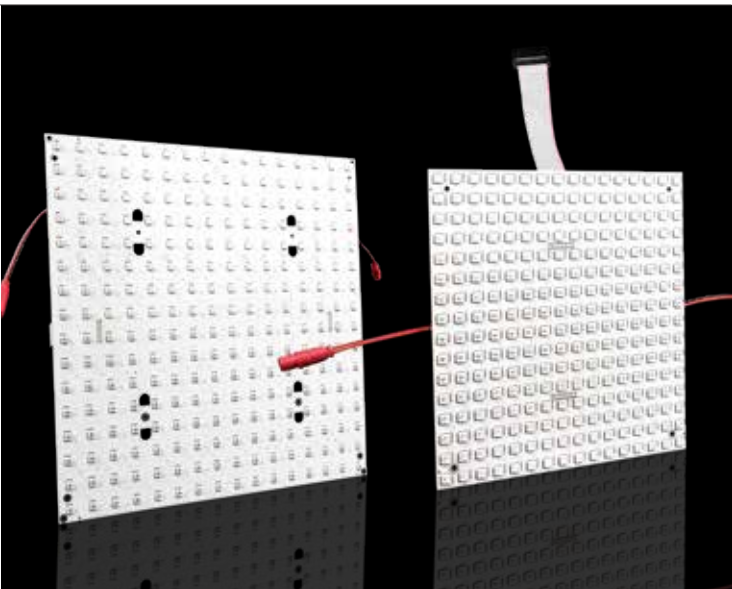

LM-80

ONE BIN ONLY

IP20

LED5050


DC5V

3Years


PROFILE DRAWINGS

Unit:mm/inch

NW128-B-P20-A1

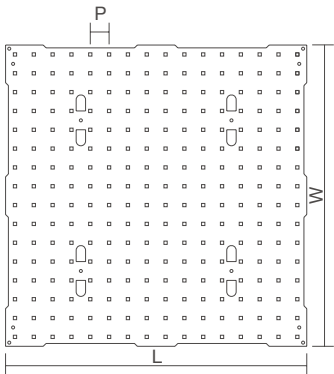

NW260-B-P10-A1

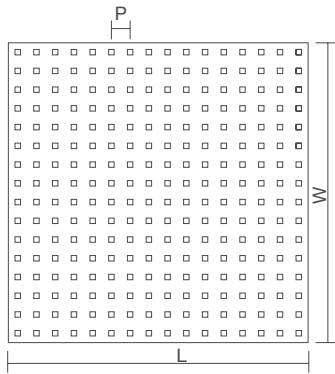

Model No.	L :mm/inch	W :mm/inch	P :mm/inch
NF230-B-P20-B1	320[12.90]	320[12.90]	20[0.79]
NF230-B-P12-B1	192[7.56]	192[7.56]	12[0.47]

BASIC PARAMETERS

Model No.	Voltage	Light Color	LM/pcs	Max. Current	Max.Power	LED-to-Canvas Distance
NW128-B-P20-A1	5V DC	W	1000	2.56 A/piece	12.8 W/piece	30-40mm
NW260-B-P10-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	25-30mm



Blueview Elec-Optic Tech Co., Ltd

Tel: +86-28-8148 0011

Fax: +86-28-8148 1258

Web: www.blueviewled.com

Email: sales@blueviewled.com

© No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Zone, Chengdu, Sichuan, China