


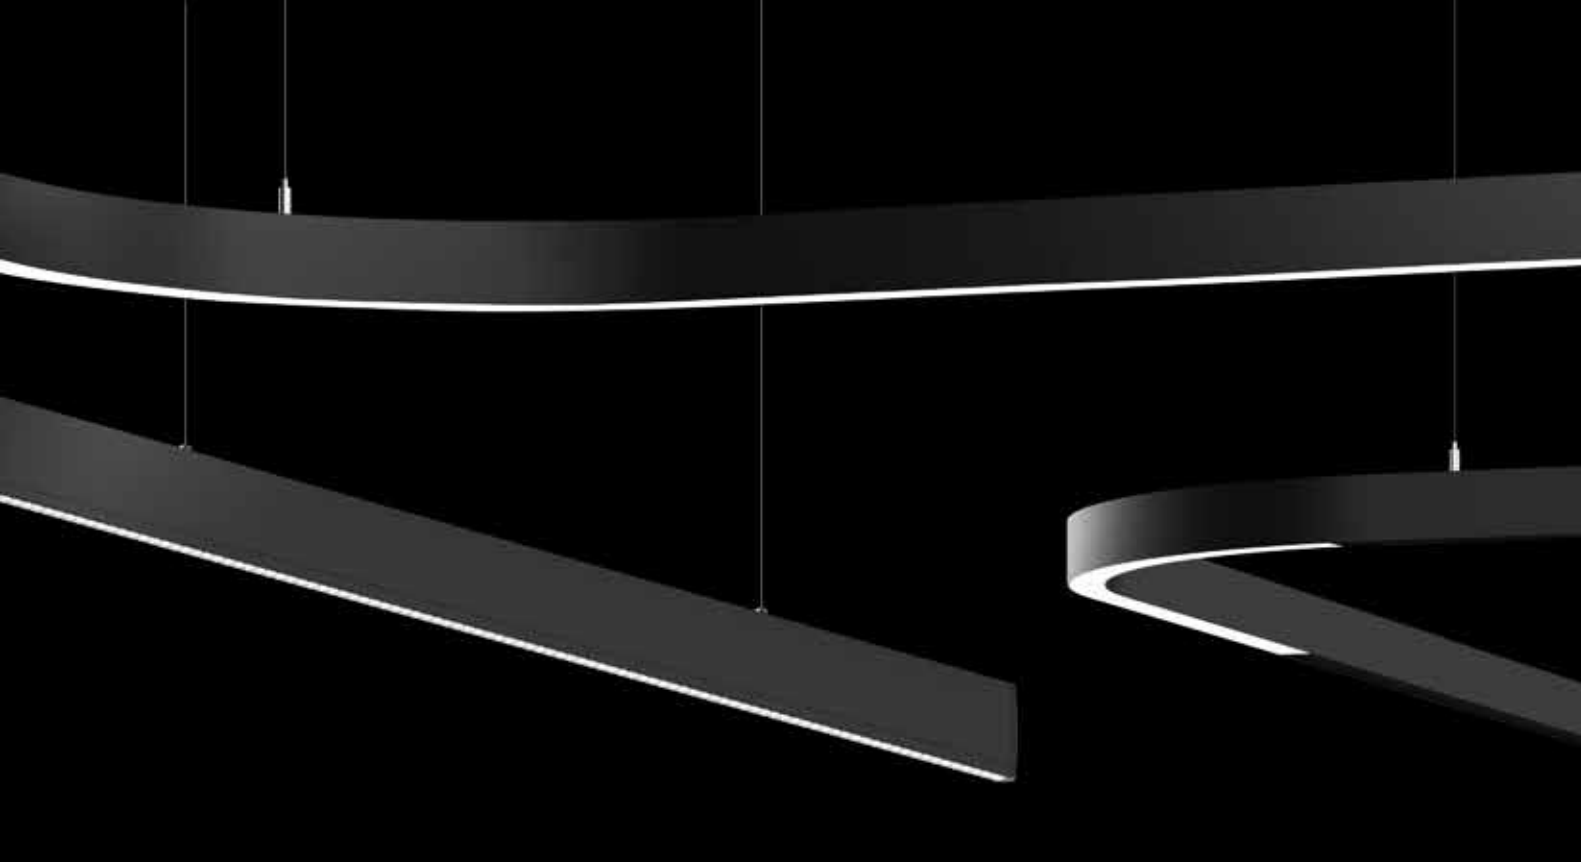

BLUEVIEW ELEC-OPTIC TECH CO.,LTD



Tel: +86-28-8148 0011 Add: No. 1000, Section 2, 2nd Konggang Road,
Fax: +86-28-8148 1258 Southwest Aviation Industrial Development Zone,
Web: www.blueviewled.com Shuangliu, Chengdu, Sichuan, China.610207

BVINSPIRATION LINEAR DIVISION

Mail: support@inspiration.com Add: No. 1 TianQin St., Wusha Industrial Zone,
Web: www.bvinspiration.com Henglan Town, ZhongShan, Guangdong, China

BV Inspiration

BLUEVIEW
Better Light Better View

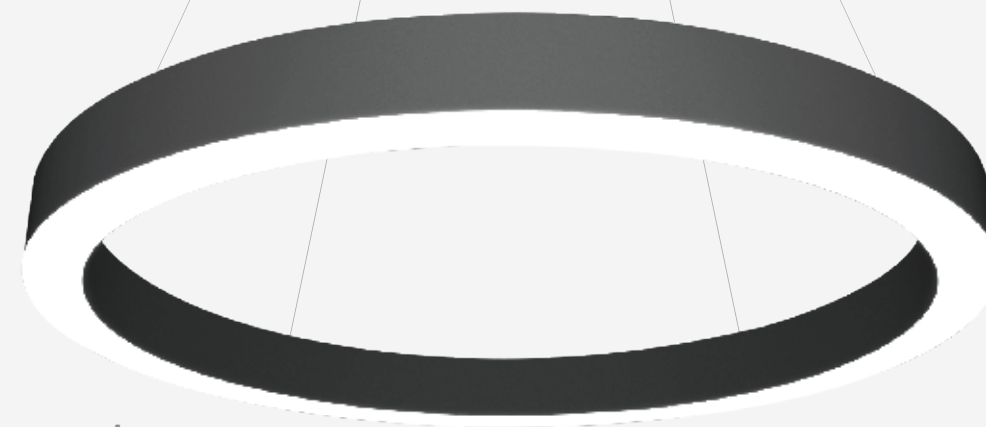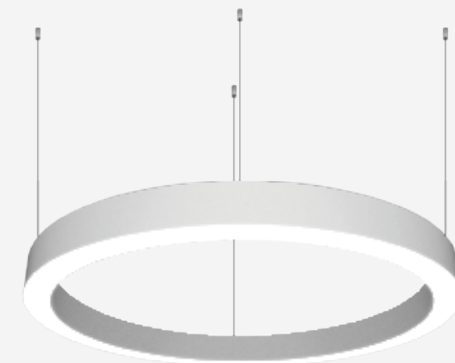

LINEAR LIGHTING

BLUEVIEW LINEAR LIGHT 2025

TOP 5

Reasons to choose Blueview linear lighting

BEST-IN-CLASS SERVICES

- Customized spec support, private label service
- 24 hours response policy
- Solution offering with result-oriented
- Technical, Sales, Marketing team service

EXPERIENCE YOU CAN TURST

- Aiming to long-term partner relationship
- Focus on the advantage LED manufacturing technology
- Serving for High-end Market over since 2004, 1150 employees

CLASSIC ENGINEERING DESIGN

- Modular system offers more than million variations
- Blue light harzard less lighting source
- Min labor cost on installation & maintenance

HIGH STANDARD QUALITY CONTROL

- TÜV Rheinland authorized laboratory
- Operations accredited to ISO 9001:2015
- Acoustical Lab. in house at ISO354 for most accurate NRC tested data.
- Over than 20 process on reliability testing for one item

ODM & OEM AVAILABLE

- 55 Engineers team
- Over than 80 R&D Patents
- Strong Supply Chain System

CONTENT

01	INTRODUCTION
03	LINEAR LIGHTING SYSTEM
09	PRODUCT VIEW
11	OLA SERIES
28	BENDING
29	CLOUD SERIES
31	FIREFLY SERIES
35	HAO SERIES
41	SLIM SERIES
81	LUZ SERIES
105	ZOLI SERIES
127	HONG SERIES
147	HILA SERIES
153	BVG SERIES
167	OLI SERIES

BVINSPIRATION INTRODUCE



About us

BVInspiration, born as a brand extension of Blueview in 2016, is your dedicated source for premium commercial architectural luminaires. With a steadfast commitment to excellence, we specialize in crafting high-performance LED luminaires tailored to elevate various environments, including offices, commercial spaces, educational institutions, recreational areas, and the hospitality sector.

Our mission revolves around delivering innovative solutions that not only meet but also anticipate the ever-evolving requirements of today's projects. Whether it's designing and manufacturing custom lighting solutions or staying ahead of industry trends, BVInspiration stands as the beacon of forward-thinking capabilities and innovation.

At the core of our philosophy is a close partnership with our clients. We believe in co-creating products that not only meet industry trends but also deliver functional and aesthetic advantages. Every product that bears our name is meticulously designed and engineered with the guiding principles of captivating design, ease of installation, user-friendly operation, and straightforward maintenance.

When you choose BVInspiration, you're not just selecting luminaires; you're embracing a legacy of excellence and innovation. Discover the BVInspiration difference and illuminate your spaces with brilliance.

Why BVInspiration

At BVInspiration, we offer a comprehensive approach to lighting solutions, meticulously covering every aspect from material selection to in-field installation. Our close collaboration with designers, suppliers, and assembly workers ensures realistic, superior, and flexible luminaire systems.


We provide an extensive range of optical options, including Direct, Direct & Indirect, Asymmetric, and Double Asymmetric lighting, with various lens options. Our products offer exceptional light quality with CRI95+ and 90+ options across 10 CCT settings. We also provide versatile dimming methods, from 0-10V to DALI and DMX, allowing precise control. Choose BVInspiration for lighting solutions that excel in design, functionality, and customization, setting us apart as your ideal partner.



Creative Transformations CURVE

What shapes you?

Our curved linear lighting system includes straight and curved modules that can be combined in different ways to create unique lighting projects. The modules can be configured to different ways such as curved shapes, waves or even more abstract shapes. The single or continuous luminaires can be suspended or ceiling/wall mounted and the light can have different directions: downwards, inwards, outwards or twisting.

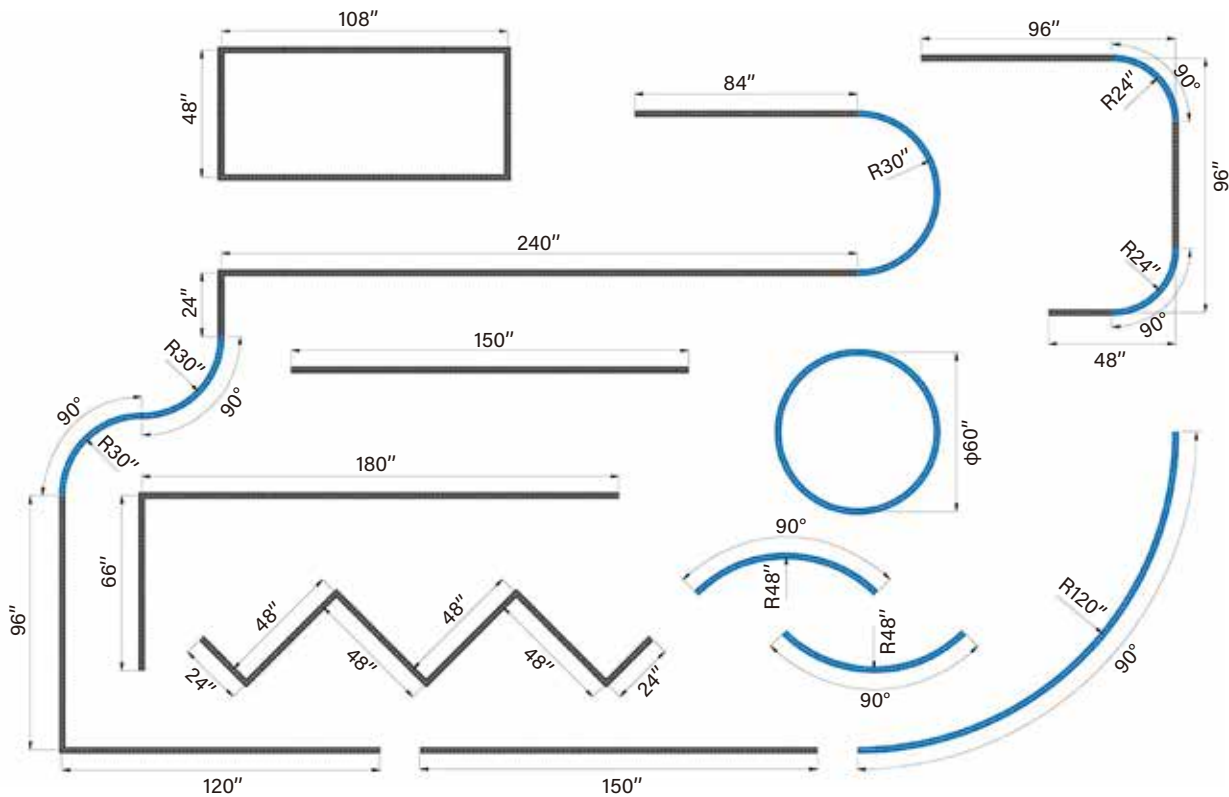

CURVED LINEAR LIGHTING SYSTEM

Shaping your space

It all starts with a line. Whether its architecture, fine art, design or engineering, it all begins the same way.

As ideas come together, the lines change direction, become curves, circles, rectangles and everything in between.

Explore the possibilities that allow the light flowing freely, creating independent or crossing rings, waves, spirals, interconnecting curves.



Module shapes & sizes

Circle	W15mm	W20mm	W30mm	W50mm	W75mm	W100mm
1/2 of a Circle	W15mm	W20mm	W30mm	W50mm	W75mm	W100mm
1/4 of a Circle	W15mm	W20mm	W30mm	W50mm	W75mm	W100mm
1/8 of a Circle	W15mm	W20mm	W30mm	W50mm	W75mm	W100mm

Your Design, Your Vision, Illuminated by Us.


LED Quality Options



Colour Temperature



Installation

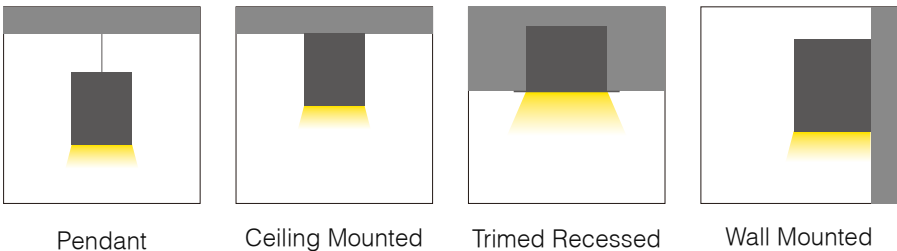

Finishes

Explore our range of standard colors, matt white, black, and silver, for a timeless and classic look. Additionally, we offer a stunning selection of 48 colors for powder coating finishes, allowing you to add a touch of personality and uniqueness to your space.



Prime Color Options

BVFC 7023	BVFC 7024	BVFC 7028	BVFC 7030	BVFC 7032	BVFC 7035	BVFC 7037
BVFC 7043	BVFC 7047	BVFC 7048	BVFC 8004	BVFC 8015	BVFC 8019	BVFC 8025
BVFC 9001	BVFC 9002	BVFC 9004	BVFC 9006	BVFC 9007	BVFC 9010	BVFC 7021
BVFC 7022	BVFC 9011	BVFC 9016	BVFC 9017	BVFC 1001	BVFC 1002	BVFC 1007
BVFC 1034	BVFC 1035	BVFC 2004	BVFC 3011	BVFC 3012	BVFC 3024	BVFC 4002
BVFC 5001	BVFC 5002	BVFC 5008	BVFC 5009	BVFC 5011	BVFC 5012	BVFC 5013
BVFC 5025	BVFC 6000	BVFC 7009	BVFC 7010	BVFC 7012	BVFC 7016	

Diffuser



Flush Optical Kit
Creating the most human friendly lighting.



Prismatic Lens
Available for anti-glaring lighting requirements.



General PC lens
With high transmission.

Gapless Joining In Filed



Gapless joining solution that significantly reduces field labor requirements.



MORE LIGHT SOURCE & DRIVER OPTIONS



Product View

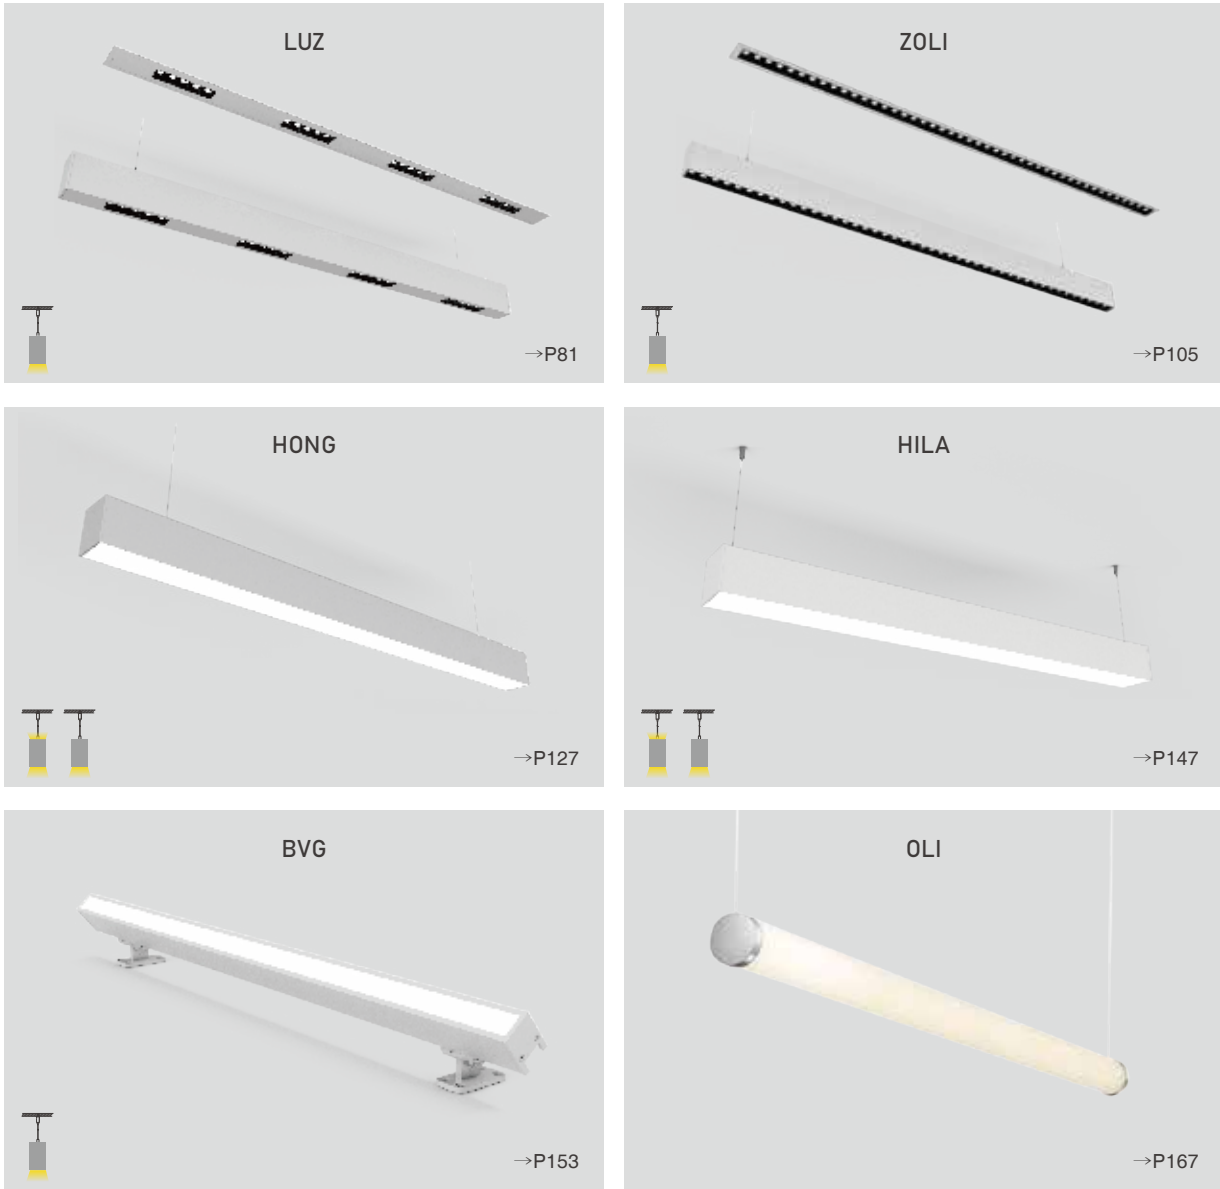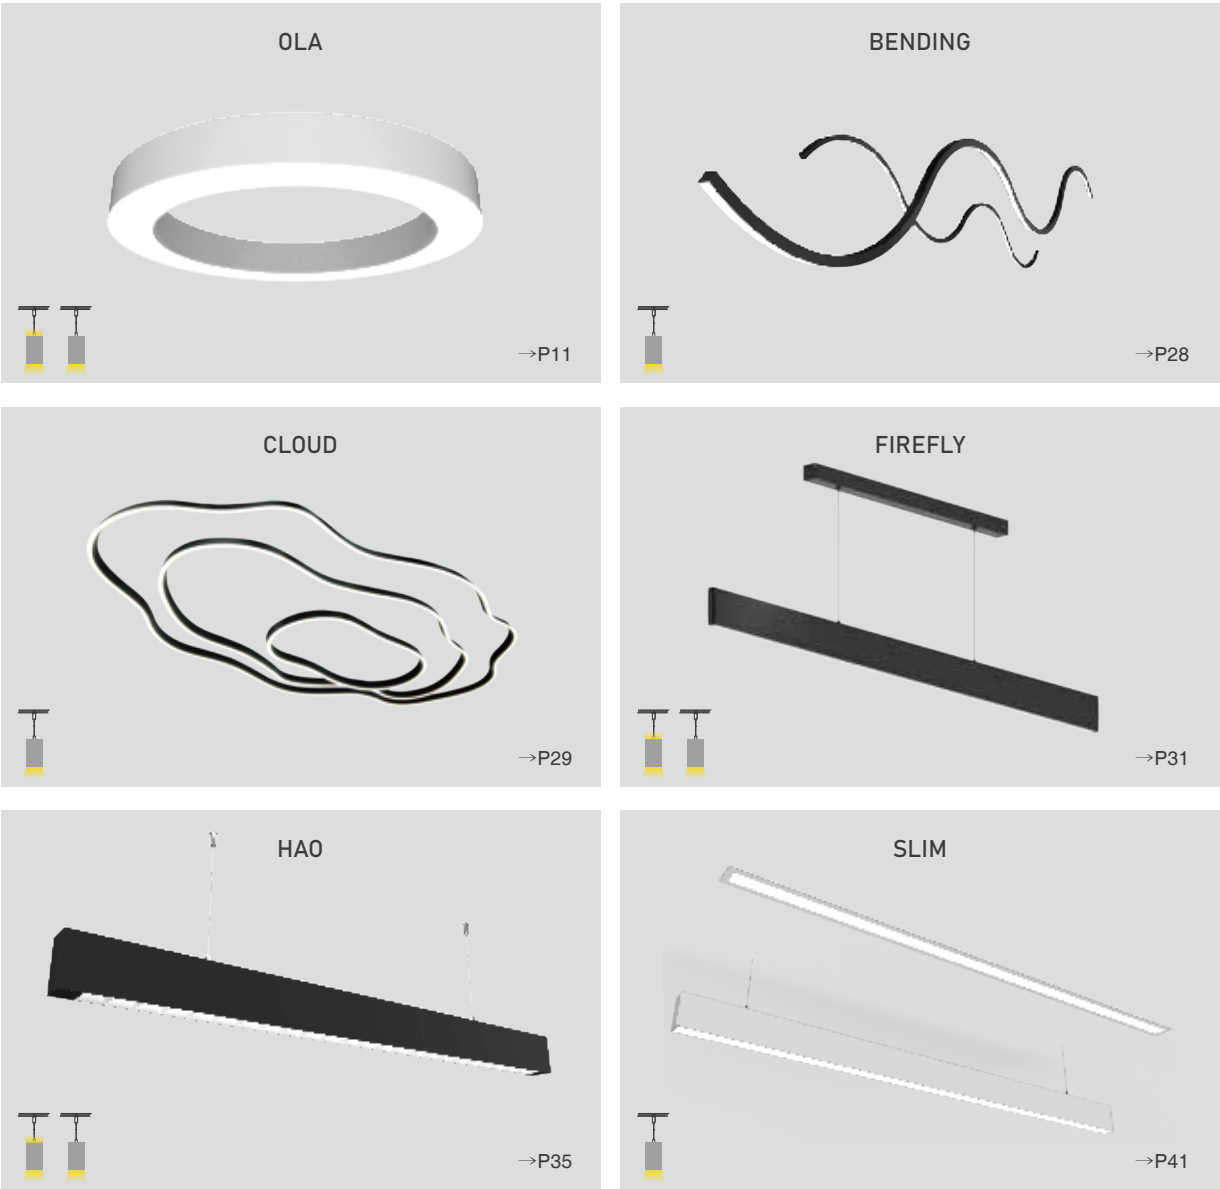

OLA Bendable System

OLA is a range of creatively designed and high-performance curved luminaires that come equipped with a host of top-quality features. Including snap-in silicone lenses, seamless housing shapes.

It provides wider and more uniform illumination. OLA is a top-quality linear lighting that offers exceptional performance, innovative features, and a stylish design.

- Direct & Indirect 5 types width in 20mm, 30mm, 50mm, 75mm, 100mm
- The curved corners give the luminaires a more sophisticated and stylish design
- Micro-Prismatic & Rolling silicone lens
- Seam-less joining for greater flexibility in application
- Customized Bending Shape available

SHAPES



Ring



Square



Rectangle



Track



Star








Bending




Luminaires with rounded shapes, devoid of sharp angles, blend into space in a gentle and fluid manner.
When arranged in patterns, the curves create a scenic route with playful twists and turns that are unpredictable.
OLA luminaires provide greater flexibility in lighting design.

Dimension Unit:mm[in]




■ Ring

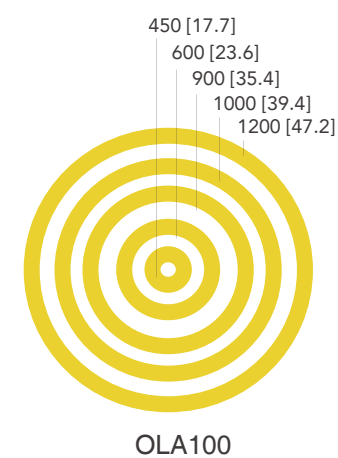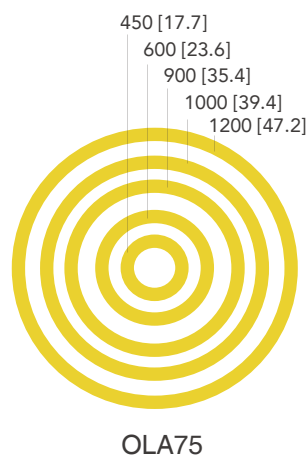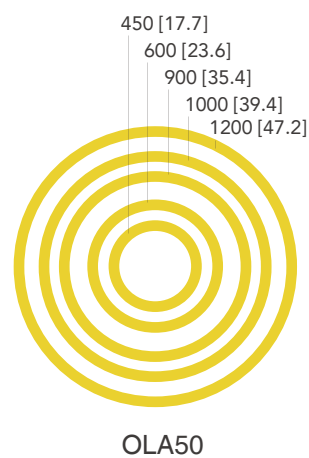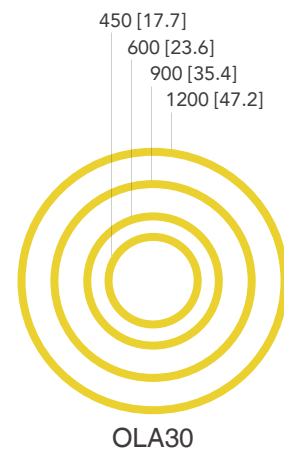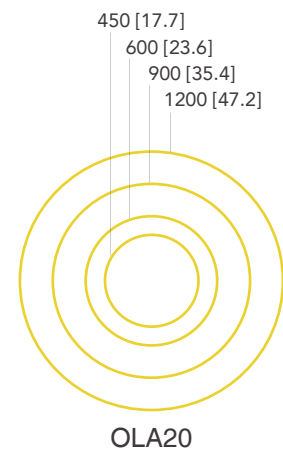




■ Square

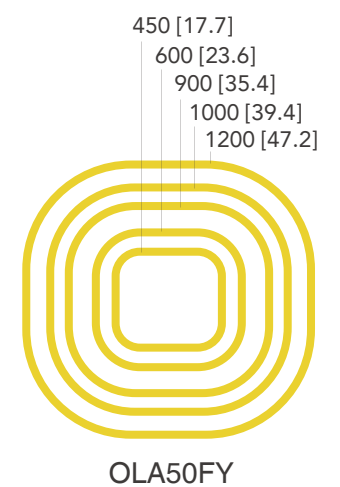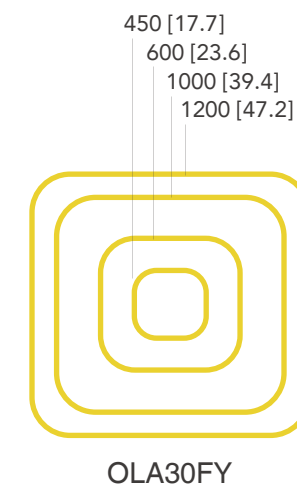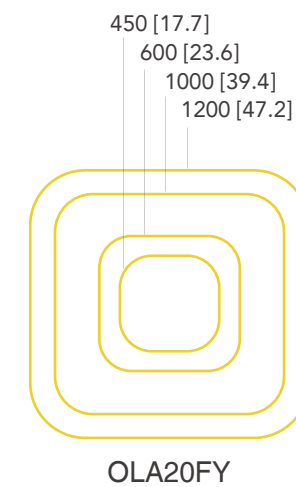

■ Rectangle OLA50CFY

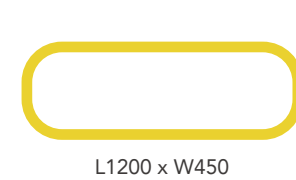


■ Track OLA50PD

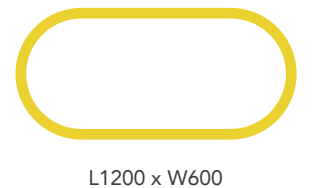

■ Bending OLA50R




■ Star OLA50S

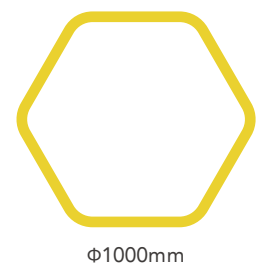


OLA20

BENDABLE SYSTEM LINEAR LIGHT

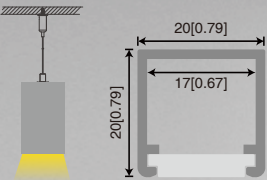

OLA30

BENDABLE SYSTEM LINEAR LIGHT

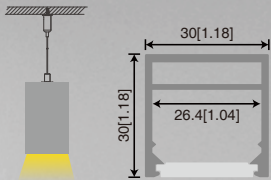

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA20	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ 450 x W20 x H20mm	1- 17.0W	3000K	70lm/W	1- 80+ (1280lm) - 90+ (1190lm)	Aircraft Cable Pendant	DALI
2- Φ 600 x W20 x H20mm	2- 25.0W	4000K		2- 80+ (1850lm) - 90+ (1700lm)		0-10V
3- Φ 900 x W20 x H20mm	3- 35.0W	2700~4000K		3- 80+ (2590lm) - 90+ (2380lm)		On/Off
4- Φ 1200 x W20 x H20mm	4- 70.0W			4- 80+ (5190lm) - 90+ (4760lm)		


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA30	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ 450 x W30 x H30mm	1- 21.0W	3000K	70lm/W	1- 80+ (1550lm) - 90+ (1420lm)	Aircraft Cable Pendant	DALI
2- Φ 600 x W30 x H30mm	2- 25.0W	4000K		2- 80+ (1830lm) - 90+ (1700lm)		0-10V
3- Φ 900 x W30 x H30mm	3- 50.0W	2700~4000K		3- 80+ (3706lm) - 90+ (3400lm)		On/Off
4- Φ 1200 x W30 x H30mm	4- 75.0W			4- 80+ (5560lm) - 90+ (5100lm)		

OLA50

BENDABLE SYSTEM LINEAR LIGHT





SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA50	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ450 x W50 x H75mm	1- 25.0W	3000K	70lm/W	1- 80+ (1850lm) - 90+ (1700lm)	Aircraft Cable Pendant	DALI
2- Φ600 x W50 x H75mm	2- 30.0W	4000K		2- 80+ (2220lm) - 90+ (2040lm)		0-10V
3- Φ900 x W50 x H75mm	3- 43.0W	2700~4000K		3- 80+ (3180lm) - 90+ (2920lm)		On/Off
4- Φ1000 x W50 x H75mm	4- 52.0W			4- 80+ (3850lm) - 90+ (3530lm)		
5- Φ1200 x W50 x H75mm	5- 60.0W			5- 80+ (4440lm) - 90+ (4080lm)		

OLA75

BENDABLE SYSTEM LINEAR LIGHT

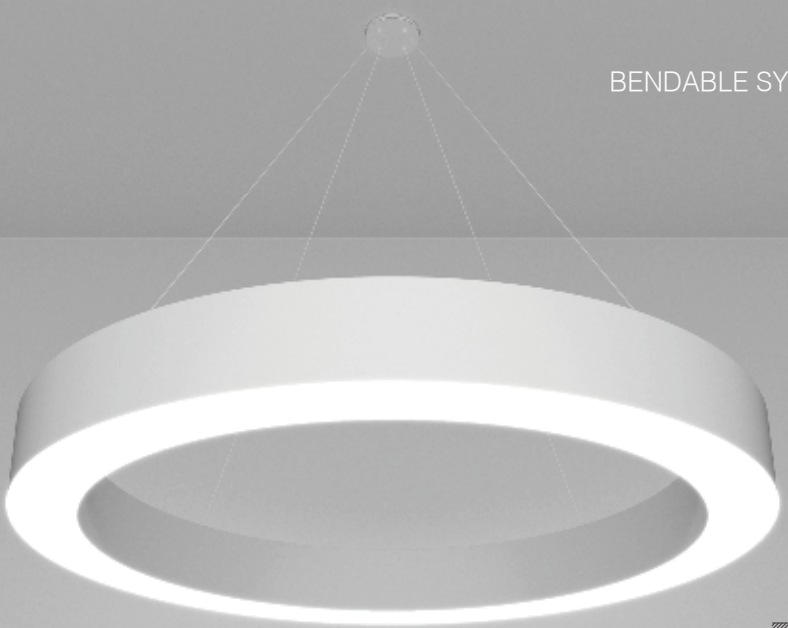


SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA75	Textured Black Textured White Silver Grey	PC Diffuser	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ450 x W75 x H100mm	1- 28.0W	3000K	40-50lm/W	1- 80+ (2075lm) - 90+ (1900lm)	Aircraft Cable Pendant	DALI
2- Φ600 x W75 x H100mm	2- 37.0W	4000K		2- 80+ (2740lm) - 90+ (2510lm)		0-10V
3- Φ900 x W75 x H100mm	3- 56.0W	2700~4000K		3- 80+ (4150lm) - 90+ (3808lm)		On/Off
4- Φ1000 x W75 x H100mm	4- 65.0W			4- 80+ (4810lm) - 90+ (4420lm)		
5- Φ1200 x W75 x H100mm	5- 78.0W			5- 80+ (5780lm) - 90+ (5340lm)		

OLA100
BENDABLE SYSTEM LINEAR LIGHT



OLA20FY
BENDABLE SYSTEM LINEAR LIGHT



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA100	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ450 x W100 x H100mm	1- 35.0W	3000K	70lm/W	1- 80+ (2594lm) - 90+ (2380lm)	Aircraft Cable Pendant	DALI
2- Φ600 x W100 x H100mm	2- 48.0W	4000K		2- 80+ (3550lm) - 90+ (3260lm)		0-10V
3- Φ900 x W100 x H100mm	3- 70.0W	2700~4000K		3- 80+ (5180lm) - 90+ (4760lm)		On/Off
4- Φ1000 x W100 x H100mm	4- 78.0W			4- 80+ (5780lm) - 90+ (5300lm)		
5- Φ1200 x W100 x H100mm	5- 95.0W			5- 80+ (7040lm) - 90+ (6460lm)		



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA20FY	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L450 x W450mm 1- Luminaire W20 x H20mm	1- 17.6W	3000K	70lm/W	1- 80+ (1300lm) - 90+ (1190lm)	Aircraft Cable Pendant	DALI
2- L600 x W600mm 2- Luminaire W20 x H20mm	2- 34.0W	4000K		2- 80+ (2520lm) - 90+ (2310lm)		0-10V
3- L1000 x W1000mm 3- Luminaire W20 x H20mm	3- 51.0W	2700~4000K		3- 80+ (3780lm) - 90+ (3460lm)		On/Off
4- L1200 x W1200mm 4- Luminaire W20 x H20mm	4- 59.0W			4- 80+ (4370lm) - 90+ (4000lm)		



OLA30FY

BENDABLE SYSTEM LINEAR LIGHT

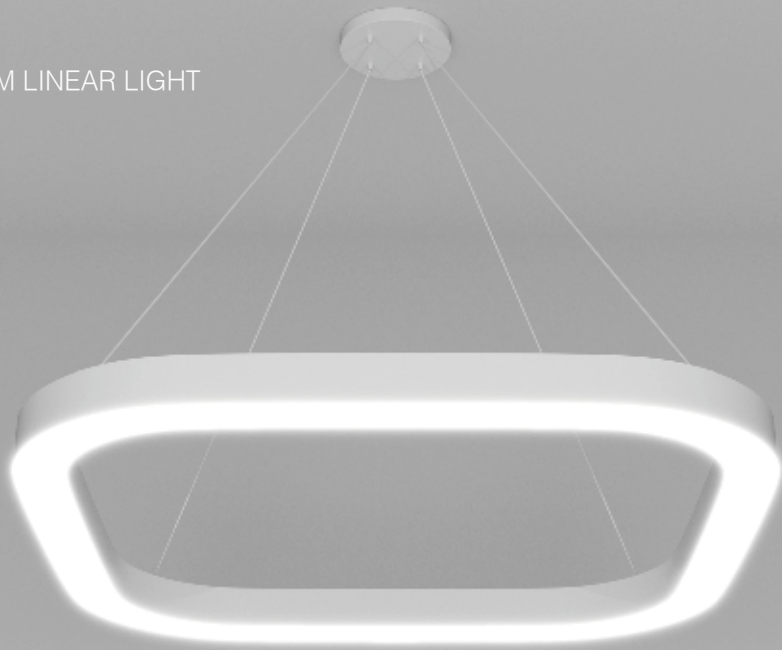

OLA50FY

BENDABLE SYSTEM LINEAR LIGHT

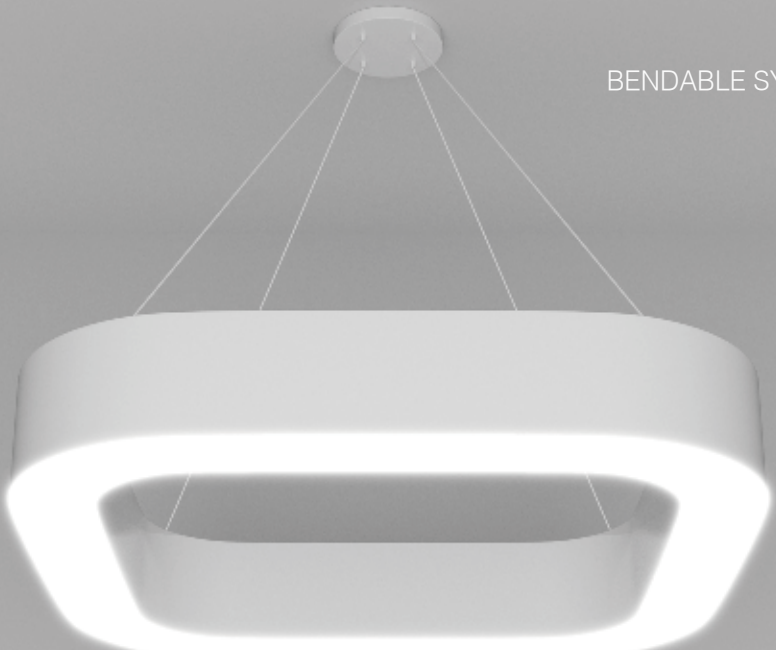

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA30FY	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L450 x W450mm 1- Luminaire W30 x H30mm	1- 21.0W	3000K	70lm/W	1- 80+ (1550lm) - 90+ (1420lm)	Aircraft Cable Pendant	DALI
2- L600 x W600mm 2- Luminaire W30 x H30mm	2- 38.0W	4000K		2- 80+ (2810lm) - 90+ (2580lm)		0-10V
3- L1000 x W1000mm 3- Luminaire W30 x H30mm	3- 59.0W	2700~4000K		3- 80+ (4370lm) - 90+ (4010lm)		On/Off
4- L1200 x W1200mm 4- Luminaire W30 x H30mm	4- 68.0W			4- 80+ (5040lm) - 90+ (4620lm)		

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA50FY	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L450 x W450mm 1- Luminaire W50 x H75mm	1- 25.0W	3000K	40-50lm/W	1- 80+ (1850lm) - 90+ (1700lm)	Aircraft Cable Pendant	DALI
2- L600 x W600mm 2- Luminaire W50 x H75mm	2- 42.0W	4000K		2- 80+ (3110lm) - 90+ (2850lm)		0-10V
3- L900 x W900mm 3- Luminaire W50 x H75mm	3- 59.0W	2700~4000K		3- 80+ (4370lm) - 90+ (4010lm)		On/Off
4- L1000 x W1000mm 4- Luminaire W50 x H75mm	4- 68.0W			4- 80+ (5040lm) - 90+ (4620lm)		
5- L1200 x W1200mm 5- Luminaire W50 x H75mm	5- 76.0W			5- 80+ (5630lm) - 90+ (5160lm)		

OLA50CFY

BENDABLE SYSTEM LINEAR LIGHT




SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA50CFY	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L1000 x W450mm 1- Luminaire W50 x H75mm	1- 38.0W 2- 42.0W	3000K 4000K	70lm/W	1- 80+ (2810lm) - 90+ (2580lm)	Aircraft Cable Pendant	DALI 0-10V
2- L1000 x W600mm 2- Luminaire W50 x H75mm	3- 51.0W 4- 59.0W	2700~4000K		2- 80+ (3110lm) - 90+ (2850lm)		On/Off
3- L1200 x W450mm 3- Luminaire W50 x H75mm				3- 80+ (3780lm) - 90+ (3460lm)		
4- L1200 x W600mm 4- Luminaire W50 x H75mm				4- 80+ (4370lm) - 90+ (4010lm)		

OLA50PD

BENDABLE SYSTEM LINEAR LIGHT


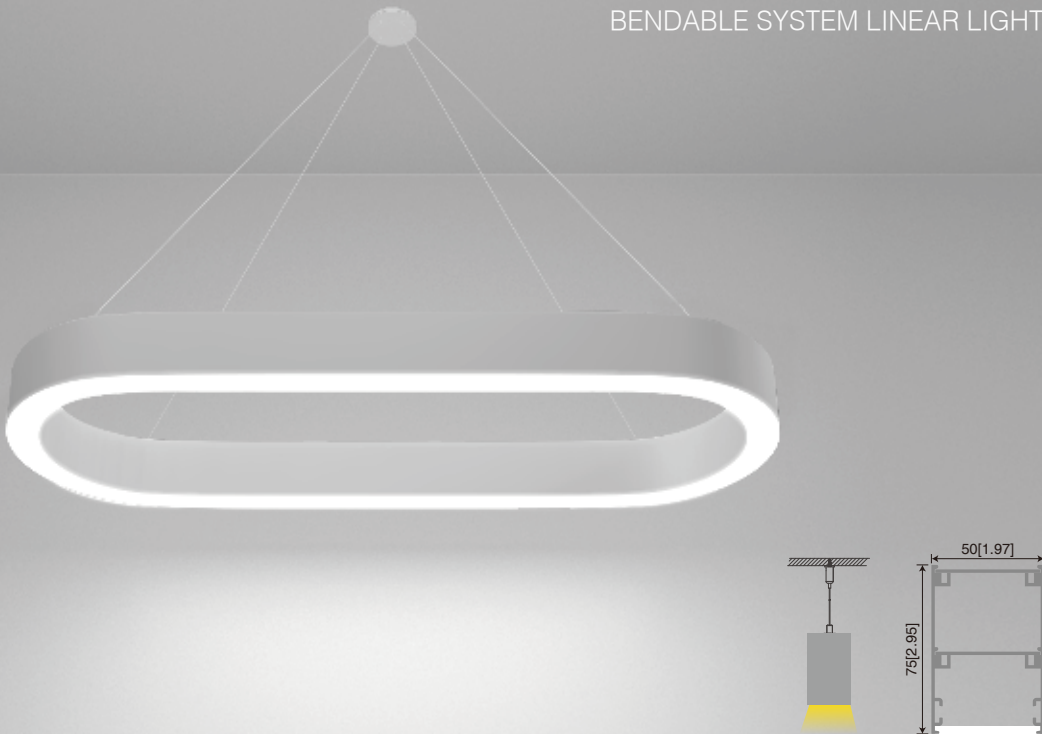


SPECIFICATION



LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA50PD	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L1000 x W450mm 1- Luminaire W50 x H75mm	1- 38.0W 2- 42.0W	3000K 4000K	70lm/W	1- 80+ (2850lm) - 90+ (2622lm)	Aircraft Cable Pendant	DALI 0-10V
2- L1000 x W600mm 2- Luminaire W50 x H75mm	3- 51.0W 4- 59.0W	2700~4000K		2- 80+ (3150lm) - 90+ (2900lm)		On/Off
3- L1200 x W450mm 3- Luminaire W50 x H75mm				3- 80+ (3835lm) - 90+ (3520lm)		
4- L1200 x W600mm 4- Luminaire W50 x H75mm				4- 80+ (4430lm) - 90+ (4070lm)		

OLA50S
BENDABLE SYSTEM LINEAR LIGHT

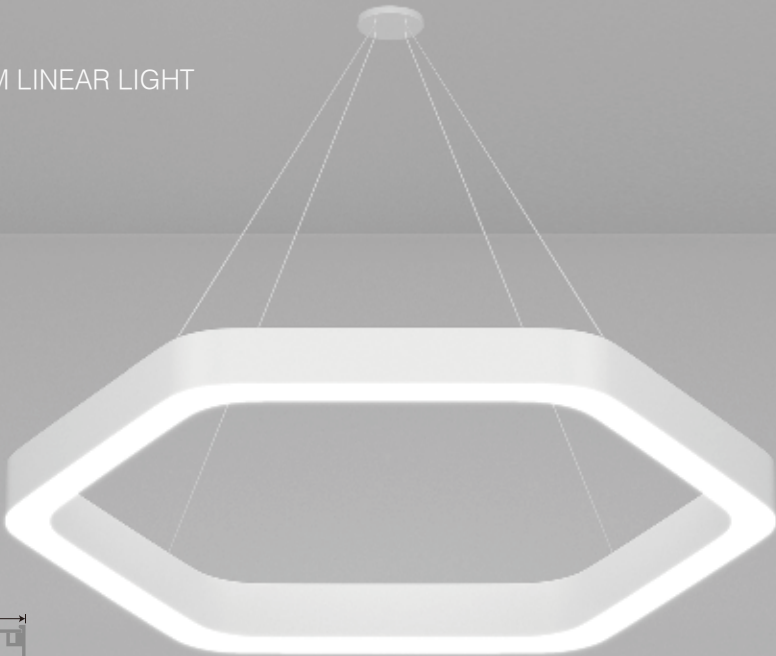

OLA-H3035
BENDABLE SYSTEM LINEAR LIGHT

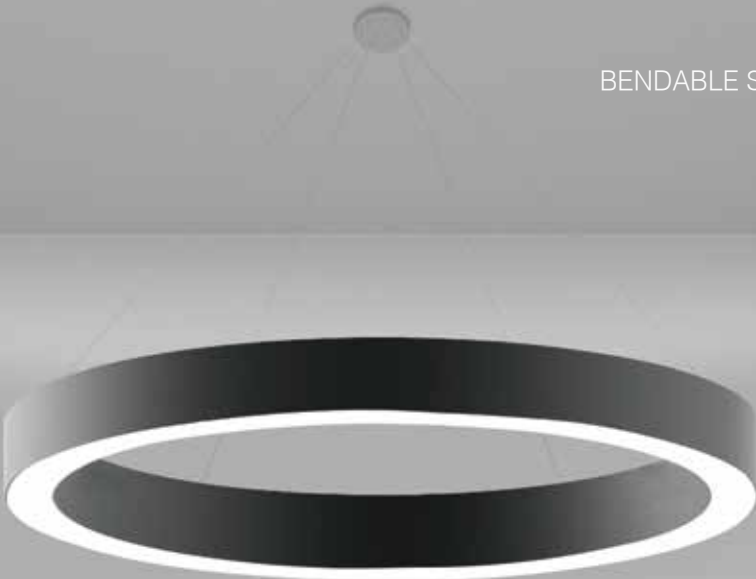

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA50S	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC



DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L1000 x W450mm 1- Luminaire W50 x H75mm	1- 38.0W	3000K	70lm/W	1- 80+ (2810lm) - 90+ (2580lm)	Aircraft Cable Pendant	DALI
2- L1000 x W600mm 2- Luminaire W50 x H75mm	2- 42.0W 3- 51.0W	4000K 2700~4000K		2- 80+ (3110lm) - 90+ (2850lm)		0-10V On/Off
3- L1200 x W450mm 3- Luminaire W50 x H75mm	4- 59.0W			3- 80+ (3780lm) - 90+ (3460lm)		
4- L1200 x W600mm 4- Luminaire W50 x H75mm				4- 80+ (4370lm) - 90+ (4010lm)		

SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA-H3035	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
Φ450mm	1- 38.0W	3000K	70lm/W	1- 80+ (2850lm) - 90+ (2622lm)	Aircraft Cable Pendant	DALI
Φ600mm	2- 42.0W	4000K		2- 80+ (3150lm) - 90+ (2900lm)		0-10V
Φ900mm	3- 51.0W			3- 80+ (3835lm) - 90+ (3520lm)		On/Off
Φ1200mm	4- 59.0W			4- 80+ (4430lm) - 90+ (4070lm)		
Φ1500mm						

OLA-H7590
BENDABLE SYSTEM LINEAR LIGHT

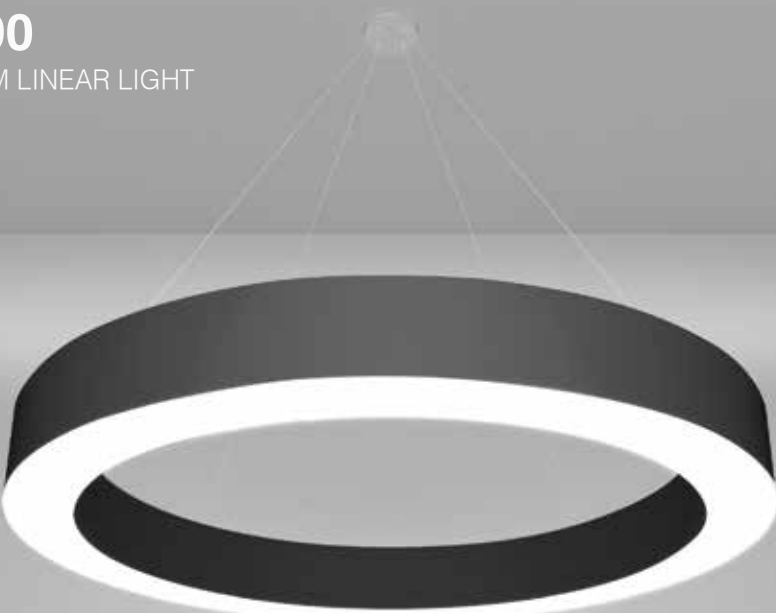

BENDING
BENDABLE SYSTEM LINEAR LIGHT

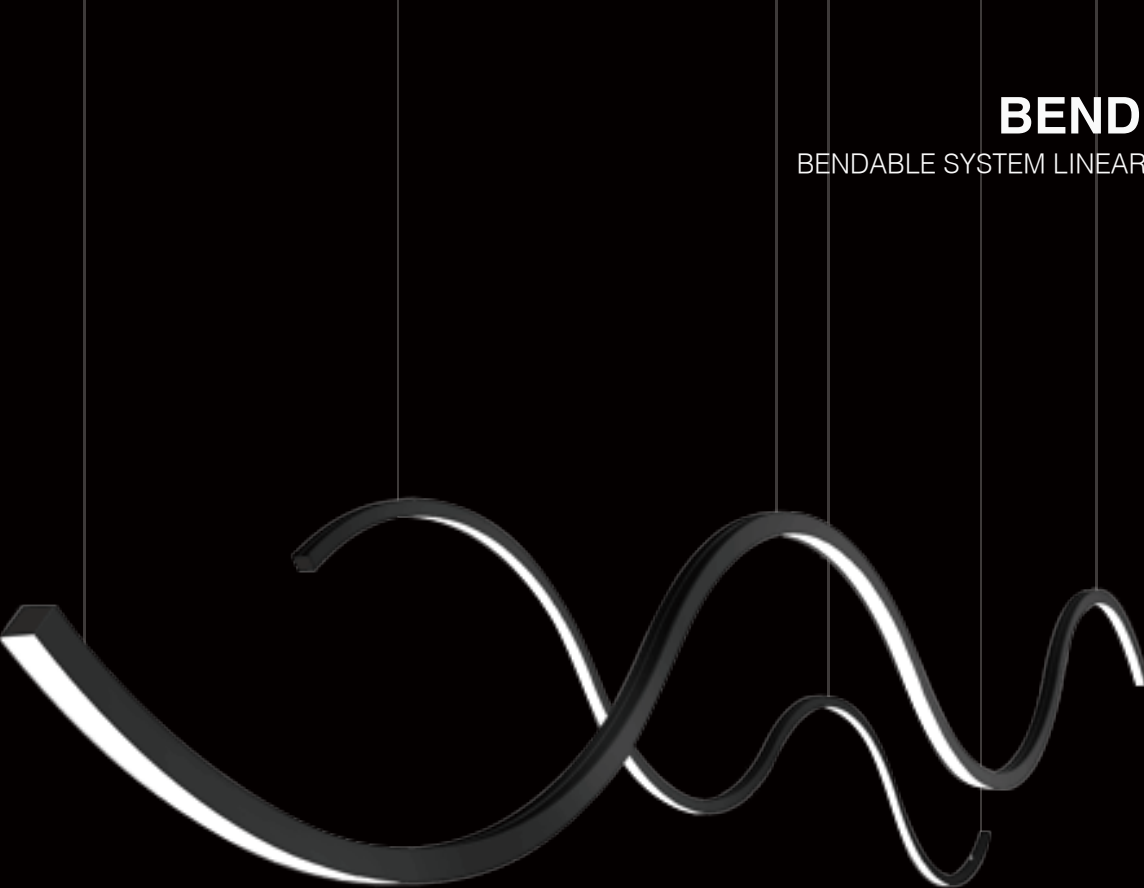

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA-H7590	Textured Black Textured White Silver Grey	PC Diffuser	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ450 x W75 x H90mm	1- 28.0W	3000K	40-50lm/W	1- 80+ (2075lm) - 90+ (1900lm)	Aircraft Cable Pendant	DALI
2- Φ600 x W75 x H90mm	2- 37.0W	4000K		2- 80+ (2740lm) - 90+ (2510lm)		0-10V
3- Φ900 x W75 x H90mm	3- 56.0W	2700~4000K		3- 80+ (4150lm) - 90+ (3808lm)		On/Off
4- Φ1000 x W75 x H90mm	4- 65.0W			4- 80+ (4810lm) - 90+ (4420lm)		
5- Φ1200 x W75 x H90mm	5- 78.0W			5- 80+ (5780lm) - 90+ (5340lm)		

Unlimited possibilities

OLA-Bendable system is comprised of straight and curved basic modules that can be combined in different ways to create unique lighting projects.

The modules can be configured to classic circular luminaires, rounded rectangles, continuous waves or even more abstract shapes. The single or continuous luminaires can be suspended or mounted on ceilings and walls with the light directing downwards, inwards, outwards.




CLOUD Curved Linear Light

CLOUD LIGHT bring you experience ultimate design flexibility with our innovative lighting solution, featuring a bendable design that allows for custom shapes and layouts to suit any interior.


With an ultra-thin width of just 15mm, it seamlessly integrates into spaces while maintaining a sleek, modern aesthetic. Its seamless connections create smooth, continuous lines, and the minimum bending radius of 300mm opens up endless possibilities for creative shapes and configurations. Perfect for adding a sophisticated touch to your projects.



S-type 2835
Flexible LED Strip

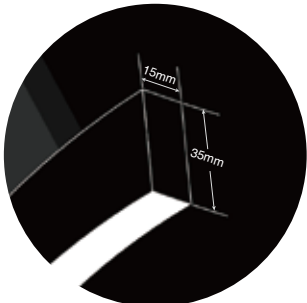


15mm
Ultra-thin Width

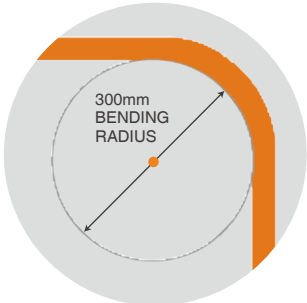

300mm
Minimum Bending Radius

CLOUD CLOUD CURVED LINEAR LIGHT

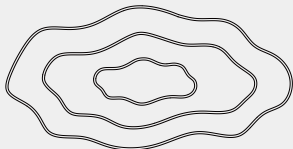

Top View/Bottom View




Front View

SPECIFICATION

Luminaire U1535	LED 2835 SMD	Installations Pendant
Dimension L × W15 × H35mm		Angle 120°
Lumen 780lm/M		Power 13W/M
Color Quality 3-step MacAdam , 5-step MacAdam		CRI 90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC
		Control DALI , 0-10V , On/Off

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.

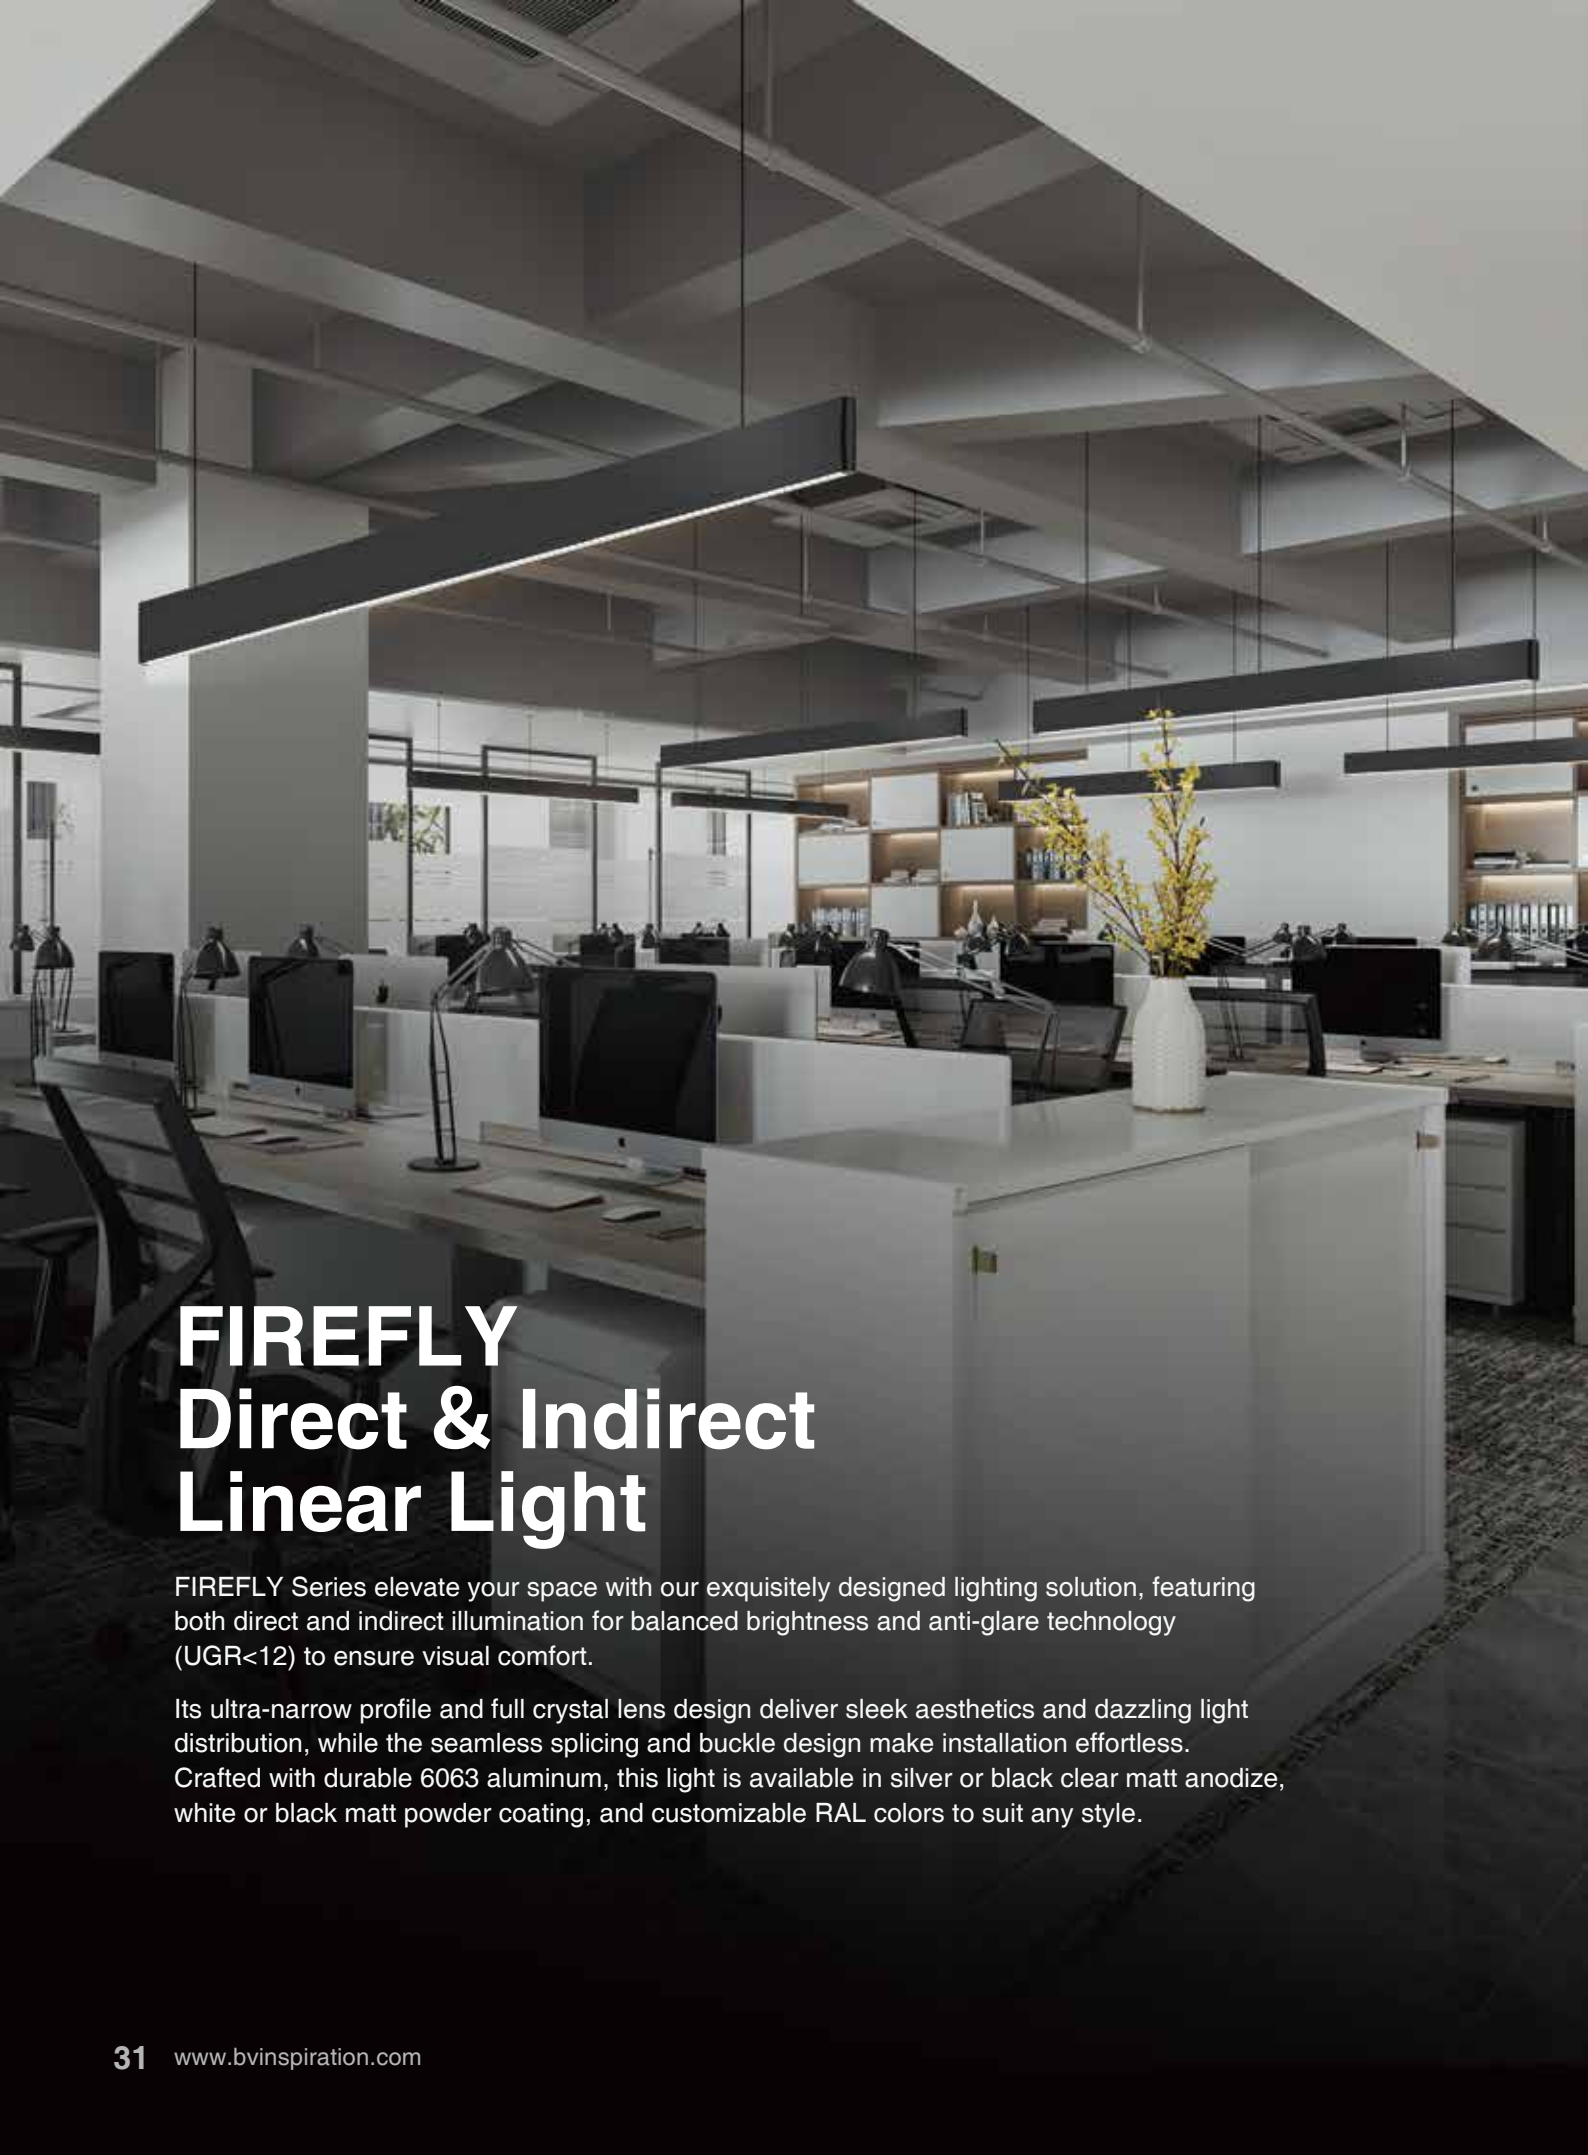

FIREFLY Direct & Indirect Linear Light

FIREFLY Series elevate your space with our exquisitely designed lighting solution, featuring both direct and indirect illumination for balanced brightness and anti-glare technology (UGR<12) to ensure visual comfort.

Its ultra-narrow profile and full crystal lens design deliver sleek aesthetics and dazzling light distribution, while the seamless splicing and buckle design make installation effortless. Crafted with durable 6063 aluminum, this light is available in silver or black clear matt anodize, white or black matt powder coating, and customizable RAL colors to suit any style.

FIREFLY

FIREFLY DIRECT & INDIRECT LINEAR LIGHT

120
lm/W

UGR
<12

Direct & Indirect Light

- Anti-Glaring UGR<12
- Exquisite Exclusive Design
- Compact Ultra-Narrow Design



Full Crystals Lens Design

- Buckle Design
- Seamless Splicing Design
- Highly Decorative and Wide Application



6063 Aluminum

- Silver / Black Clear Matt Anodize
- White / Black Matt Powder Coating
- Customized RAL Color Available




FIREFLY

DIRECT & INDIRECT LINEAR LIGHT



FIREFLY

FIREFLY DIRECT & INDIRECT LINEAR LIGHT

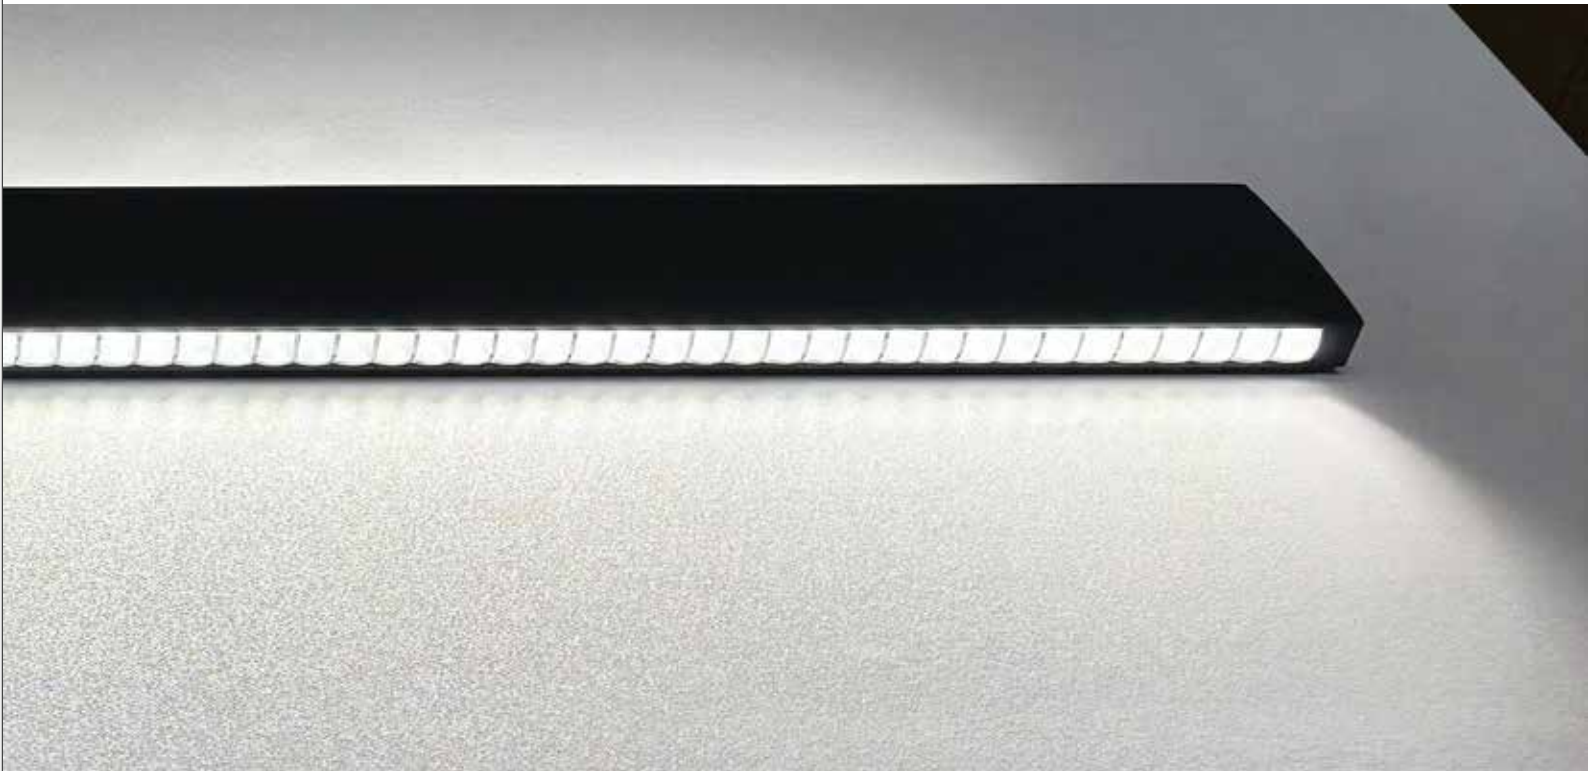

SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	POWER	BEAM ANGLE	UGR	EFFICIENCY	LUMEN	CRI	IP/IK GRADE
H2280 Direct & Indirect Linear Light	White Black Silver	TIR Lens	Direct- 30W Indirect- 11W	Direct- 40° Indirect- 110°	<12	120lm/W	Direct- 3600lm Indirect- 1320lm	80+ 90+	IP22
U2280 Direct Linear Light									

SPECIFICATION


IP Grade	IP20
Voltage	220-240 VAC
Dimension	L1200 × W22 × H80mm
Color Temp.	2700K , 3000K , 4000K
Control	DALI , 0-10V , On/off
Color Quality	3-step MacAdam , 5-step MacAdam





DIMENSION

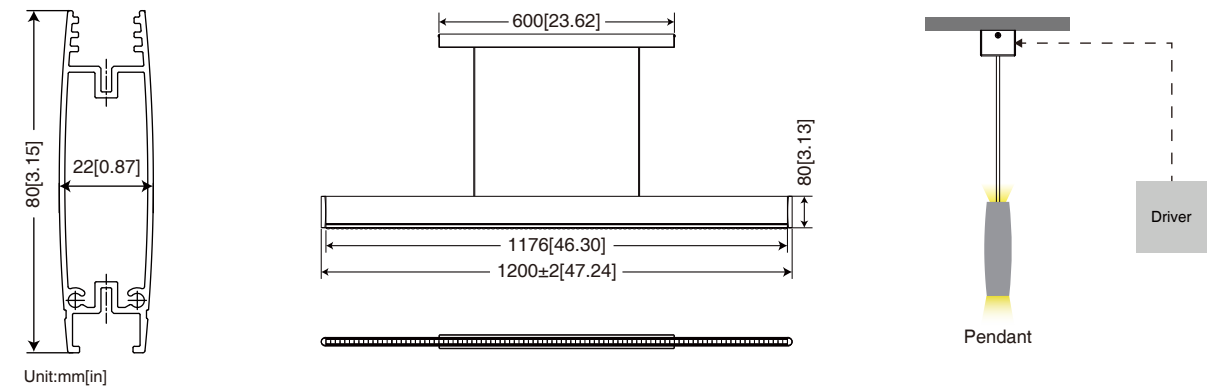

TIR LENS

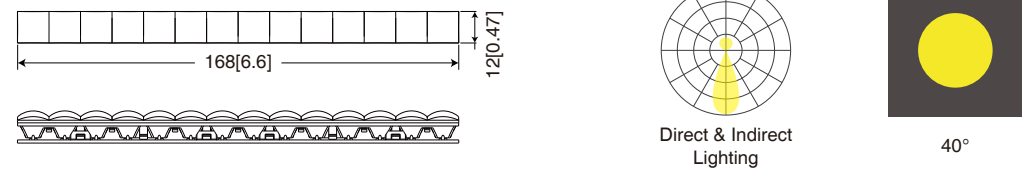

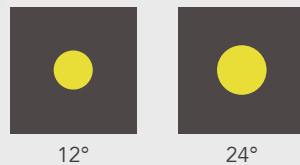
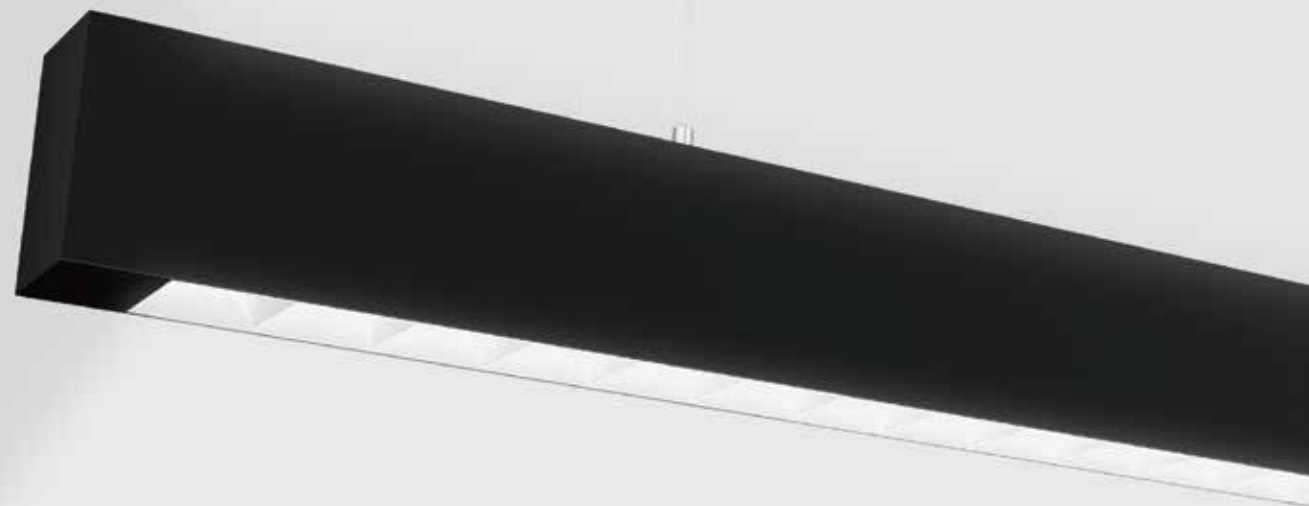


HAO Direct & Indirect Linear Light



Elevate your space with the HAO Linear Light. Immerse yourself in the seamless harmony of direct and indirect UGR<16 lighting, creating an environment that's both comfortable and free from glare.



Experience color consistency like never before, thanks to our SDCM<3 technology. Simplify installation with our user-friendly joining kit.

INSTALLATIONS

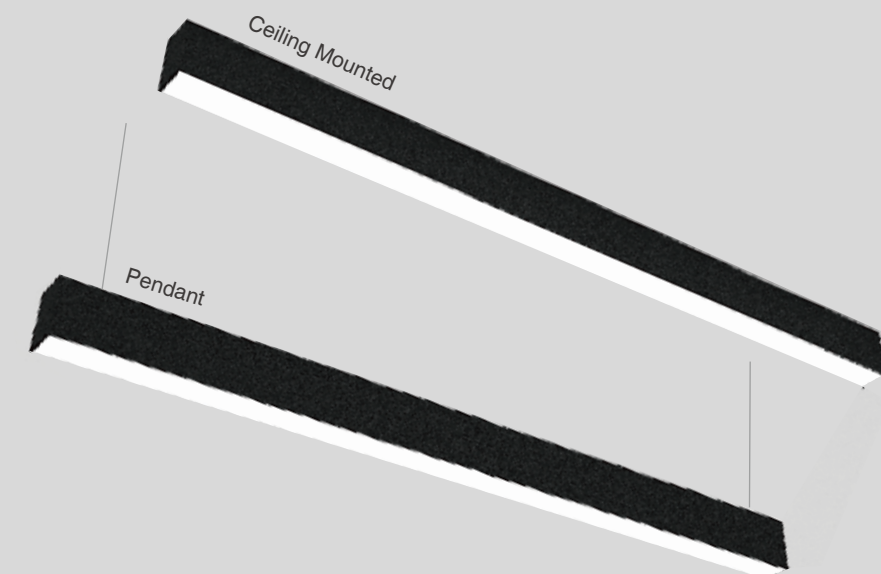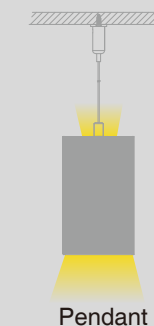

DIMENSIONS

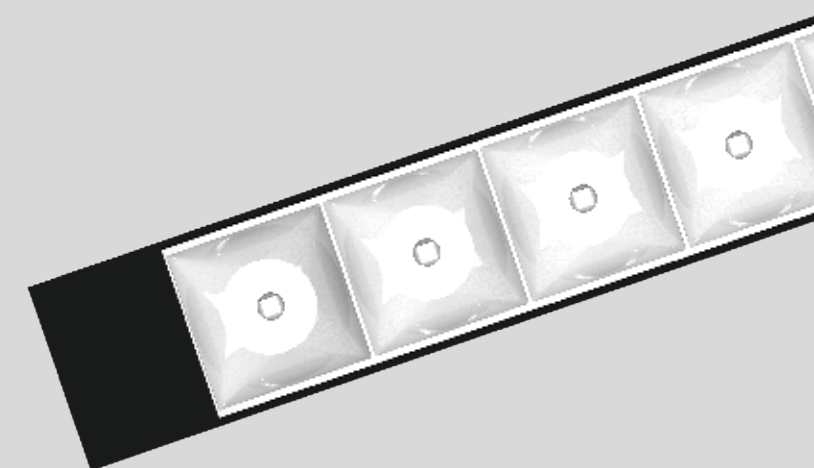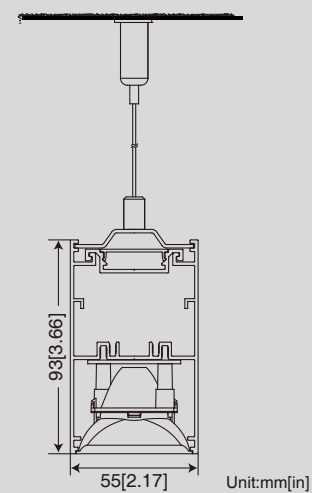

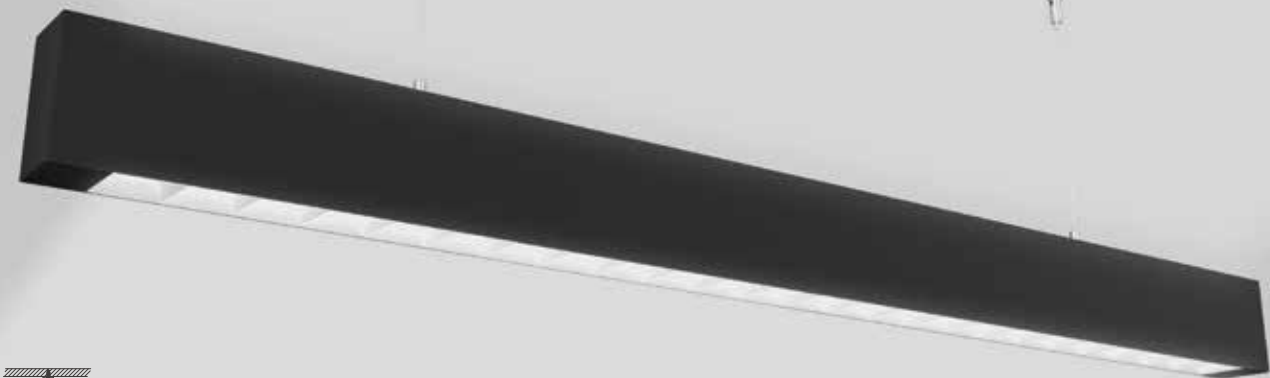


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
HAO5593	Textured Black Textured White Silver Anodized	Louver & Reflector Clear Lens	12Deg 24Deg	<16	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC



DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW55xH93mm 2- L 1508xW55xH93mm	Louver & Reflector	1- 30.0W 2- 38.0W	3000K 4000K	100lm/W	1- 80+ (3100lm) - 90+ (2850lm) 2- 80+ (4080lm) - 90+ (3750lm)	Aircraft Cable Pendant	DALI 0-10V On/off

DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW55xH93mm 2- L 1508xW55xH93mm	Clear Lens	1- 10.0W 2- 13.0W	3000K 4000K	100lm/W	1- 80+ (1040lm) - 90+ (950lm) 2- 80+ (1380lm) - 90+ (1260lm)	Aircraft Cable Pendant	DALI 0-10V On/off


DIMENSION

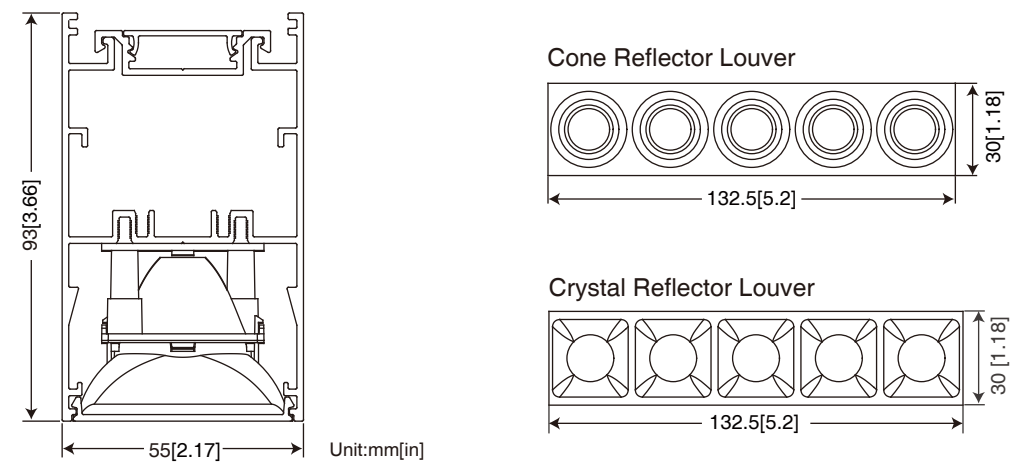

Beam Angle

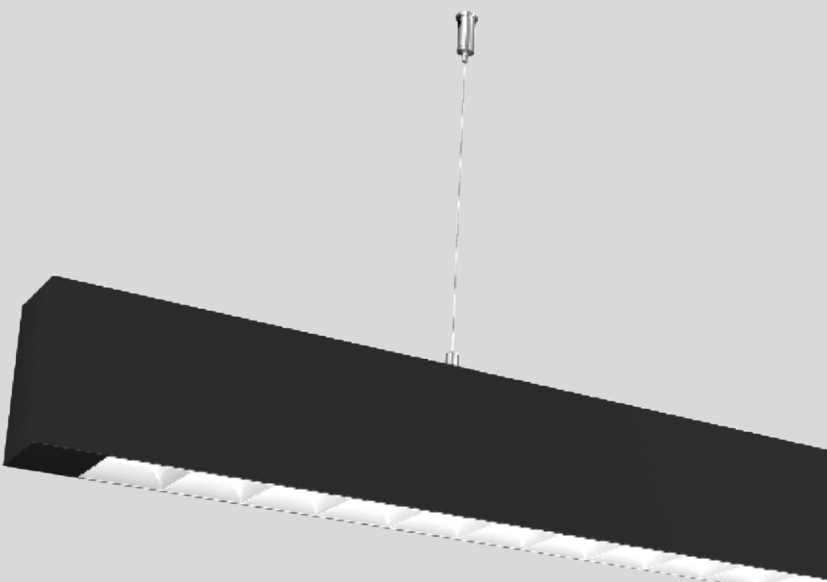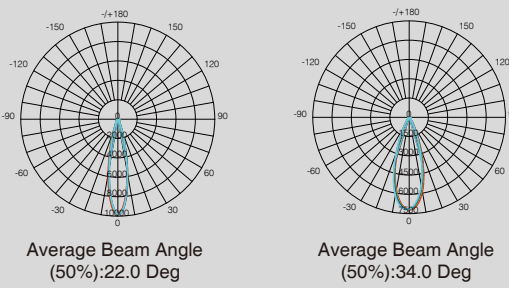

HAO
HAO DIRECT LINEAR LIGHT

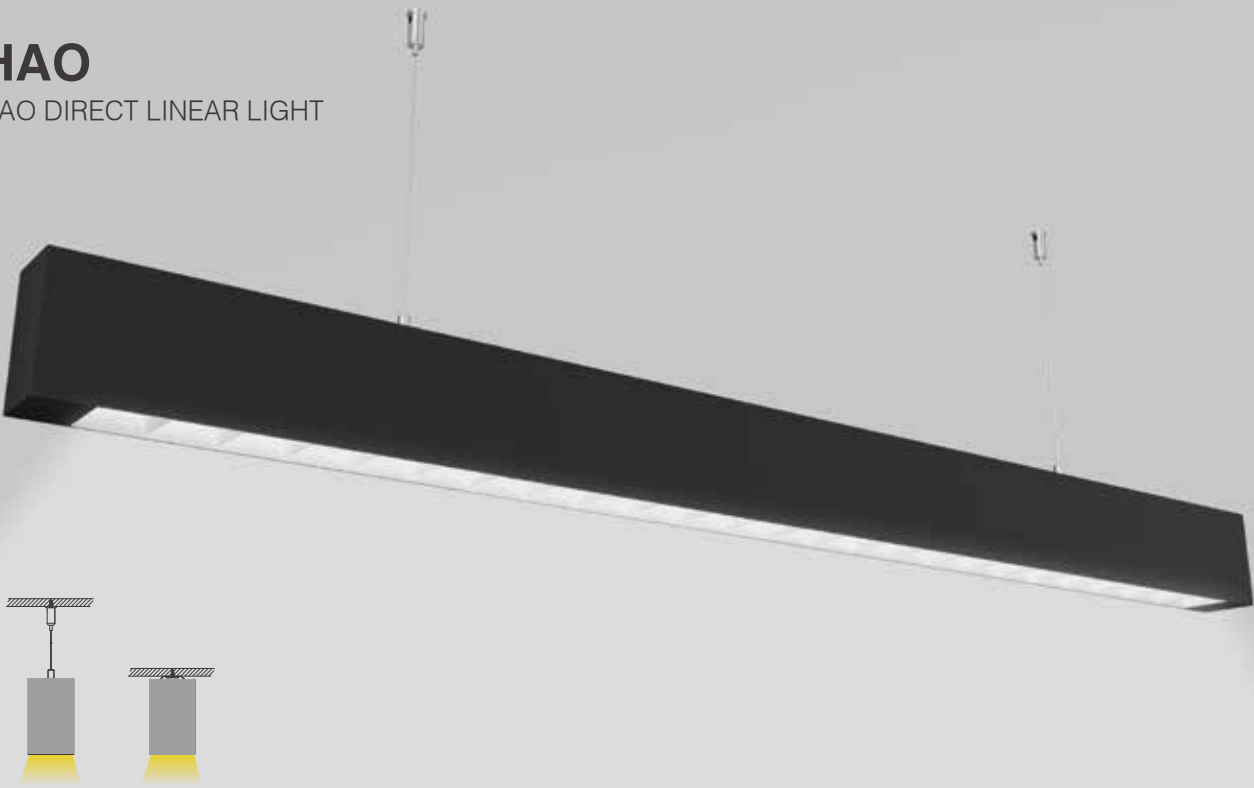



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
HAO5593	Textured Black Textured White Silver Anodized	Louver & Reflector	12Deg 24Deg	<19	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC



DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW55xH93mm 2- L 1508xW55xH93mm	1- 42.0W 2- 52.0W	3000K 4000K	100lm/W	1- 80+ (4520lm) - 90+ (4150lm) 2- 80+ (5550lm) - 90+ (5100lm)	Aircraft Cable Pendant Ceiling Mounted	DALI 0-10V On/off

HAO
HAO DIRECT LINEAR LIGHT

DIMENSION

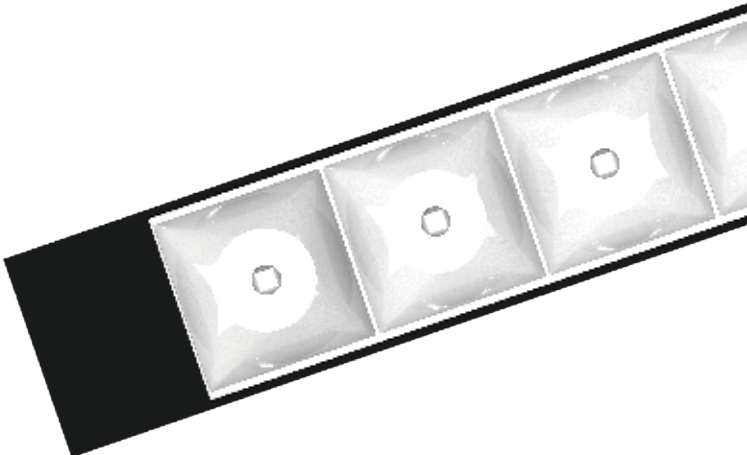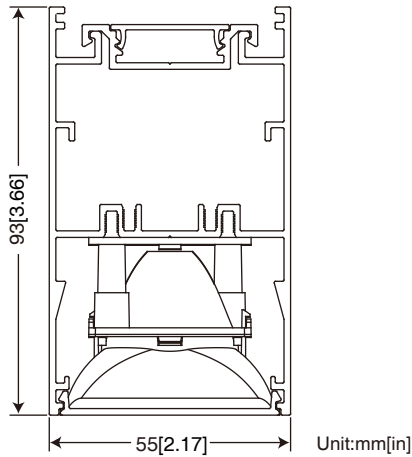

INSTALLATION

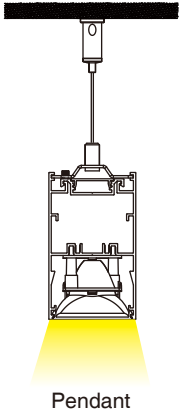





SLIM Surface & Trimmed Recessed

SLIM linear lights are the ultimate lighting solution, designed for surface or trim-recess installation. With a choice of 20 beam angles and 7 optical systems, you have the power to create the perfect lighting arrangement for your space.

What's more, our lighting offers personalization with 9 finish options for the optical kit, allowing for a seamless integration with your decor. Elevate your lighting design effortlessly with SLIM linear lights, which bring together flexibility and style to enhance any environment.

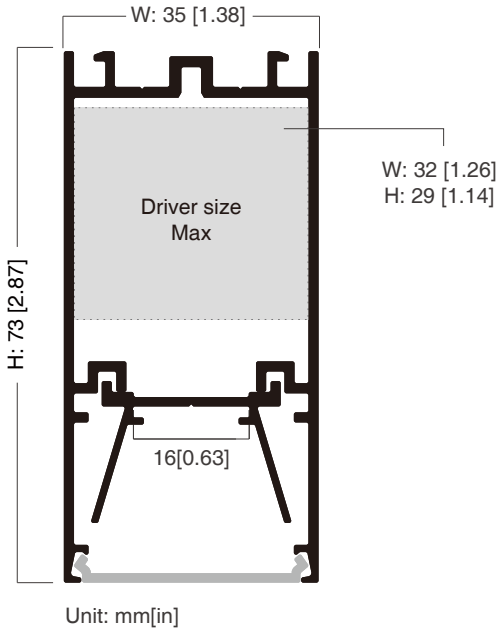

DIMENSIONS
U357216
Surface Installation
(Pendant, Surface Mounted)

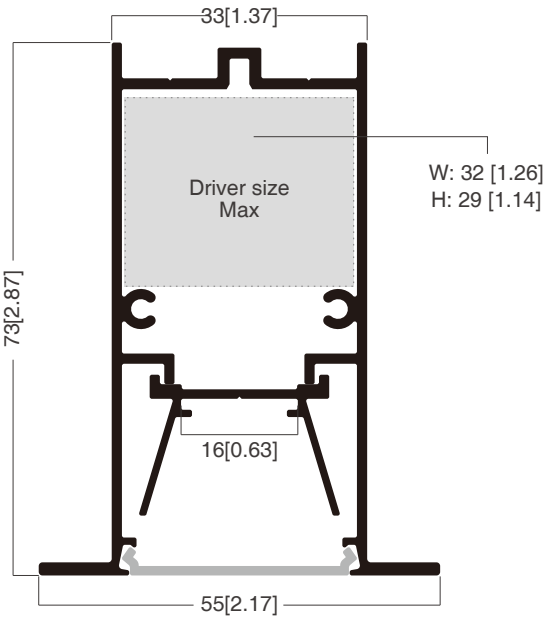


U557316
Trimmed Recessed
Installation



Crystal Louver

- 5IN1 Crystal Louver creating UGR<19 comforting light.
- Available in 24°, 38° beam angles.
- Tunable white dimming from 2700k to 6500k.

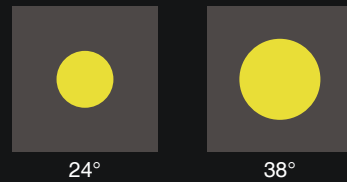

Tunable White
2700K ~ 6500K


UGR
<19

Crystal Louver Finish



White Smoky Black

Diffuser & Silicone



Silicone lens up to 30m/pc,
Gapless joining for any length luminaires and applications.

TIR LENS

UGR
<19

35° x 75°

Square 50°

50° x 50°

Diamond 50°

Cone Louver


UGR
<19



- 5in1 flexible Cone louver set .
- Any length flexible as multiple of 132.5mm.
- Available in 24°,38° beam angles.
- Anti-glaring in General UGR<19, Hex louver UGR<8.
- Available Cone louver color in Matt Black, Matt White, Matt White+black, Matt White+Golden, Matt White+Chrome, Nickle, Chrome.....



5in1 TIR Louver

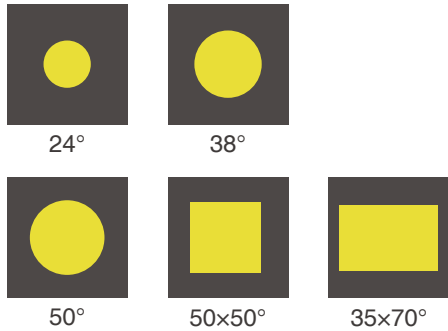


Wall Washer



5in1 flexible louver set.
Any length flexible as multiple of 132.5mm.
Available in 15°, 30°, 45°, Asymmetric wall washer beam angles. Anti-glaring in UGR<19.

Reflector Louver

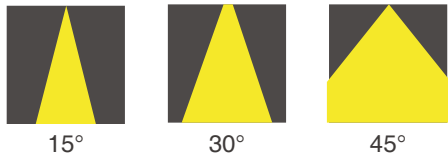

Gapless Joining In Filed

A revolutionary gapless joining solution that significantly reduces field labor requirements.




MORE LIGHT SOURCE & DRIVER OPTIONS



SLIM

SLIM LINEAR LIGHTING-CRYSTAL LOUVER

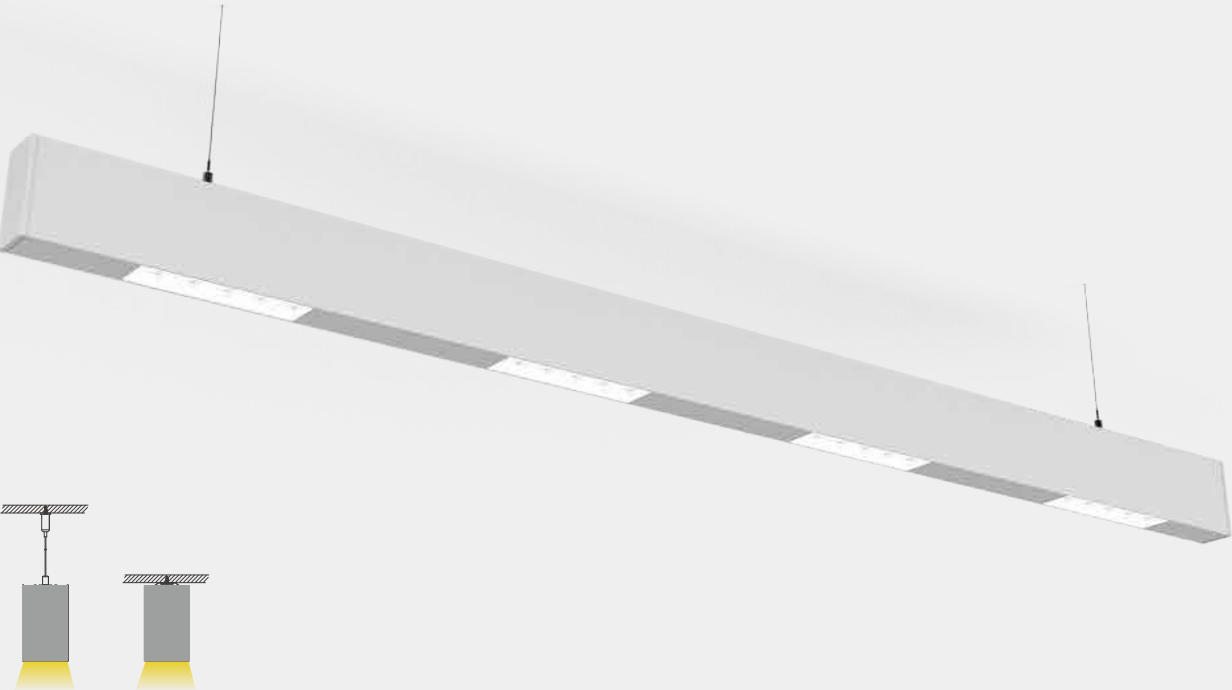

SPECIFICATION



LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-CL	Textured Black	Crystal Louver Lens	24Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC
	Textured White		38Deg					
	Silver Anodized							

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS	
1- L 1208xW35xH72mm	1- 4sets	1- 21.0W	3000K	100lm/W	1- 80+ (2234lm) - 90+ (2050lm)	Aircraft Cable Pendant	DALI	
2- L 1508xW35xH72mm	2- 5sets	2- 27.0W	4000K		2- 80+ (2810lm) - 90+ (2600lm)	Ceiling Mounted	0-10V	
	3- 8sets	3- 30.0W	2700K~4000K		3- 80+ (3200lm) - 90+ (2940lm)		On/Off	
	4- 10sets	4- 45.0W			4- 80+ (4800lm) - 90+ (4410lm)			

SLIM

SLIM LINEAR LIGHTING-CRYSTAL LOUVER

DIMENSION

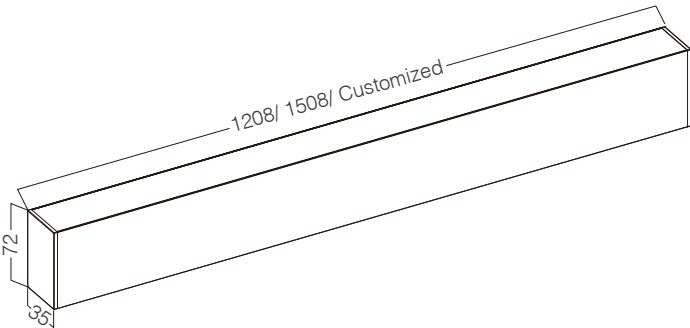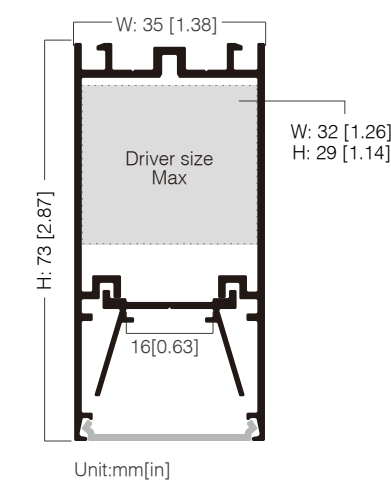

CRYSTAL LOUVER



ACCESSORIES




Aircraft Cable Pendant Kit Ceiling Mounted Kit





SLIM

SLIM LINEAR LIGHTING-SILICONE LENS

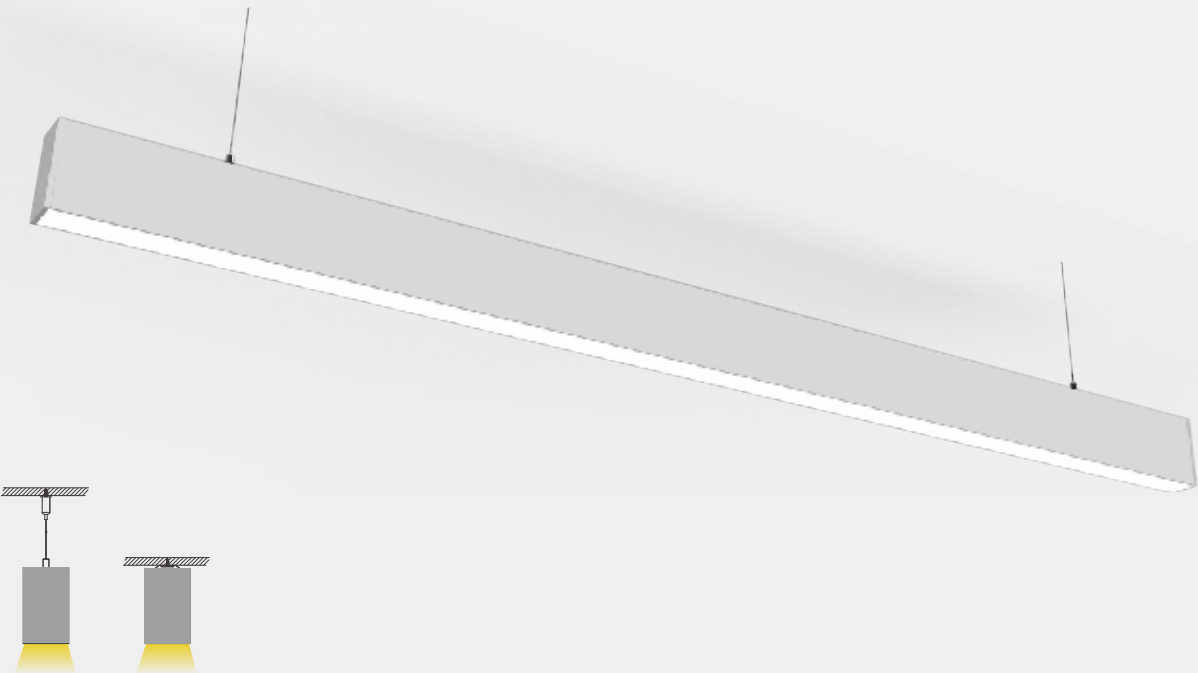

DIMENSION

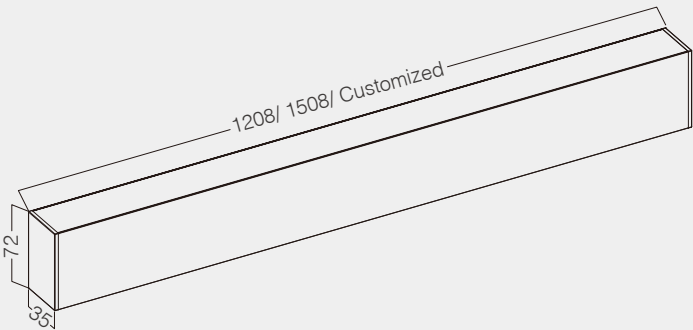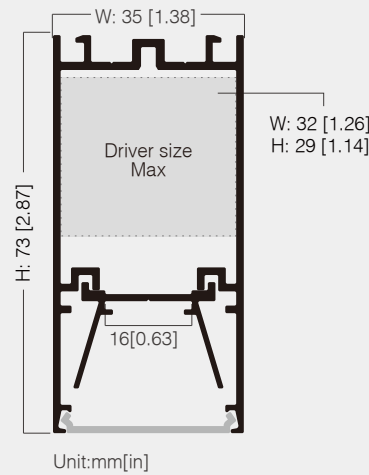

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-SC	Textured Black Textured White Silver Anodized	Silicone	105Deg	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm 2- L 1508xW35xH72mm	1.1- 15.0W 1.2 - 21.0W 1.3- 27.0W	3000K 4000K 2700~4000K	110lm/W	1.1- 80+ (1740lm) - 90+ (1580lm) 1.2- 80+ (2550lm) - 90+ (2315lm) 1.3- 80+ (3240lm) - 90+ (2940lm)	Aircraft Cable Pendant Ceiling Mounted	DALI 0-10V On/Off
1- L 1208xW35xH72mm 2- L 1508xW35xH72mm	2.1- 15.0W 2.2 - 21.0W 2.3- 27.0W	3000K 4000K 2700~4000K	120lm/W	2.1- 80+ (1930lm) - 90+ (1750lm) 2.2- 80+ (2780lm) - 90+ (2530lm) 2.3- 80+ (3230lm) - 90+ (3550lm)	Aircraft Cable Pendant Ceiling Mounted	DALI 0-10V On/Off

SILICONE LENS



ACCESSORIES



Aircraft Cable Pendant Kit

Ceiling Mounted Kit



SLIM



SLIM LINEAR LIGHTING-PC DIFFUSER



SLIM

SLIM LINEAR LIGHTING-PC DIFFUSER

DIMENSION

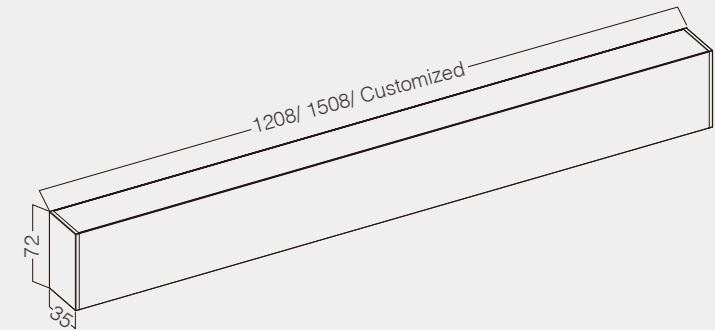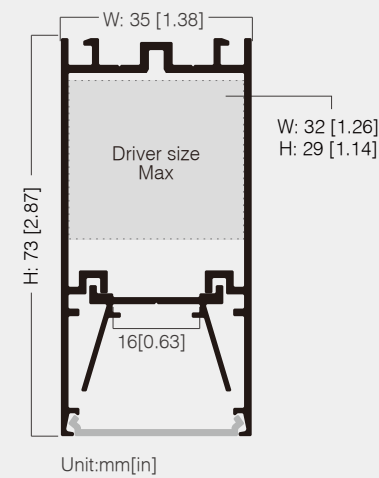


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm	1.1- 15.0W	3000K	100lm/W	1.1- 80+ (1655lm) - 90+ (1505lm)	Aircraft Cable Pendant	DALI
2- L 1508xW35xH72mm	1.2- 21.0W 1.3- 27.0W	4000K 2700~4000K		1.2- 80+ (2425lm) - 90+ (2205lm) 1.3- 80+ (3090lm) - 90+ (2810lm)	Ceiling Mounted	0-10V On/Off
1- L 1208xW35xH72mm	2.1- 15.0W	3000K	110lm/W	2.1- 80+ (1850lm) - 90+ (1685lm)	Aircraft Cable Pendant	DALI
2- L 1508xW35xH72mm	2.1- 21.0W 2.3- 27.0W	4000K 2700~4000K		2.2- 80+ (2710lm) - 90+ (2470lm) 2.3- 80+ (3460lm) - 90+ (3140lm)	Ceiling Mounted	0-10V On/Off


PC DIFFUSER

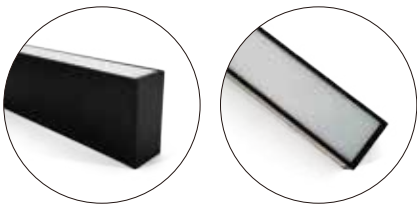

ACCESSORIES





SLIM
SLIM LINEAR LIGHTING-TIR LENS

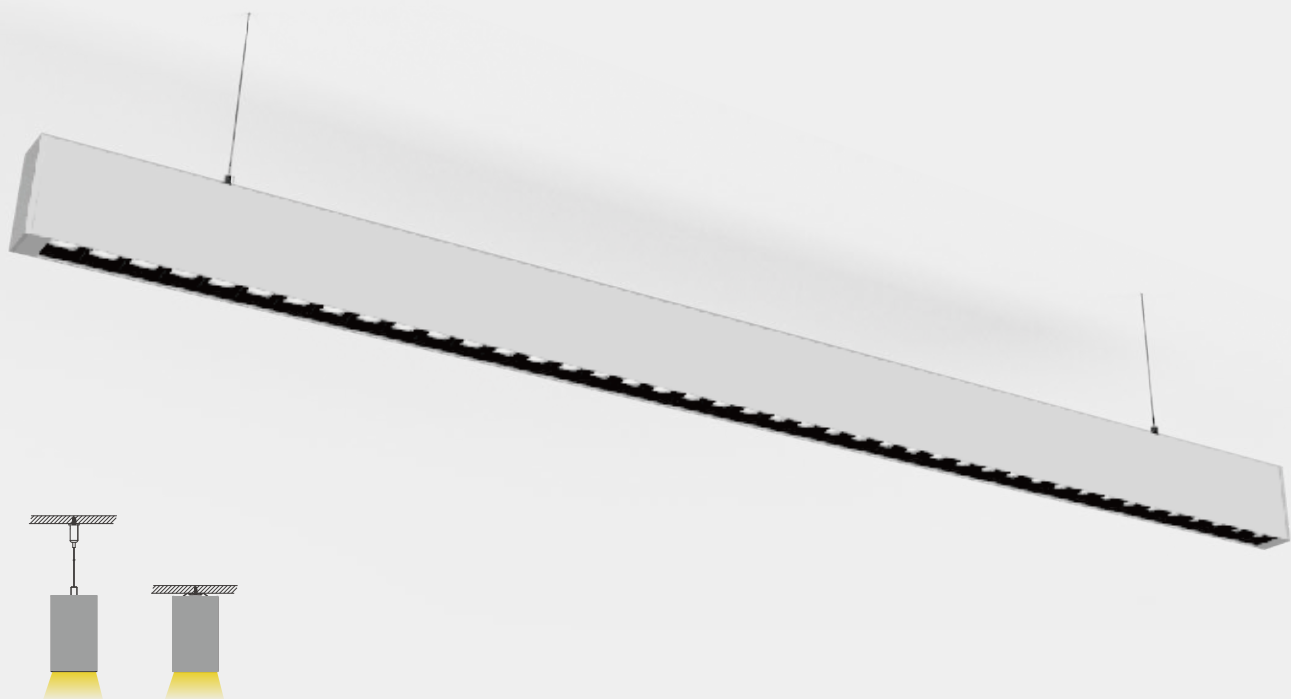

SLIM
SLIM LINEAR LIGHTING-TIR LENS

DIMENSION

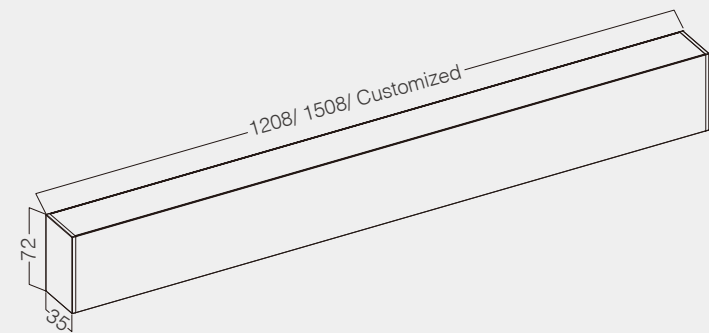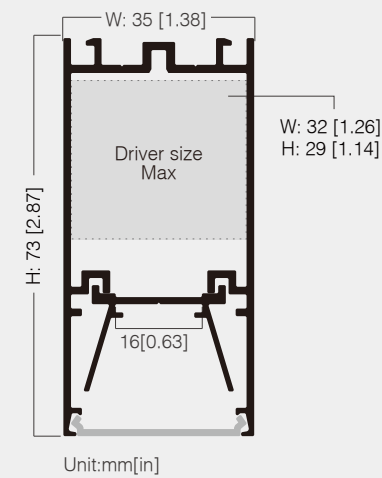


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-LLT	Textured Black Textured White Silver Anodized	Louver & Reflector	35×75° 50×50° Dimond 50°×50°	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm	1- 21.0W 2- 30.0W	3000K 4000K	100lm/W	1- 80+ (2190lm) - 90+ (2010lm) 2- 80+ (3200lm) - 90+ (2950lm)	Aircraft Cable Pendant Ceiling Mounted	DALI 0-10V On/Off

TIR LENS

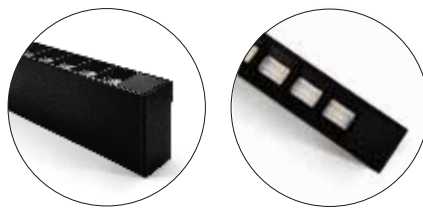

ACCESSORIES



Aircraft Cable Pendant Kit



Ceiling Mounted Kit



SLIM



SLIM LINEAR LIGHTING-CONE LOUVER



SLIM

SLIM LINEAR LIGHTING-CONE LOUVER

DIMENSION

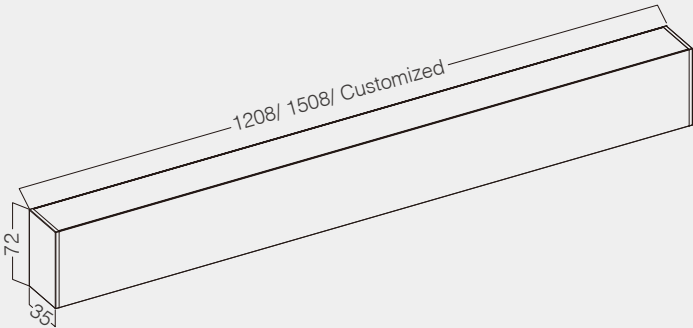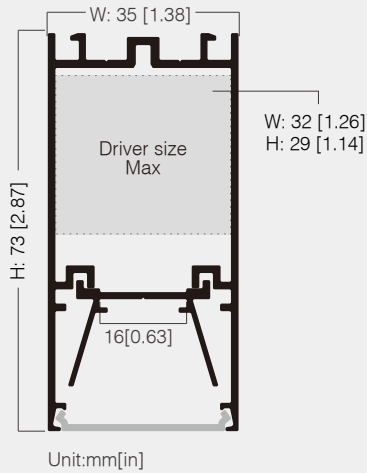

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-CN	Textured Black Textured White Silver Anodized	Cone Louver	24Deg 38Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm	1.1- 4sets	1- 21.0W	3000K	100lm/W	1.1- 80+ (2200lm) - 90+ (2020lm)	Aircraft Cable Pendant	DALI
2- L 1508xW35xH72mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2884lm) - 90+ (2640lm)	Ceiling Mounted	0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (3200lm) - 90+ (2940lm)		On/Off
	2.2- 10sets	4- 45.0W			2.2- 80+ (4800lm) - 90+ (4410lm)		

CONE LOUVER FINISH & BEAM ANGLE



With Hex Louver

ACCESSORIES



Aircraft Cable Pendant Kit

Ceiling Mounted Kit

SLIM



SLIM LINEAR LIGHTING-NICKLE LOUVER LENS



SLIM

SLIM LINEAR LIGHTING-NICKLE LOUVER LENS


DIMENSION

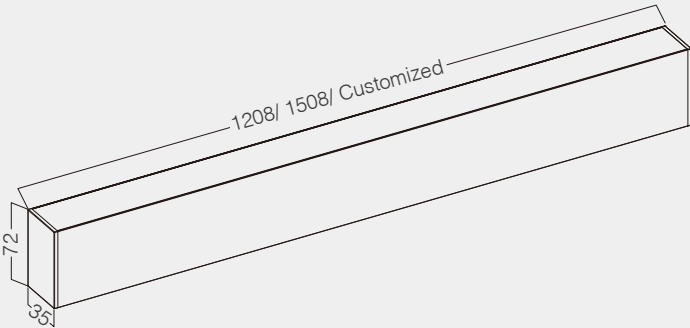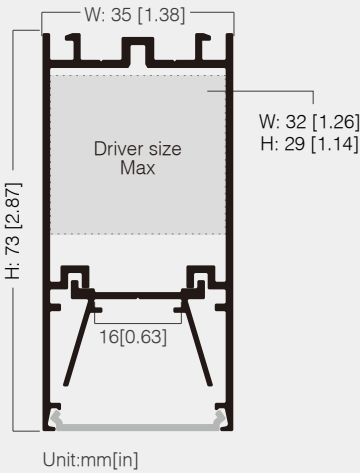

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-LT	Textured Black	Nickle Louver	24°	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC
	Textured White		38°					
	Silver Anodized		50°					
			35×75°					
			50×50°					

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm	1.1- 4sets	1- 21.0W	3000K	100lm/W	1.1- 80+ (2240lm) - 90+ (2050lm)	Aircraft Cable Pendant	DALI
2- L 1508xW35xH72mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2880lm) - 90+ (2640lm)	Ceiling Mounted	0-10V
	2.1- 8sets	3- 30.0W	2.1- 80+ (3230lm) - 90+ (2970lm)		On/Off		
	2.2- 10sets	4- 45.0W	2.2- 80+ (4850lm) - 90+ (4450lm)				

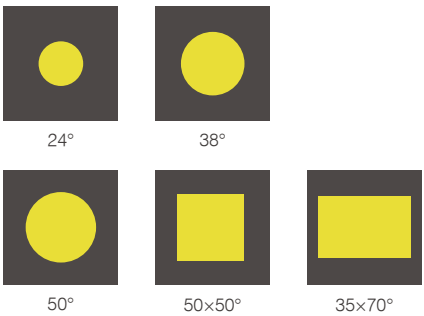

ACCESSORIES




5IN1 Nickle Louver



SLIM



SLIM LINEAR LIGHTING-WALL WASHER



SLIM

SLIM LINEAR LIGHTING-WALL WASHER

DIMENSION

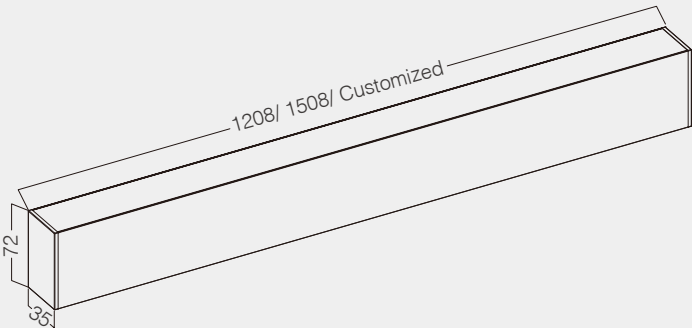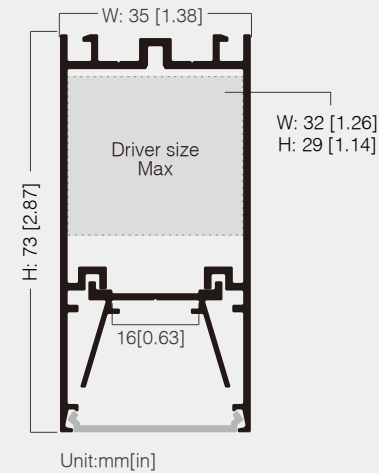

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-WW	Textured Black Textured White Silver Anodized	5in1 Louver & Reflector	Wall Washer	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm	1.1- 4sets	1- 21.0W	3000K	80lm/W	1.1- 80+ (1830lm) - 90+ (1680lm)	Aircraft Cable Pendant	DALI
2- L 1508xW35xH72mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2350lm) - 90+ (2160lm)	Ceiling Mounted	0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (2560lm) - 90+ (2350lm)		On/Off
	2.2- 10sets	4- 45.0W			2.2- 80+ (3880lm) - 90+ (3550lm)		



ACCESSORIES



Aircraft Cable Pendant Kit



Ceiling Mounted Kit

SLIM



SLIM LINEAR LIGHTING-REFLECTOR LOUVER



SLIM

SLIM LINEAR LIGHTING-REFLECTOR LOUVER

DIMENSION

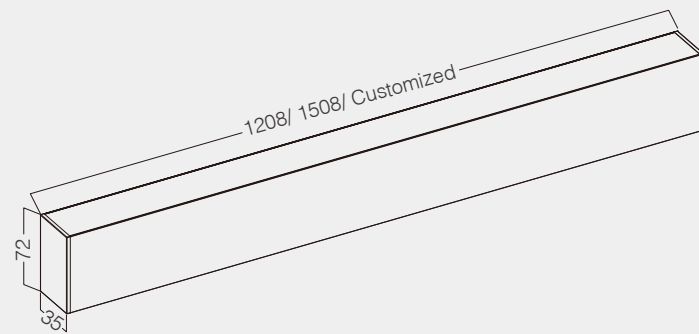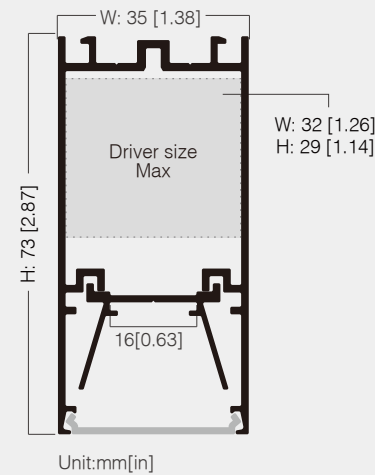


SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-LV	Textured Black Textured White Silver Anodized	5in1 Louver & Reflector	15Deg 30Deg 45Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L1208xW35xH72mm	1.1- 4sets	1.1- 21.0W	3000K	100lm/W	1.1- 80+ (2240lm) - 90+ (2050lm)	Aircraft Cable Pendant Ceiling Mounted	DALI
	1.2- 8sets	1.2- 30.0W	4000K		1.1- 80+ (2300lm) - 90+ (2100lm) 1.2- 80+ (3170lm) - 90+ (2940lm) 1.2- 80+ (3210lm) - 90+ (2900lm)		0-10V On/Off
2- L1508xW35xH72mm	2.1- 5sets	2.1- 27.0W	3000K	100lm/W	2.1- 80+ (2880lm) - 90+ (2640lm)	Aircraft Cable Pendant Ceiling Mounted	DALI
	2.2- 10sets	2.2- 45.0W	4000K		2.1- 80+ (2930lm) - 90+ (2690lm) 2.2- 80+ (4800lm) - 90+ (4410lm) 2.2- 80+ (4850lm) - 90+ (4460lm)		0-10V On/Off

REFLECTOR LOUVER

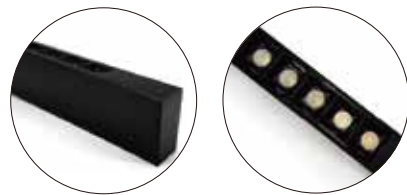

BEAM ANGLE


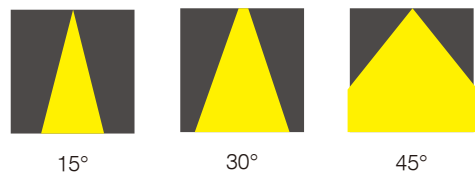


ACCESSORIES



SLIM



SLIM RECESSED LINEAR LIGHTING-CRYSTAL LOUVER

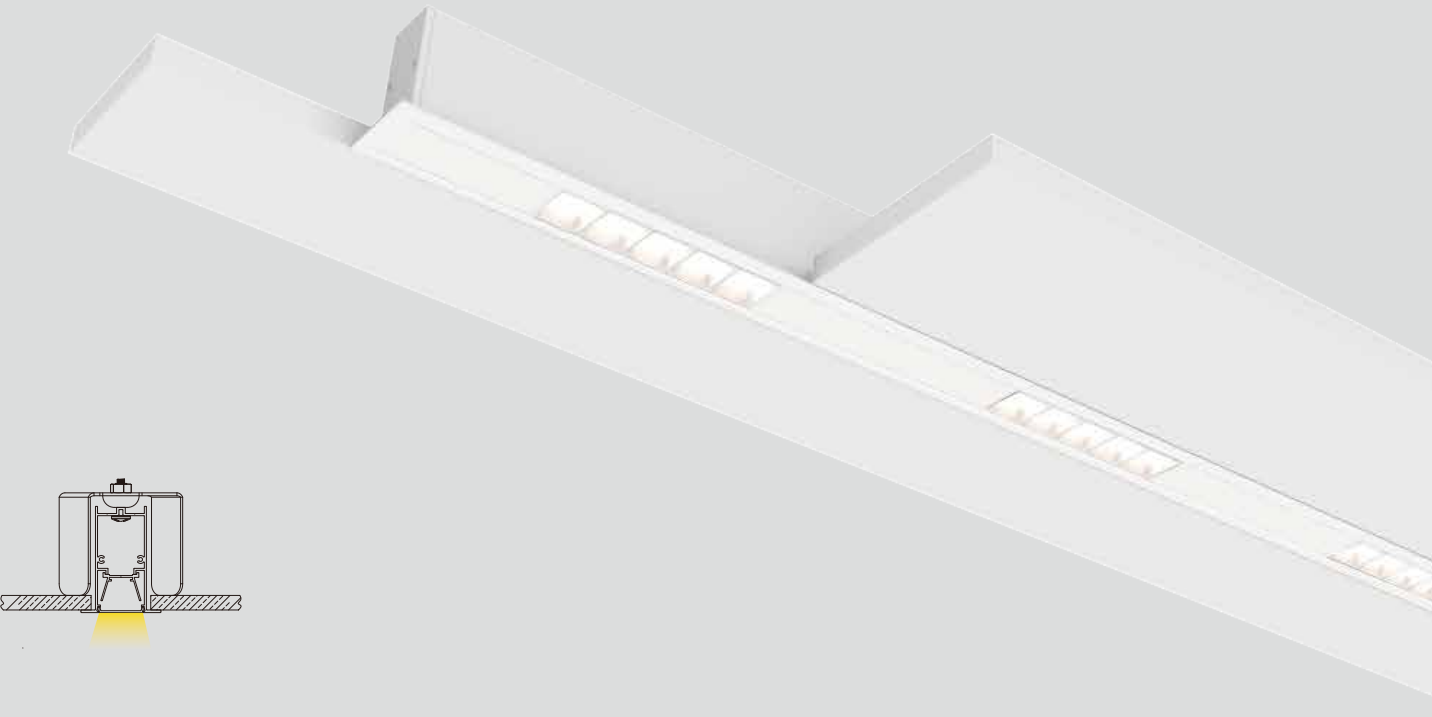

SLIM

SLIM RECESSED LINEAR LIGHTING-CRYSTAL LOUVER

DIMENSION

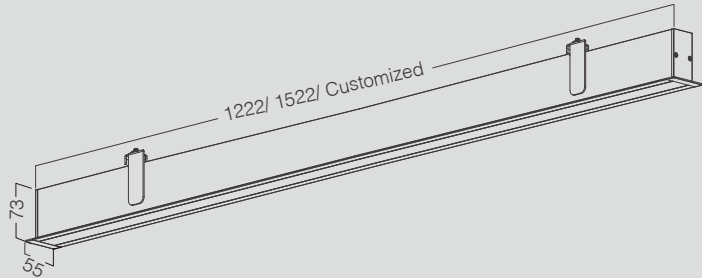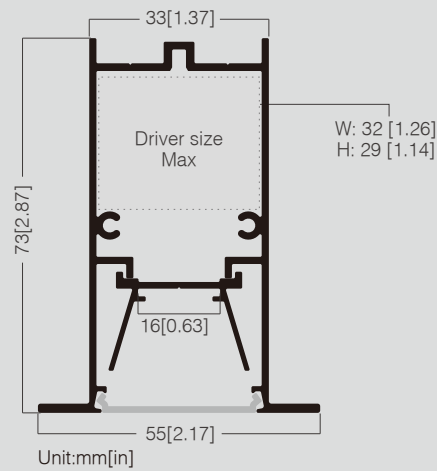


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RHCL	Textured Black Textured White Silver Anodized	Crystal Louver	24Deg 38Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm	1.1- 4sets	1- 21.0W	3000K	100lm/W	1.1- 80+ (2240lm) - 90+ (2050lm)	Trimed Recessed	DALI
2- L 1522xW55xH73mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2880lm) - 90+ (2640lm)		0-10V
	2.1- 8sets	3- 30.0W	2700~4000K		2.1- 80+ (3200lm) - 90+ (2940lm)		On/Off
	2.2- 10sets	4- 45.0W			2.2- 80+ (4800lm) - 90+ (4410lm)		

BEAM ANGLE




ACCESSORIES



Aircraft Cable Pendant Kit

SLIM


SLIM RECESSED LINEAR LIGHTING-SILICONE LENS

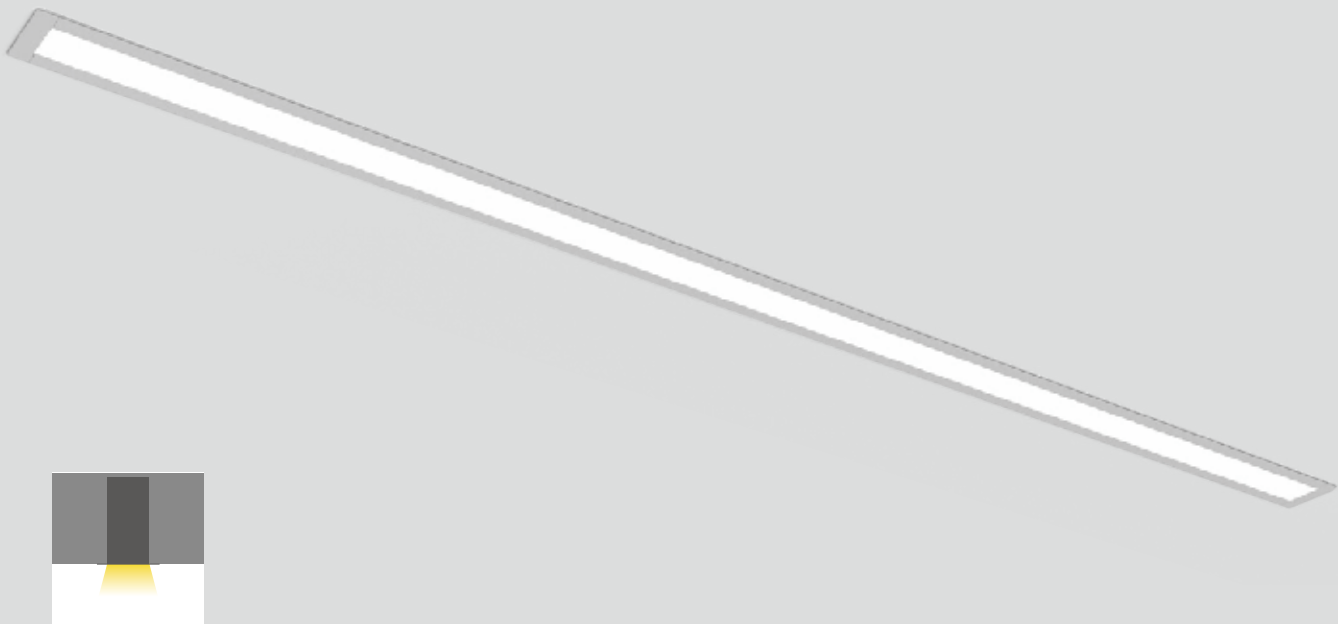

SLIM

SLIM RECESSED LINEAR LIGHTING-SILICONE LENS

DIMENSION

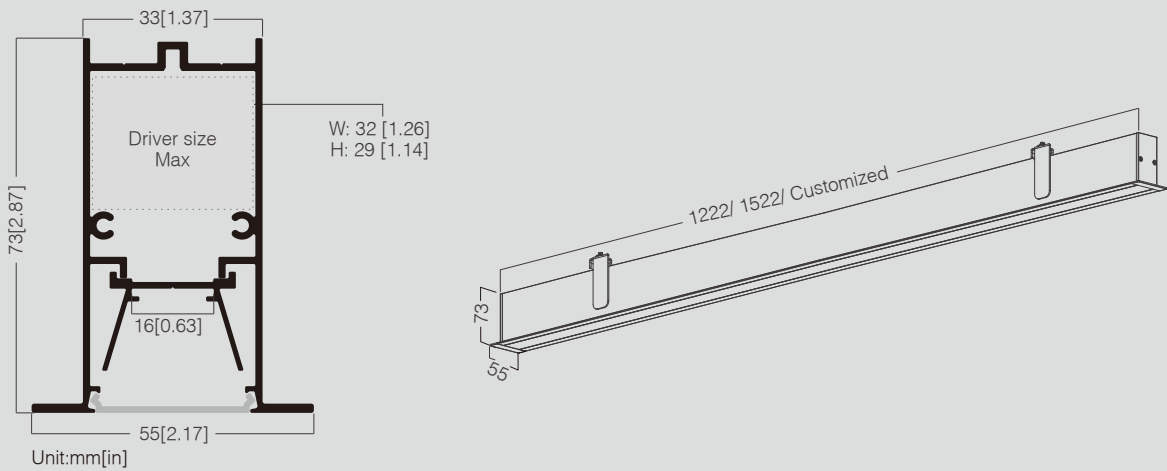

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RSC	Textured Black Textured White Silver Anodized	Silicone	105Deg	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm 2- L 1522xW55xH73mm	1.1- 15.0W 1.2- 21.0W 1.3- 27.0W	3000K 4000K 2700~4000K	110lm/W	1.1- 80+ (1800lm) - 90+ (1600lm) 1.2- 80+ (2450lm) - 90+ (2250lm) 1.3- 80+ (3120lm) - 90+ (2970lm)	Trimed Recessed	DALI 0-10V On/off
1- L 1222xW55xH73mm 2- L 1522xW55xH73mm	2.1- 15.0W 2.2- 21.0W 2.3- 27.0W	3000K 4000K 2700~4000K	120lm/W	2.1- 80+ (1925lm) - 90+ (1750lm) 2.2- 80+ (2690lm) - 90+ (2450lm) 2.3- 80+ (3560lm) - 90+ (3240lm)	Trimed Recessed	DALI 0-10V On/Off


SILICONE LENS



ACCESSORIES




Aircraft Cable Pendant Kit

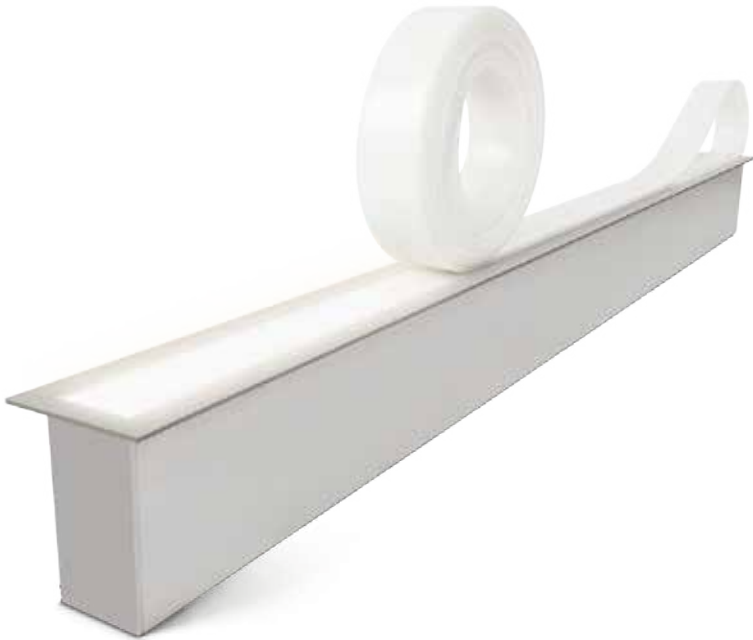

SLIM


SLIM RECESSED LINEAR LIGHTING-PC DIFFUSER

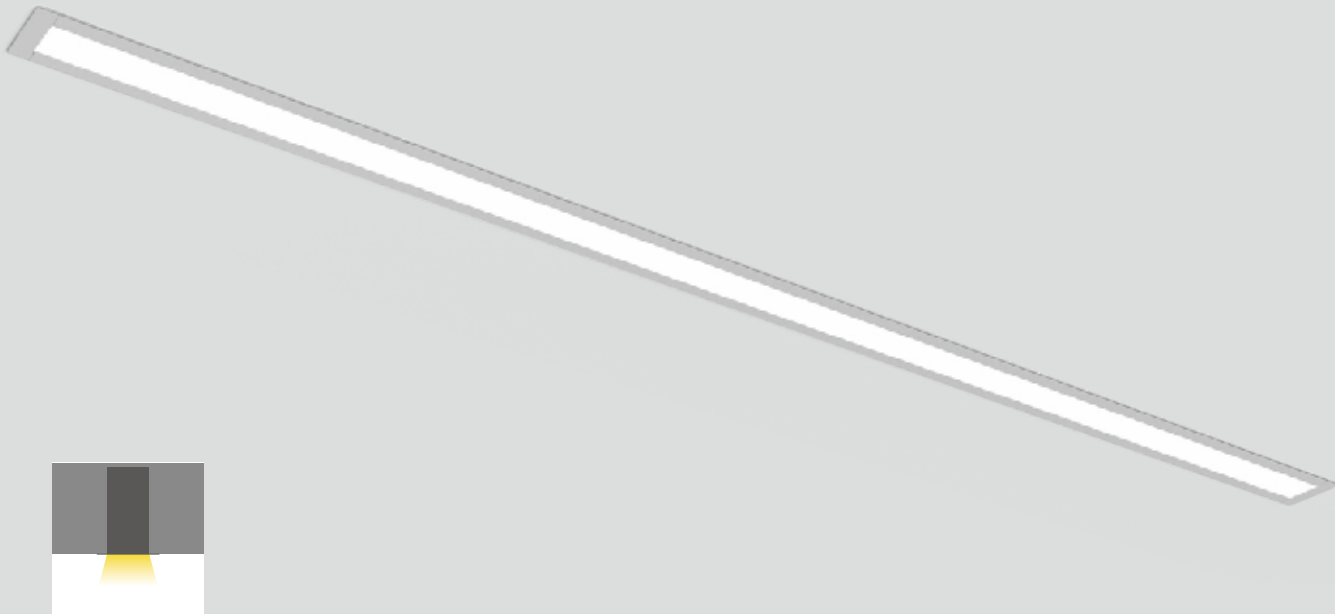

SLIM

SLIM RECESSED LINEAR LIGHTING-PC DIFFUSER

DIMENSION

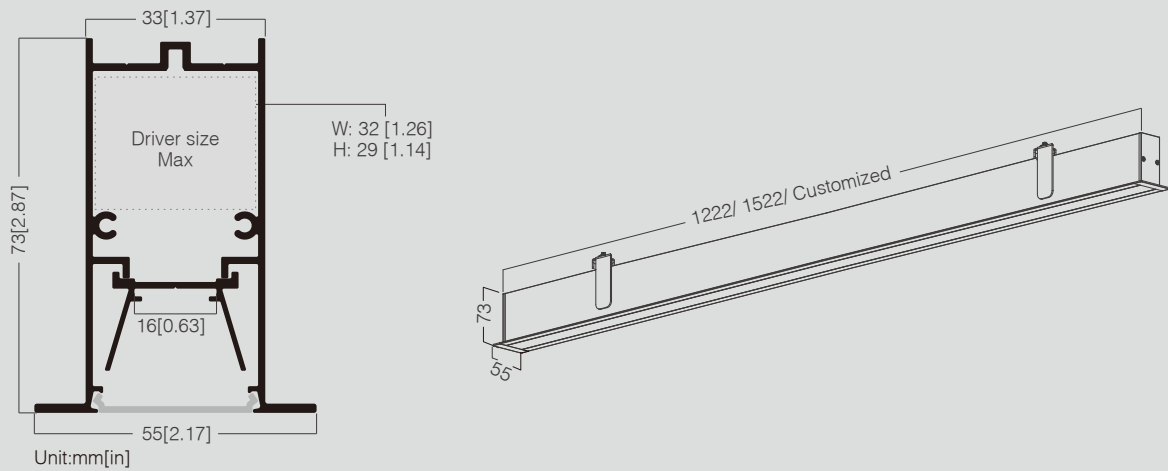


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RPC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm 2- L 1522xW55xH73mm	1.1- 15.0W 1.2- 21.0W 1.3- 27.0W	3000K 4000K 2700~4000K	100lm/W	1.1- 80+ (1500lm) - 90+ (1410lm) 1.2- 80+ (2130lm) - 90+ (1940lm) 1.3- 80+ (2910lm) - 90+ (2650lm)	Trimed Recessed	DALI 0-10V On/off
1- L 1222xW55xH73mm 2- L 1522xW55xH73mm	2.1- 15.0W 2.2- 21.0W 2.3- 27.0W	3000K 4000K 2700~4000K	110lm/W	2.1- 80+ (1800lm) - 90+ (1600lm) 2.2- 80+ (2450lm) - 90+ (2250lm) 2.3- 80+ (3120lm) - 90+ (2970lm)	Trimed Recessed	DALI 0-10V On/Off

PC DIFFUSER

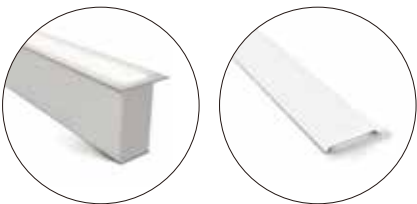

ACCESSORIES




Aircraft Cable Pendant Kit



SLIM



SLIM RECESSED LINEAR LIGHTING-TIR LENS

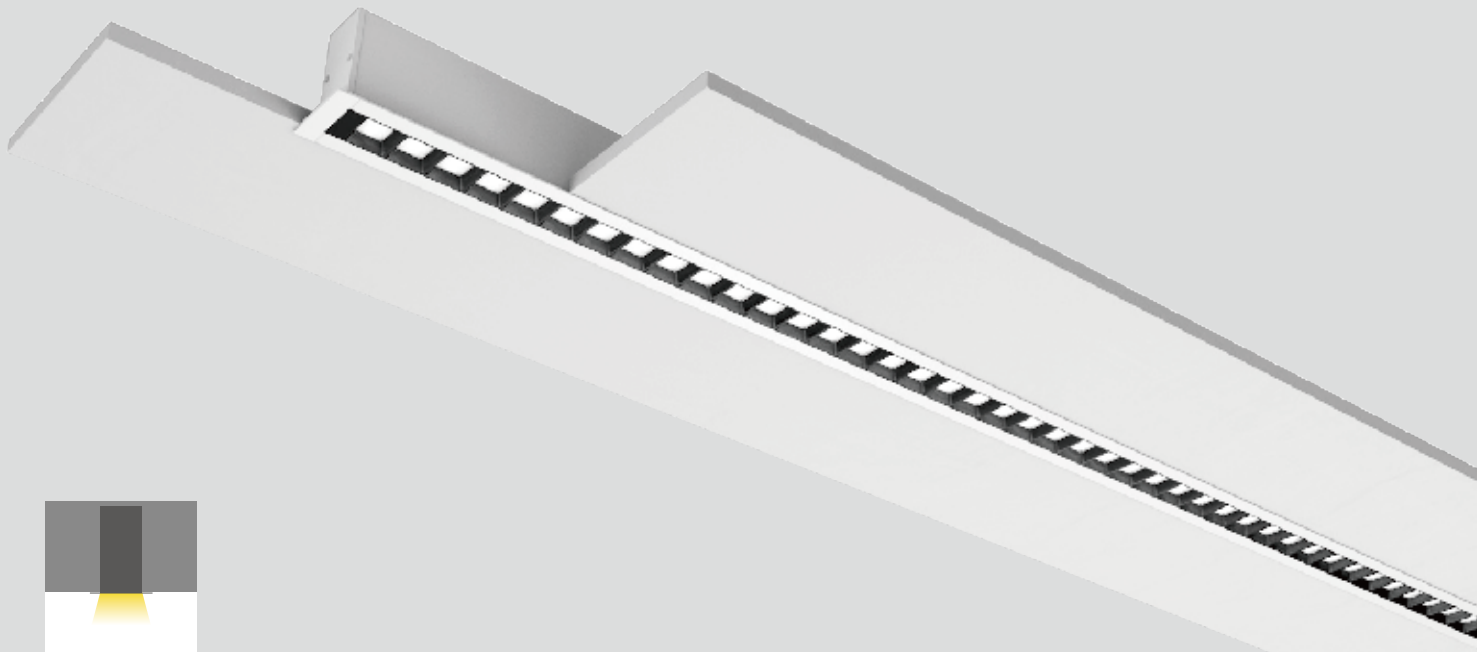

SLIM

SLIM RECESSED LINEAR LIGHTING-TIR LENS

DIMENSION

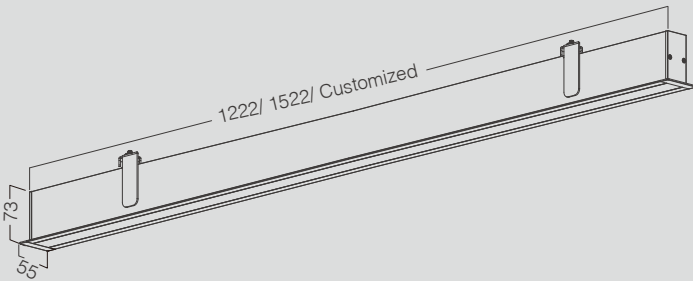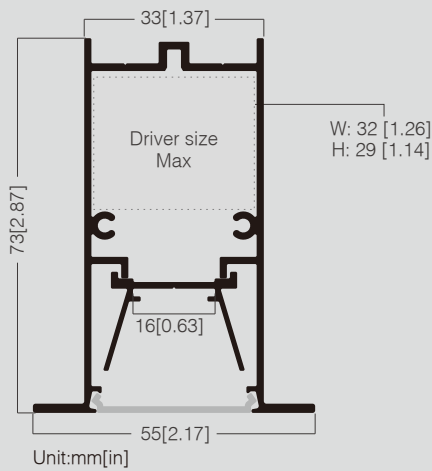


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RLLT	Textured Black Textured White Silver Anodized	Louver & Reflector	35×75° 50×50° Dimond 50°×50°	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L1222xW55xH73mm	1- 21.0W 2- 30.0W	3000K 4000K	100lm/W	1- 80+ (2240lm) - 90+ (2050lm) 2- 80+ (3200lm) - 90+ (2940lm)	Trimed Recessed	DALI 0-10V On/Off

BEAM ANGLE

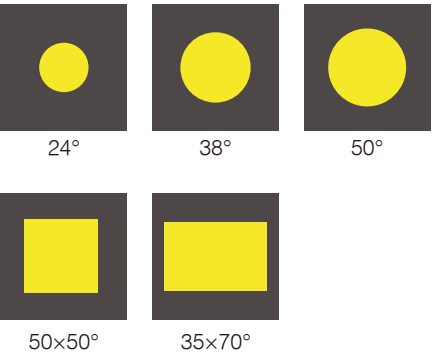

ACCESSORIES





Aircraft Cable Pendant Kit



SLIM


SLIM RECESSED LINEAR LIGHTING-CONE LOUVER

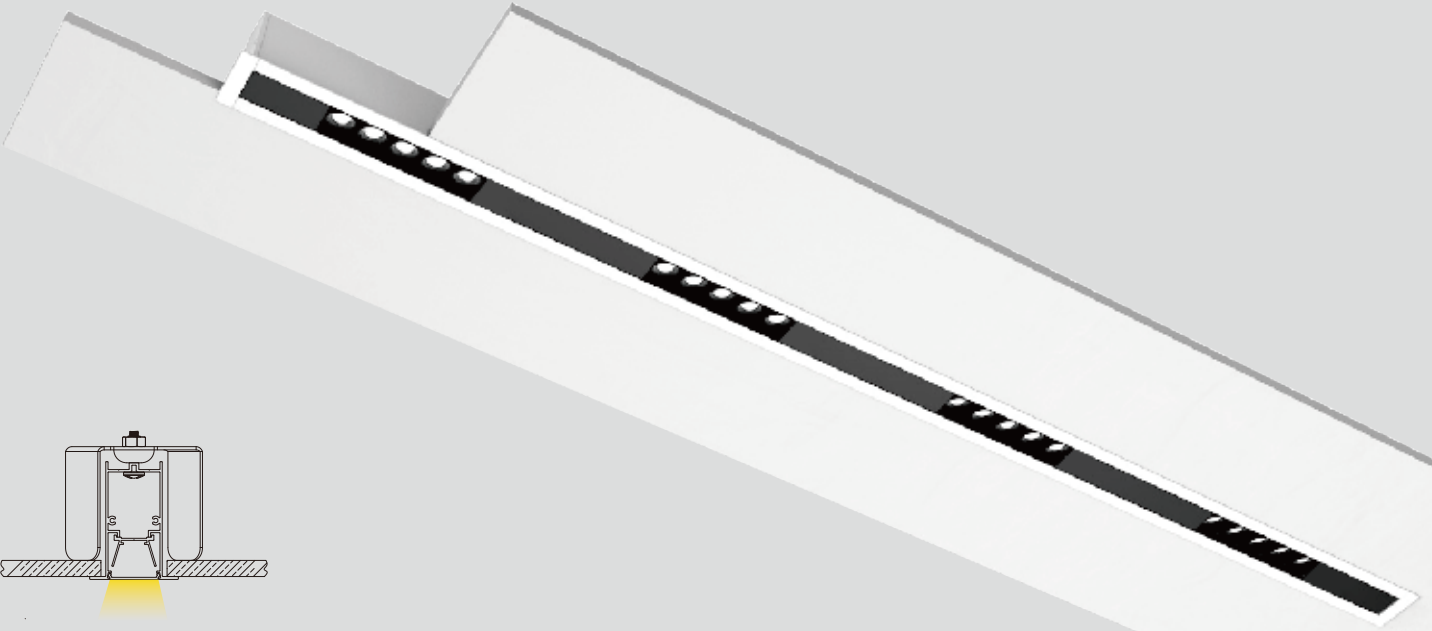

SLIM

SLIM RECESSED LINEAR LIGHTING-CONE LOUVER

DIMENSION

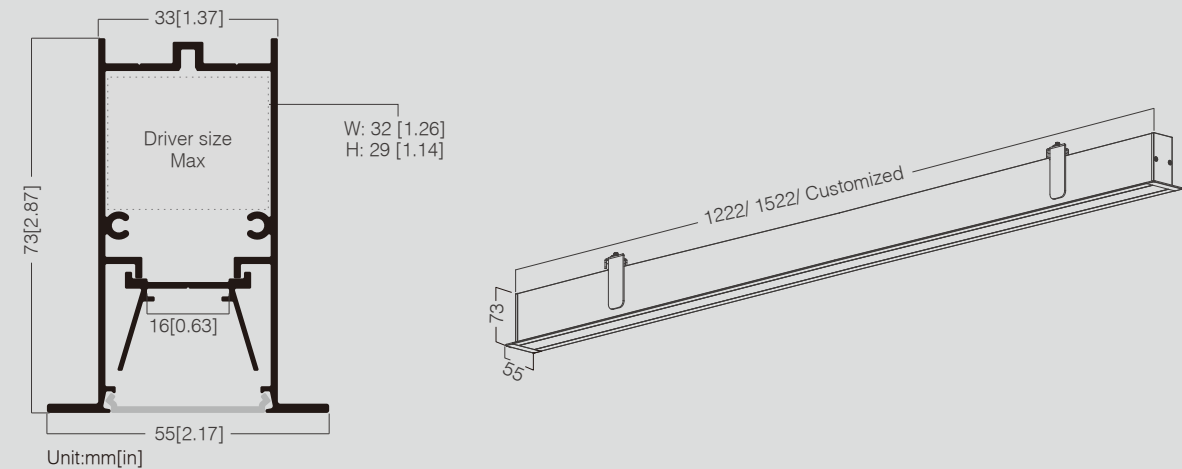


SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RCN	Textured Black Textured White Silver Anodized	Cone Louver	24Deg 38Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm	1.1- 4sets	1- 21.0W	3000K	100lm/W	1.1- 80+ (2240lm) - 90+ (2050lm)	Trimed Recessed	DALI
2- L 1522xW55xH73mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2880lm) - 90+ (2640lm)		0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (3200lm) - 90+ (2940lm)		On/Off
	2.2- 10sets	4- 45.0W			2.2- 80+ (4850lm) - 90+ (4450lm)		

BEAM ANGLE



CONE LOUVER FINISH


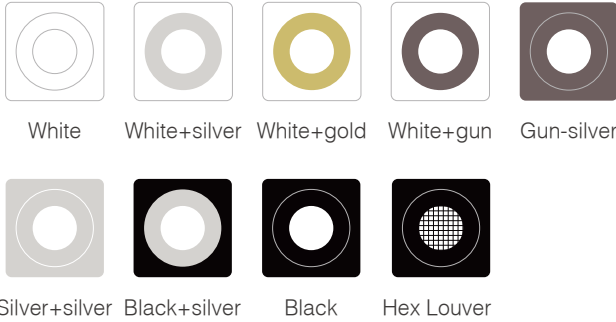


ACCESSORIES



SLIM


SLIM RECESSED LINEAR LIGHTING-NICKLE LOUVER LENS

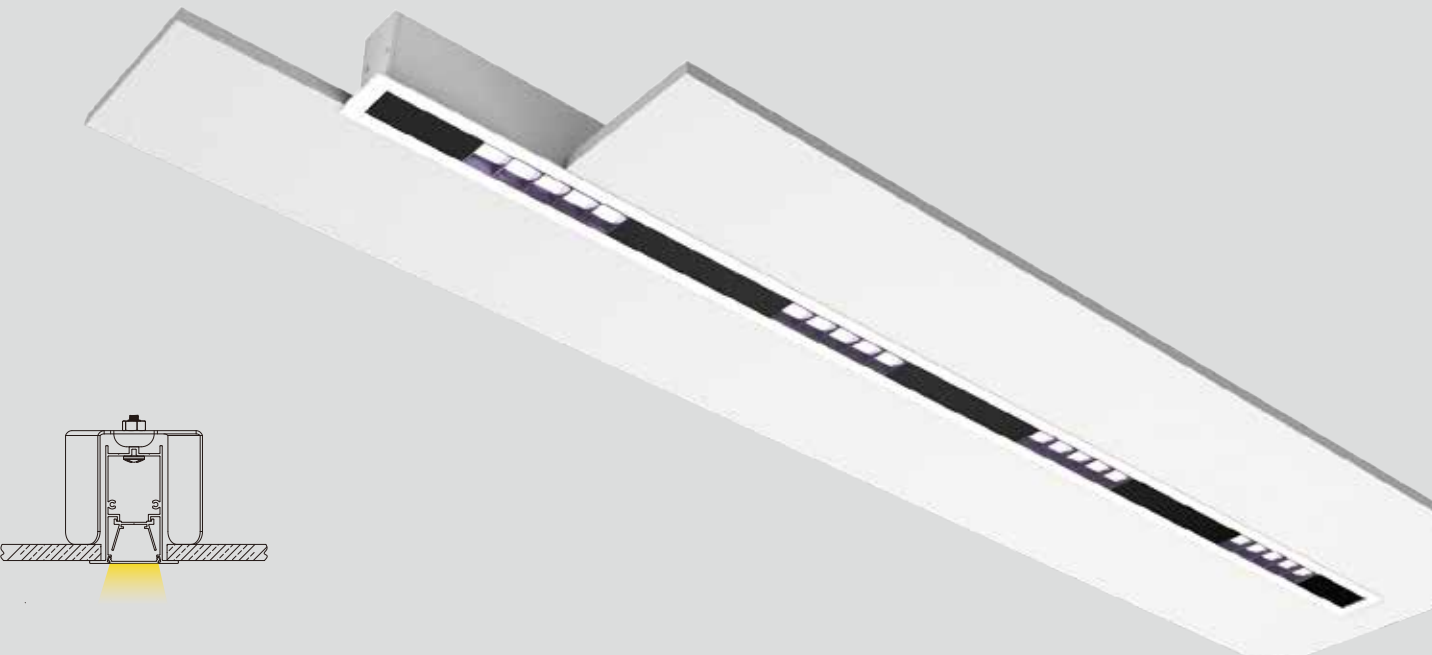

SLIM

SLIM RECESSED LINEAR LIGHTING-NICKLE LOUVER LENS

DIMENSION

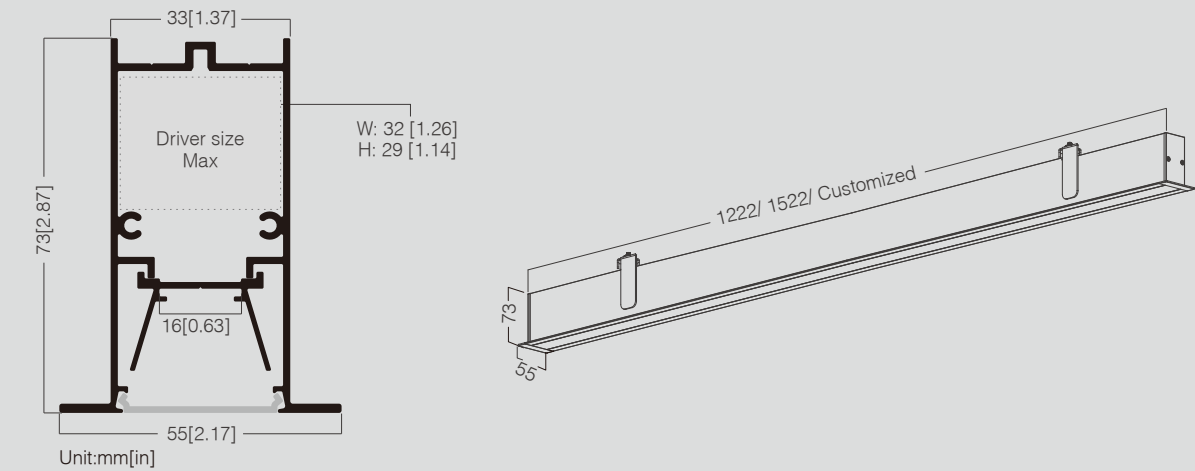


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RLT	Textured Black	Nickle Louver	24°	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC
	Textured White		38°					
	Silver Anodized		50°					
			35×75°					
			50×50°					

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L1222xW55xH73mm	1.1- 4sets	1- 21.0W	3000K	100lm/W	1.1- 80+ (2240lm) - 90+ (2050lm)	Trimed Recessed	DALI
2- L1522xW55xH73mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2880lm) - 90+ (2640lm)		0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (3200lm) - 90+ (2940lm)		On/Off
	2.2- 10sets	4- 45.0W					

BEAM ANGLE

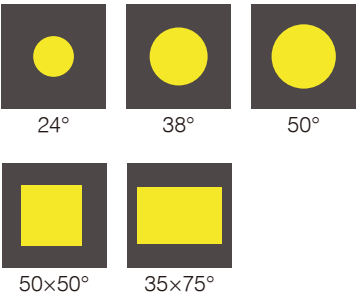


ACCESSORIES



Aircraft Cable Pendant Kit

SLIM

SLIM RECESSED LINEAR LIGHTING-WALL WASHER

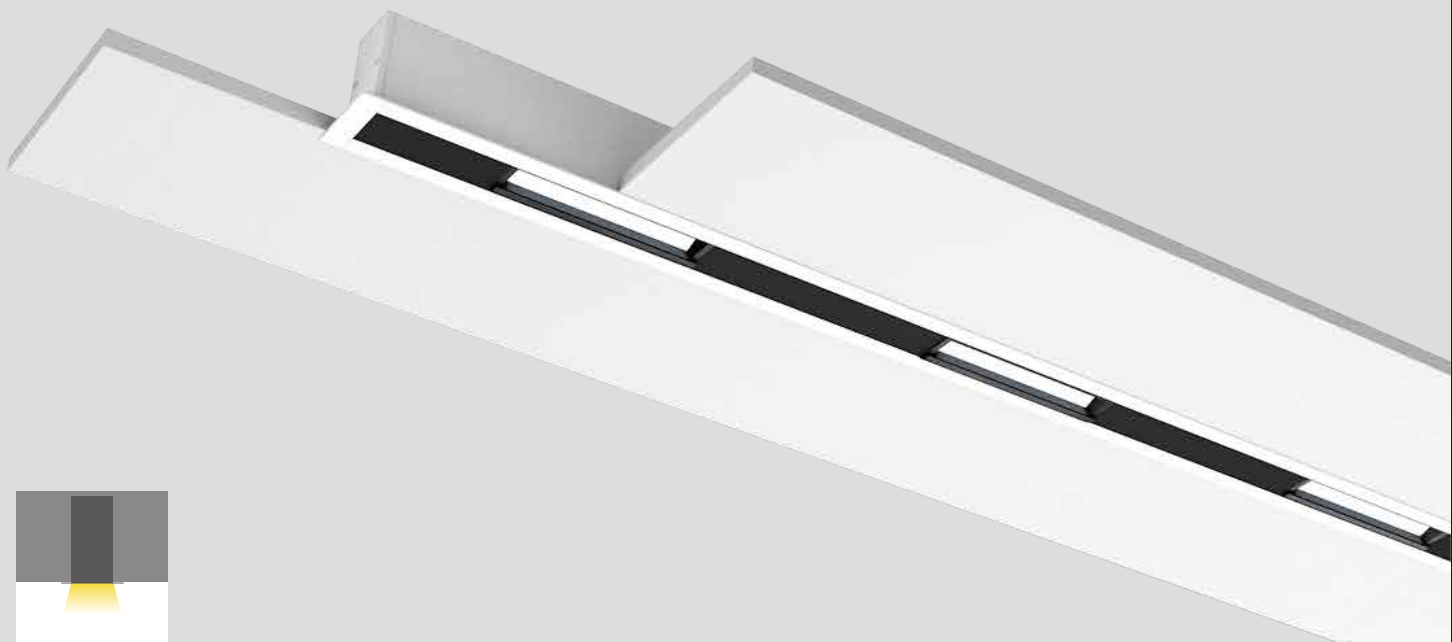

SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RWW	Textured Black Textured White Silver Anodized	5in1 Louver & Reflector	Wall Washer	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm	1.1- 4sets	1- 21.0W	3000K	80lm/W	1.1- 80+ (1780lm) - 90+ (1630lm)	Trimed Recessed	DALI
2- L 1522xW55xH73mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2290lm) - 90+ (2100lm)		0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (2550lm) - 90+ (2340lm)		On/off
	2.2- 10sets	4- 45.0W			2.2- 80+ (3820lm) - 90+ (3510lm)		

SLIM

SLIM RECESSED LINEAR LIGHTING-WALL WASHER

DIMENSION

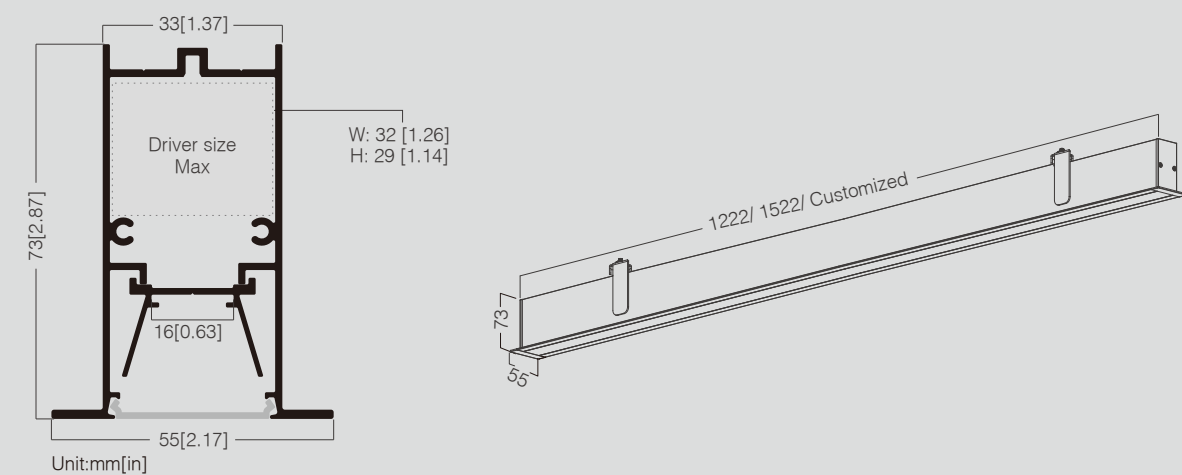

WALL WASHER



ACCESSORIES




Aircraft Cable Pendant Kit



SLIM


SLIM RECESSED LINEAR LIGHTING-REFLECTOR LOUVER

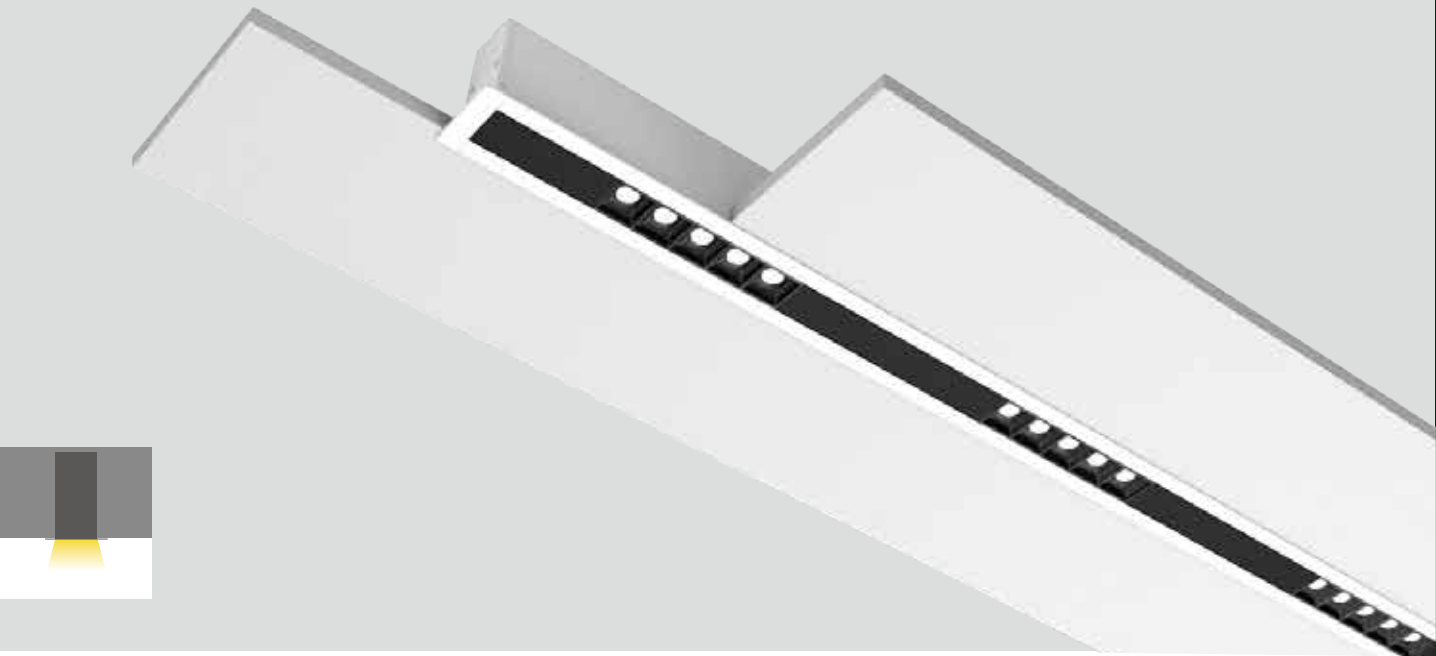

SLIM

SLIM RECESSED LINEAR LIGHTING-REFLECTOR LOUVER

DIMENSION

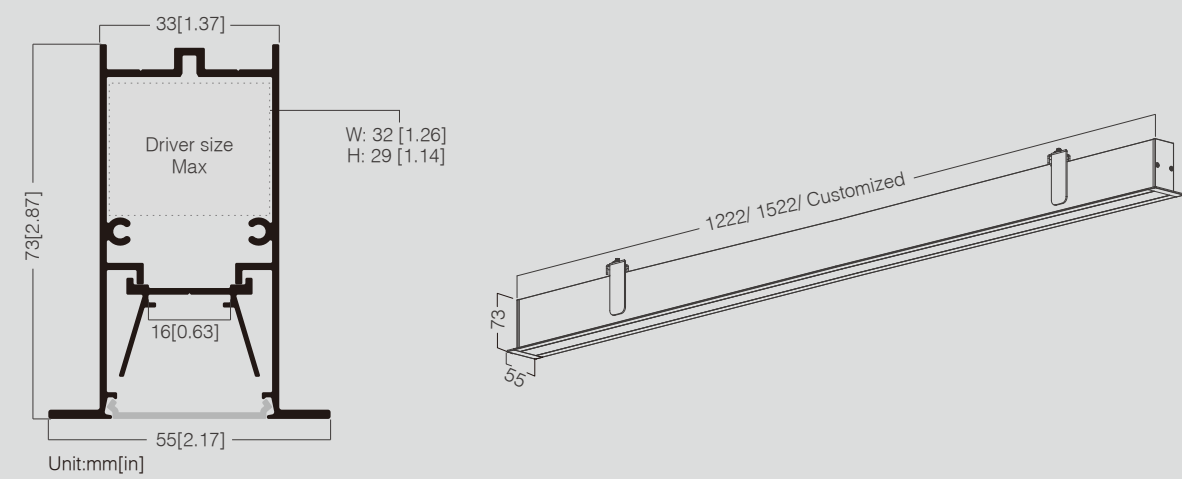

SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RLV	Textured Black Textured White Silver Anodized	5in1 Louver & Reflector	15Deg 30Deg 45Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm	1.1- 4sets	1- 21.0W	3000K	100lm/W	1.1- 80+ (2240lm) - 90+ (2050lm)	Trimed Recessed	DALI 0-10V On/off
	1.2- 8sets	2- 30.0W	4000K		1.1- 80+ (2290lm) - 90+ (2100lm) 1.2- 80+ (3200lm) - 90+ (2940lm) 1.2- 80+ (3250lm) - 90+ (3000lm)		
2- L 1522xW55xH73mm	2.1- 5sets	1- 27.0W	3000K	100lm/W	2.1- 80+ (2880lm) - 90+ (2640lm)	Trimed Recessed	DALI 0-10V On/off
	2.2- 10sets	2- 45.0W	4000K		2.1- 80+ (2930lm) - 90+ (2690lm) 2.2- 80+ (4800lm) - 90+ (4410lm) 2.2- 80+ (4850lm) - 90+ (4460lm)		

REFLECTOR LOUVER



BEAM ANGLE

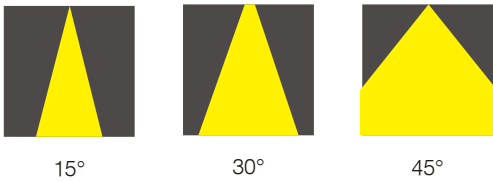

ACCESSORIES



Aircraft Cable Pendant Kit






LUZ Surface & Recessed Linear Light

Aesthetically pleasing design. Versatile Optical solutions, including anti-glare design, creating a more suitable lighting environment.

Ideal for various open space settings, enhancing both ambiance and functionality.

DIMENSIONS

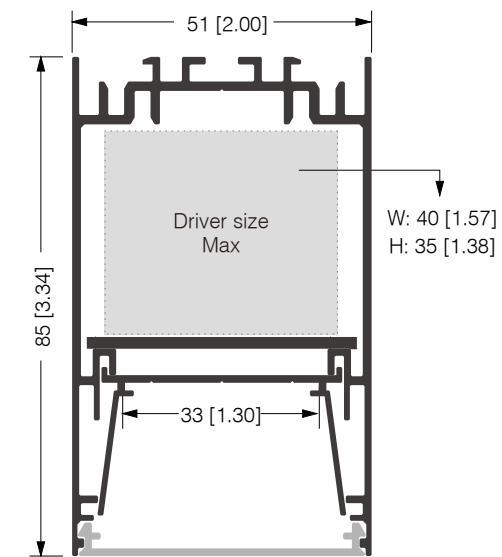


Unit:mm[in]

508533

Surface Installation
(Pendant, Surface Mounted,
Wall Mounted)

708533

Trimed Recessed Installation

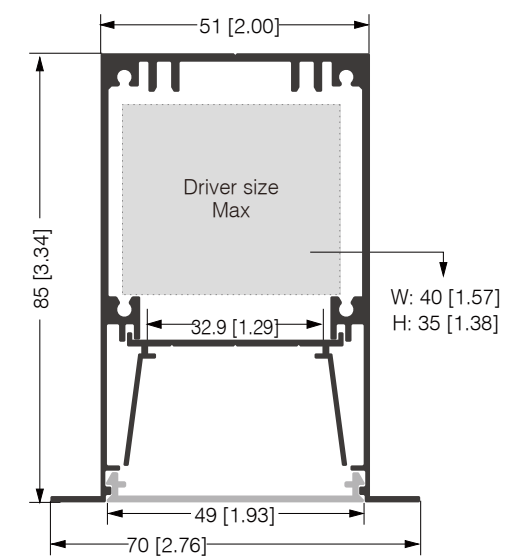

Diffuser



Flush Optical Kit
Creating the most human friendly lighting.



Prismatic Lens
Available for anti-glaring lighting requirements.




General PC lens
With high transmission.

5IN1 louver optical kit is flexible in any multiple lengths as W30=132.5mm, W38=L189.8mm.
Available in various beam angles which is most satisfying for lighting environments. The anti-glaring performance is up to UGR<16.


Reflector Louver-W38mm



UGR
<16

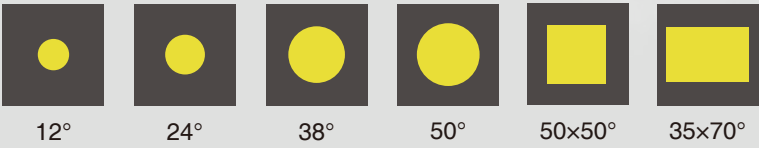


Reflector Louver-W30mm

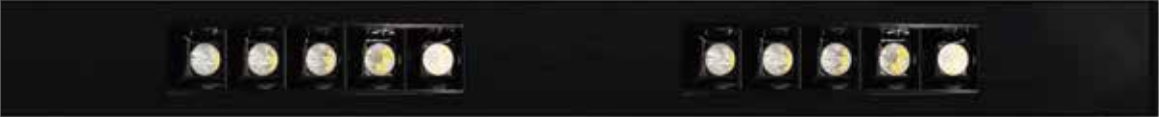


Wall Washer




INSTALLSTIONS

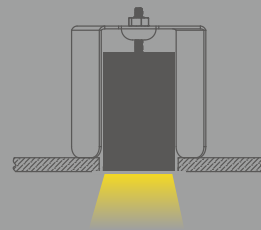

Trimmed Recessed




Ceiling Mounted

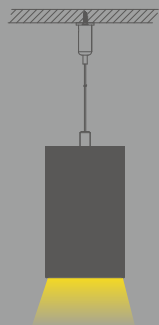

Pendant



Wall Mounted

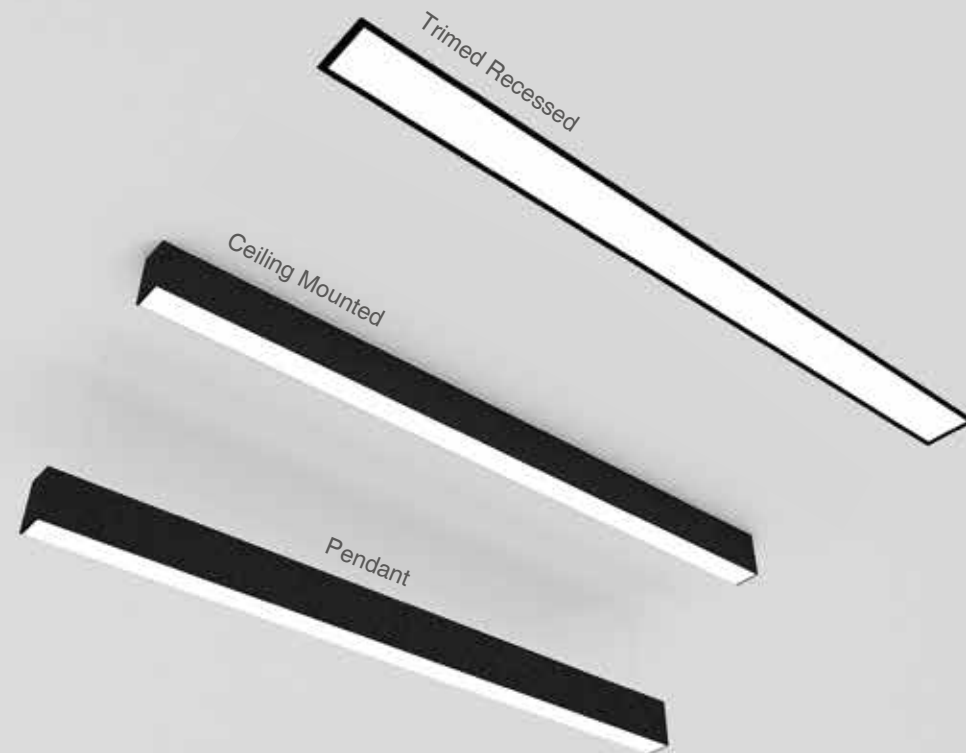

Accurate Injected Lens

Beam angle in Asymmetric,
Batwing, 60°, 90°.



Beam Angle



60°



90°



BATWING



ASYMMETRIC





SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
LUZ-AGF	Textured Black	Anti-Glare Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Prismatic Lens						
	Silver Anodized							


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1215xW50xH85mm	1- 15.0W	3000K	100lm/W	1- 80+ (1590lm) - 90+ (1450lm)	Aircraft Cable Pendant	DALI
	2- 27.0W	4000K		2- 80+ (2930lm) - 90+ (2660lm)	Ceiling Mounted	0-10V
	3- 35.0W	2700~4000K		3- 80+ (3760lm) - 90+ (3420lm)	Wall Mounted	On/Off
			110lm/W	1- 80+ (1672lm) - 90+ (1520lm)		
				2- 80+ (2992lm) - 90+ (2720lm)		
				3- 80+ (3817lm) - 90+ (3470lm)		
			120lm/W	1- 80+ (1900lm) - 90+ (1710lm)		
				2- 80+ (3420lm) - 90+ (3070lm)		
				3- 80+ (4430lm) - 90+ (3990lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1515xW50xH85mm	1- 27.0W	3000K	100lm/W	1- 80+ (2930lm) - 90+ (2660lm)	Aircraft Cable Pendant	DALI
	2- 36.0W	4000K		2- 80+ (3760lm) - 90+ (3420lm)	Ceiling Mounted	0-10V
	3- 45.0W	2700~4000K		3- 80+ (4900lm) - 90+ (4460lm)	Wall Mounted	On/Off
			110lm/W	1- 80+ (2992lm) - 90+ (2720lm)		
				2- 80+ (3817lm) - 90+ (3470lm)		
				3- 80+ (5390lm) - 90+ (4900lm)		
			120lm/W	1- 80+ (3420lm) - 90+ (3070lm)		
				2- 80+ (4430lm) - 90+ (3990lm)		
				3- 80+ (5840lm) - 90+ (5310lm)		

DIMENSION

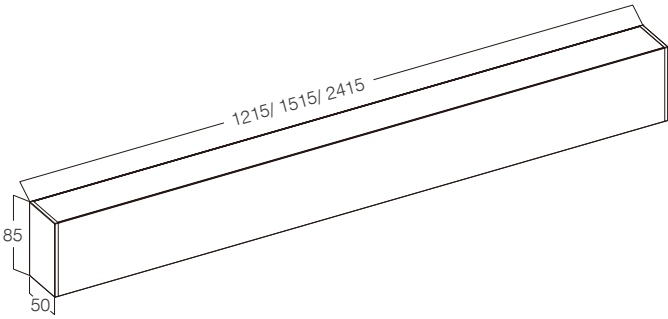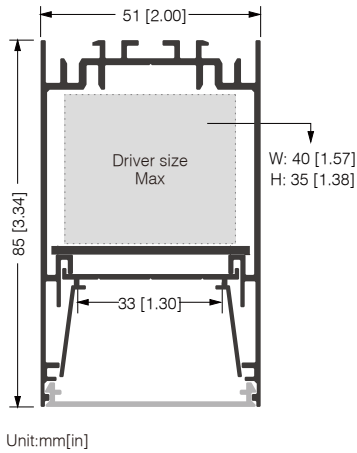


ANTI-GLARE FILM

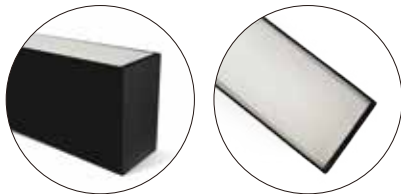

ACCESSORIES



Aircraft Cable Pendant Kit Ceiling Mounted Kit Wall Mounted Kit

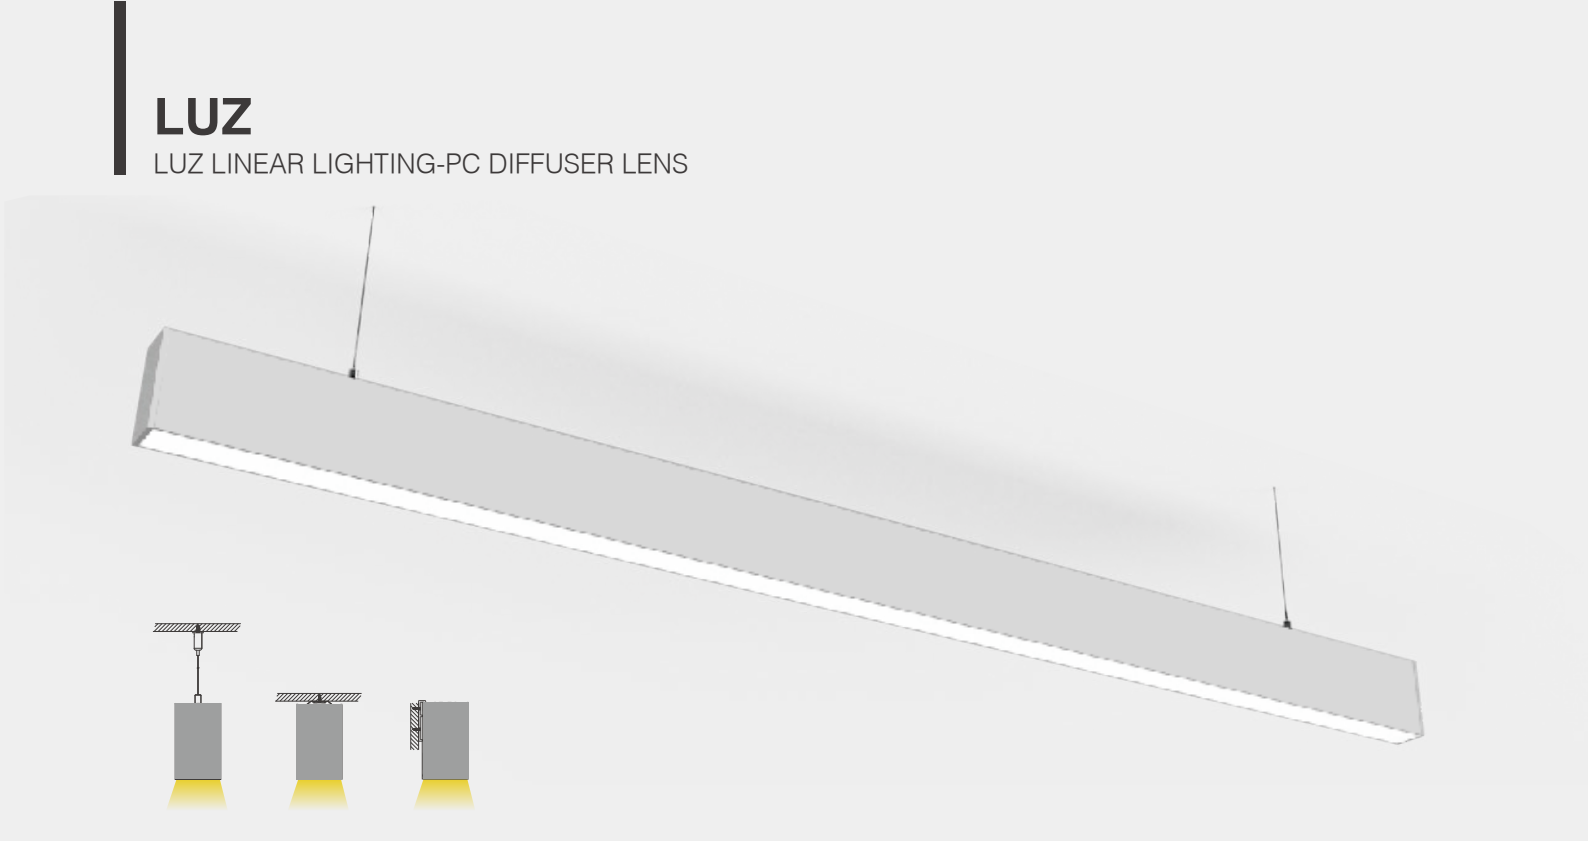



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
LUZ-PC	Textured Black Textured White Silver Anodized	PC Diffuser Lens	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1215xW50xH85mm	1- 15.0W	3000K	110lm/W	1- 80+ (1870lm) - 90+ (1700lm)	Aircraft Cable Pendant	DALI
	2- 27.0W	4000K		2- 80+ (3350lm) - 90+ (3050lm)	Ceiling Mounted	0-10V
	3- 35.0W	2700~4000K		3- 80+ (4250lm) - 90+ (3900lm)	Wall Mounted	On/Off
			120lm/W	1- 80+ (1900lm) - 90+ (1750lm)		
				2- 80+ (3420lm) - 90+ (3100lm)		
				3- 80+ (4620lm) - 90+ (4200lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1515xW50xH85mm	1- 27.0W	3000K	110lm/W	1- 80+ (3300lm) - 90+ (3050lm)	Aircraft Cable Pendant	DALI
	2- 36.0W	4000K		2- 80+ (4200lm) - 90+ (3900lm)	Ceiling Mounted	0-10V
	3- 45.0W	2700~4000K		3- 80+ (5350lm) - 90+ (4900lm)	Wall Mounted	On/Off
			120lm/W	1- 80+ (3420lm) - 90+ (3100lm)		
				2- 80+ (4650lm) - 90+ (4300lm)		
				3- 80+ (5700lm) - 90+ (5350lm)		

DIMENSION

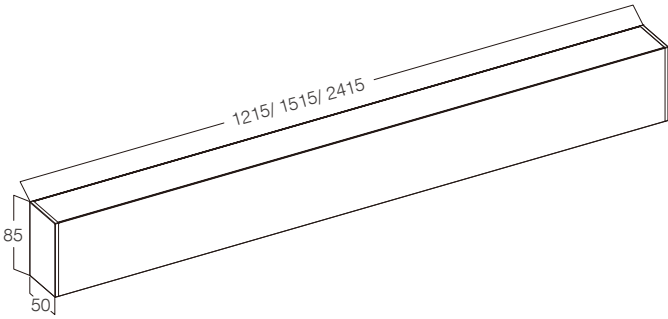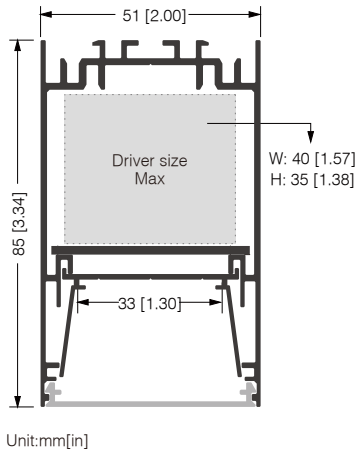

PC DIFFUSER LENS

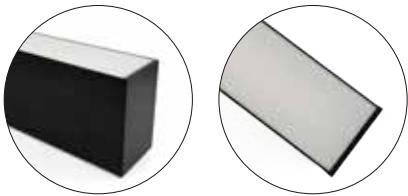


ACCESSORIES



LUZ

LUZ LINEAR LIGHTING-LOUVER LENS

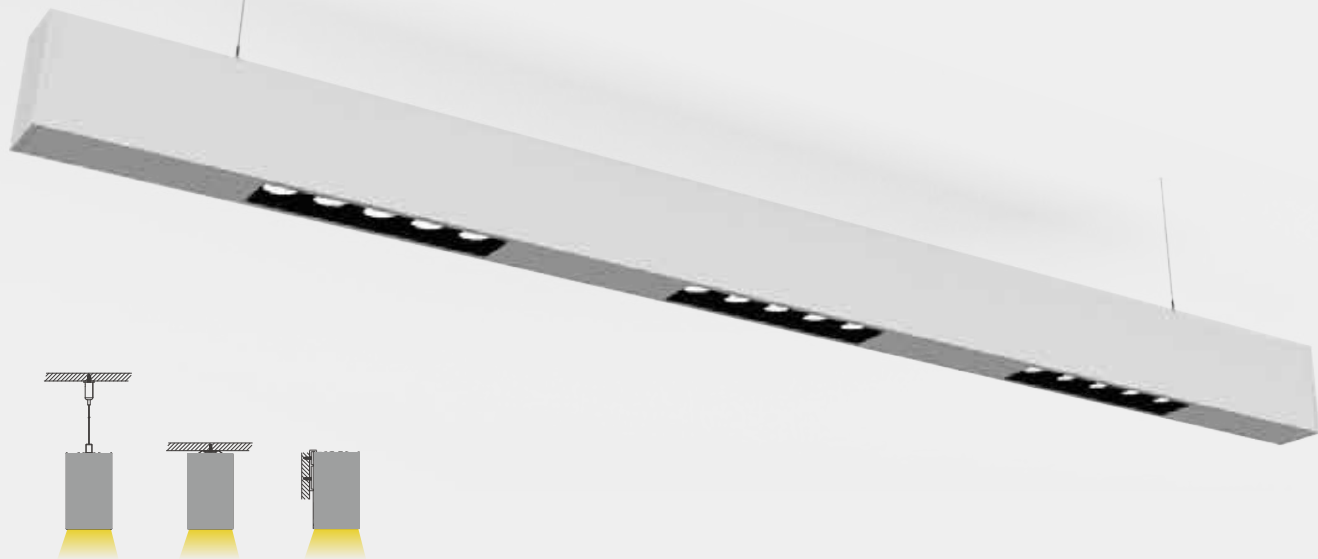

LUZ

LUZ LINEAR LIGHTING-LOUVER LENS





SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
LUZ-LT	Textured Black Textured White Silver Anodized	Nickle Louver lens	12° 24° 38° 50° 35×70° 50×50°	<19	IP22 IK06	CREE	3-Step MacAdam	220V-240VAC


DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW50xH85mm	1.1- 3sets	1.1- 25.0W	3000K	1.1-100lm/W	1.1- 80+ (2670lm) - 90+ (2450lm)	Aircraft Cable Pendant	DALI
	1.2- 6sets	1.2- 36.0W	4000K	1.1-103lm/W 1.2-110lm/W 1.2-114lm/W	1.1- 80+ (2740lm) - 90+ (2520lm) 1.2- 80+ (4230lm) - 90+ (3880lm) 1.2- 80+ (4390lm) - 90+ (4032lm)	Ceiling Mounted Wall Mounted	0-10V On/off

2- L 1508xW50xH85mm	2.1- 4sets	2.1- 31.0W	3000K	1.1-100lm/W	1.1- 80+ (3300lm) - 90+ (3030lm)	Aircraft Cable Pendant	DALI
	2.2- 8sets	2.2- 45.0W	4000K	1.1-103lm/W 1.2-110lm/W 1.2-114lm/W	1.1- 80+ (3410lm) - 90+ (3130lm) 1.2- 80+ (5290lm) - 90+ (4860lm) 1.2- 80+ (5490lm) - 90+ (5040lm)	Ceiling Mounted Wall Mounted	0-10V On/Off

DIMENSION

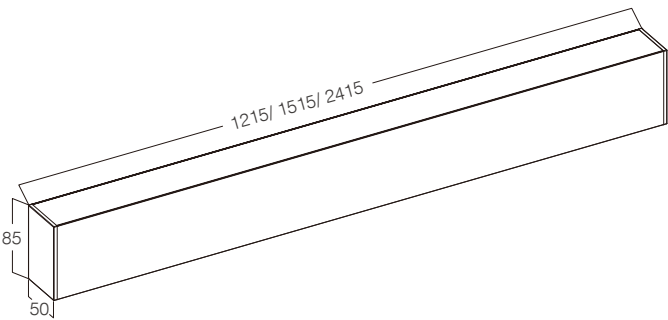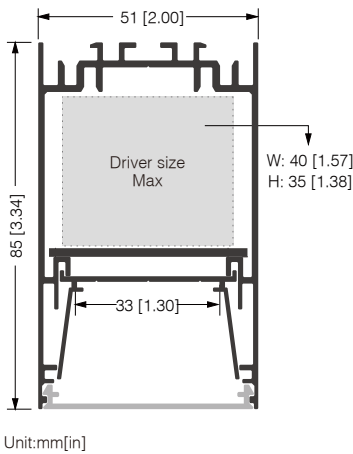

LOUVER LENS

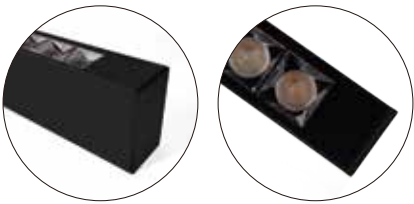

ACCESSORIES






SPECIFICATION



LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
LUZ-WW	Textured Black Textured White Silver Anodized	Louver lens	Wall Washer	<19	IP22 IK06	CREE	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW50xH85mm	1.1- 3sets	1.1- 25.0W	3000K	1.1- 80lm/W	1.1- 80+ (2180lm) - 90+ (2000lm)	Aircraft Cable Pendant	DALI
	1.2- 6sets	1.2- 36.0W	4000K	1.1- 85lm/W	1.2- 80+ (3330lm) - 90+ (3060lm)	Ceiling Mounted Wall Mounted	0-10V On/Off

2- L 1508xW50xH85mm	2.1- 4sets	2.1- 31.0W	3000K	2.1- 80lm/W	2.1- 80+ (2630lm) - 90+ (2410lm)	Aircraft Cable Pendant	DALI
	2.2- 8sets	2.2- 45.0W	4000K	2.2- 85lm/W	2.2- 80+ (4070lm) - 90+ (3730lm)	Ceiling Mounted Wall Mounted	0-10V On/Off

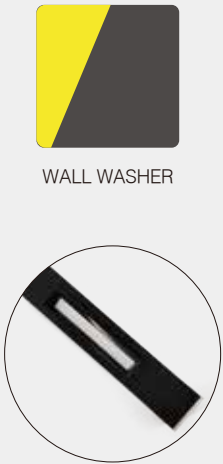

DIMENSION

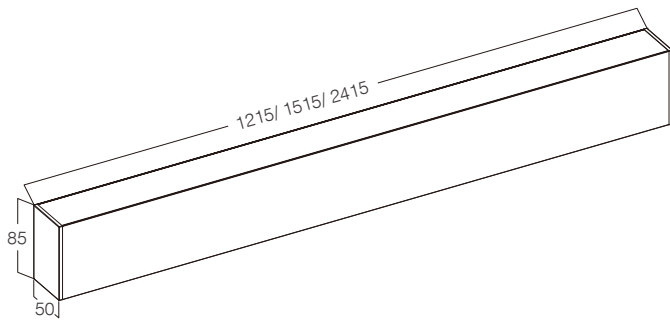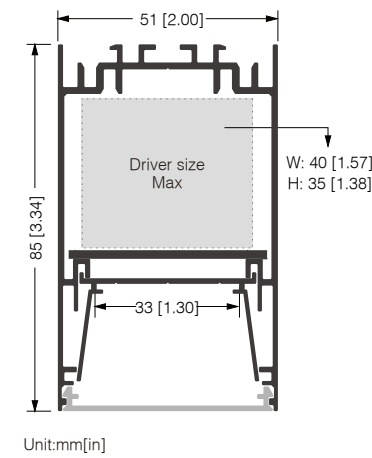

ACCESSORIES



Aircraft Cable Pendant Kit



Ceiling Mounted Kit



Wall Mounted Kit

LOUVER LENS



LUZ
LUZ LINEAR LIGHTING-TIR LENS



LUZ
LUZ LINEAR LIGHTING-TIR LENS




SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
LUZ-TR	Textured Black Textured White Silver Anodized	TIR Injected Lens	60° 90° Assymetric Batwing	<19 to <26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1182xW50xH85mm	1- 21.0W 2- 30.0W	3000K 4000K	140lm/W	1- 80+ (3230lm) - 90+ (2940lm) 2- 80+ (4620lm) - 90+ (4200lm)	Aircraft Cable Pendant Ceiling Mounted Wall Mounted	DALI 0-10V On/Off


DIMENSION

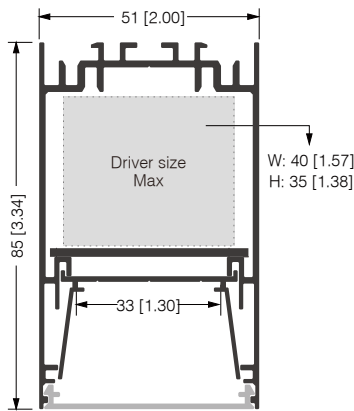

Unit:mm[in]

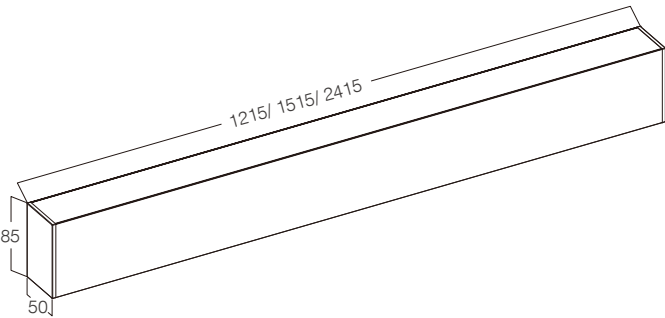

TIR LENS

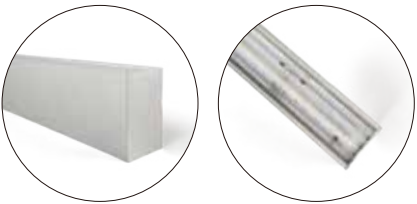

ACCESSORIES





Aircraft Cable Pendant Kit



Ceiling Mounted Kit



Wall Mounted Kit

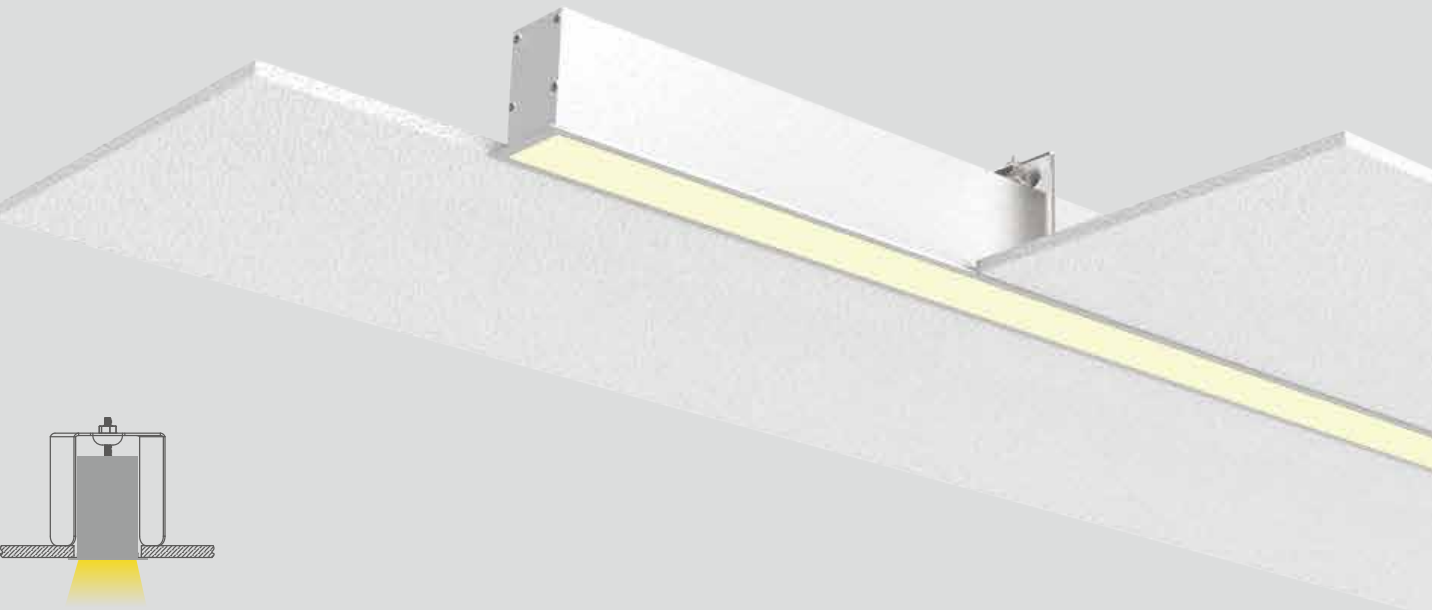



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7085-AGF	Textured Black Textured White Silver Anodized	Anti-Glare Lens Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW70xH85mm	1- 15.0W	3000K	100lm/W	1- 80+ (1600lm) - 90+ (1450lm)	Trimmed Recessed	DALI 0-10V On/Off
	2- 27.0W 3- 35.0W	4000K 2700~4000K		2- 80+ (2860lm) - 90+ (2600lm) 3- 80+ (3750lm) - 90+ (3410lm)		
			110lm/W	1- 80+ (1672lm) - 90+ (1520lm) 2- 80+ (2992lm) - 90+ (2720lm) 3- 80+ (3817lm) - 90+ (3470lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1529xW70xH85mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	100lm/W	1- 80+ (2930lm) - 90+ (2660lm) 2- 80+ (3760lm) - 90+ (3420lm) 3- 80+ (4900lm) - 90+ (4460lm)	Trimmed Recessed	DALI 0-10V On/Off
			110lm/W	1- 80+ (3110lm) - 90+ (2820lm) 2- 80+ (4140lm) - 90+ (3770lm) 3- 80+ (5390lm) - 90+ (4900lm)		

DIMENSION

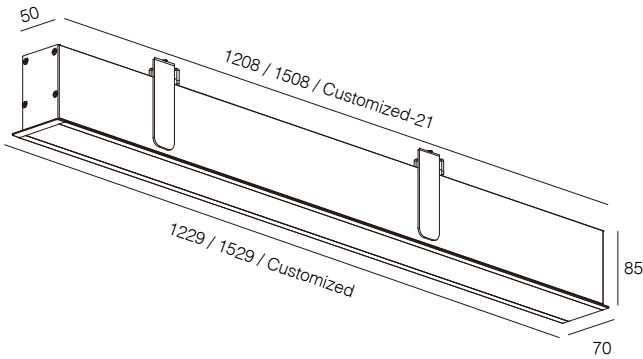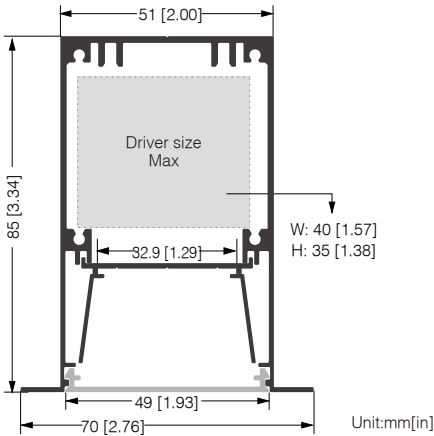


LENS

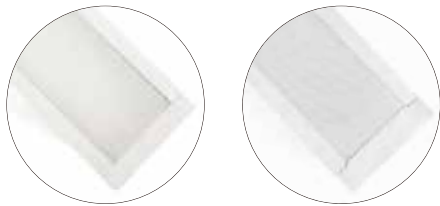

ACCESSORIES



Aircraft Cable Pendant Kit Ceiling Mounted Kit Wall Mounted Kit

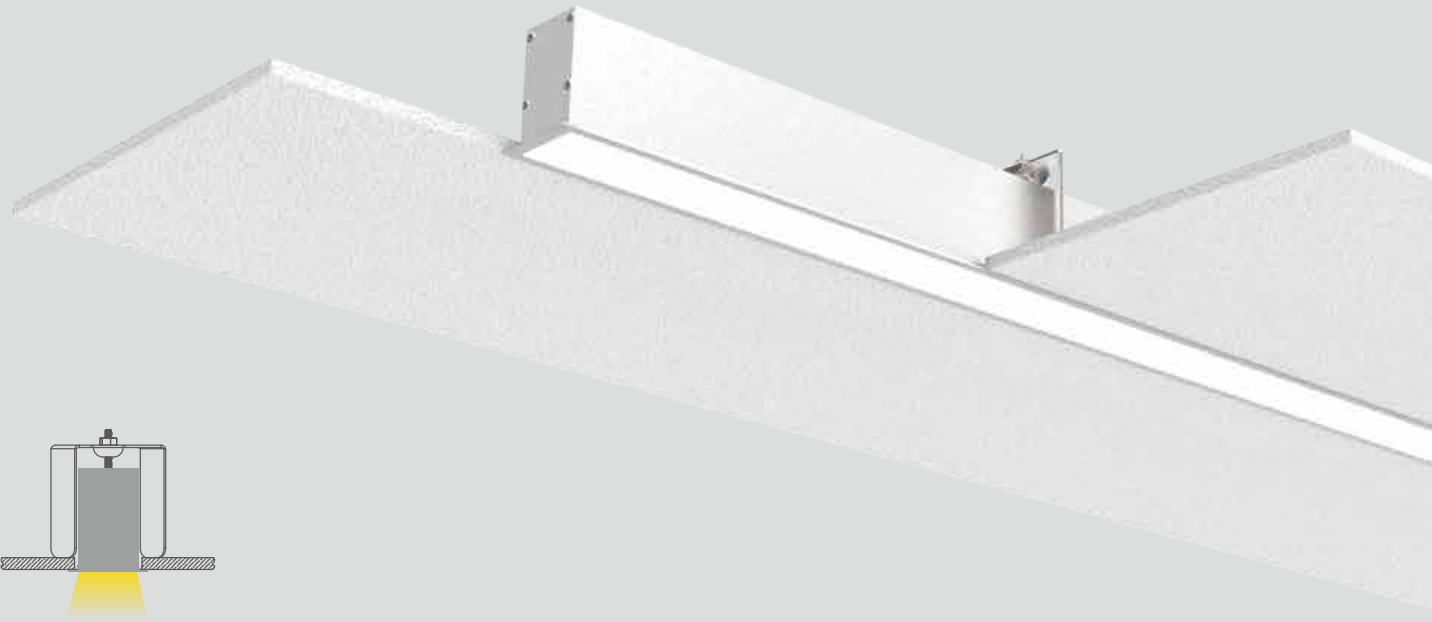


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7085-PC	Textured Black Textured White Silver Anodized	PC Diffuser Lens	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW70xH85mm	1- 15.0W	3000K	110lm/W	1- 80+ (1700lm) - 90+ (1550lm)	Trimed Recessed	DALI 0-10V On/Off
	2- 27.0W 3- 35.0W	4000K 2700~4000K		2- 80+ (3220lm) - 90+ (2920lm) 3- 80+ (4125lm) - 90+ (3750lm)		
			120lm/W	1- 80+ (1900lm) - 90+ (1750lm) 2- 80+ (3600lm) - 90+ (3180lm) 3- 80+ (4550lm) - 90+ (4000lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW70xH85mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	110lm/W	1- 80+ (3200lm) - 90+ (2920lm) 2- 80+ (4120lm) - 90+ (3750lm) 3- 80+ (5300lm) - 90+ (4850lm)	Trimed Recessed	DALI 0-10V On/Off
			120lm/W	1- 80+ (3600lm) - 90+ (3180lm) 2- 80+ (4550lm) - 90+ (4000lm) 3- 80+ (5550lm) - 90+ (5200lm)		

DIMENSION

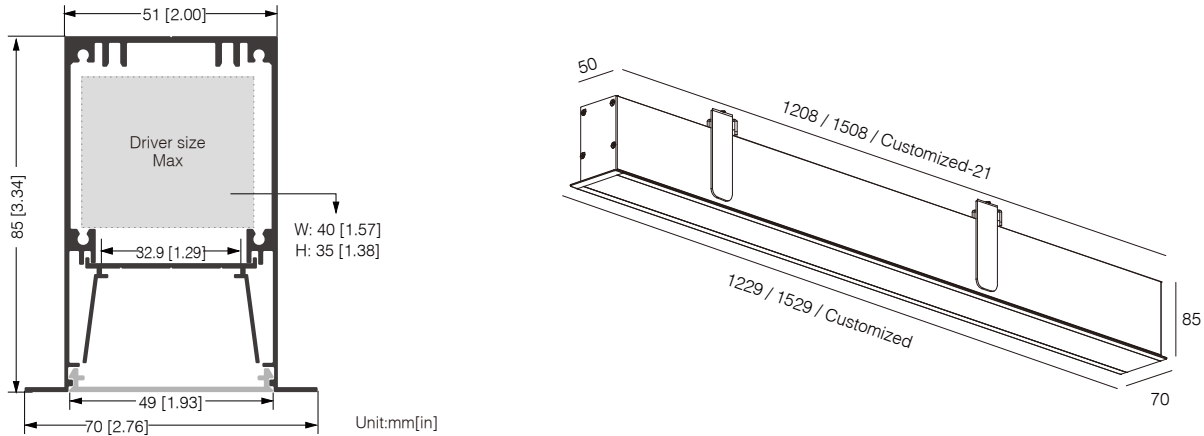

ACCESSORIES



Aircraft Cable Pendant Kit





Ceiling Mounted Kit



Wall Mounted Kit

LENS



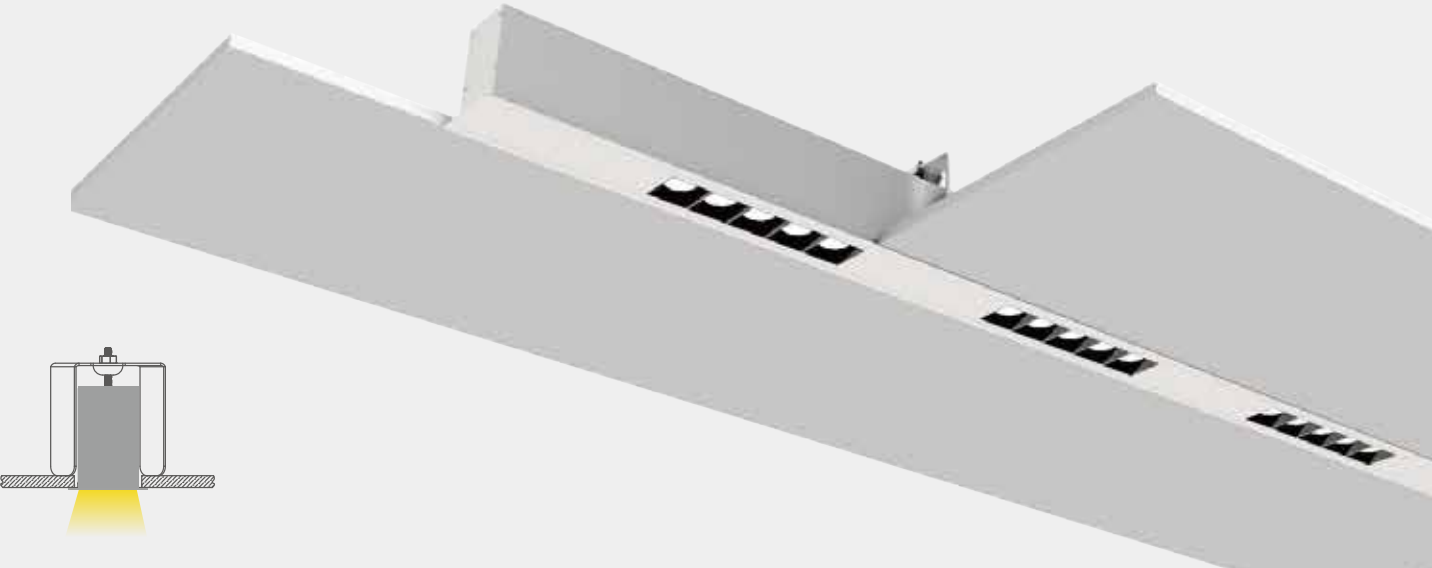


SPECIFICATION



LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7085-LT	Textured Black Textured White Silver Anodized	Nickle Louver lens	12° 24° 38° 50° 35×70° 50×50°	<19	IP22 IK06	CREE	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW70xH85mm	1.1- 3sets	1- 25.0W	3000K	1.1-100lm/W	1.1- 80+ (2670lm) - 90+ (2450lm)	Trimed Recessed	DALI
	1.2- 6sets	2- 36.0W	4000K	1.1-103lm/W 1.2-110lm/W 1.2-113lm/W	1.1- 80+ (2750lm) - 90+ (2520lm) 1.2- 80+ (4230lm) - 90+ (3880lm) 1.2- 80+ (4350lm) - 90+ (3995lm)		0-10V On/Off

2- L 1529xW70xH85mm	2.1- 4sets	1- 31.0W	3000K	1.1-100lm/W	1.1- 80+ (3310lm) - 90+ (3038lm)	Trimed Recessed	DALI
	2.2- 8sets	2- 45.0W	4000K	1.1-103lm/W 1.2-110lm/W 1.2-113lm/W	1.1- 80+ (3412lm) - 90+ (3130lm) 1.2- 80+ (5297lm) - 90+ (4860lm) 1.2- 80+ (5440lm) - 90+ (4995lm)		0-10V On/Off

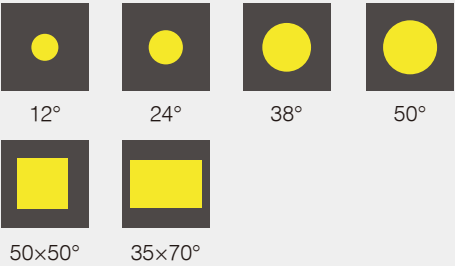

DIMENSION

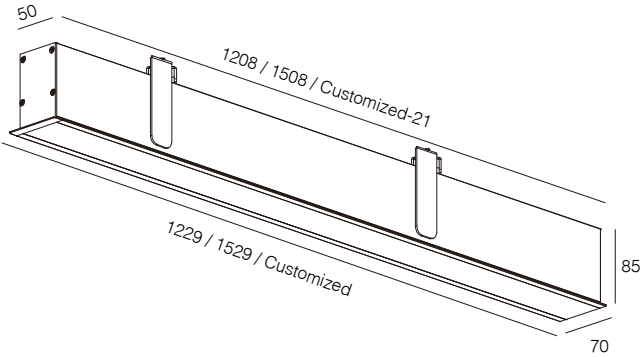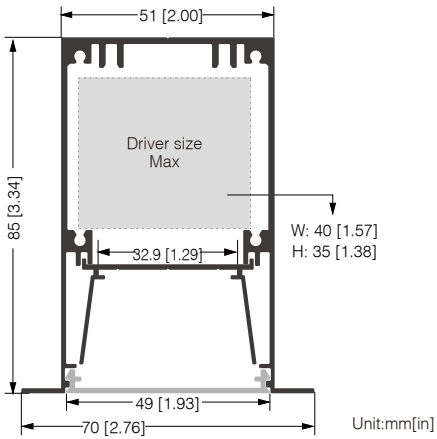



LENS



ACCESSORIES



Aircraft Cable Pendant Kit Ceiling Mounted Kit Wall Mounted Kit

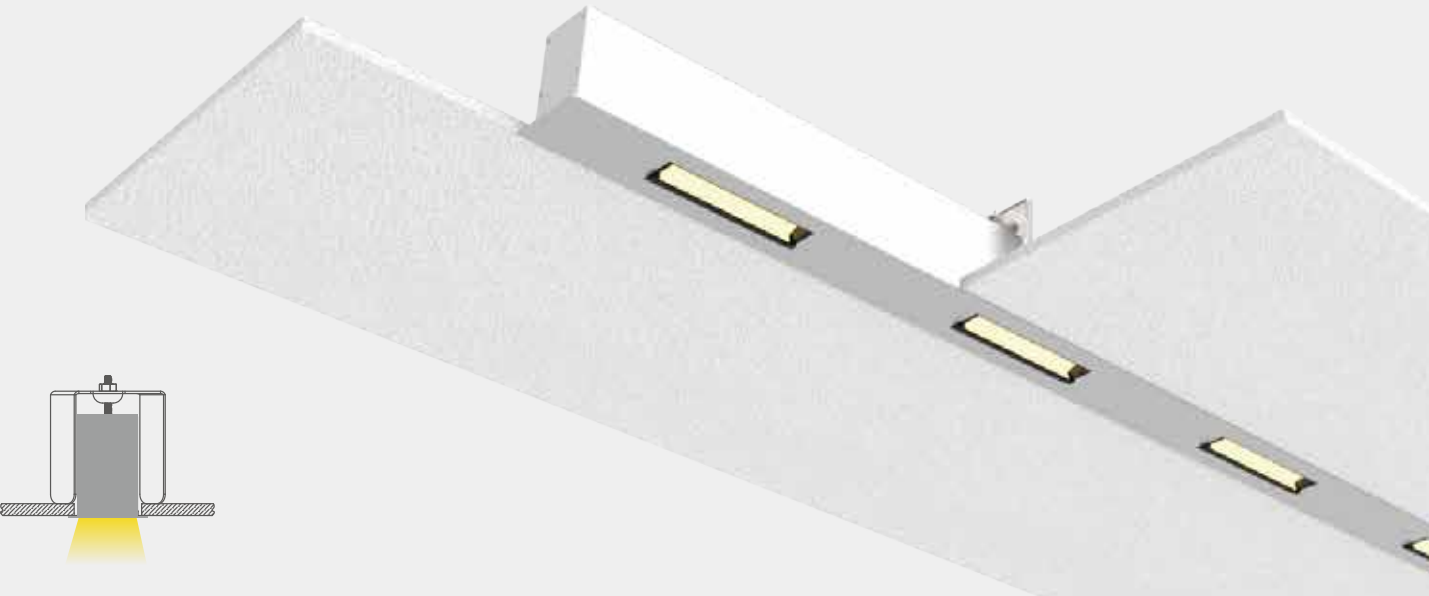

SPECIFICATION



LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7085-WW	Textured Black Textured White Silver Anodized	Louver lens	Wall Washer	<19	IP22 IK06	CREE	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW50xH85mm	1.1- 3sets	1.1- 25.0W	3000K	1- 75lm/W	1.1- 80+ (1980lm) - 90+ (1820lm)	Trimed Recessed	DALI 0-10V On/Off
	1.2- 6sets	1.2- 36.0W	4000K	2- 80lm/W	1.2- 80+ (3060lm) - 90+ (2810lm)		
2- L 1529xW50xH85mm	2.1- 4sets	2.1- 31.0W	3000K	2.1- 75lm/W	2.1- 80+ (2460lm) - 90+ (2260lm)	Trimed Recessed	DALI 0-10V On/Off
	2.2- 8sets	2.2- 45.0W	4000K	2.2- 80lm/W	2.2- 80+ (3820lm) - 90+ (3500lm)		



WALL WASHER

DIMENSION

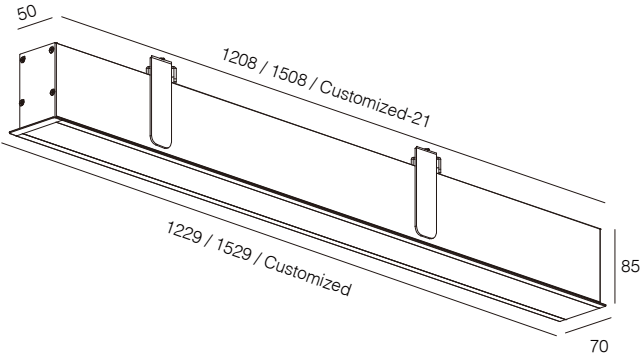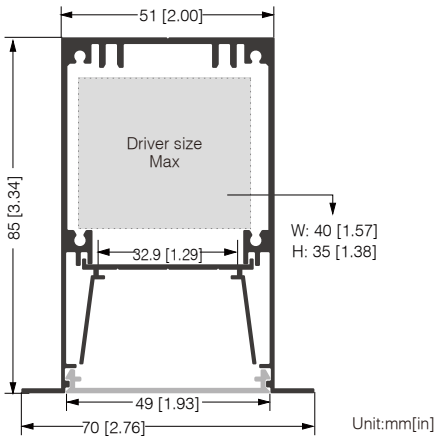

LENS



ACCESSORIES



Aircraft Cable Pendant Kit



Ceiling Mounted Kit




Wall Mounted Kit



ZOLI LINEAR LIGHT

ZOLI engineered for seamless linear light connections. Effortless linking.
Anti-glare optics for superior lighting quality.

Perfect for diverse public spaces, elevating aesthetics and functionality.

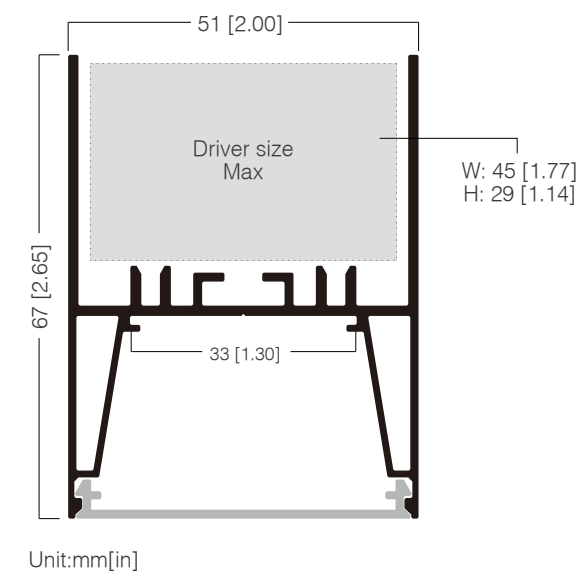

DIMENSIONS




U516833

Pendant Installation




Angular Module


U5168 provides versatile angular module choices and a field-friendly, labor-efficient joining solution.

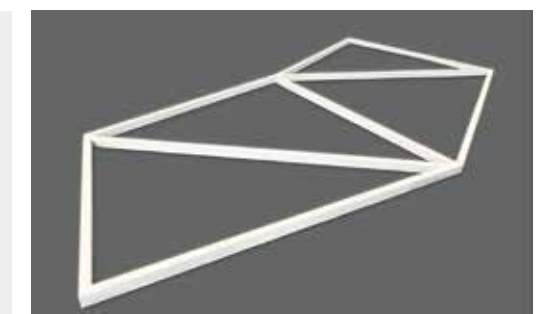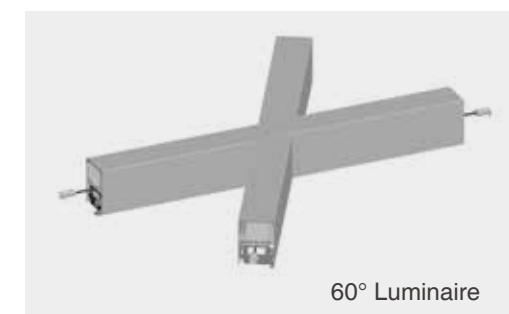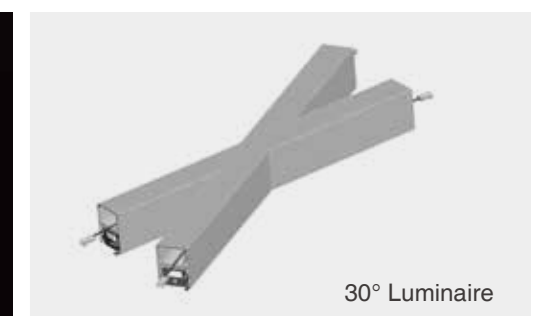

Flush Lens





Prismatic Lens
Available for anti-glaring
lighting requirements

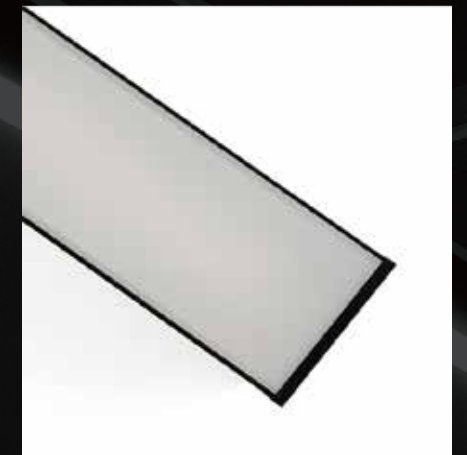

General PC Lens
With high transmission


U514128

Surface Installation
(Pendant, Surface Mounted)

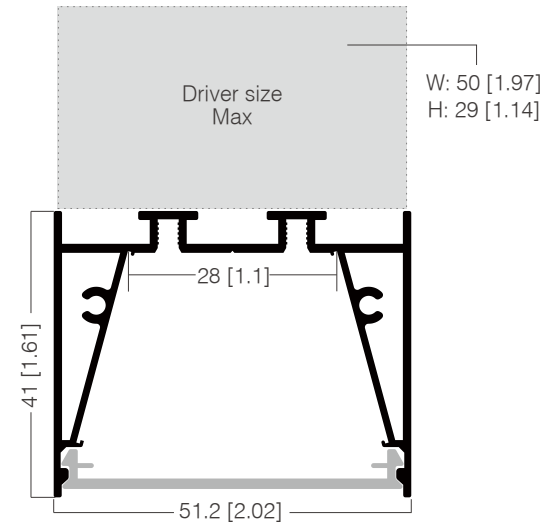

U674128


Trimmed Recessed
Installation

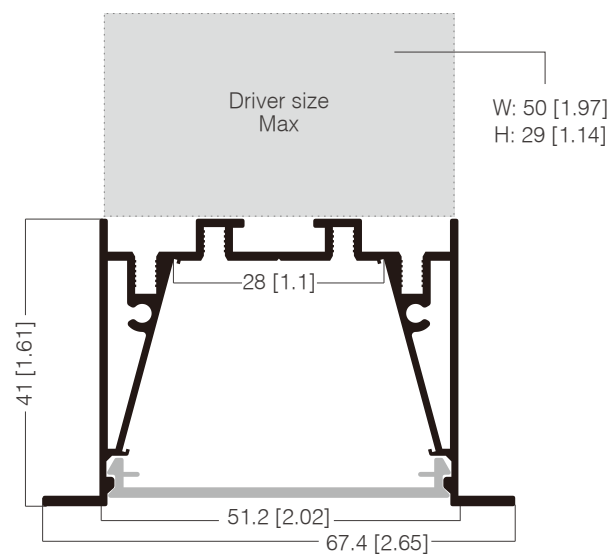

Unit:mm[in]

ZOLI

ZOLI LINEAR LIGHTING-PRISMATIC LENS

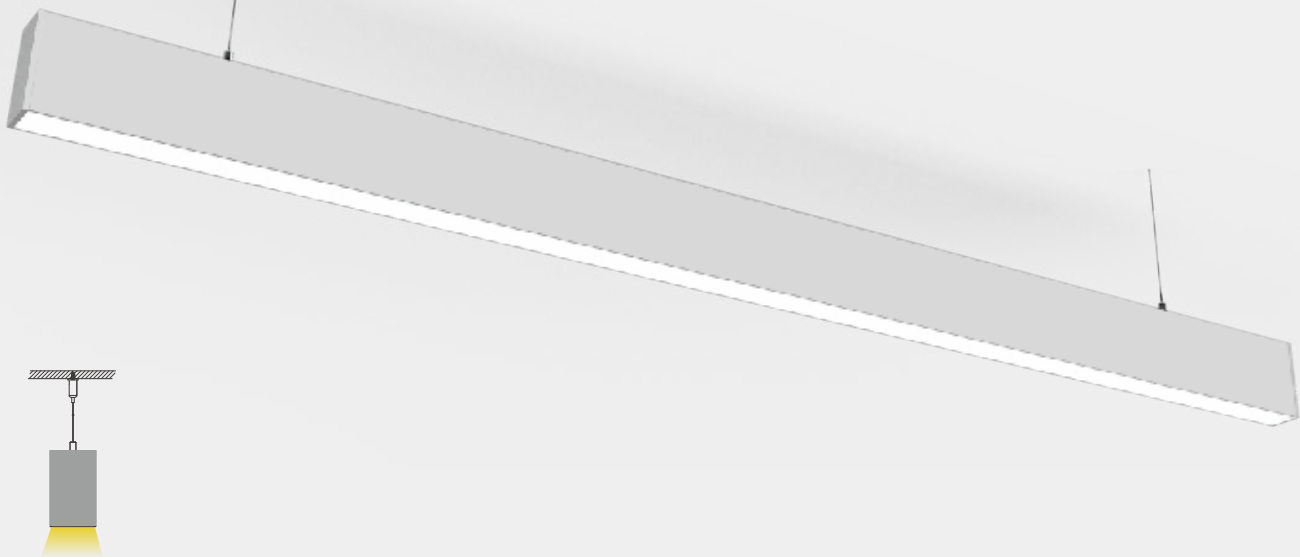

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U5168-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC



DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW51xH68mm	1- 15.0W 2- 27.0W 3- 35.0W	3000K 4000K 2700~4000K	100lm/W	1- 80+ (1590lm) - 90+ (1480lm) 2- 80+ (2750lm) - 90+ (2500lm) 3- 80+ (3740lm) - 90+ (3400lm)	Aircraft Cable Pendant	DALI 0-10V On/Off
			110lm/W	1- 80+ (1800lm) - 90+ (1650lm) 2- 80+ (3210lm) - 90+ (2900lm) 3- 80+ (4150lm) - 90+ (3800lm)		

ZOLI

ZOLI LINEAR LIGHTING-PRISMATIC LENS

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1508xW51xH68mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	100lm/W	1- 80+ (2750lm) - 90+ (2500lm) 2- 80+ (3740lm) - 90+ (3400lm) 3- 80+ (4750lm) - 90+ (4300lm)	Aircraft Cable Pendant	DALI 0-10V On/Off
			110lm/W	1- 80+ (3210lm) - 90+ (2900lm) 2- 80+ (4150lm) - 90+ (3800lm) 3- 80+ (5300lm) - 90+ (4850lm)		

DIMENSION

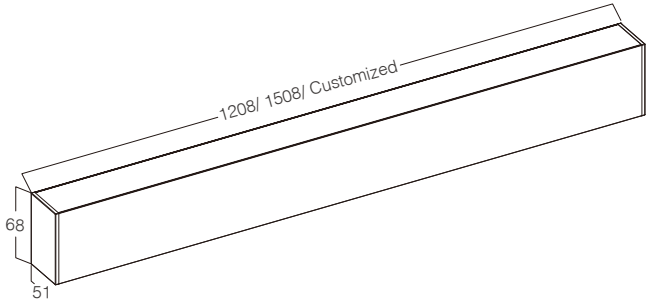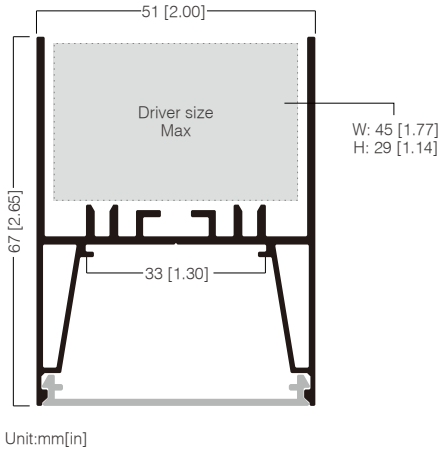


ACCESSORIES



Aircraft Cable Pendant Kit

PRISMATIC LENS



ZOLI

ZOLI LINEAR LIGHTING-PC DIFFUSER



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U5168-PC	Textured Black Textured White Silver Anodized	PC Diffuser Lens	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC



DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW51xH68mm	1- 15.0W	3000K	110lm/W	1- 80+ (1800lm) - 90+ (1530lm)	Aircraft Cable Pendant	DALI 0-10V On/Off
	2- 27.0W 3- 35.0W	4000K 2700~4000K		2- 80+ (3260lm) - 90+ (2970lm) 3- 80+ (4200lm) - 90+ (3850lm)		
			120lm/W	1- 80+ (1870lm) - 90+ (1700lm) 2- 80+ (3510lm) - 90+ (3200lm) 3- 80+ (4500lm) - 90+ (4150lm)		

ZOLI

ZOLI LINEAR LIGHTING-PC DIFFUSER

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1508xW51xH68mm	1- 27.0W	3000K	110lm/W	1- 80+ (3260lm) - 90+ (2970lm)	Aircraft Cable Pendant	DALI 0-10V On/off
	2- 36.0W 3- 45.0W	4000K 2700~4000K	120lm/W	2- 80+ (4200lm) - 90+ (3850lm) 3- 80+ (5400lm) - 90+ (4850lm)		
				1- 80+ (3510lm) - 90+ (3200lm) 2- 80+ (4500lm) - 90+ (4150lm) 3- 80+ (5840lm) - 90+ (5300lm)		

DIMENSION

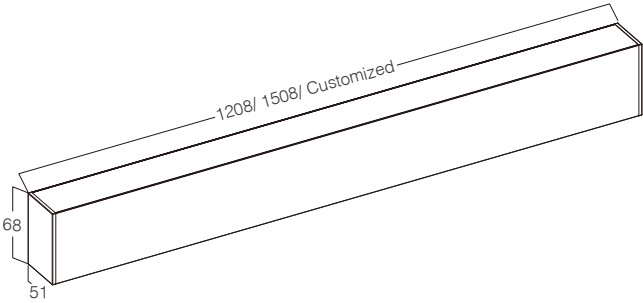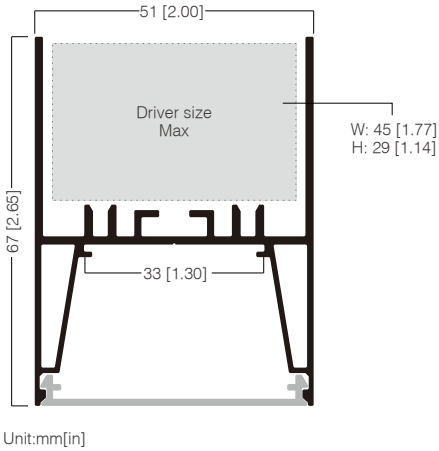


ACCESSORIES




Aircraft Cable Pendant Kit

PC DIFFUSER LENS

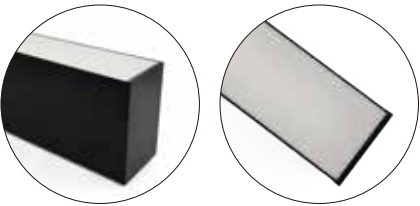

ZOLI

ZOLI LINEAR LIGHTING-PRISMATIC LENS

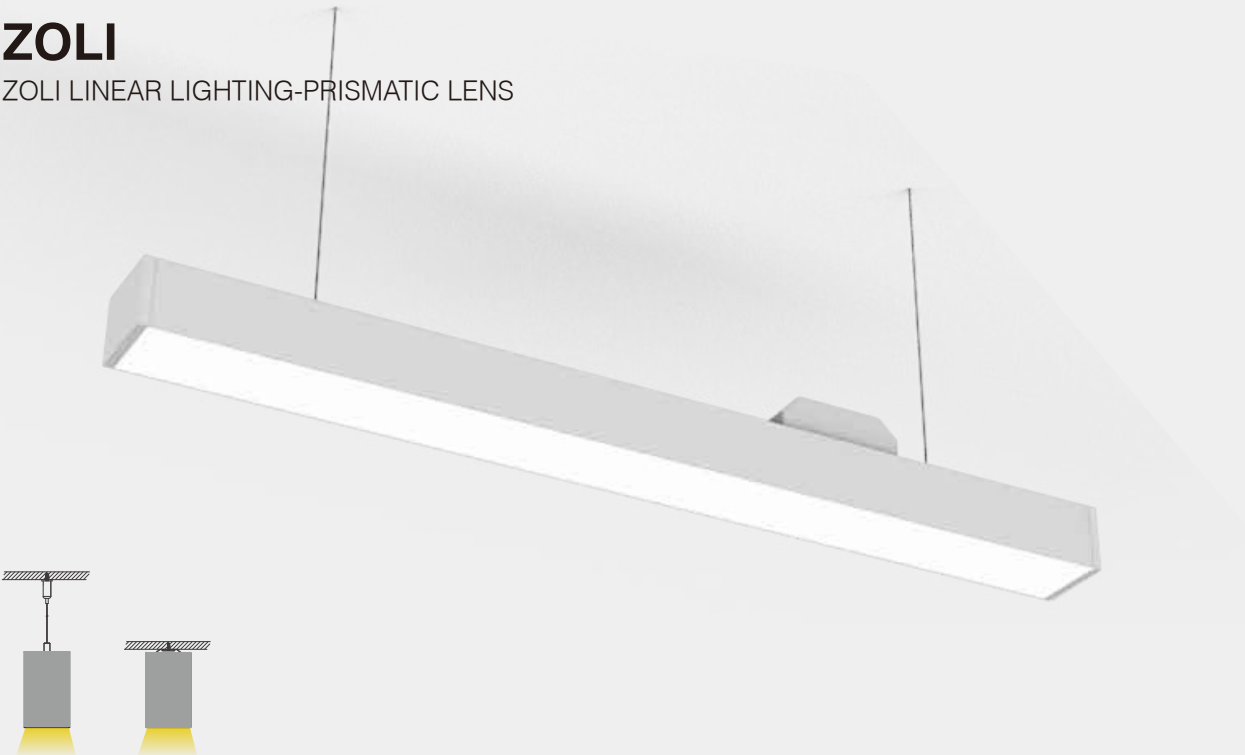

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U5141-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC



DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW51xH41mm	1- 15.0W	3000K	100lm/W	1- 80+ (1620lm) - 90+ (1460lm)	Aircraft Cable Pendant	DALI
	2- 27.0W	4000K		2- 80+ (2900lm) - 90+ (2620lm)	Ceiling Mounted	0-10V
	3- 35.0W	2700~4000K		3- 80+ (3780lm) - 90+ (3450lm)		On/Off
			110lm/W	1- 80+ (1750lm) - 90+ (1620lm)		
				2- 80+ (3207lm) - 90+ (2943lm)		
				3- 80+ (4158lm) - 90+ (3800lm)		

ZOLI

ZOLI LINEAR LIGHTING-PRISMATIC LENS

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1508xW51xH68mm	1- 27.0W	3000K	100lm/W	1- 80+ (2900lm) - 90+ (2620lm)	Aircraft Cable Pendant	DALI
	2- 36.0W	4000K		2- 80+ (3780lm) - 90+ (3450lm)	Ceiling Mounted	0-10V
	3- 45.0W	2700~4000K		3- 80+ (4840lm) - 90+ (4400lm)		On/Off
			110lm/W	1- 80+ (3207lm) - 90+ (2943lm)		
				2- 80+ (4158lm) - 90+ (3800lm)		
				3- 80+ (5400lm) - 90+ (5000lm)		


DIMENSION

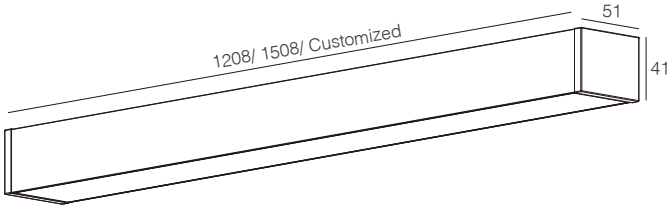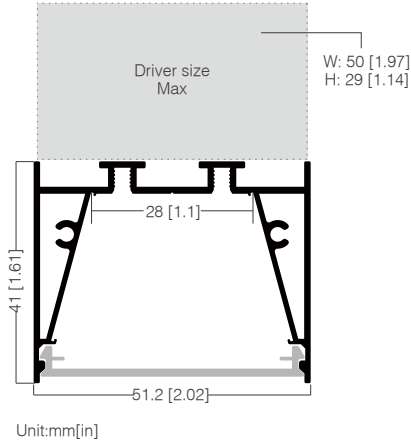


ACCESSORIES



PRISMATIC LENS

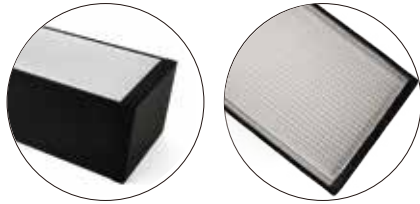

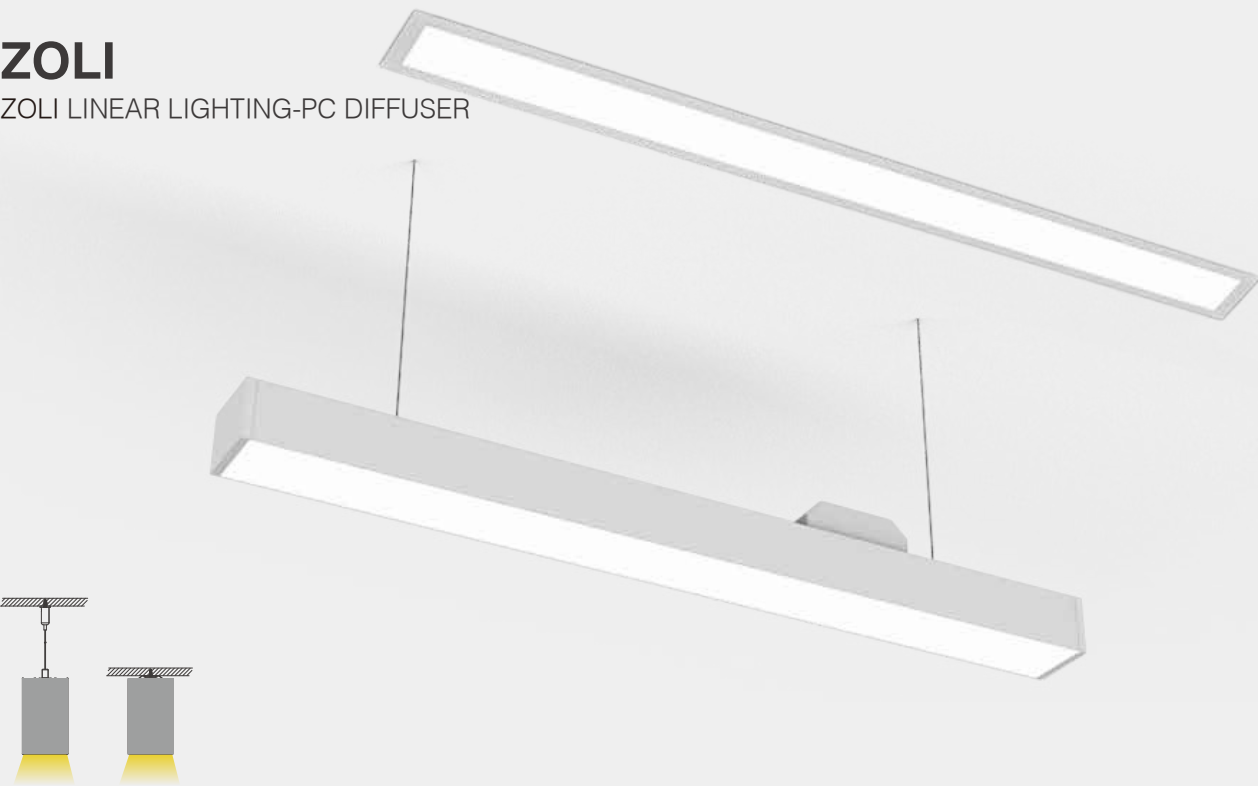



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U5141-PC	Textured Black Textured White Silver Anodized	PC Diffuser Lens	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW51xH68mm	1- 15.0W	3000K	110lm/W	1- 80+ (1700lm) - 90+ (1530lm)	Aircraft Cable Pendant	DALI
	2- 27.0W	4000K		2- 80+ (3050lm) - 90+ (2750lm)	Ceiling Mounted	0-10V
	3- 35.0W	2700~4000K		3- 80+ (3960lm) - 90+ (3560lm)		On/Off
				1- 80+ (1850lm) - 90+ (1700lm)		
				2- 80+ (3500lm) - 90+ (3200lm)		
				3- 80+ (4470lm) - 90+ (4100lm)		
			120lm/W			

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1508xW51xH68mm	1- 27.0W	3000K	110lm/W	1- 80+ (3050lm) - 90+ (2750lm)	Aircraft Cable Pendant	DALI
	2- 36.0W	4000K		2- 80+ (4010lm) - 90+ (3750lm)	Ceiling Mounted	0-10V
	3- 45.0W	2700~4000K		3- 80+ (5350lm) - 90+ (4900lm)		On/Off
				1- 80+ (3500lm) - 90+ (3200lm)		
				2- 80+ (4470lm) - 90+ (4100lm)		
				3- 80+ (5830lm) - 90+ (5350lm)		
			120lm/W			

DIMENSION

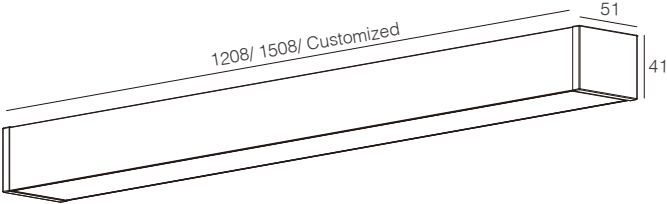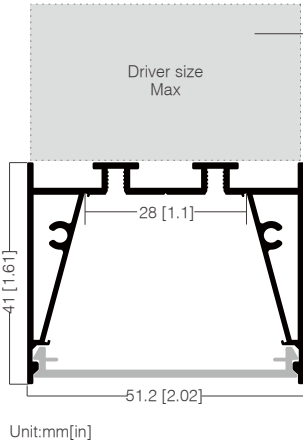

ACCESSORIES





Aircraft Cable Pendant Kit



Ceiling Mounted Kit

PC DIFFUSER LENS

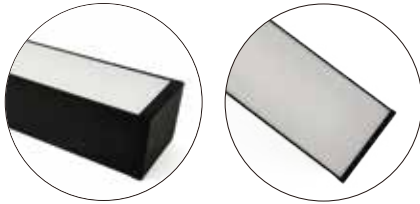




SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U6741-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW67xH41mm	1- 15.0W	3000K	100lm/W	1- 80+ (1620lm) - 90+ (1460lm)	Trimmed Recessed	DALI 0-10V On/Off
	2- 27.0W	4000K		2- 80+ (2920lm) - 90+ (2620lm)		
	3- 35.0W	2700~4000K		3- 80+ (3780lm) - 90+ (3400lm)		
			110lm/W	1- 80+ (1800lm) - 90+ (1630lm)		
				2- 80+ (3180lm) - 90+ (2900lm)		
				3- 80+ (4140lm) - 90+ (3800lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1522xW67xH41mm	1- 27.0W	3000K	100lm/W	1- 80+ (2920lm) - 90+ (2620lm)	Trimmed Recessed	DALI 0-10V On/Off
	2- 36.0W	4000K		2- 80+ (3810lm) - 90+ (3500lm)		
	3- 45.0W	2700~4000K		3- 80+ (4880lm) - 90+ (4440lm)		
			110lm/W	1- 80+ (3180lm) - 90+ (2900lm)		
				2- 80+ (4140lm) - 90+ (3800lm)		
				3- 80+ (5500lm) - 90+ (5000lm)		

DIMENSION

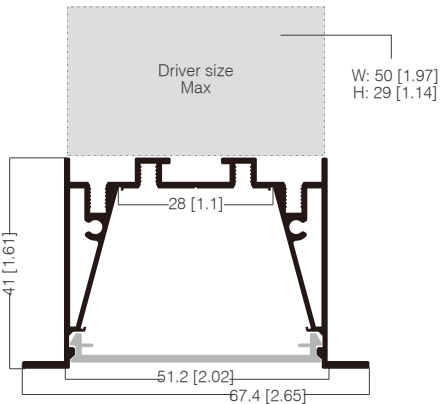

Unit:mm[in]

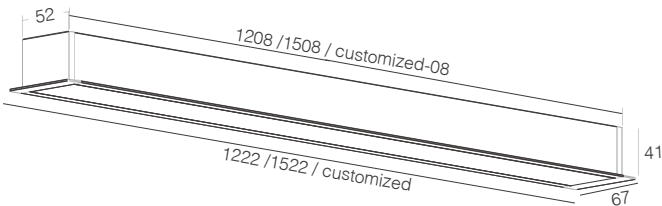



✂ ACCESSORIES



Trimmed Recessed Kit

PRISMATIC LENS

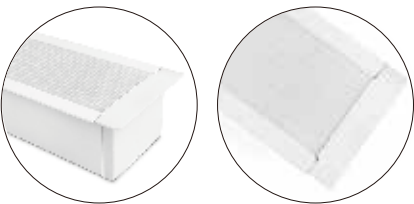

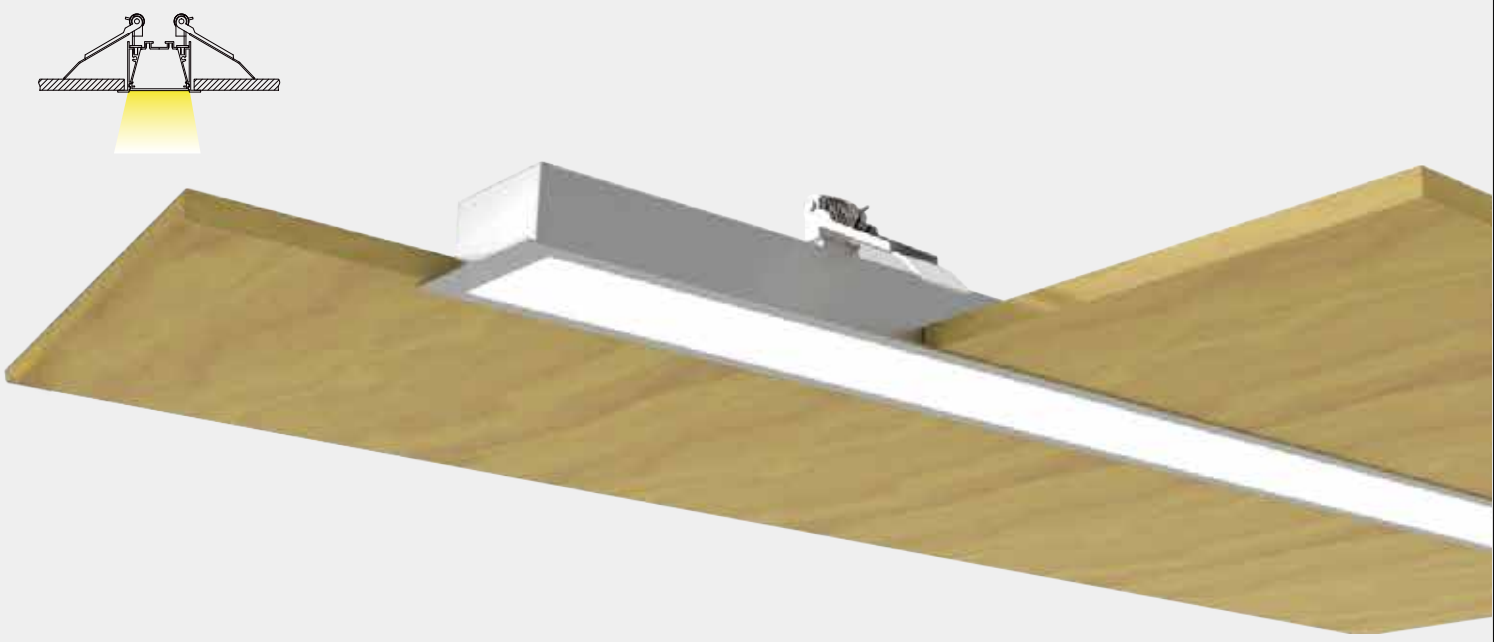


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U6741-PC	Textured Black Textured White Silver Anodized	PC Diffuser Lens	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW67xH41mm	1- 15.0W	3000K	110lm/W	1- 80+ (1700lm) - 90+ (1530lm)	Trimmed Recessed	DALI 0-10V On/Off
	2- 27.0W 3- 35.0W	4000K 2700~4000K		2- 80+ (3050lm) - 90+ (2750lm) 3- 80+ (3960lm) - 90+ (3560lm)		
			120lm/W	1- 80+ (1780lm) - 90+ (1630lm) 2- 80+ (3480lm) - 90+ (3200lm) 3- 80+ (4530lm) - 90+ (4160lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1522xW67xH41mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	110lm/W	1- 80+ (3050lm) - 90+ (2750lm) 2- 80+ (4070lm) - 90+ (3670lm) 3- 80+ (5090lm) - 90+ (4580lm)	Trimmed Recessed	DALI 0-10V On/Off
			120lm/W	1- 80+ (3610lm) - 90+ (3250lm) 2- 80+ (4820lm) - 90+ (4330lm) 3- 80+ (6020lm) - 90+ (5420lm)		

DIMENSION

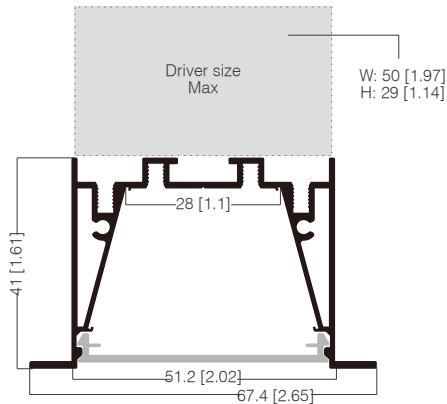

Unit:mm[in]

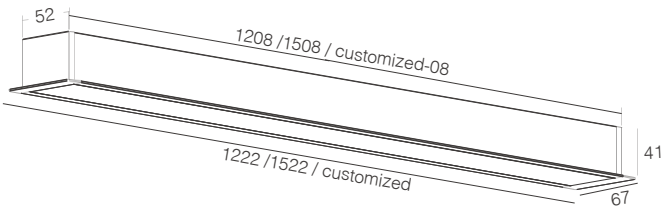



ACCESSORIES



Trimmed Recessed Kit

PC DIFFUSER LENS

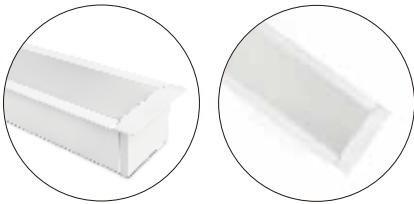




Unit:mm[in]

U353728

Pendant Installation

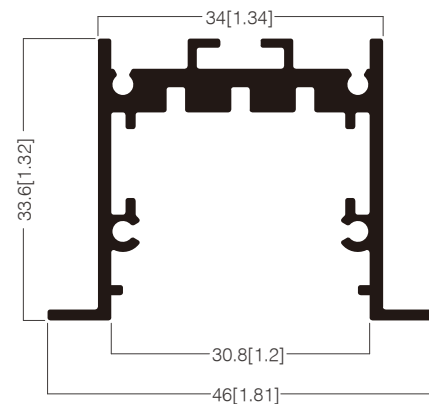

Unit:mm[in]



U463328

Trimmed Recessed
Installation





MULTIPLE OPTIC OPTIONS


Crystal Louver




Cone Louver

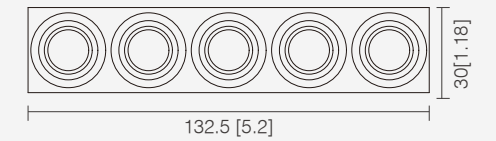


TIR Lens

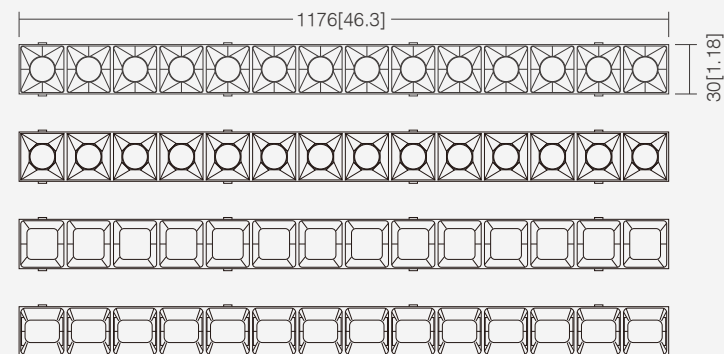

Wall Washer

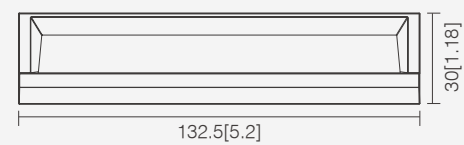

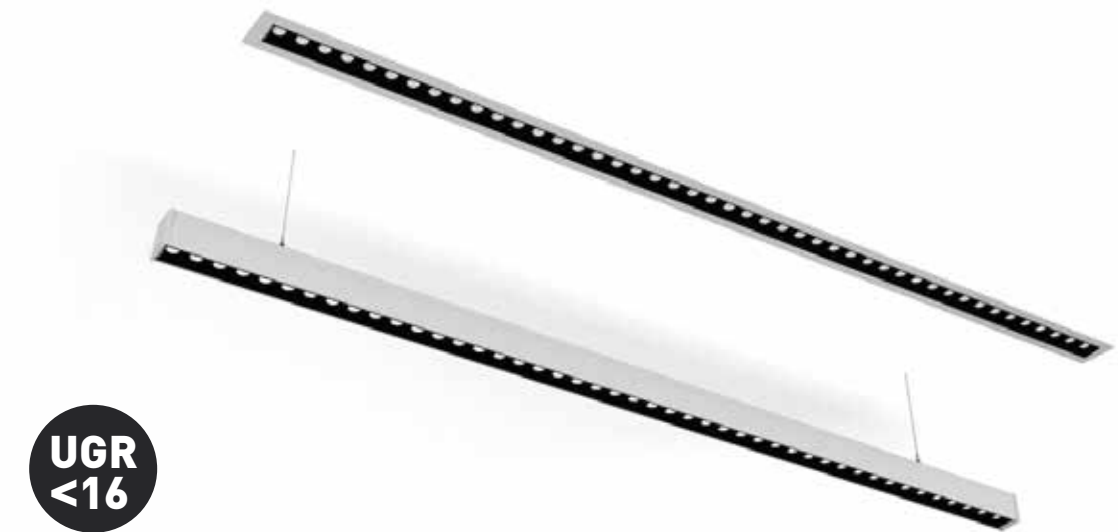

UGR
<16

SPECIFICATIONS

Finish 	Lens Multiple OPTIC options	Installations Aircraft cable pendant , Trimed recessed
Width / Hight 35x37mm , 46x33mm	Length 1208mm , 1508mm Customized	
Efficacy 100lm/W	Power 25W/pc , 33W/pc , 50W/pc	
Color Quality 3-step MacAdam , 5-step MacAdam	CRI 80+ , 90+	
Color Temperature [Tunable White] 	Voltage 220-240 VAC	
	Control DALI , 0-10V , On/off	
LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD		IP / IK Grade IP22 / IK06

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U3536	Textured Black	Crystal Louver	24°	<16	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC
	Textured White	Cone Louver	38°					
	Silver Anodized	TIR Lens	50°					
		Wall Washer	35x75°					
			50x50°					

DIMENSION	OPTICAL	ANGLE	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH37mm 2- L 1508xW35xH37mm	Crystal Louver	24°	1- 25.0W	3000K	100lm/W	1- 80+ / 90+ (2450-2670lm)	Aircraft Cable Pendant	DALI
		38°	2- 31.0W	4000K		2- 80+ / 90+ (2800-3100lm)	Ceiling Mounted	0-10V On/Off

1- L 1208xW35xH36mm 2- L 1508xW35xH36mm	Cone Louver	24°	1- 25.0W	3000K	100lm/W	1- 80+ / 90+ (2450-2670lm)	Aircraft Cable Pendant	DALI
		38°	2- 31.0W	4000K		2- 80+ / 90+ (2800-3100lm)	Ceiling Mounted	0-10V On/Off

1- L 1208xW35xH36mm	TIR Lenss	35x75°	1- 25.0W	3000K 4000K	100lm/W	1- 80+ / 90+ (2450-2670lm)	Aircraft Cable Pendant	DALI
		50x50°					Ceiling Mounted	0-10V On/Off
		Dimond 50°						
		50°						

1- L 1208xW35xH36mm 2- L 1508xW35xH36mm	Wall Washer	Wall Washer	1- 25.0W	3000K	100lm/W	1- 80+ / 90+ (2450-2670lm)	Aircraft Cable Pendant	DALI
			2- 31.0W	4000K		2- 80+ / 90+ (2800-3100lm)	Ceiling Mounted	0-10V On/Off

SPECIFICATION



LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U4633	Textured Black Textured White Silver Anodized	Crystal Louver	24°	<16	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC
		Cone Louver	38°					
		TIR Lens	50°					
		Wall Washer	35x75°					
			50x50°					

DIMENSION	OPTICAL	ANGLE	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1220xW46xH33mm	Crystal Louver	24°	1- 25.0W	3000K	100lm/W	1- 80+ / 90+ (2420-2660lm)	Trimed Recessed	DALI
2- L 1520xW46xH33mm		38°	2- 31.0W	4000K		2- 80+ / 90+ (3000-3310lm)		0-10V On/Off


1- L 1220xW46xH33mm	Cone Louver	24°	1- 25.0W	3000K	100lm/W	1- 80+ / 90+ (2420-2660lm)	Trimed Recessed	DALI
2- L 1520xW46xH33mm		38°	2- 31.0W	4000K		2- 80+ / 90+ (3000-3310lm)		0-10V On/Off

1- L 1220xW46xH33mm	TIR Lenss	35x75°	1- 25.0W	3000K 4000K	100lm/W	1- 80+ / 90+ (2420-2660lm)	Trimed Recessed	DALI 0-10V On/Off
		50x50°						
		Dimond 50°						
		50°						

1- L 1220xW46xH33mm	Wall Washer	Wall Washer	1- 25.0W	3000K	100lm/W	1- 80+ / 90+ (2420-2660lm)	Trimed Recessed	DALI 0-10V On/Off
2- L 1520xW46xH33mm			2- 31.0W	4000K		2- 80+ / 90+ (3000-3310lm)		

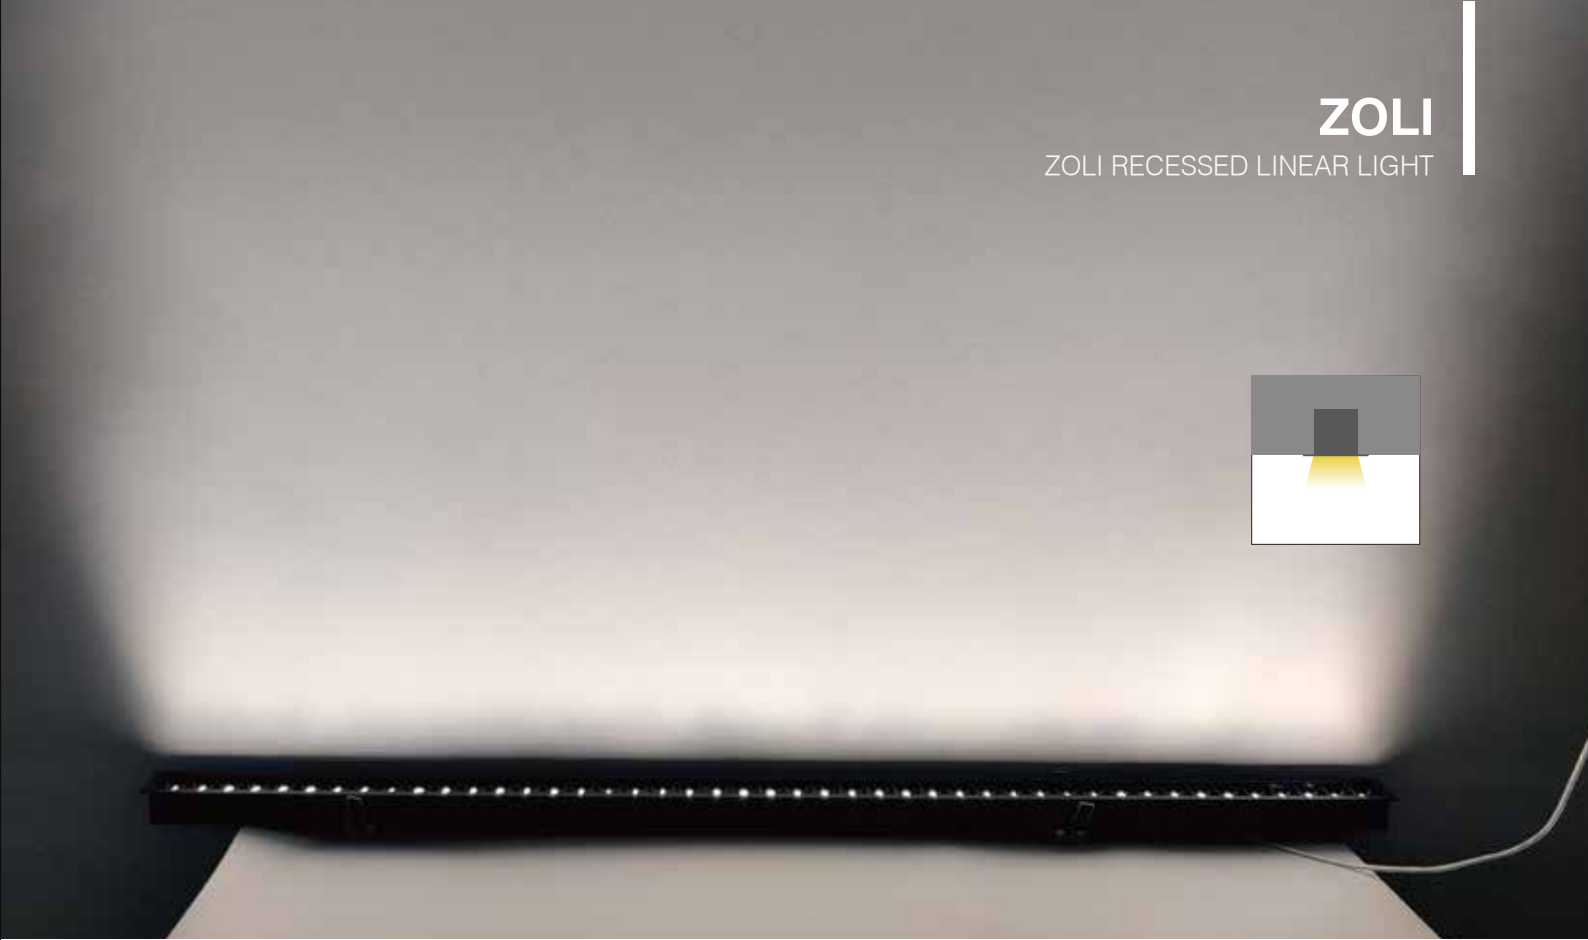

DIMENSION

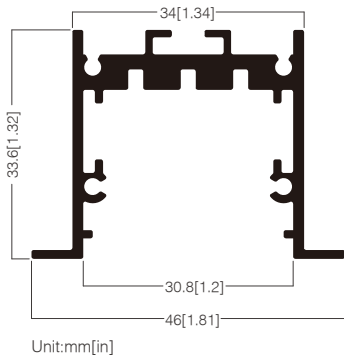

✂ ACCESSORIES





HONG Direct & Indirect Linear Light

Direct and Indirect lighting distribution.
More optical options in PC lens, UGR < 19 Anti-glaring optical kit.



HONG

SURFACE & RECESSED LINEAR LIGHT

DIMENSIONS


759057

Surface Installation
(Pendant, Surface Mounted,
Wall Mounted)

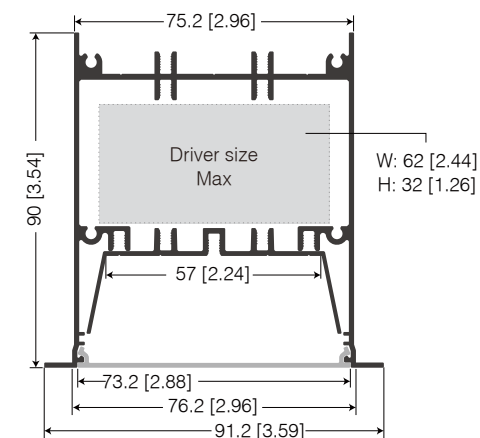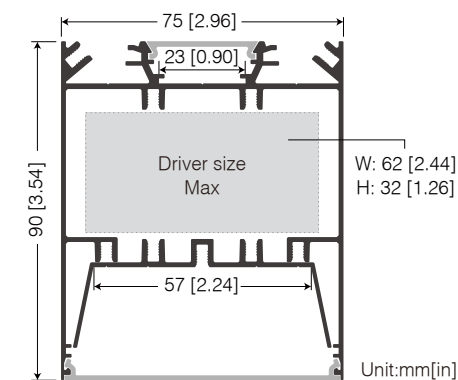

919057

Trimmed Recessed Installation

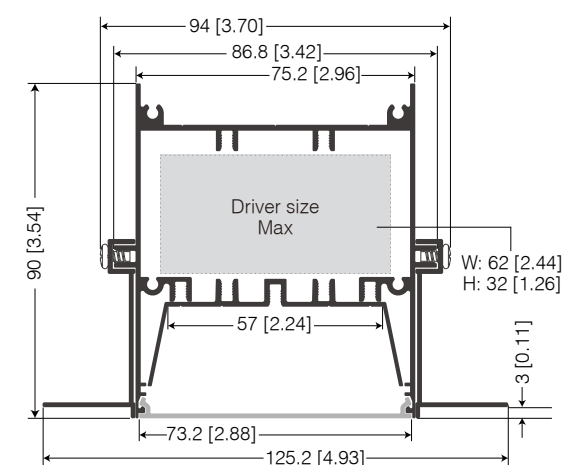

1259057

Trimless Recessed Installation



APPLICATIONS

759057 Surface



919057 Trimmed Recessed



1259057 Trimmed Recessed



Diffuser




INDIRECT

PC Diffuser with
high transmission



DIRECT

Prismatic Lens
Creating the most human friendly
lighting or General PC lens with
high transmission



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PM	Textured Black	Direct: Prismatic	85Deg	38.0W	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								

DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	Prismatic lens	36.0W	3000K	1- 105lm/W	1- 80+ (2180lm) - 90+ (1970lm)	Aircraft Cable Pendant	DALI
L 1515xW75xH90mm		45.0W	4000K	2- 115lm/W	2- 80+ (2700lm) - 90+ (2430lm)	Ceiling Mounted	0-10V
			2700K-4000K			Wall Mounted	On/Off

DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	PC Diffuser	13.0W	3000K	1- 115lm/W	1- 80+ (1600lm) - 90+ (1460lm)	Aircraft Cable Pendant	DALI
L 1515xW75xH90mm		16.0W	4000K	2- 125lm/W	2- 80+ (1750lm) - 90+ (1600lm)	Ceiling Mounted	0-10V
			2700K-4000K			Wall Mounted	On/Off


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PM	Textured Black	Direct: Prismatic	85Deg	54.0W	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								


DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	Prismatic lens	36.0W	3000K	1- 105lm/W	1- 80+ (4860lm) - 90+ (4700lm)	Aircraft Cable Pendant	DALI
L 1515xW75xH90mm		45.0W	4000K	2- 115lm/W	2- 80+ (5600lm) - 90+ (5100lm)	Ceiling Mounted	0-10V
			2700K-4000K			Wall Mounted	On/Off


DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	PC Diffuser	18.0W	3000K	1- 115lm/W	1- 80+ (2800lm) - 90+ (2600lm)	Aircraft Cable Pendant	DALI
L 1515xW75xH90mm		23.0W	4000K	2- 125lm/W	2- 80+ (3100lm) - 90+ (2850lm)	Ceiling Mounted	0-10V
			2700K~4000K			Wall Mounted	On/Off

DIMENSION

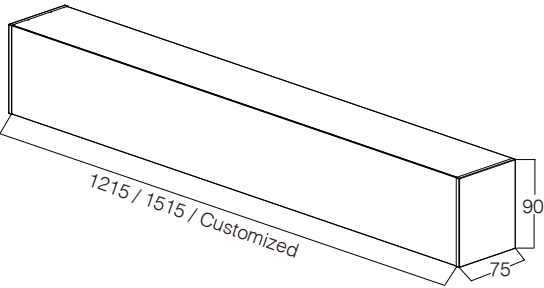

PRISMATIC LENS

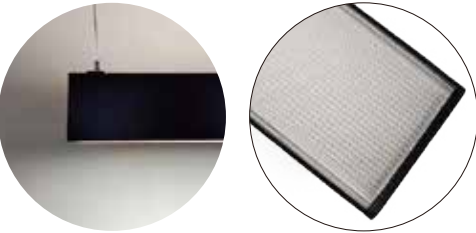

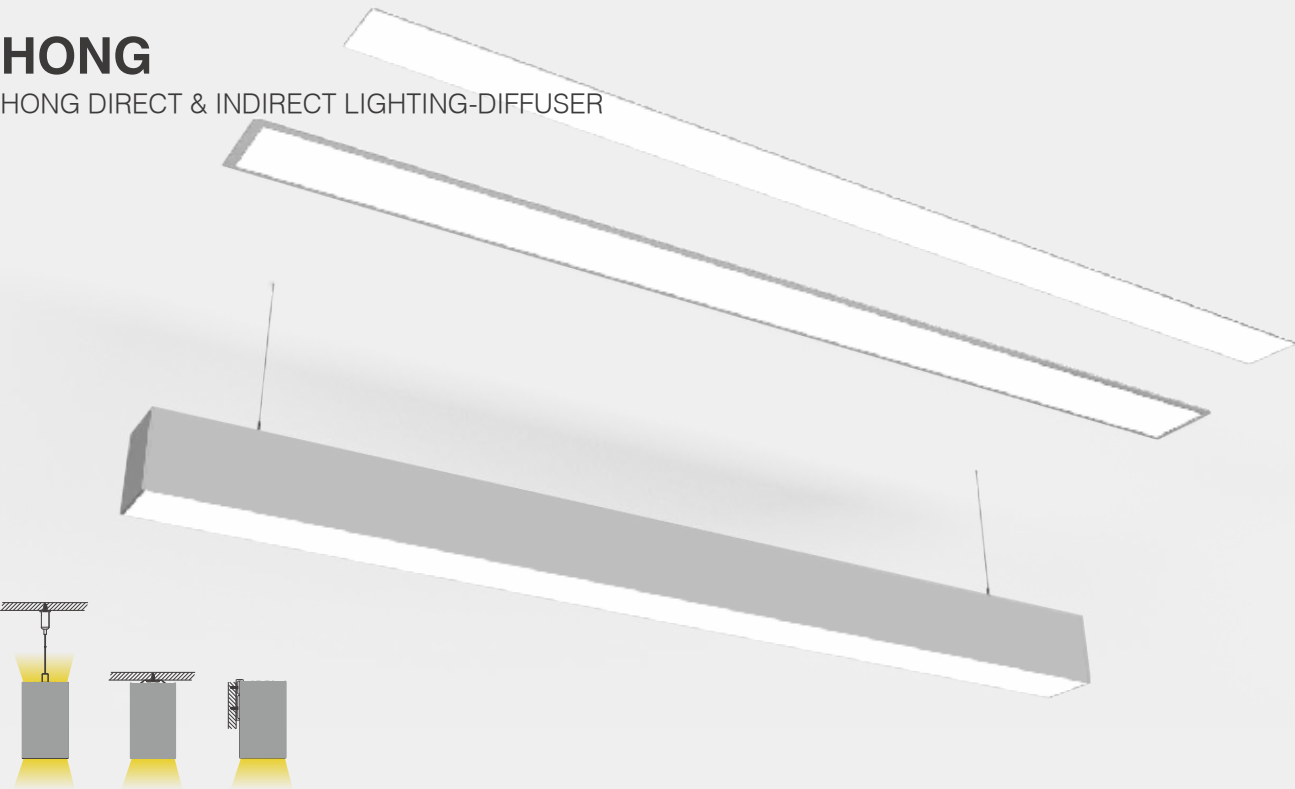

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PC	Textured Black	Direct: Diffuser	105Deg	38.0W	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								

DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1215xW75xH90mm	PC Diffuser	25.0W	3000K	1- 115lm/W	1- 80+ (3050lm) - 90+ (2800lm)	Aircraft Cable Pendant	DALI
L1515xW75xH90mm		31.0W	4000K	2- 125lm/W	2- 80+ (3380lm) - 90+ (3100lm)	Ceiling Mounted	0-10V
			2700K-4000K			Wall Mounted	On/Off

DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1215xW75xH90mm	PC Diffuser	13.0W	3000K	1- 115lm/W	1- 80+ (1540lm) - 90+ (1400lm)	Aircraft Cable Pendant	DALI
L1515xW75xH90mm		16.0W	4000K	2- 125lm/W	2- 80+ (1750lm) - 90+ (1600lm)	Ceiling Mounted	0-10V
			2700K-4000K			Wall Mounted	On/Off


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PC	Textured Black	Direct: Diffuser	105Deg	54.0W	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								


DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1215xW75xH90mm	PC Diffuser	36.0W	3000K	1- 115lm/W	1- 80+ (4400lm) - 90+ (4050lm)	Aircraft Cable Pendant	DALI
L1515xW75xH90mm		45.0W	4000K	2- 125lm/W	2- 80+ (4860lm) - 90+ (4460lm)	Ceiling Mounted	0-10V
			2700K-4000K			Wall Mounted	On/Off

DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1215xW75xH90mm	PC Diffuser	18.0W	3000K	1- 115lm/W	1- 80+ (2230lm) - 90+ (2050lm)	Aircraft Cable Pendant	DALI
L1515xW75xH90mm		23.0W	4000K	2- 125lm/W	2- 80+ (2432lm) - 90+ (2250lm)	Ceiling Mounted	0-10V
			2700K-4000K			Wall Mounted	On/Off

DIMENSION

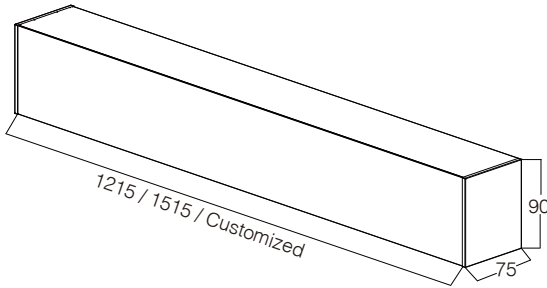

DIFFUSER LENS

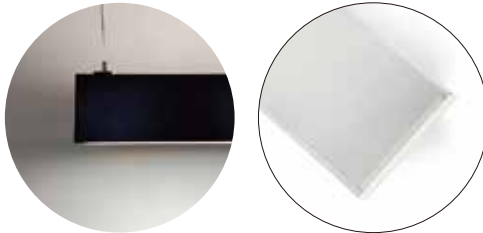



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7590-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1215xW75xH90mm	1- 27.0W	3000K	110lm/W	1- 80+ (3200lm) - 90+ (2970lm)	Aircraft Cable Pendant	DALI
	2- 36.0W	4000K		2- 80+ (3800lm) - 90+ (3480lm)	Ceiling Mounted	0-10V
	3- 45.0W	2700~4000K		3- 80+ (5280lm) - 90+ (4800lm)	Wall Mounted	On/Off
			120lm/W	1- 80+ (3500lm) - 90+ (3200lm)		
				2- 80+ (4590lm) - 90+ (4250lm)		
				3- 80+ (5770lm) - 90+ (5350lm)		

SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7590-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1515xW75xH90mm	1- 36.0W	3000K	110lm/W	1- 80+ (3800lm) - 90+ (3480lm)	Aircraft Cable Pendant	DALI
	2- 45.0W	4000K		2- 80+ (5280lm) - 90+ (4800lm)	Ceiling Mounted	0-10V
	3- 60.0W	2700~4000K		3- 80+ (7000lm) - 90+ (6480lm)	Wall Mounted	On/Off
			120lm/W	1- 80+ (4590lm) - 90+ (4250lm)		
				2- 80+ (5770lm) - 90+ (5350lm)		
				3- 80+ (7740lm) - 90+ (7100lm)		

DIMENSION

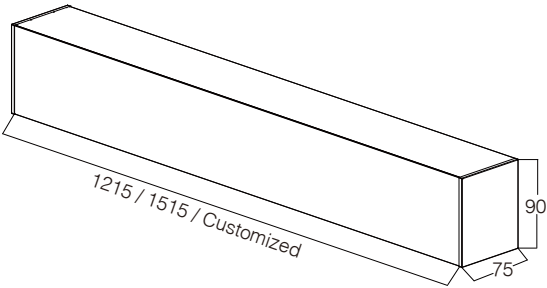

Prismatic Lens

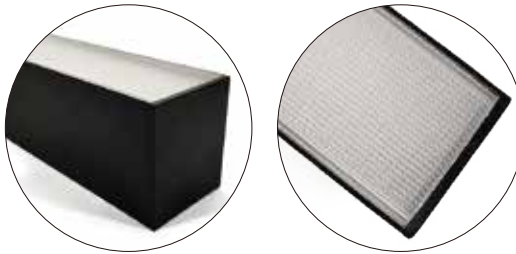



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7590-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1215xW75xH90mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	115lm/W 125lm/W	1- 80+ (3320lm) - 90+ (3050lm) 2- 80+ (4470lm) - 90+ (4100lm) 3- 80+ (5540lm) - 90+ (5130lm) 1- 80+ (3590lm) - 90+ (3300lm) 2- 80+ (4820lm) - 90+ (4430lm) 3- 80+ (6082lm) - 90+ (5580lm)	Aircraft Cable Pendant Ceiling Mounted Wall Mounted	DALI 0-10V On/Off

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7590-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC



DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1515xW75xH90mm	1- 36.0W 2- 45.0W 3- 60.0W	3000K 4000K 2700~4000K	115lm/W 125lm/W	1- 80+ (4470lm) - 90+ (4100lm) 2- 80+ (5540lm) - 90+ (5130lm) 3- 80+ (7340lm) - 90+ (6800lm) 1- 80+ (4820lm) - 90+ (4430lm) 2- 80+ (6082lm) - 90+ (5580lm) 3- 80+ (8030lm) - 90+ (7740lm)	Aircraft Cable Pendant Ceiling Mounted Wall Mounted	DALI 0-10V On/Off

DIMENSION

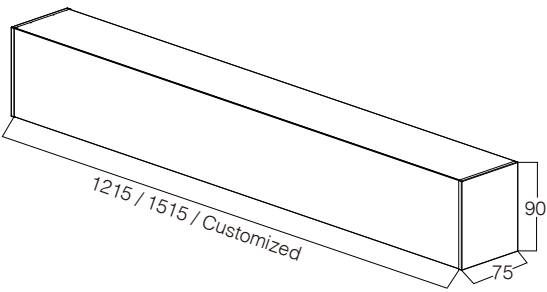

PC DIFFUSER



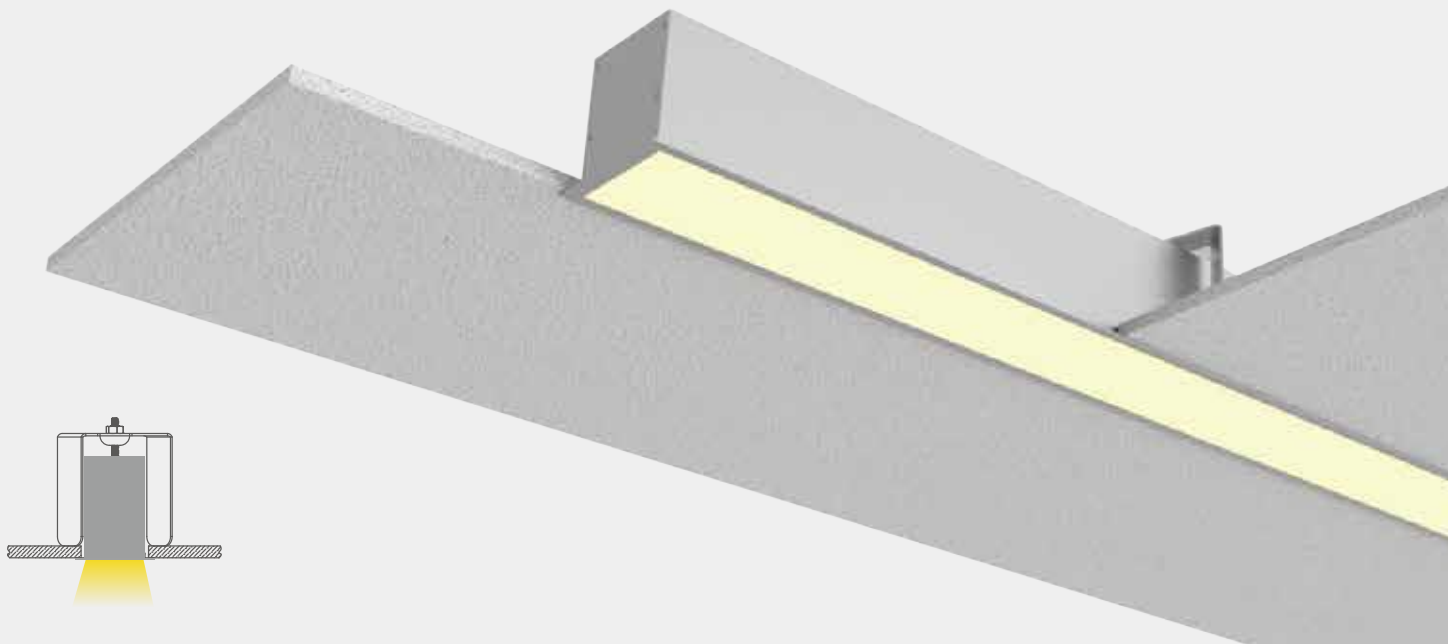

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U9190-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW91xH90mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	105lm/W 115lm/W	1- 80+ (3150lm) - 90+ (2830lm) 2- 80+ (4030lm) - 90+ (3700lm) 3- 80+ (5150lm) - 90+ (4725lm) 1- 80+ (3320lm) - 90+ (3050lm) 2- 80+ (4470lm) - 90+ (4100lm) 3- 80+ (5540lm) - 90+ (5130lm)	Trimed Recessed	DALI 0-10V On/Off

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U9190-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC



DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1529xW91xH90mm	1- 36.0W 2- 45.0W 3- 60.0W	3000K 4000K 2700~4000K	105lm/W 115lm/W	1- 80+ (4030lm) - 90+ (3700lm) 2- 80+ (5150lm) - 90+ (4725lm) 3- 80+ (6800lm) - 90+ (6240lm) 1- 80+ (4470lm) - 90+ (4100lm) 2- 80+ (5540lm) - 90+ (5130lm) 3- 80+ (7450lm) - 90+ (6840lm)	Trimed Recessed	DALI 0-10V On/Off

DIMENSION

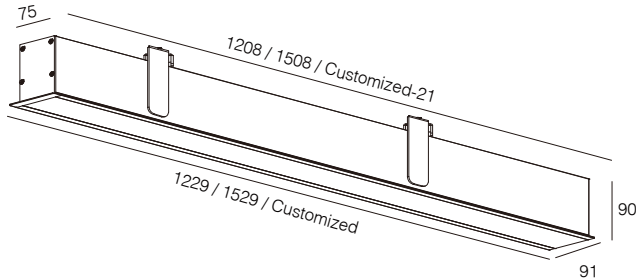

Prismatic Lens



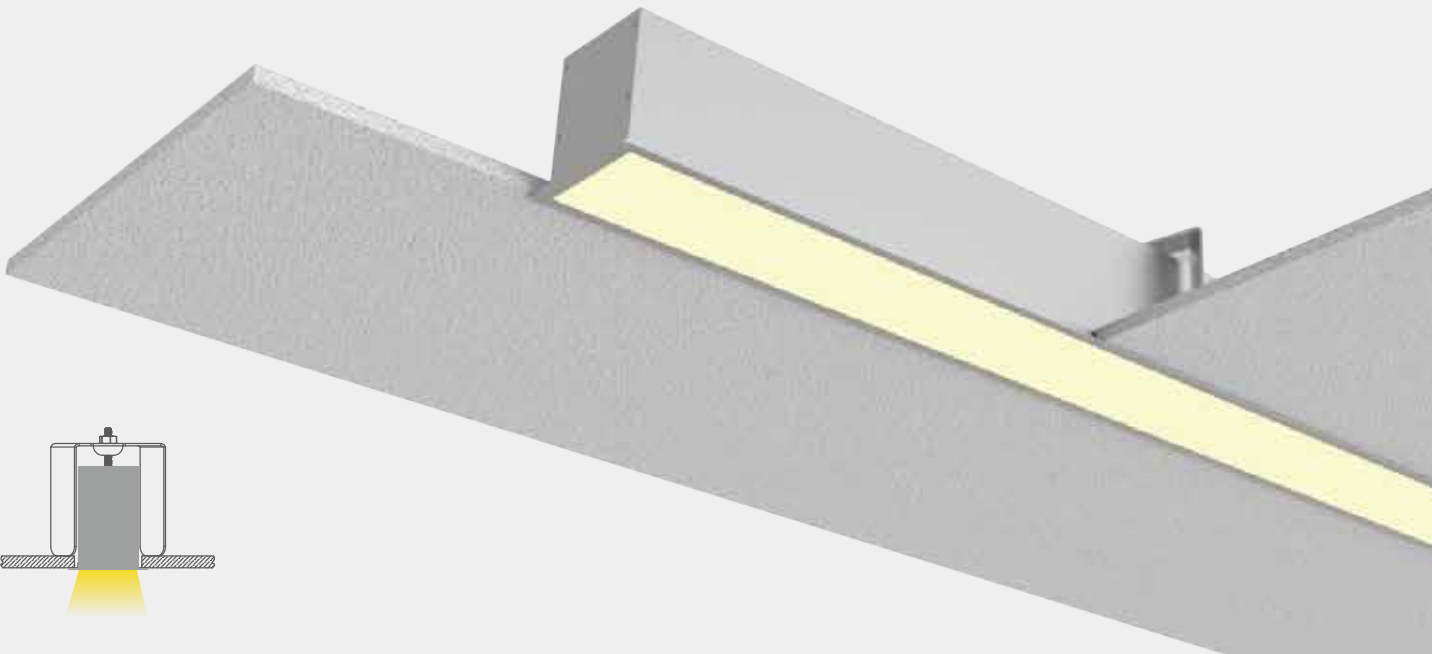

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U9190-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW91xH90mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	115lm/W 125lm/W	1- 80+ (3350lm) - 90+ (3070lm) 2- 80+ (4470lm) - 90+ (4100lm) 3- 80+ (5540lm) - 90+ (5130lm) 1- 80+ (3610lm) - 90+ (3340lm) 2- 80+ (4860lm) - 90+ (4460lm) 3- 80+ (6080lm) - 90+ (5580lm)	Trimed Recessed	DALI 0-10V On/Off

SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U9190-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC



DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1529xW91xH90mm	1- 36.0W 2- 45.0W 3- 60.0W	3000K 4000K 2700~4000K	115lm/W 125lm/W	1- 80+ (4470lm) - 90+ (4100lm) 2- 80+ (5540lm) - 90+ (5130lm) 3- 80+ (7450lm) - 90+ (6840lm) 1- 80+ (4860lm) - 90+ (4460lm) 2- 80+ (6080lm) - 90+ (5580lm) 3- 80+ (8030lm) - 90+ (7440lm)	Trimed Recessed	DALI 0-10V On/Off

DIMENSION

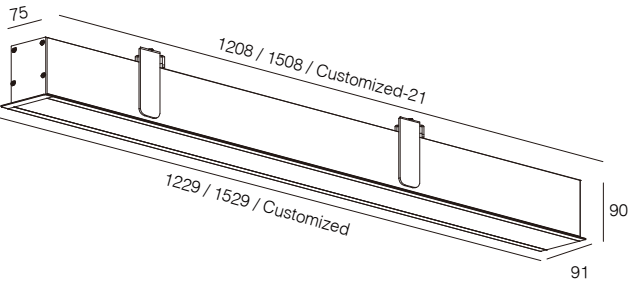

PC DIFFUSER

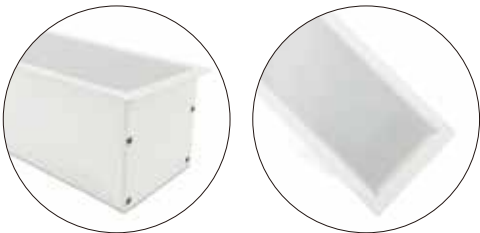

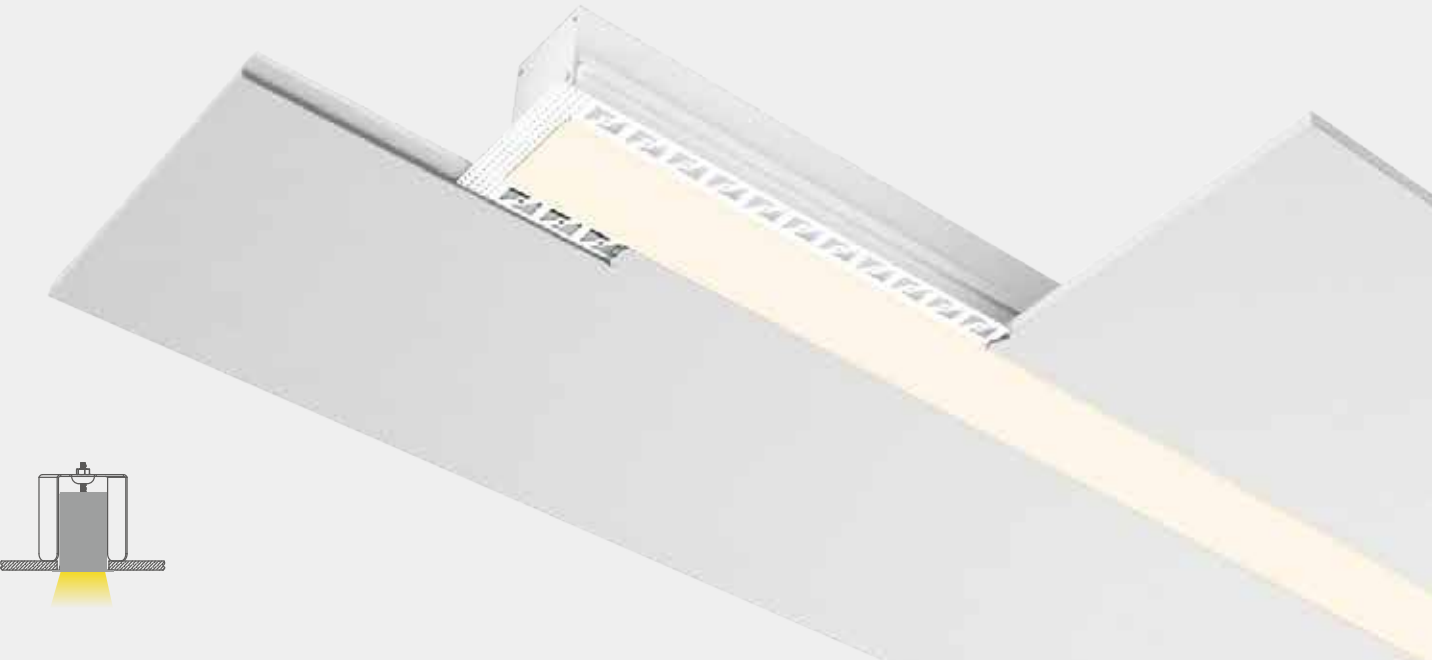

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U12590-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1248xW125xH90mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	105lm/W 115lm/W	1- 80+ (3050lm) - 90+ (2800lm) 2- 80+ (4080lm) - 90+ (3740lm) 3- 80+ (5050lm) - 90+ (4680lm) 1- 80+ (3270lm) - 90+ (3000lm) 2- 80+ (4500lm) - 90+ (4100lm) 3- 80+ (5590lm) - 90+ (5100lm)	Trimed Recessed	DALI 0-10V On/Off

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U12590-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1548xW125xH90mm	1- 36.0W 2- 45.0W 3- 60.0W	3000K 4000K 2700~4000K	105lm/W 115lm/W	1- 80+ (4080lm) - 90+ (3740lm) 2- 80+ (5050lm) - 90+ (4680lm) 3- 80+ (6700lm) - 90+ (6150lm) 1- 80+ (4500lm) - 90+ (4100lm) 2- 80+ (5590lm) - 90+ (5100lm) 3- 80+ (7350lm) - 90+ (6750lm)	Trimed Recessed	DALI 0-10V On/Off

DIMENSION

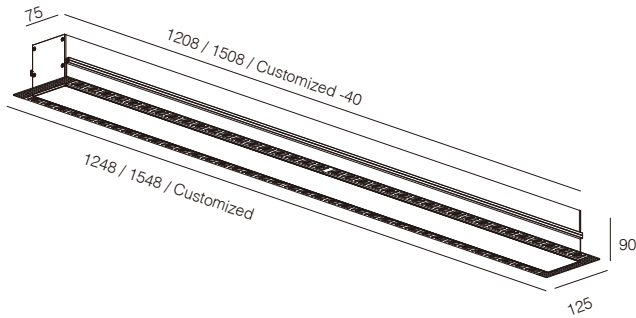

Prismatic Lens



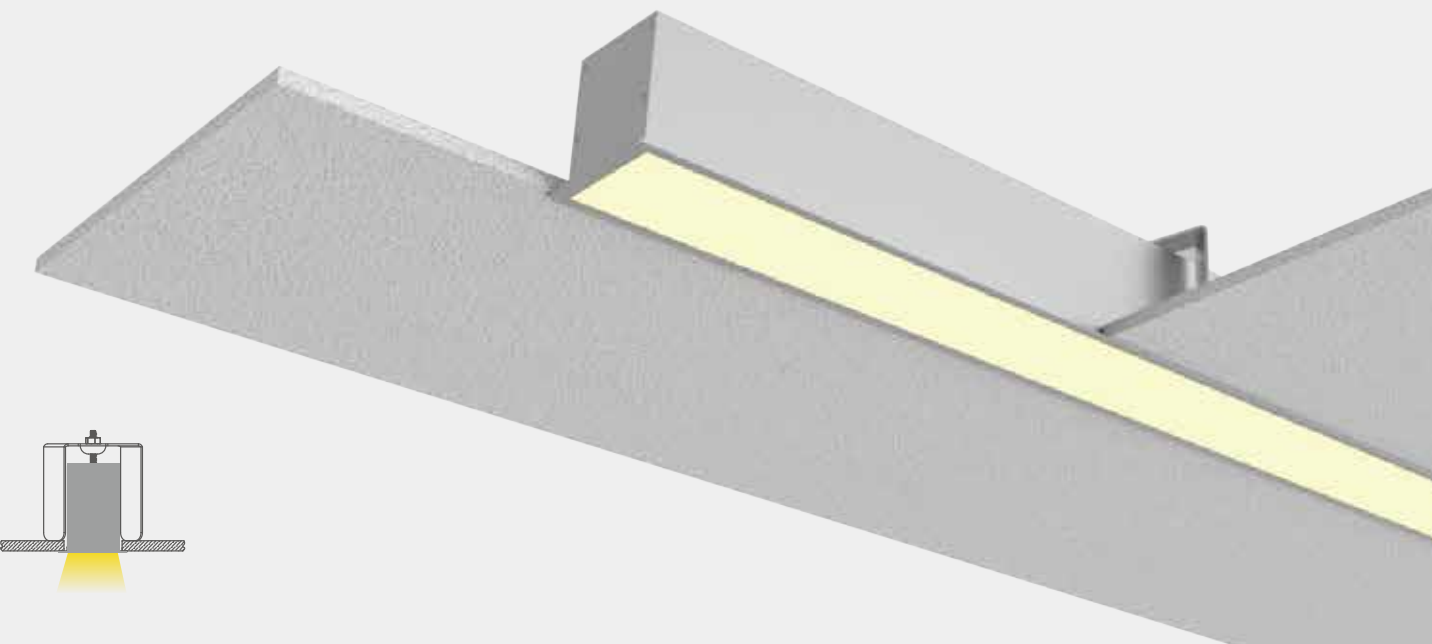

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U12590-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1248xW125xH90mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	115lm/W 125lm/W	1- 80+ (3320lm) - 90+ (3050lm) 2- 80+ (4410lm) - 90+ (4050lm) 3- 80+ (5500lm) - 90+ (5050lm) 1- 80+ (3610lm) - 90+ (3250lm) 2- 80+ (4820lm) - 90+ (4330lm) 3- 80+ (6020lm) - 90+ (5420lm)	Trimmed Recessed	DALI 0-10V On/Off

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U12590-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1548xW125xH90mm	1- 36.0W 2- 45.0W 3- 60.0W	3000K 4000K 2700~4000K	115lm/W 125lm/W	1- 80+ (4410lm) - 90+ (4050lm) 2- 80+ (5500lm) - 90+ (5050lm) 3- 80+ (7340lm) - 90+ (6740lm) 1- 80+ (4820lm) - 90+ (4330lm) 2- 80+ (6020lm) - 90+ (5420lm) 3- 80+ (7550lm) - 90+ (7000lm)	Trimmed Recessed	DALI 0-10V On/Off

DIMENSION

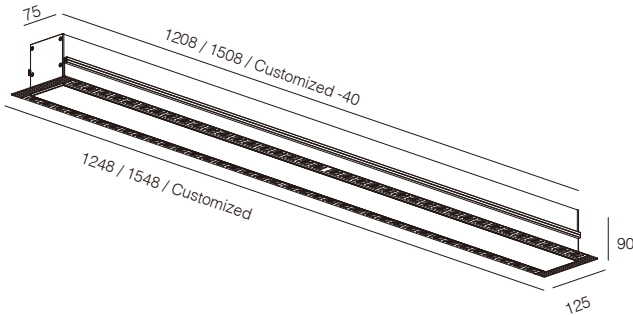

PC DIFFUSER






HILA Direct & Indirect Linear Light

HILA is engineered for the rising trend of direct and indirect lighting in commercial architecture and office spaces.

In indirect lighting, the light source remains concealed, distributing illumination through reflections off ceilings, walls, and floors, effectively eliminating glare and shadows. This approach creates a comfortable lighting ambiance, enabling room framing with soft light, resulting in a shadow-free, spacious feel.

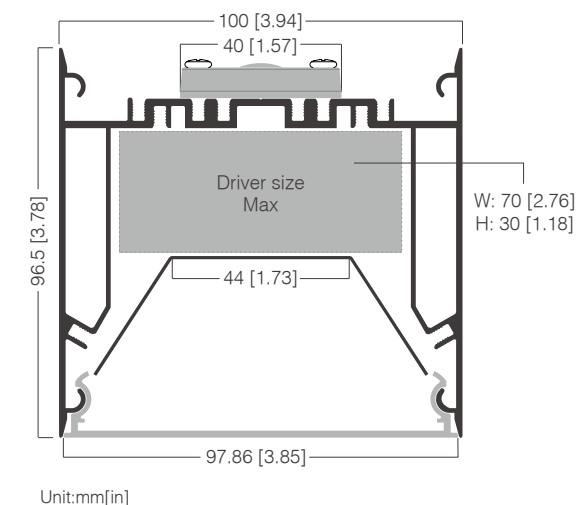

H1009744
U1009744

Surface Installation
(Pendant, Ceiling Mounted)




INDIRECT

Optical TIR Lens or
General PC lens with
high transmission



DIRECT

General PC lens with
high transmission

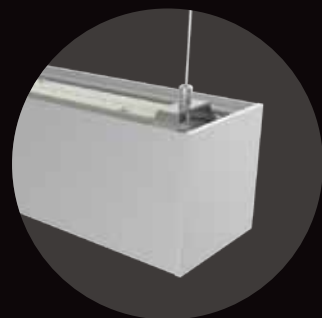

Beam Angle



Diffuser & Diffuser



Diffuser & 30° TIR




Diffuser & 45° TIR



Diffuser & 60° TIR



Diffuser & 90° TIR

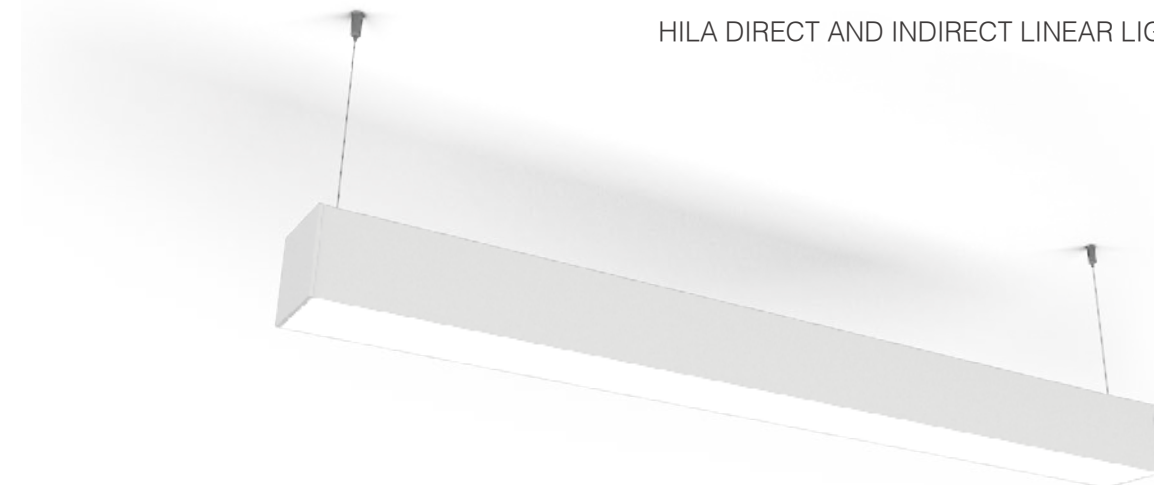


SPECIFICATIONS

Luminaire H10097	Lens Diffuser , TRI Lens [30°/45°/60°/90°]	Installations Pendant , Ceiling mounted
Width / Hight 100 × 97mm		Length 1200mm , 1500mm , 2400mm , Customized
Efficacy up to 120lm/W	Power 62W/pc , 64W/pc , 124W/pc	
Color Quality 3-step MacAdam , 5-step MacAdam	CRI 80+ , 90+	
Color Temperature [Tunable White]  2700K 3000K 3500K 4000K 5000K 6000K 6500K	Voltage 220-240 VAC , 100-277 VAC	Control DALI , 0-10V , On/off
Indirect Angle TRI  Unit:mm[in] 40 [1.57]		
Direct Diffuser  97.86 [3.85]		LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.

HILA

HILA DIRECT AND INDIRECT LINEAR LIGHT



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP / IK GRADE	CONTROL OPTOINS
H10096 Direct & Indirect Linear Light	White	Diffuser	1208mm	3- 3-Step MacAdam Ellipse	2700K	80+	Aircraft Cable Pendant	22- IP22	DALI
	Black	Optical TIR Lens on top lighting	1508mm		3000K	90+			0-10V
U10096 Direct Linear Light	Silver			5- 5-Step MacAdam Ellips	3500K		Ceiling Mounted	06 IK06	On/Off
					4000K				
					5000K				
					6000K				
					6500K				

SPECIFICATION

Voltage	220-240 VAC	
Width / Height	100 x 96mm	
Length	1208mm	1508mm
Power (W/m /ft)	62W/pc	64W/pc
Efficacy Up to	120lm/w	
Control	Dali , 0-10V, On/Off	




HILA

HILA DIRECT AND INDIRECT LINEAR LIGHT


SPECIFICATIONS

COLOUR TEMPERATURE			LUMEN / LENGTH	
U10096 RA 80	2700K	down	7030lm / 1200m	7240lm / 1500mm
	3000K	down	7030lm / 1200m	7240lm / 1500mm
	4000K	down	7400lm / 1200m	7600lm / 1500mm
	5000K	down	7400lm / 1200m	7600lm / 1500mm
	6500K	down	7400lm / 1200m	7600lm / 1500mm
H10096 RA 80 Indirect: Diffuser Direct: Diffuser	2700K	up	3515lm / 1200m	3620lm / 1500mm
		down	3515lm / 1200m	3620lm / 1500mm
	3000K	up	3515lm / 1200m	3620lm / 1500mm
		down	3515lm / 1200m	3620lm / 1500mm
	4000K	up	3700lm / 1200m	3800lm / 1500mm
		down	3700lm / 1200m	3800lm / 1500mm
	5000K	up	3700lm / 1200m	3800lm / 1500mm
		down	3700lm / 1200m	3800lm / 1500mm
	6500K	up	3700lm / 1200m	3800lm / 1500mm
		down	3700lm / 1200m	3800lm / 1500mm
H10096 RA 80 Indirect: TIR Lens Direct: Diffuser	2700K	up	2034lm / 1200m	2100lm / 1500mm
		down	3950lm / 1200m	4050lm / 1500mm
	3000K	up	2260lm / 1200m	2340lm / 1500mm
		down	4390lm / 1200m	4500lm / 1500mm
	4000K	up	2520lm / 1200m	2600lm / 1500mm
		down	4880lm / 1200m	5000lm / 1500mm
	5000K	up	2520lm / 1200m	2600lm / 1500mm
		down	4880lm / 1200m	5000lm / 1500mm
	6500K	up	2520lm / 1200m	2600lm / 1500mm
		down	4880lm / 1200m	5000lm / 1500mm


BEAM ANGLE




Diffuser Direct




Diffuser
Direct & Indirect




Diffuser Direct
& IND 30° TIR



Diffuser Direct
& IND 45° TIR



Diffuser Direct
& IND 60° TIR




Diffuser Direct
& IND 90° TIR



BVG Grazer Indoor / Outdoor

This versatile family is crafted to accentuate textures, from the most delicate to the boldest, making it an excellent tool for crafting captivating walls within any space.


- BVG-O:** Outdoor IP65-rated.
- BVG-T:** Interior grazer with TIR lens.
- BVG-L:** Featuring a louver lens.
- BVG-E:** Designed with an extruded lens.

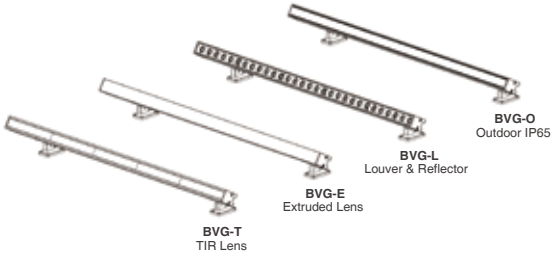


GRAZER-BVG

BVG offers versatile installation options through its surface-mounted swivel bracket, catering to various applications. It features an intuitive alignment with marked angles for easy operation, allowing for swiving from -80° to 80° for precise adjustment.

Installations

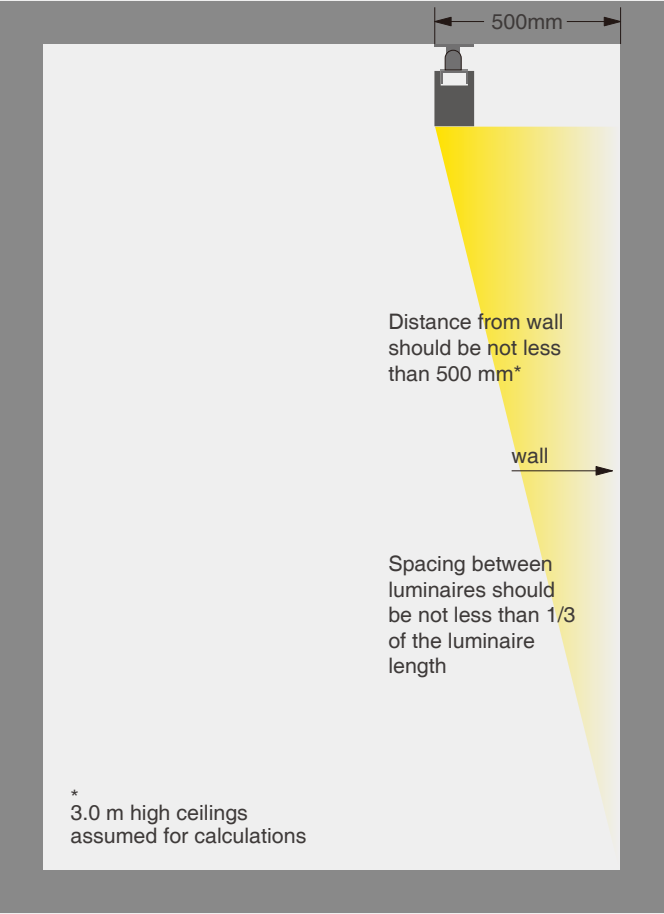

Ceiling mounted



Swivel bracket



-80°~+80°
adjustable

BVG-L

Reflector Louver

BVG-L is ingeniously designed for interior grazing, equipped with louver and reflector optical kits. It achieves an impressive UGR value of less than 12, ensuring reduced glare. With a variety of color options, including matte black, matte white, silver, golden, and chrome-plated louvers, it effortlessly blends aesthetics and functionality



UGR
<12




Beam Angle



Spot 25°



Flood 50°

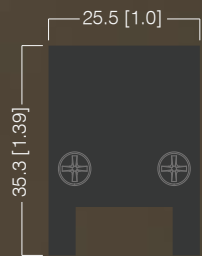

BVG-E

Extruded Lens

BVG-E boasts an interior grazer engineering design featuring an extruded PMMA lens. Its flexibility allows for easy customization to any desired length, making it compatible with a wide range of light sources available in the market. Versatile and adaptable to your unique lighting needs

Beam angle



Double
Asymmetric 25°



Asymmetric 18°




Flood 60°x110°



Flood 90°x 110°



Extremely
Flood 130°x 110°

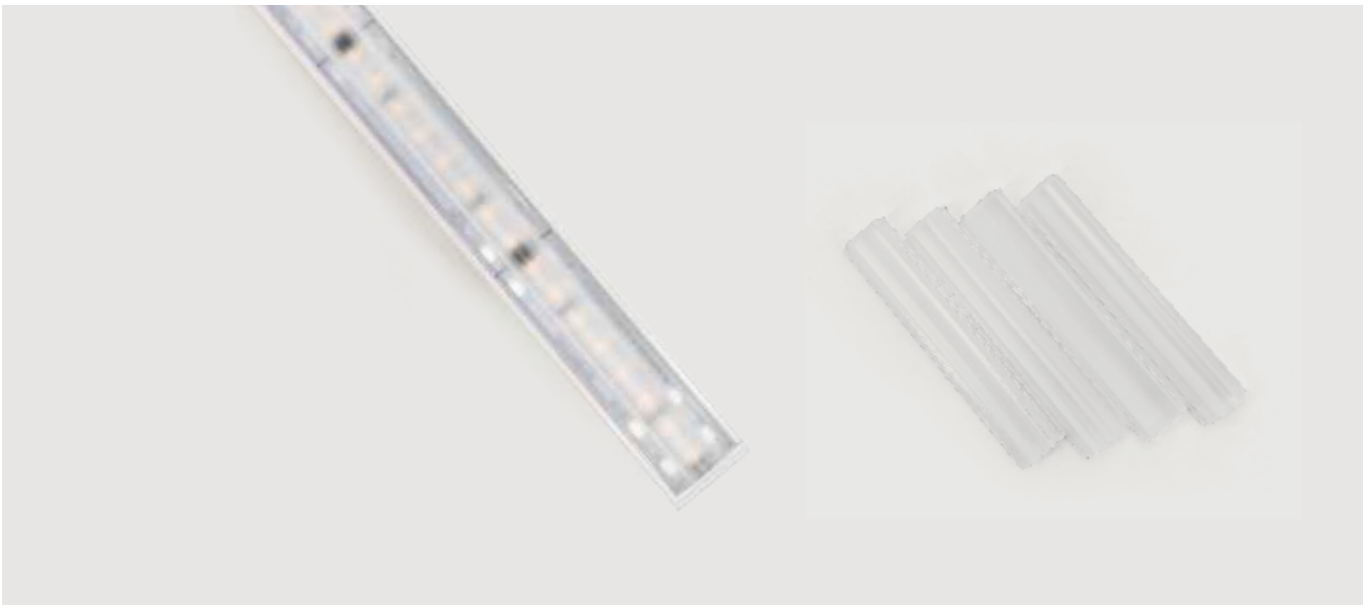


BVG-T

Precision TIR Lens

BVG-T showcases precision engineering with a selection of 12 lens options, ranging from a narrow 9° to a flood 35°x48° configuration. It delivers a precise and uniform light beam, ideal for accentuating wall textures without creating shadows or hotspots. Equipped with high-efficiency acrylic precision TIR (Total Internal Reflection) lenses, BVG-T elegantly enhances wall textures from ceiling to floor.




Beam Angle

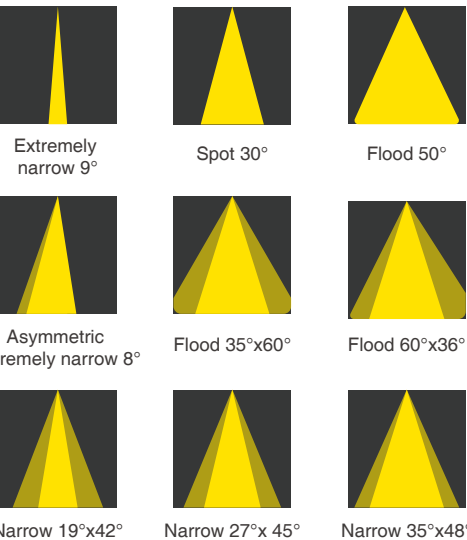


BVG-O 「Outdoor IP65」


Precision TIR Lens

BVG-O, featuring 12 optical lens options ranging from 9° to 35°x48°, offers precise, shadow-free lighting to accentuate wall textures. With high-efficiency acrylic TIR lenses, it elevates wall aesthetics from floor to ceiling.

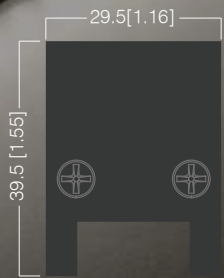


Beam Angle

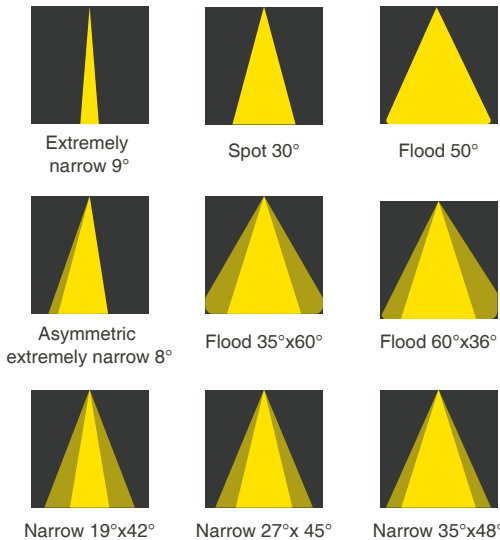

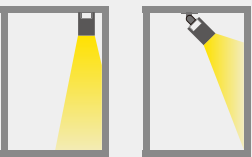


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
BVG-T	Textured Black Textured White Silver Anodized	Precision TIR Lens	9°	<19	IP22 IK08	Osram	3-Step MacAdam	220V-240VAC
			30°					
			50°					
			Asy8°					
			35x60°					
			60x36°					
			19x42°					
			27x45°					
			35x48°					
DIMENSION		POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS	
L1207xW25.5xH35.3mm	21.0W	3000K 4000K	110lm/W	80+ (2500lm) 90+ (2310lm)	Ceiling Mounted Swivel Bracket	DALI 0-10V On/Off		

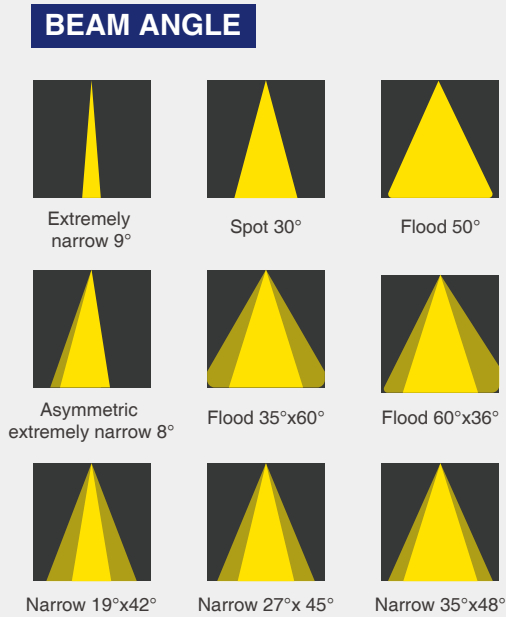

DIMENSION

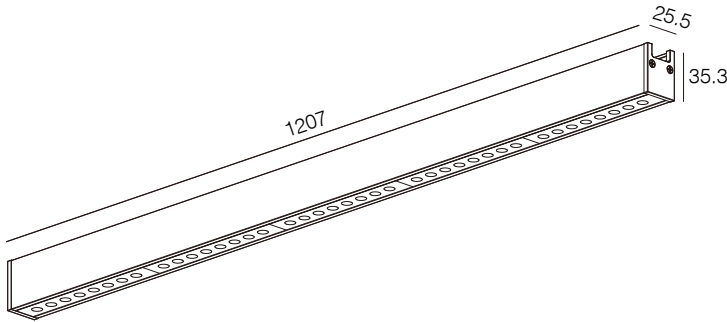


✂ ACCESSORIES



PRECISION TIR LENS






SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
BVG-O	Textured Black Textured White Silver Anodized	Precision TIR Lens	9°	<19	IP65 IK08	Osram	3-Step MacAdam	220V-240VAC
			30°					
			50°					
			Asy8°					
			35x60°					
			60x36°					
			19x42°					
			27x45°					
			35x48°					

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1207xW29.5xH39.5mm	21.0W	3000K 4000K	110lm/W	80+ (2450lm) 90+ (2280lm)	Ceiling Mounted Swivel Bracket	DALI 0-10V On/Off




DIMENSION

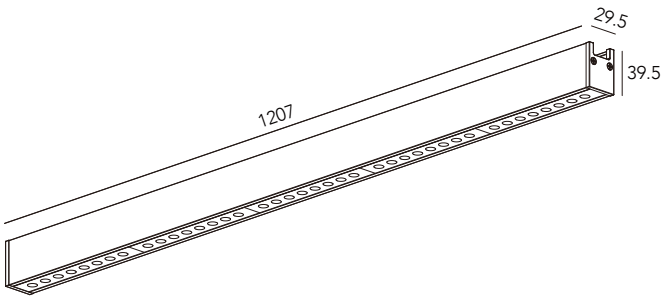

ACCESSORIES





BEAM ANGLE

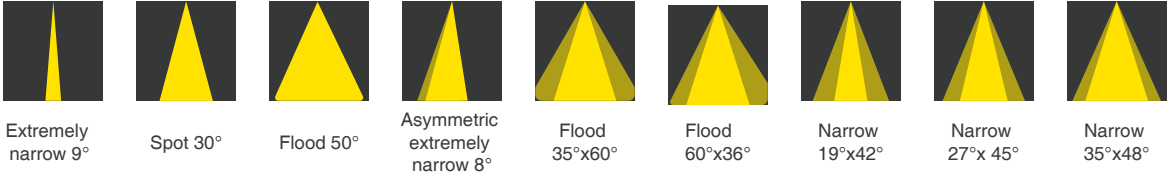

BVG

BVG-L WALL GRAZER-LOUVER REFLECTOR

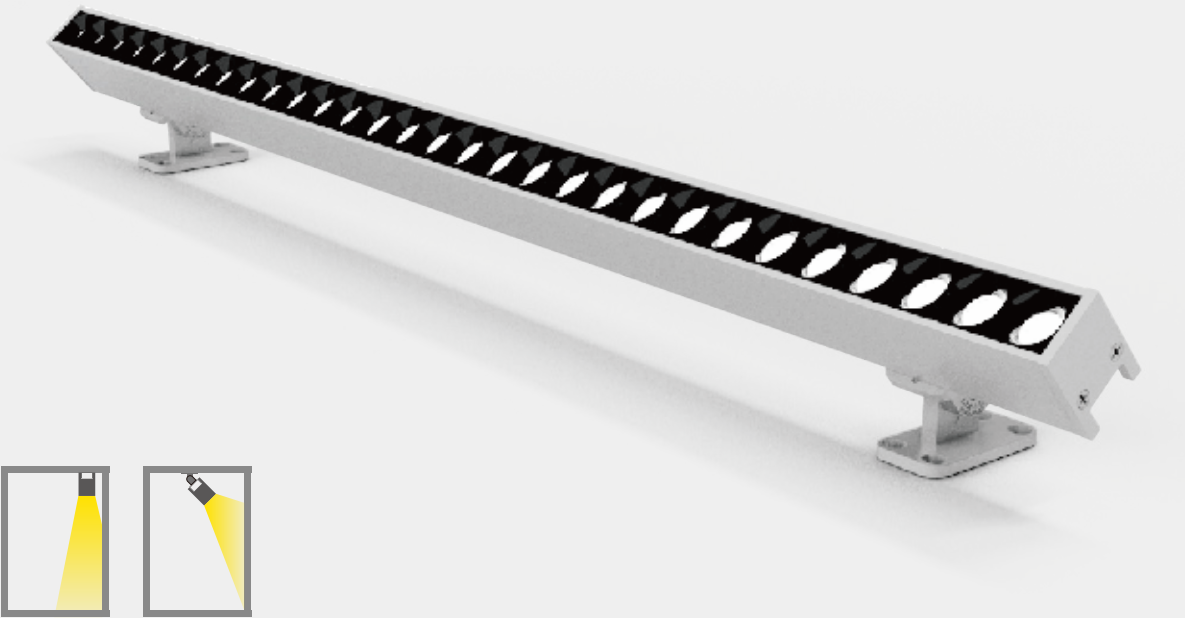

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
BVG-L	Textured Black	Louver Reflector	25°	<19	IP22 IK08	Osram	3-Step MacAdam	220V-240VAC
	Textured White		50°					
	Silver Anodized							


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1207xW25.5xH35.3mm	18.0W	3000K 4000K	100lm/W	80+ (1940lm) 90+ (1770lm)	Ceiling Mounted Swivel Bracket	DALI 0-10V On/Off

BVG

BVG-L WALL GRAZER-LOUVER REFLECTOR



DIMENSION


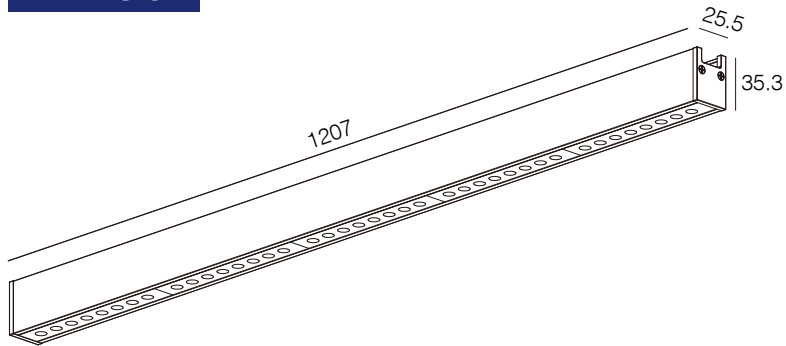


ACCESSORIES



PRECISION TIR LENS



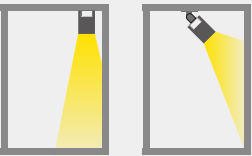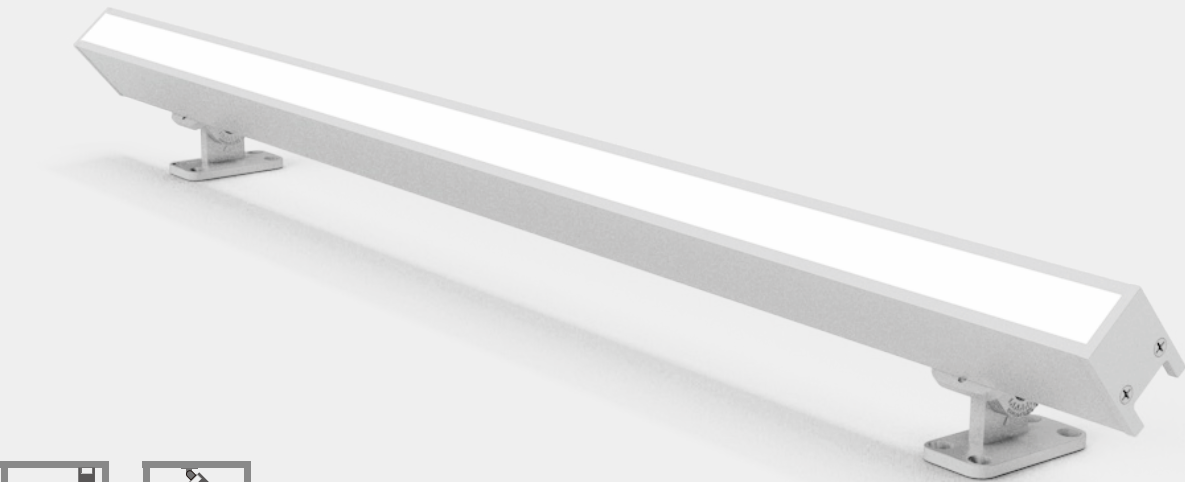


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
BVG-E	Textured Black Textured White Silver Anodized	Extruded Lens	BAT25° ASY18° 60x110° 90x110° 130x110°	<19	IP22 IK08	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1207xW25.5xH35.3mm	17.0W	3000K 4000K	90lm/W	80+ (1750lm) 90+ (1570lm)	Ceiling Mounted Swivel Bracket	DALI 0-10V On/Off



DIMENSION

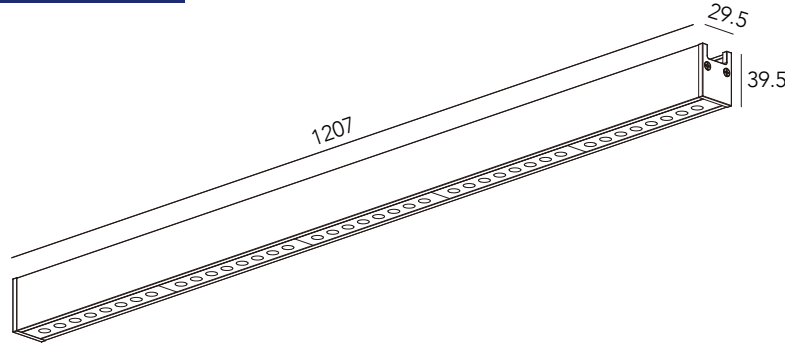


ACCESSORIES



PRECISION TIR LENS



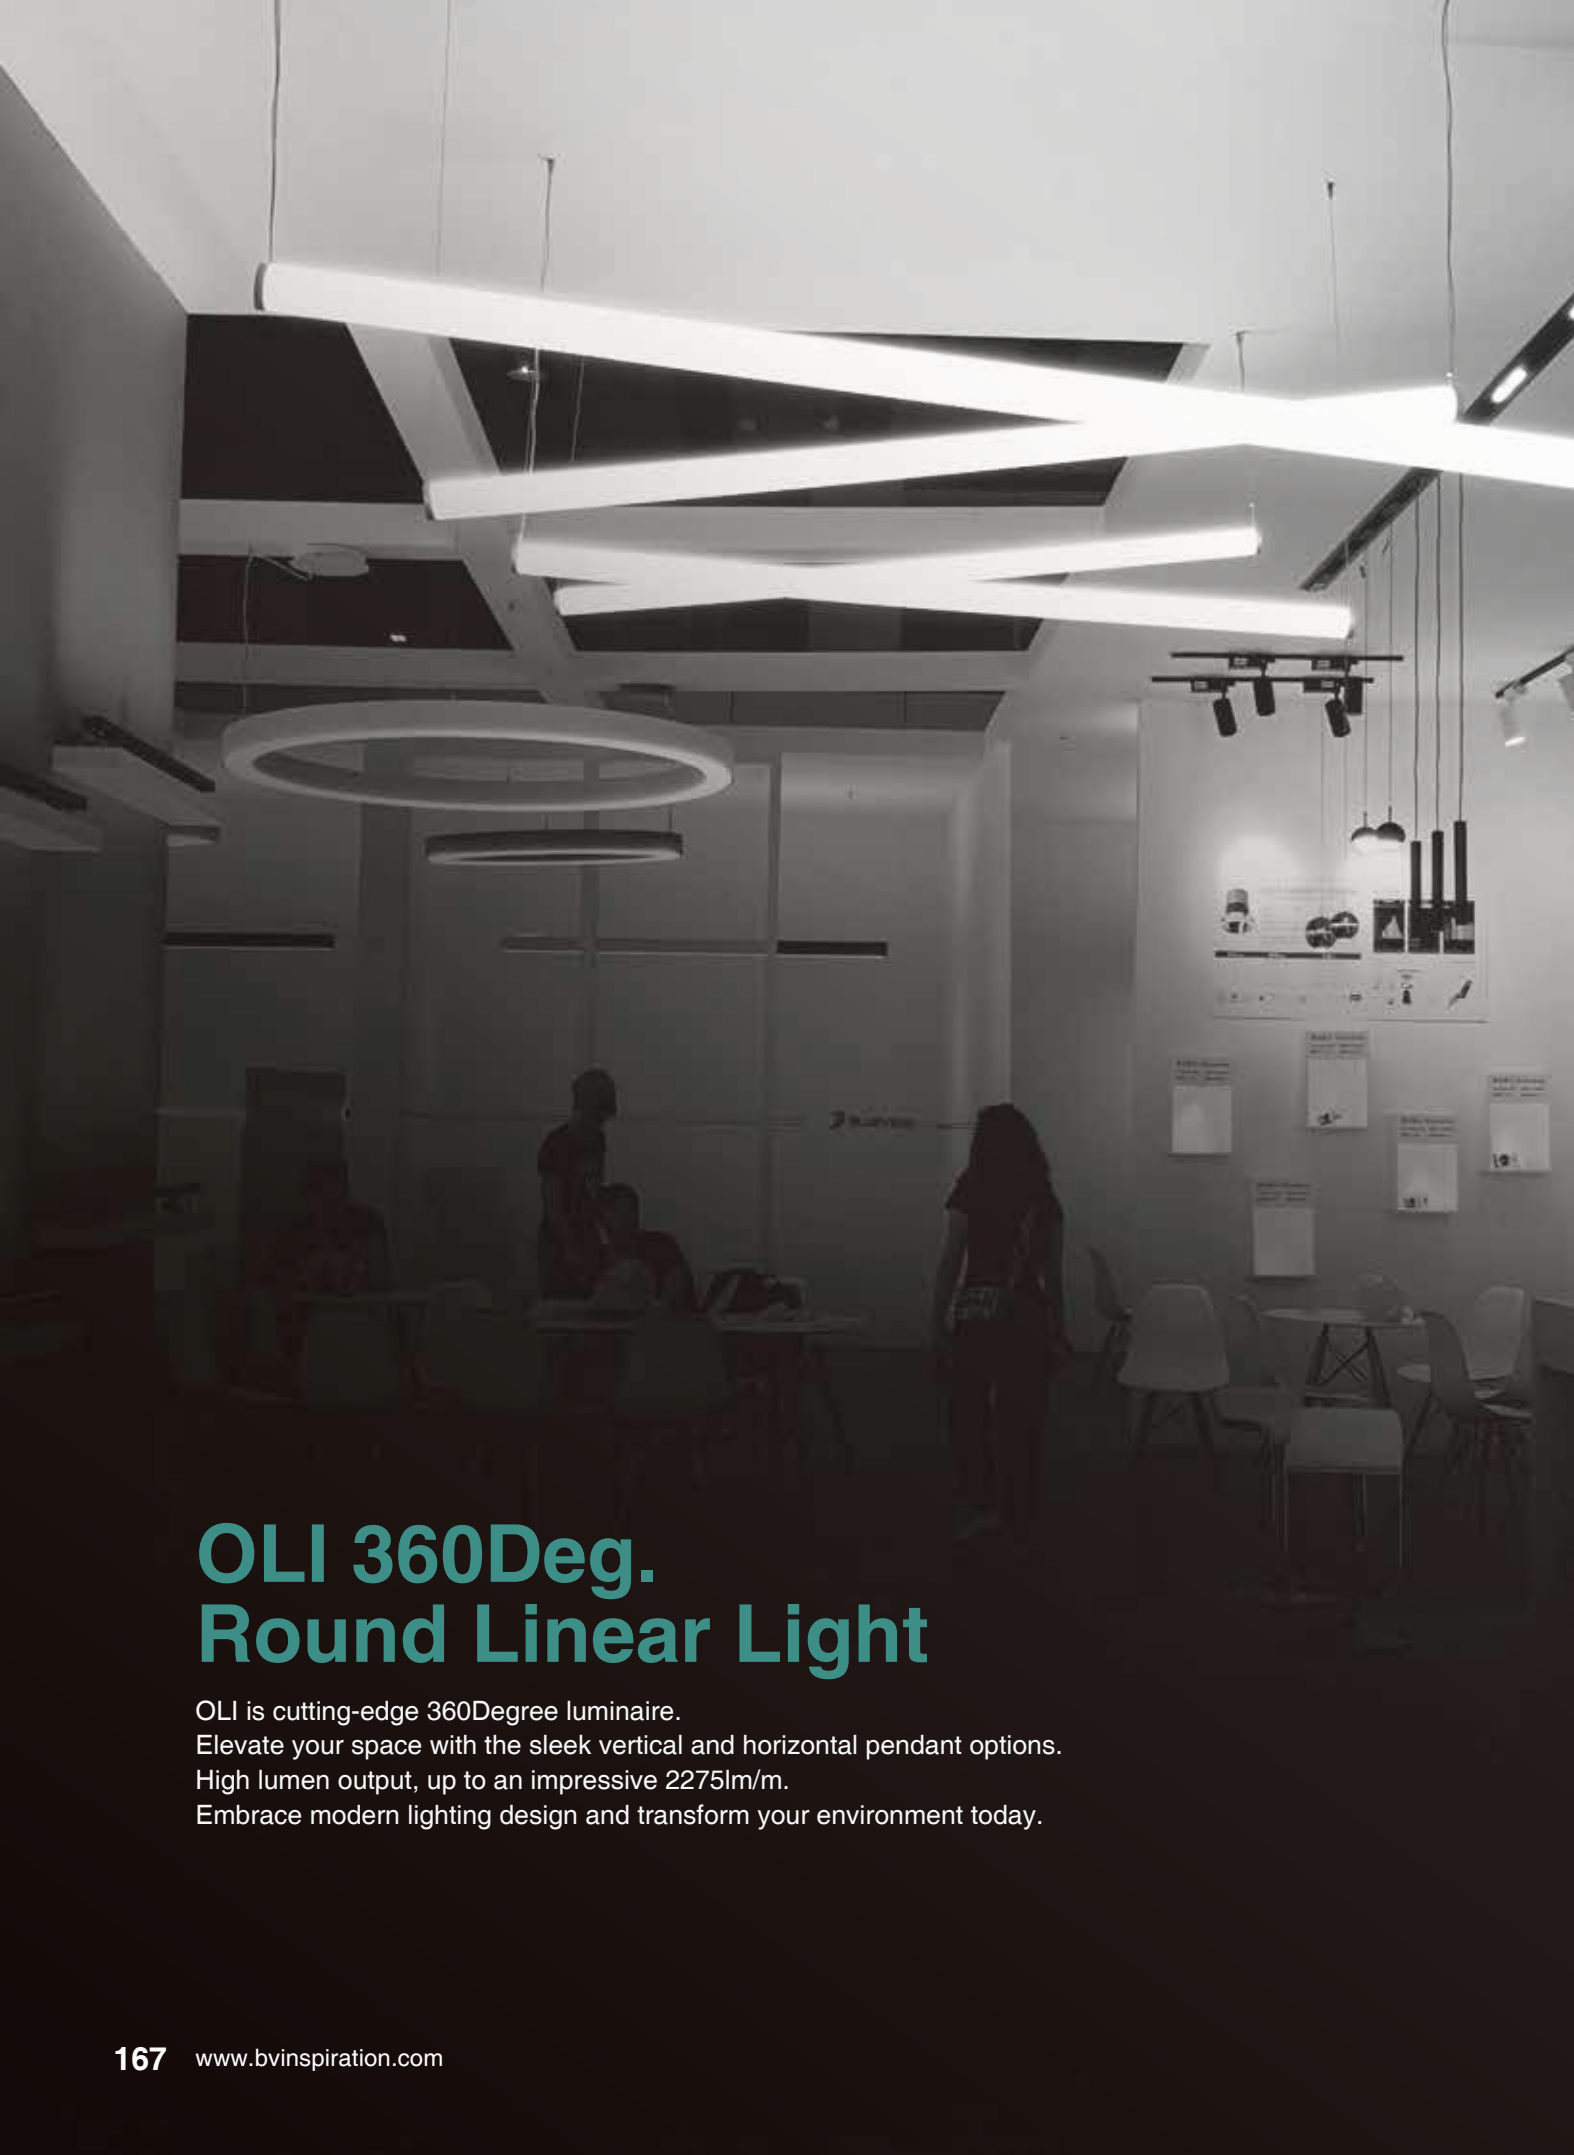




OLI 360Deg. Round Linear Light

OLI is cutting-edge 360Degree luminaire.
Elevate your space with the sleek vertical and horizontal pendant options.
High lumen output, up to an impressive 2275lm/m.
Embrace modern lighting design and transform your environment today.

DIMENSION

O600610P

Horizontal Pendant , Vertical Cylinder

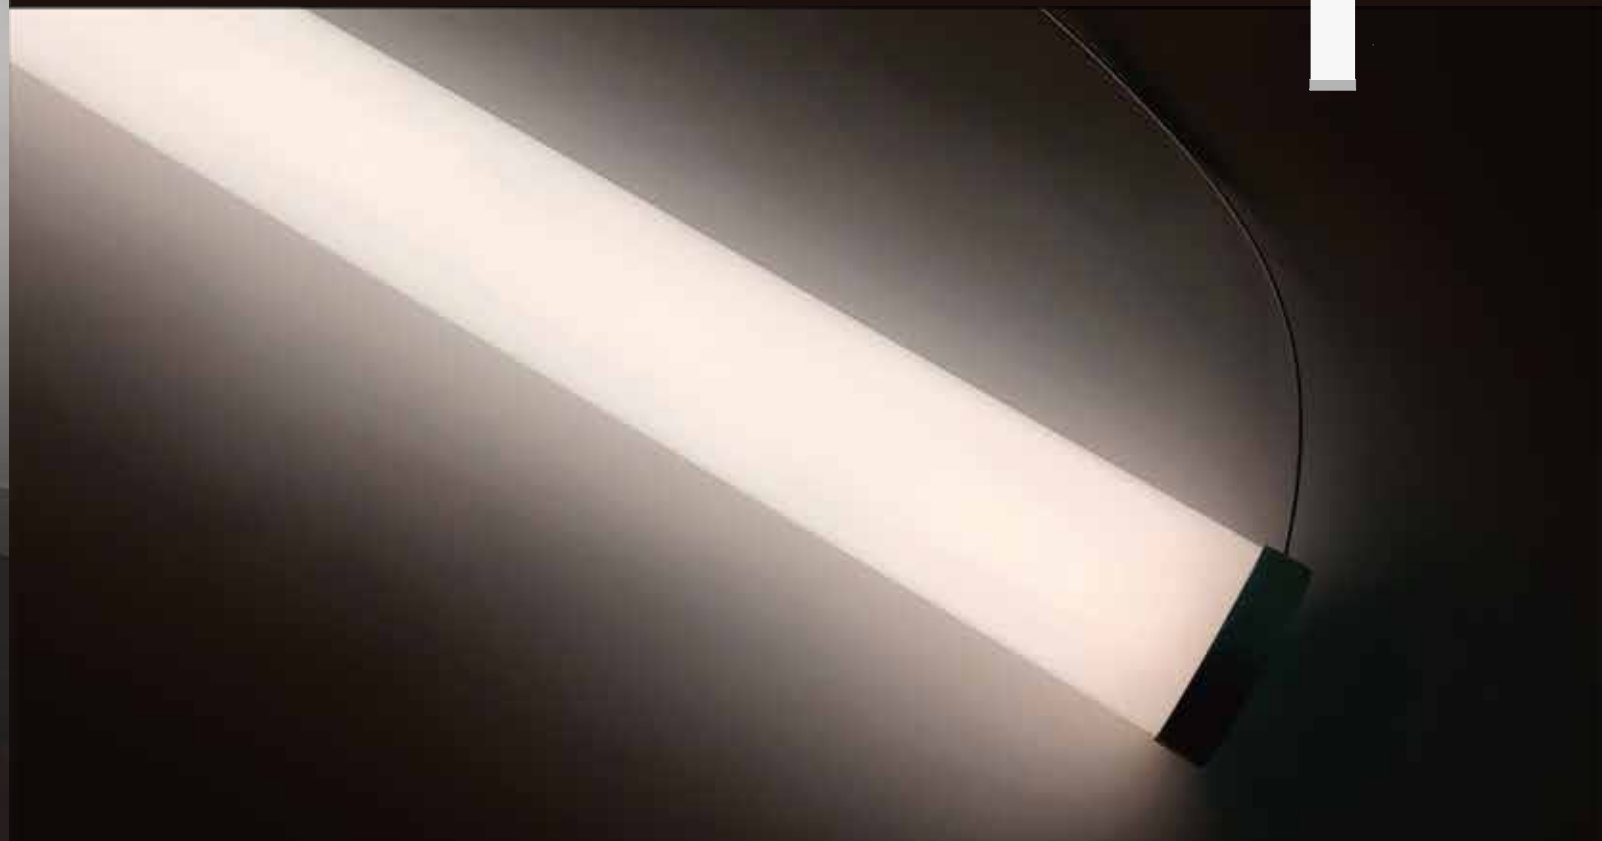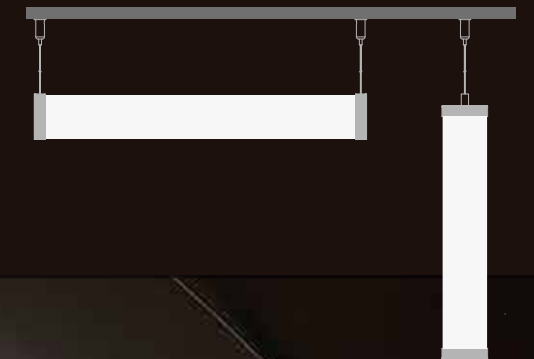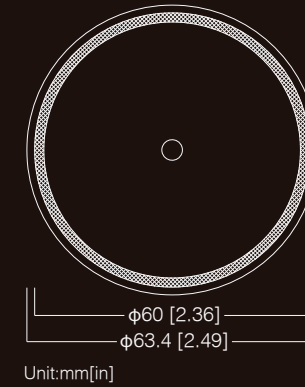

Decorative RGB





SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLI6-PC	Textured Black Textured White Silver Anodized	PC Diffuser	360Deg	IP22 IK06	2835 SMD	3-Step MacAdam Ellipse	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L630 x Ø63mm	1- 13.0W	3000K 4000K	1- 110lm/W 2- 120lm/W	1- 80+ (1510lm) - 90+ (1400lm) 2- 80+ (1650lm) - 90+ (1530lm)	Aircraft Cable Pendant	DALI 0-10V On/Off

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
2- L1230 x Ø63mm	2- 27.0W	3000K 4000K	1- 110lm/W 2- 120lm/W	1- 80+ (3140lm) - 90+ (2910lm) 2- 80+ (3440lm) - 90+ (3180lm)	Aircraft Cable Pendant	DALI 0-10V On/Off

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
3- L1530 x Ø63mm	3- 33.5W	3000K 4000K	1- 110lm/W 2- 120lm/W	1- 80+ (3940lm) - 90+ (3600lm) 2- 80+ (4260lm) - 90+ (3950lm)	Aircraft Cable Pendant	DALI 0-10V On/Off

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
4- L1830 x Ø63mm	4- 40.0W	3000K 4000K	1- 110lm/W 2- 120lm/W	1- 80+ (4660lm) - 90+ (4320lm) 2- 80+ (5090lm) - 90+ (4720lm)	Aircraft Cable Pendant	DALI 0-10V On/Off