

MODULE & RIGID BAR


SIGNAGE

CATALOG


BETTER LIGHT BETTER VIEW

◀**2025**▶

Blueview Elec-Optic Tech Co., Ltd

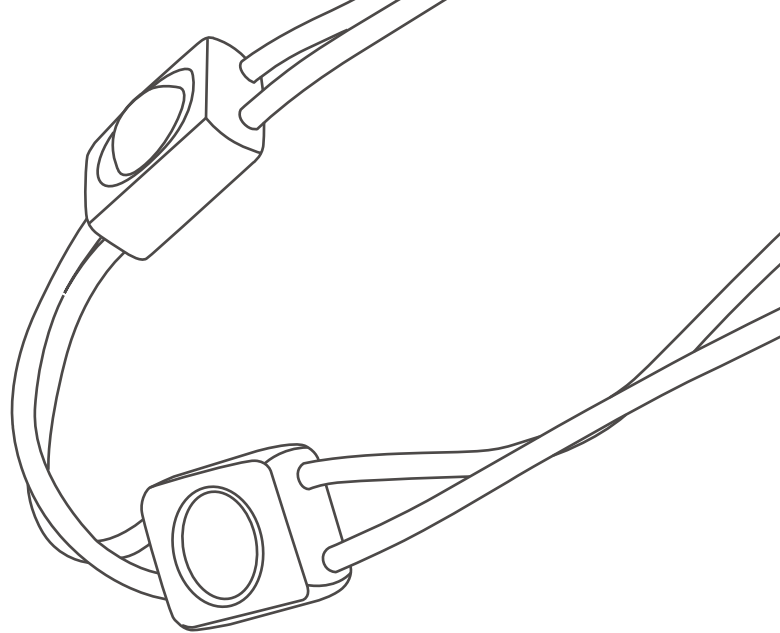

BETTER LIGHT BETTER VIEW

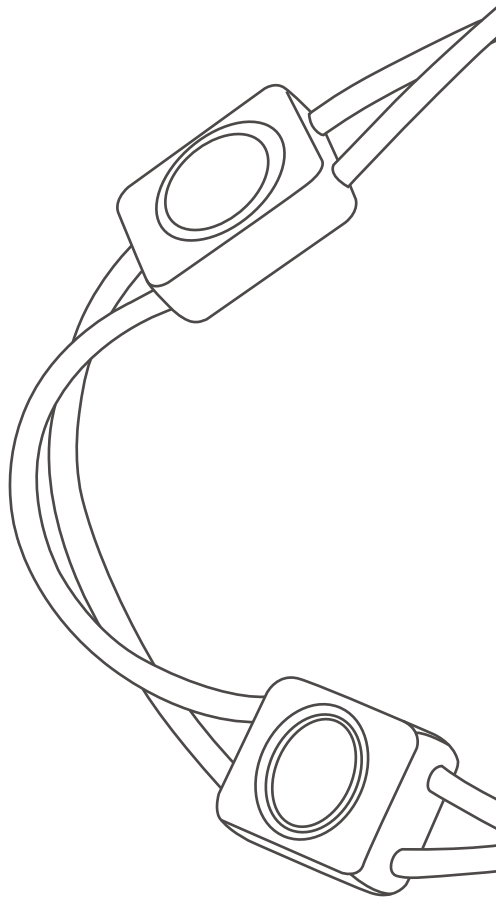

COMPANY PROFILE

BLUEVIEW ELEC-OPTIC TECH CO.,LTD. is a pioneer developer in China's LED signage lighting and linear lighting market, not only participating but also promoting the development of the entire LED industry.

Blueview has been offering professional integrated and ingenious solutions with abundant products including signage, lighting products and others since 2004.

To lead the innovation trend, Blueview introduced "Smart Control" to its products which triggered a major breakthrough for the whole LED industry. Blueview aims to provide customers with complete LED smart lighting system solutions, from lamps to systems to IOT, everything.

We always pursuit the faith that Better light could bring Better life and we never slow down the path for innovation&creation.





CULTURE&VALUES

Perfectionism.

We always treat every detail with rigorous and severe attitude.

Consumer Satisfaction .

We always provide customization and circumspect lighting solution services for each individual project.

Innovation .

We always challenge ourselves and exploit new path to “Blue Sea”.

High Performance Cost Ratio.

We always require our products possessed with remarkable performance and reasonable cost.

STRENGTH

Meticulous Quality Control system.

High reputation around the world.

Seasoned and professional project experiences .

Persistent Research&Development.

MISSIONS

Lead the development for LED industry while shouldering the social responsibilities.

Bring the maximum profits to our consumers while maintaining the highest level of lighting solution services.

COMPANY INTRODUCTION

Embranchment

50 directly affiliated offices in China, 19 branches

Scale

40,000m²

Product Lines

LED Signage, LED Lightbox, LED Smart Lighting System, LED Commercial Lighting

Certificates

CE, UL, 3C, FCC, ROHS etc.

Management System

Acquired international management system certification of TUV, ISO9001, ISO14001, ISO45001, quality, environment, occupational health and safety

Market Share


Own the largest market shares for LED advertising signage lighting

Employees


1,300+

Global Business

Domestic: 55%, Overseas: 45%

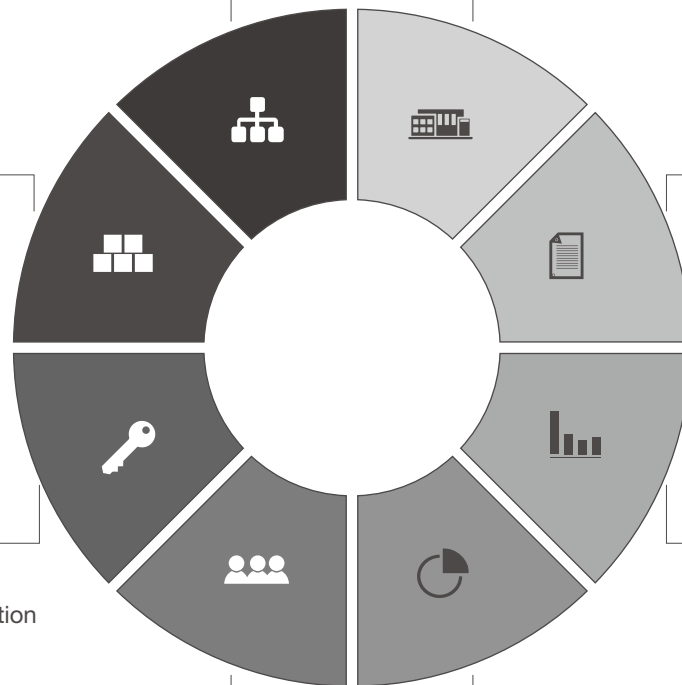

TOP TEN REASONS TO SELECT BLUEVIEW

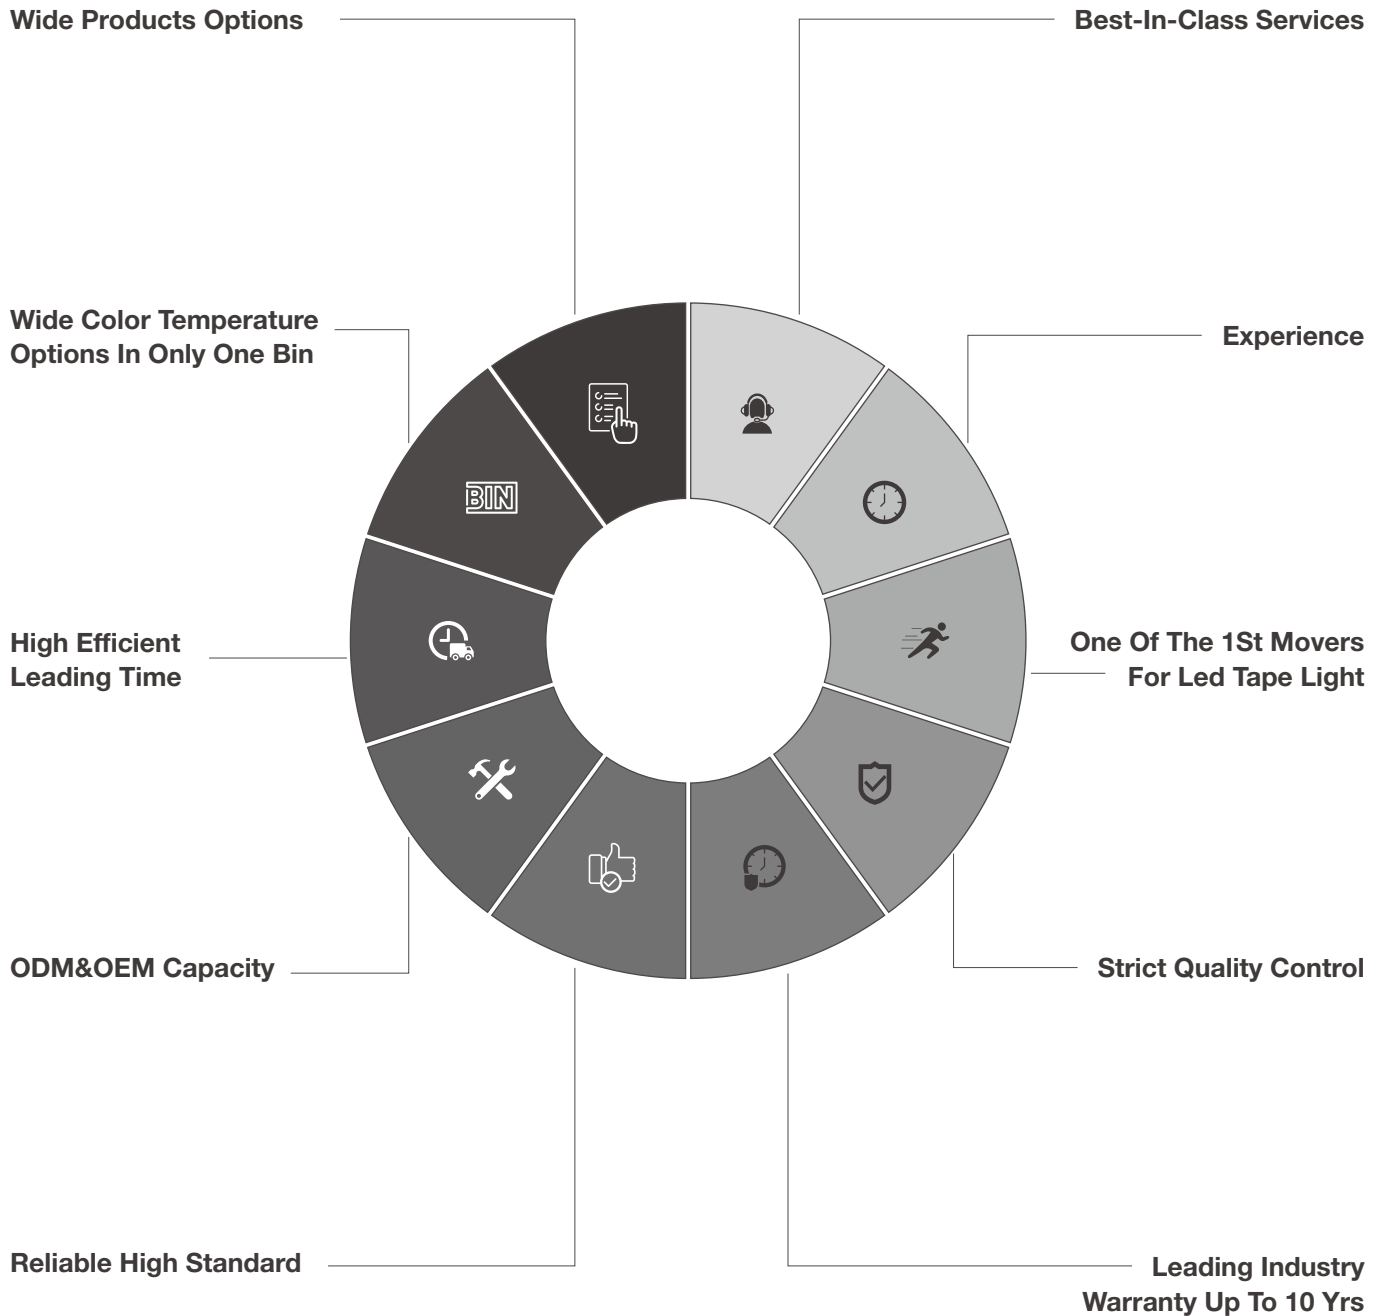

PRODUCTION BASE IN



1 Chengdu, Sichuan



2 Pujiang, Sichuan



3 Dazhou, Sichuan



4 Zhongshan, Guangdong



5 Hai Phong, Vietnam



PRODUCTION BASE IN HAI PHONG, VIETNAM



AUG 2023

Blueview Vietnam Production Base was officially completed and started operation in August **2023**. It is the first oversea production base of Blueview.

Located in Hai Phong, Vietnam's second-largest port city. Covering with **2500m²** workshop.

20+ sets of machines, professional management team from headquarters and over **40** skillful workers, we aim for consistent product quality and fast leading time for customer.

AUTOMATIC PRODUCTION LINE



SMT Production Line



Automatic Welding Machine



Manual Welding Area



Injection Molding Production Line



Machine Coding Area



Packaging Line



LED module production line





LED strip production line



LED rigid bar production line

HISTORY & EVENTS

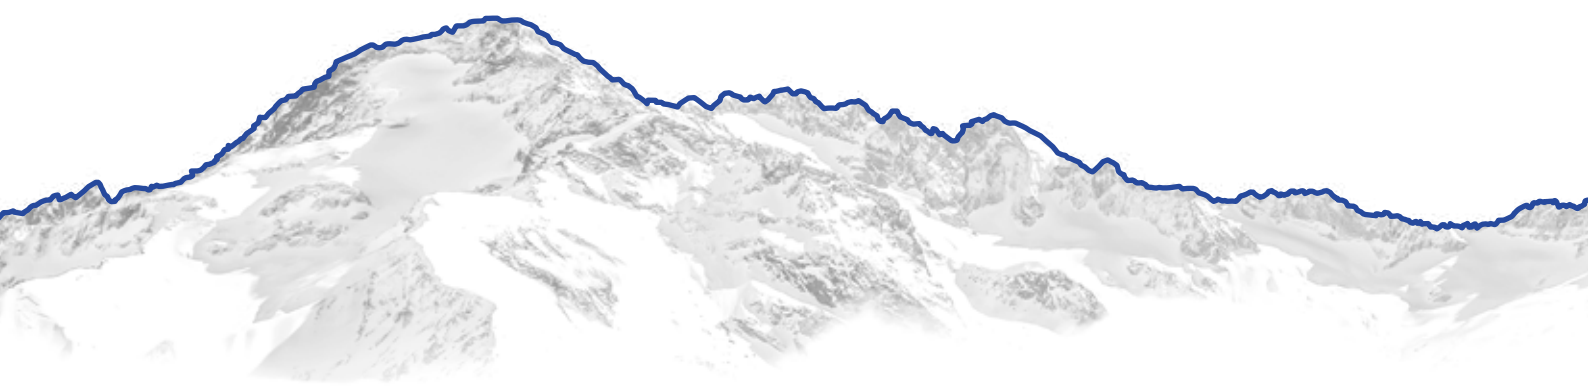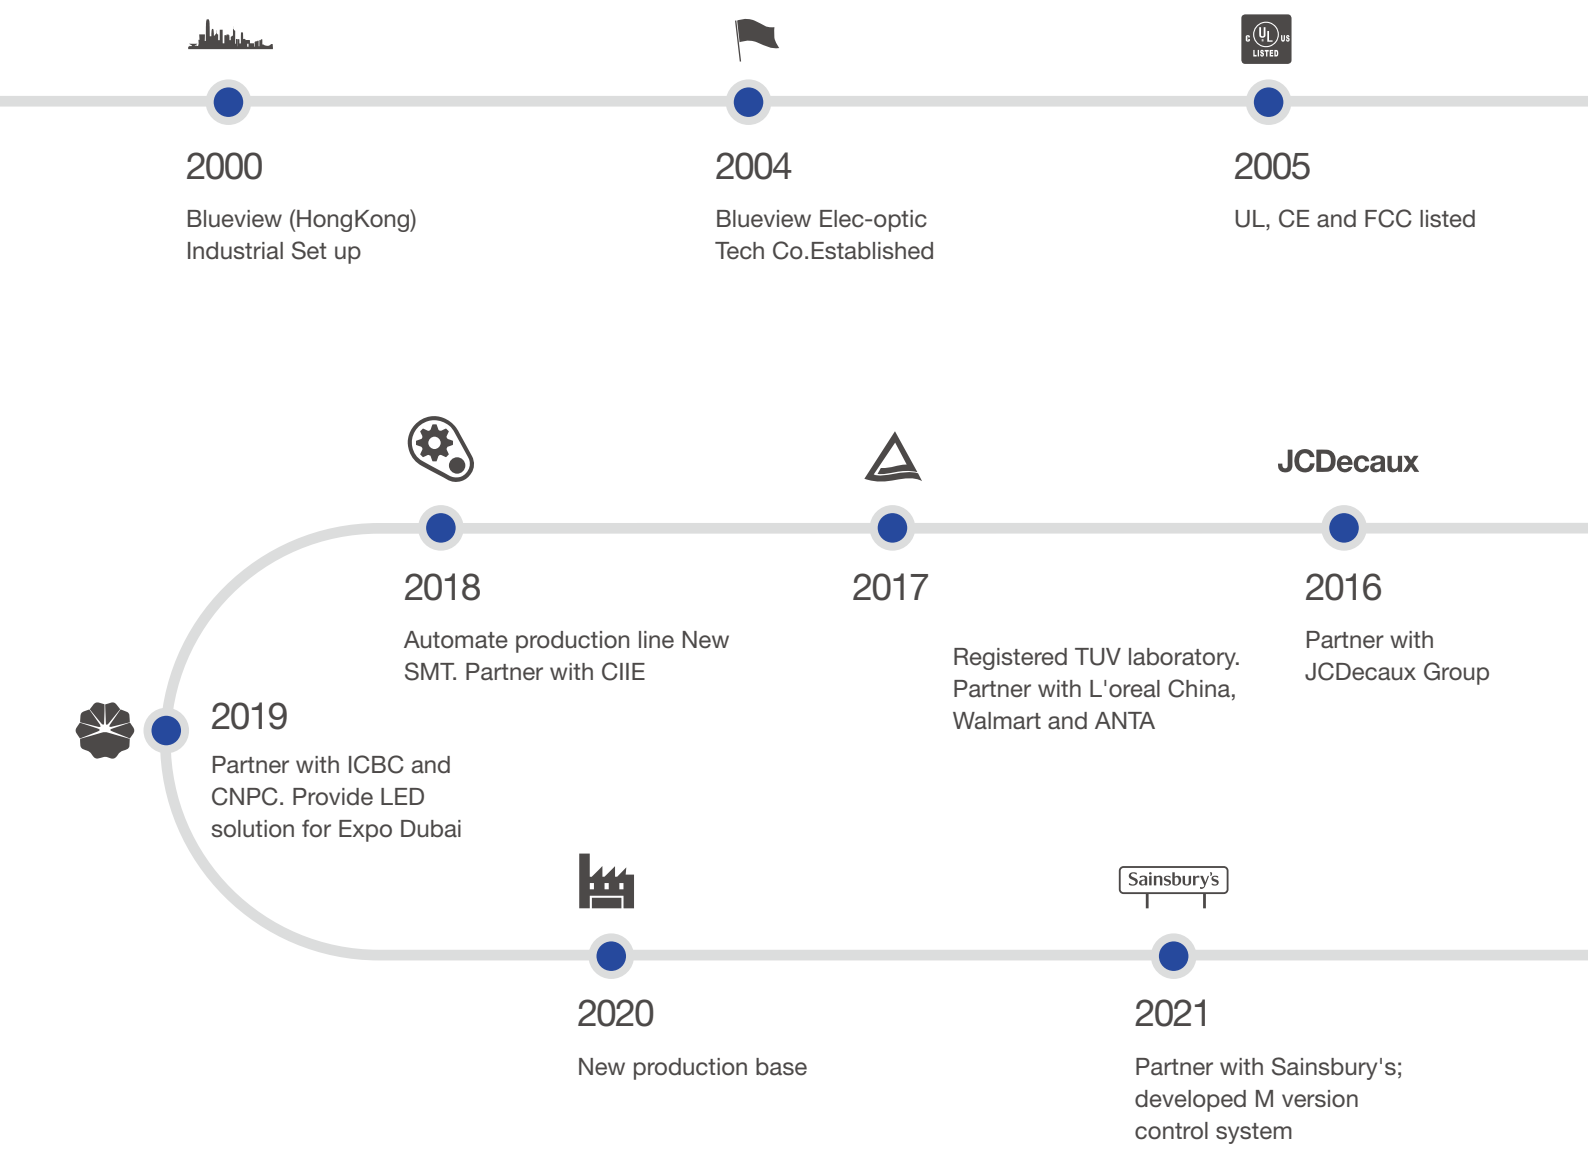



2008

Provided Led solution for
2008 Beijing Olympic



2010

Provided Led solution for
Expo 2010 Shanghai

2011

Factory Expanded
to 26000m²



2015

Initiated the Intelligent
LED system



2012

Pass the ISO 9001 Quality
Management System



2022

Partner with Apple;
Quanzhou base completed




2023

Adopt PLM, IATF 16949 certified




2024

The Vietnamese factory has
established a comprehensive
production system.

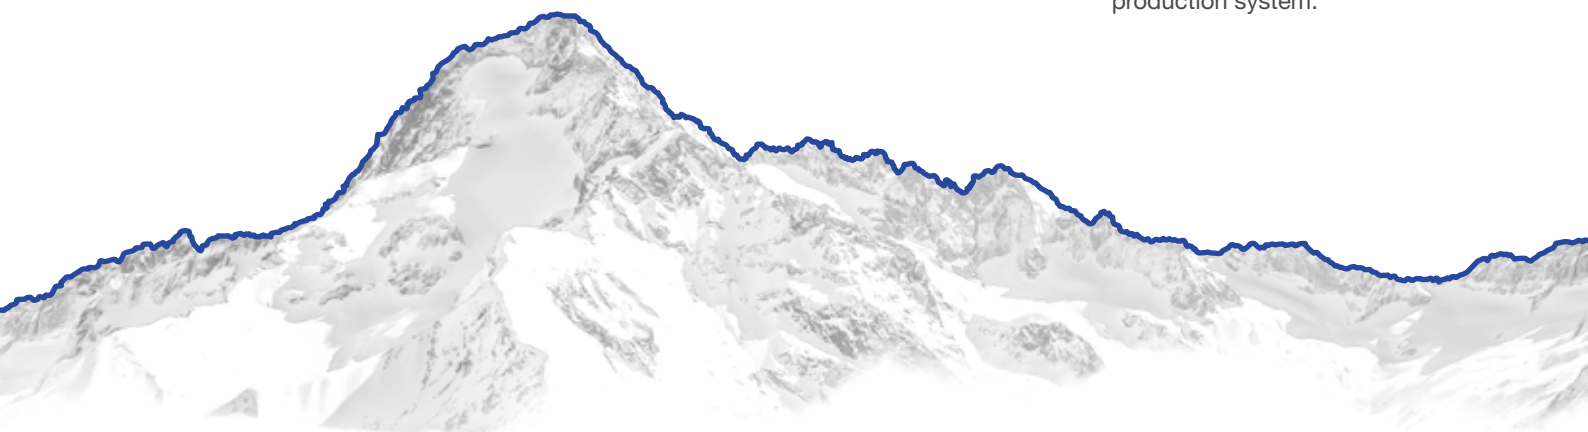

R&D INVESTMENT

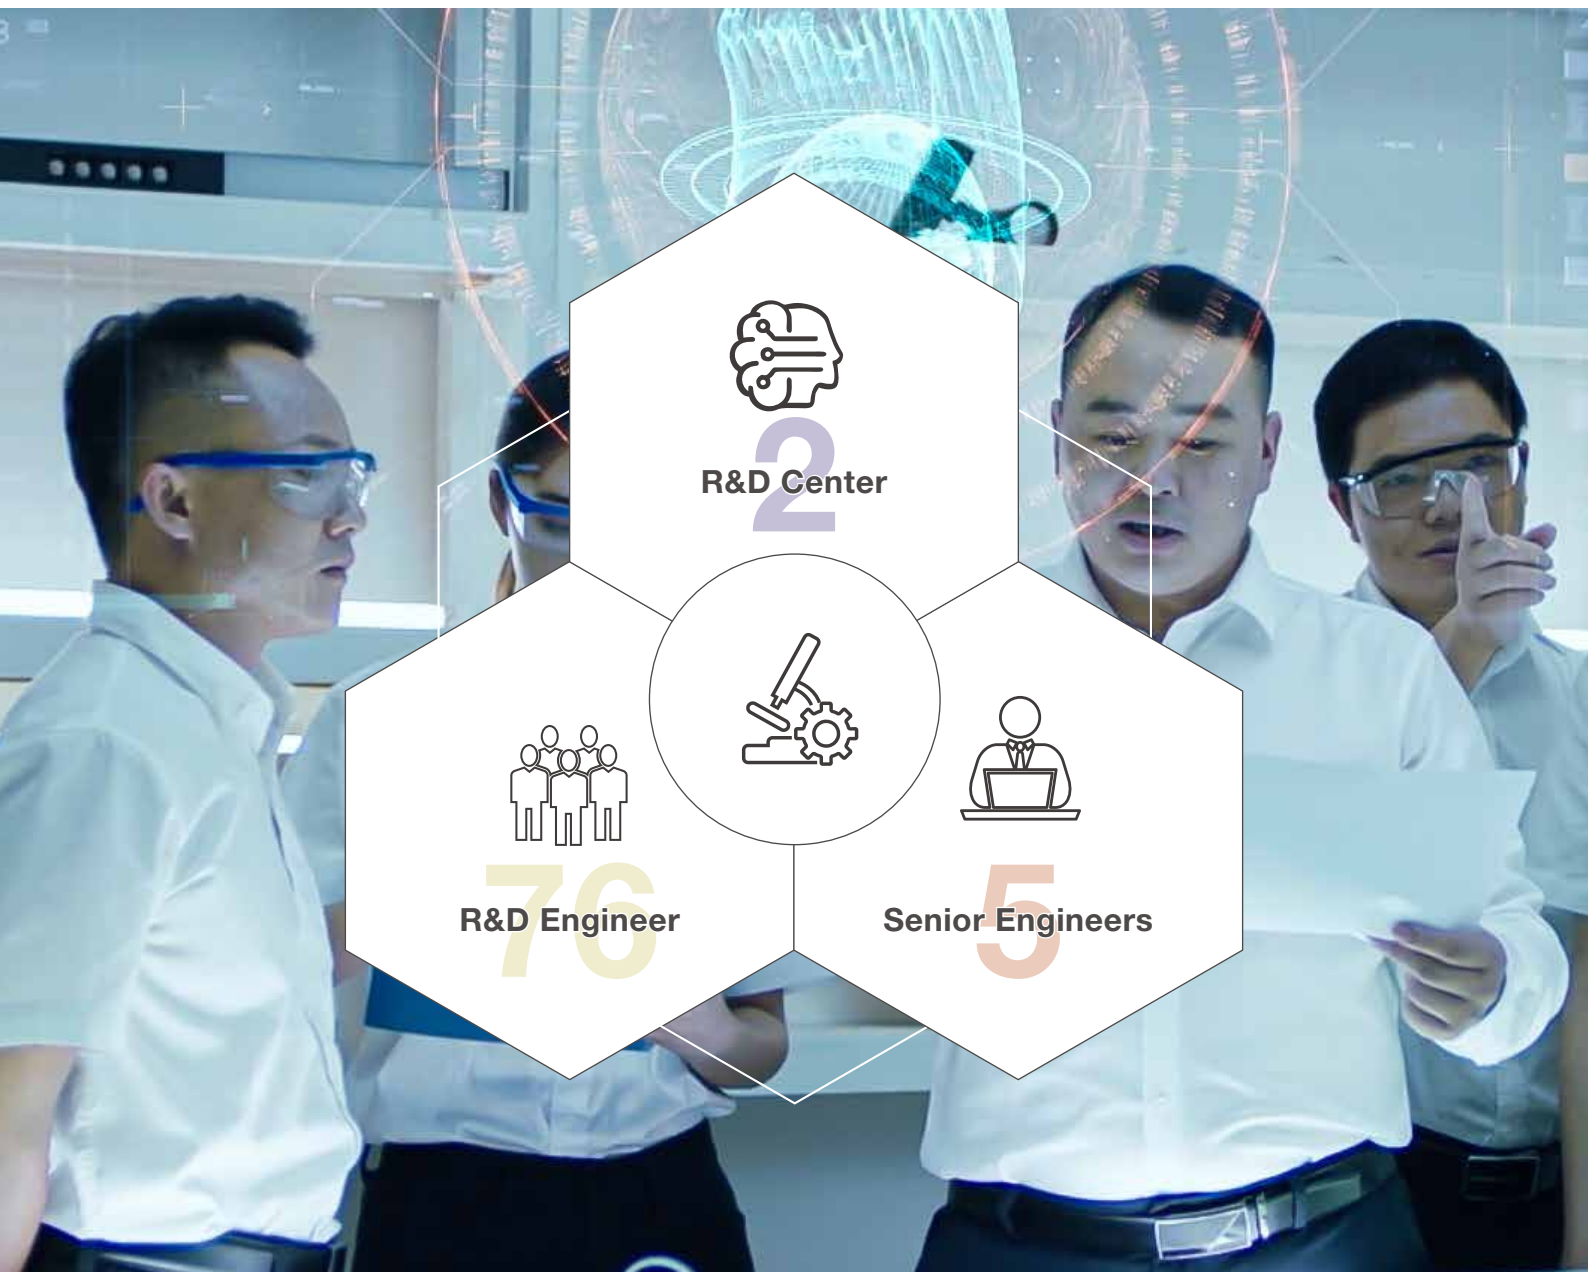

Chengdu R&D Center

Developing the entire industry chain system, including smart systems and supporting devices.



Zhongshan R&D Center

Developing commercial lighting and LED linear lighting products





SGS AUTHORIZED FIRST-CLASS LABORATORY

It has a complete set of testing equipment, which can independently undertake products testings



ACOUSTICAL LABORATORY

Our Acoustic Testing Facility is designed to comply with ISO 354 standards. Our laboratory proudly carries accreditation from the China Inspection Body and Laboratory Mandatory Approva (CMA).

PATENT&CERTIFICATE



21 innovation patents [partly]



24 appearance design patents [partly]



passed [partly]

CE, ROHS, UL, FCC, 3C certification, SGS, TUV and UL official test laboratory certification.



79 utility model patents [partly]

Acquired international management system certification of energy saving, environment, occupational health and safety

PATENT & CERTIFICATE



Domestic Certificates

CCC, CQC, energy-saving, environmental protection, explosion-proof, etc

International Certificates

UL, NA, ENEC, CE, CB, UKCA, BSCI, FCC, REACH, RoHS, ErP, TITLE 24, etc

MANAGEMENT SYSTEM

ISO 9001 QMS

ISO 14001 EMS

ISO 45001 OH&S

IATF 16949 Automotive Quality Management

ISO 14064 Greenhouse Gas

PAS 2060 Carbon-neutral

BSCI



120+

Reliability Tests

Including lifespan test, reliability test, safety test, IP test, optical test, material test etc., laying the foundation for the product quality.

60+

Test Equipment


We have high-precision and fast spectral analyzers, X-RAY testing equipment, Rohs testers, IP rating testers, lightning surge testers, drop testers, and twisting machines, among other testing equipment, to comprehensively assess product reliability.



Mechanical Strength
IEC60598 4.13



Temperature -40~80°C
336 hours

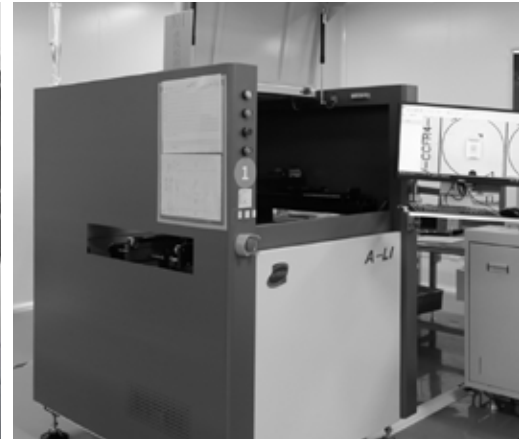

X-Ray Test
welding quality inspection



Xenon Lamp Test
336 hours



Water spray IPX5/6 standard
336 hours



Corrosion Resistance Test
72 hours



No-load/Load Capacity Test
within $\pm 0.5V$



Long-term indoor aging
8,500 hours

COMPREHENSIVE PRODUCTION LINE

Production environment meets ISO 7 standard of number of particles per cubic meter, temperature and humidity.



▲ SMT Dust-free Workshop




Continuous Quality Improvement



Lead-free Workshop



INTERNATIONAL TRADE FAIR

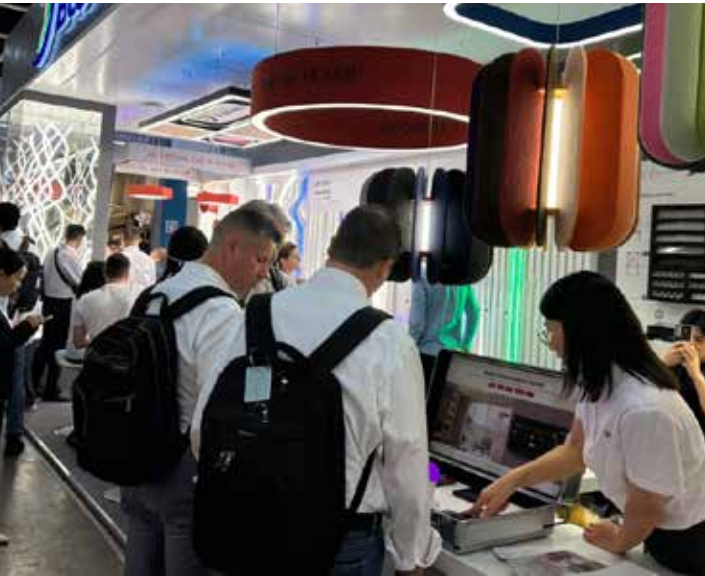

Blueview attaches great importance to the development of the global market, So it has actively participated in foreign exhibitions for many years, including exhibitions in Dubai, the United States, the United Kingdom, Germany, India and other countries.



MODULE SERIES

SIGN CABINET/Back-lit



ST2-W 3.0	030
ST2-J	031
STL	032
STL	033
PT9	034
QG05	035
M10	036
M6	037
SS10	038
SS208	039
SS308	040
ST12-B	041
ST13 2.0	042
M8-B	043
M8-C	044
BV-AL-3030	045

SIGN CABINET/Side-lit



MZ18-W	046
Z18-C	047
Z18 2.0	048
Z18 4.0	049
Z19 4.0	050
Z20/Z20 PRO	051

HIGH EFFICIENCY



STL-H(12V)	052
STL-H(24V)	053
QG05-H	054
QG10	055
M1/M1-H	056
M1-L	058
M1 PRO/PRO-H	060
PT10(12V)	062
PT10(24V)	063
M2	064

WN

ST2-T	065
-------	-----

RGB/RGBW



PS5-B	067
PS6	068
PZ5	069
PZ6	070
BC6-S2	071

DIGITAL/ADDRESSABLE



CS6	072
CS7	073
CS8	074
CS8-A	075
PQ5-J	076
PQ6	077
PQ7	078
PQ8	079
BC6-S1	080
D20/30/50	081

RIGID BAR

BACK-LIT



T12	084
H3	085
H3 2.0 PRO	086
H20	087
FB-XW	088
FB-X	089
YD2-W	090
YD2-Y 2.0	091
YD3-A	092
YD7 3.0	093
WN-YD7 3.0	094
YD8 1.0	095
YD8 3.0	096
YD8-J	097
JYD3-A	098
JYD7 3.0	099
JYD8 1.0	100
FYD2-E	101
FYD3-A	102
FYD7 3.0	103
FYD8	104
JFYD3-A	105
JFYD7 3.0	106
JFYD8	107

SIDE LIGHTING



BPS300	108
BPS300-C	109
BPS300-S	110
BPS1-S	111
BP2-W	112
BP2-WN	113
BP2-J	114
YZ9	115

RGB/RGBW



QYD8	116
BQ5-A	117
RGBW-YD8	118
QBPS	119
QBPS-C	120

High Voltage



A0-FT	121
A2 2.0	122
A4-W	123
A4-FW	124

DYNAMIC PANEL



NW-B	125
NF-B	126

MODULE SERIES

Blueview Modules are suitable for indoor and outdoor light boxes, channel letters, etc.

Designs include through hole series, mini series, digital series, etc.



ST2-W 3.0 SIGN CABINET/Back-lit


- High quality 2835 LEDs
- Full injection molding for perfect outline
- IP65 perfect for indoor and outdoor
- Single module cuttable




				CRI 80			
--	--	--	--	------------------	--	--	--

PROFILE DRAWINGS

Unit:mm/inch

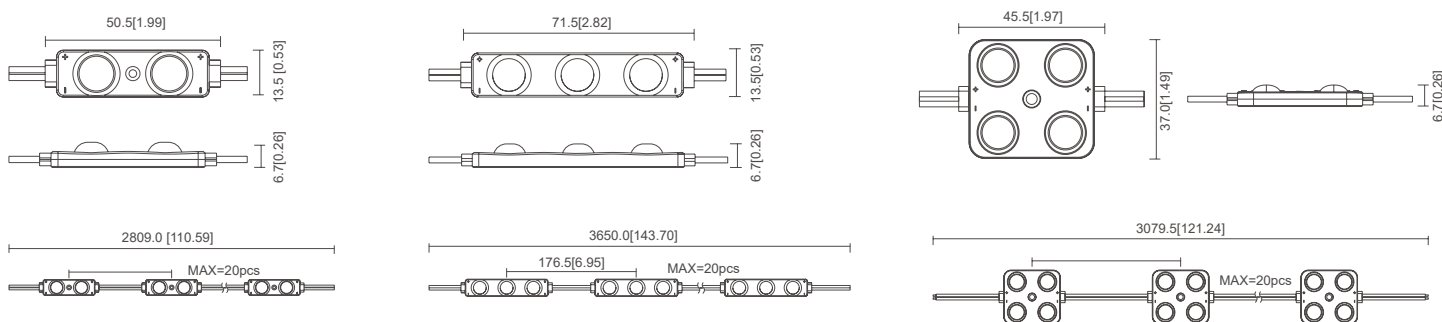


PHOTOMETRIC

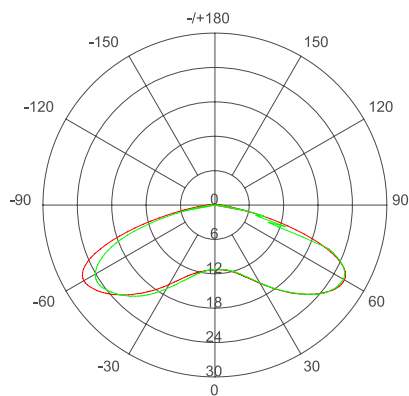

Unit: cd

- C 0/180,160.0°
- C90/270,158.2°

Average Beam Angle (50%):159.1°

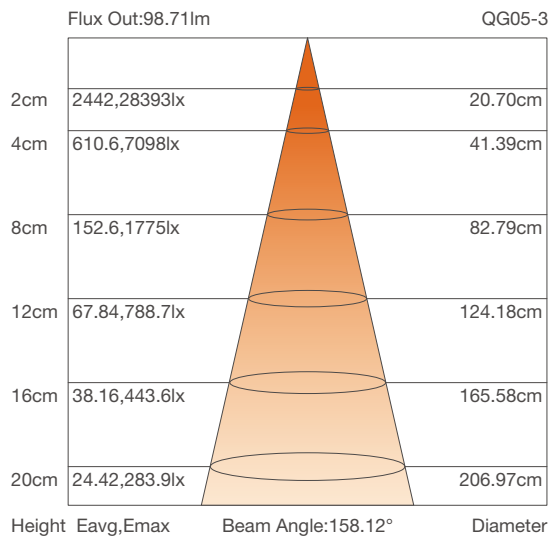

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST2W 3.0-2	12V DC	W	6000-7000K	66	100	0.66	2	20pcs
ST2W 3.0-3	12V DC	W	6000-7000K	100	100	1.0	3	20pcs
		R	620-625nm	12	25	0.48		
		G	465-470nm	39	54	0.72		
		B	520-525nm	6	16	0.36		
		Y	570-757nm	38	80	0.48		
ST2W 3.0-4	12V DC	W	6000-7000K	132	100	1.32	4	20pcs

ST2-J SIGN CABINET/Back-lit



- Super cost-effective;
- Adopted diffusion lens, reduced the installation quantity and density;
- Full injection molding for perfect outline;
- Single module cuttable, support customization;
- Support PWM, 0-10V, DALI and DMX dimming.




 DIMMABLE	 CE	 IP65	 LED2835	CRI 80	 160°	 DC12V	 3Years
--	--	--	---	-----------	--	---	--

PROFILE DRAWINGS

Unit:mm/inch

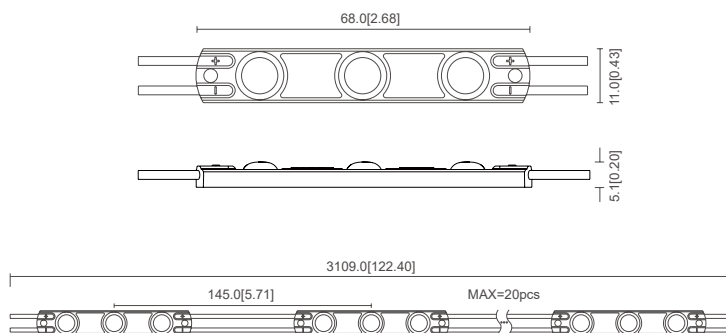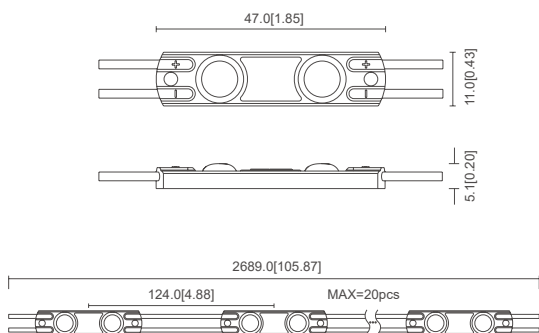


PHOTOMETRIC

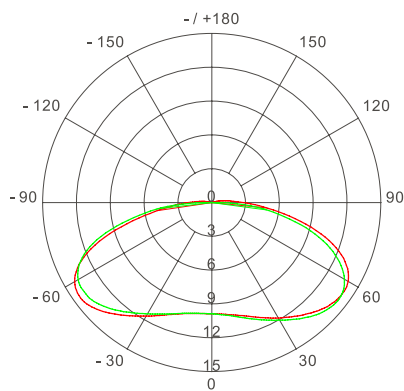

Unit: cd

- C 0/180,165.7°
- C90/270,165.6°

Average Beam Angle (50%):165.6°

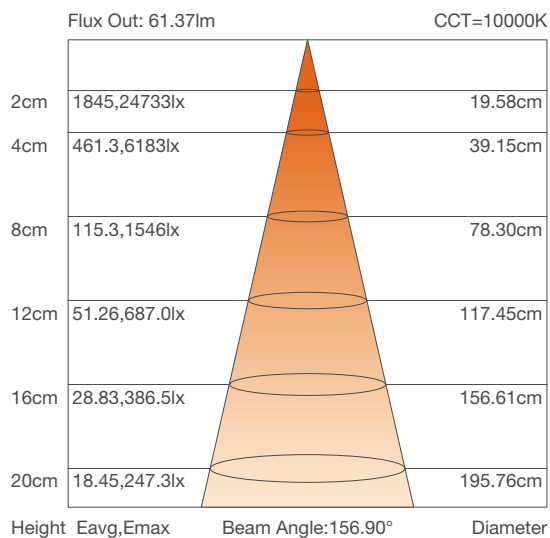

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST2-J-2	12V DC	6000-6500K	47	97	0.48	2	20pcs
ST2-J-3	12V DC	6000-6500K	70	98	0.72	3	20pcs


- Self designed lens with 170° beam angle
- Adopts full enclosure injection molding
- Single module cuttable





CE	RoHS	LM-80	IP65	LED2835	CRI 80	170°	DC12V	5Years
----	------	-------	------	---------	--------	------	-------	--------

PROFILE DRAWINGS

Unit:mm/inch

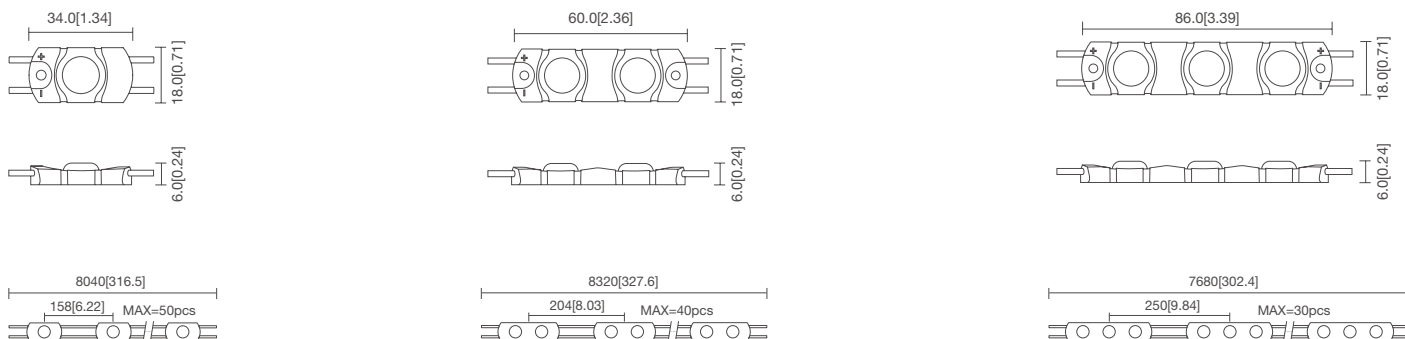

PHOTOMETRIC

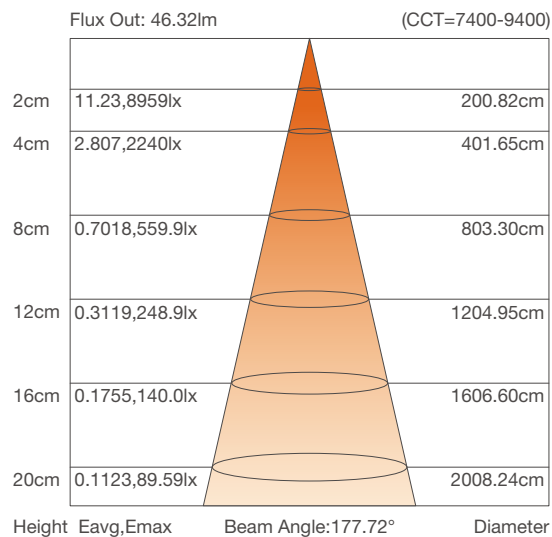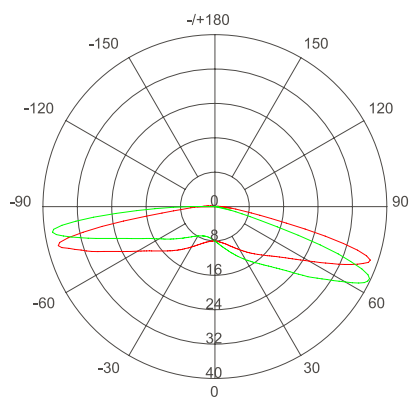

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-1	12V DC	2800-10000K	49	98	0.5	1	50pcs
STL-2	12V DC	2800-10000K	98	98	1.0	2	40pcs
STL-3	12V DC	2800-10000K	150	100	1.5	3	30pcs


- Self designed lens with 170° beam angle
- Adopts full enclosure injection molding
- Single module cuttable




CE	RoHS	LM-80	IP65	LED2835	CRI 80	170°	DC12V	5Years
----	------	-------	------	---------	--------	------	-------	--------

PROFILE DRAWINGS

Unit:mm/inch

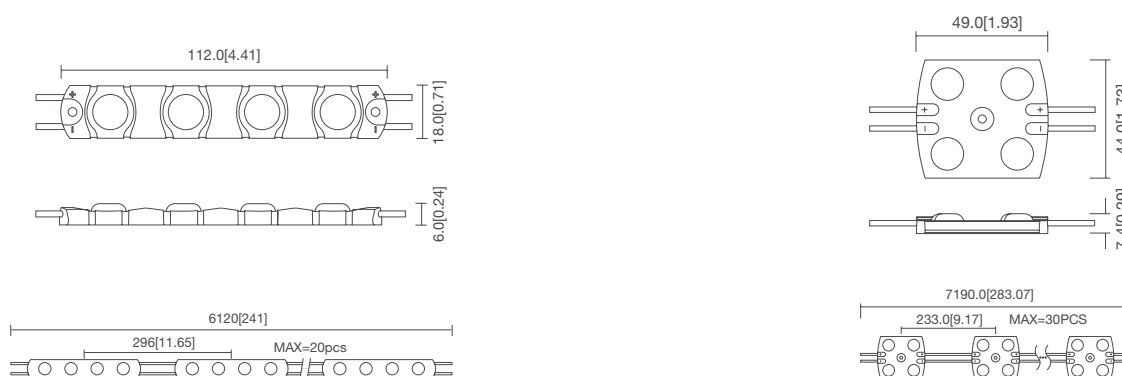


PHOTOMETRIC

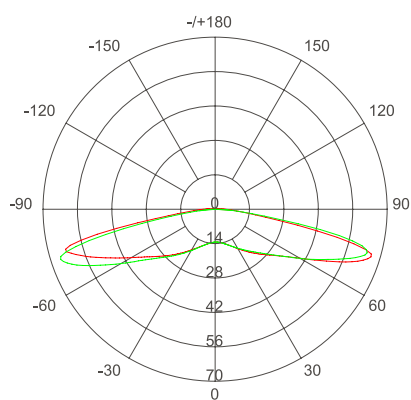

Unit: cd

- C 0/180,174.4°
- C90/270,170.3°

Average Beam Angle (50%):172.4°

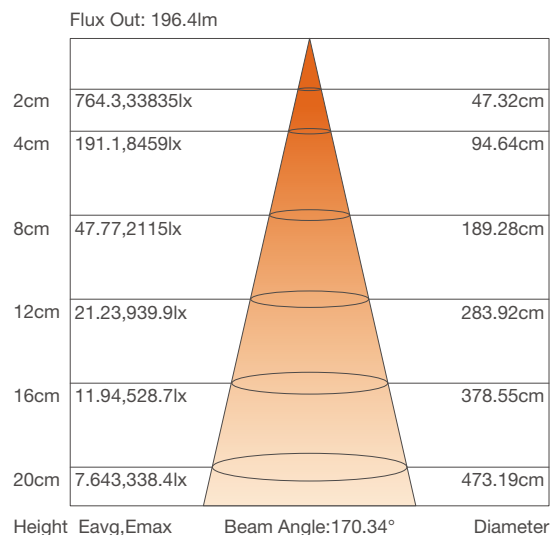

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-4	12V DC	2800-10000K	200	100	2.0	4	20pcs
STL-4(square)	12V DC	2800-10000K	200	100	2.0	4	30pcs

PT9 SIGN CABINET/Back-lit


- Adopt integrated optical lens, exquisite appearance, super cost-effective;
- Using ultrasonic waterproof technology;
- A single module can be cut, easy to install;
- Support customization;




CE	IP66	LED2835	CRI 80	165°	DC12V	5Years
----	------	---------	--------	------	-------	--------

PROFILE DRAWINGS

Unit:mm/inch

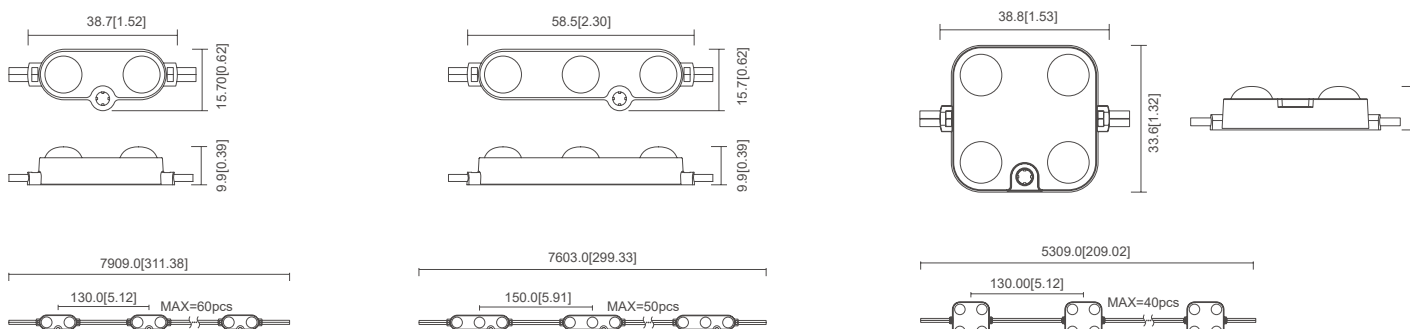

PHOTOMETRIC

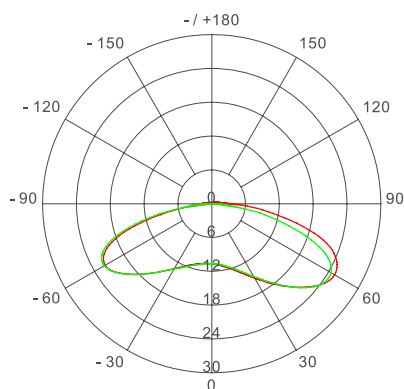


Unit: cd

- C 0/180,169.2°

- C90/270,163.5°

Average Beam Angle (50%):166.4°

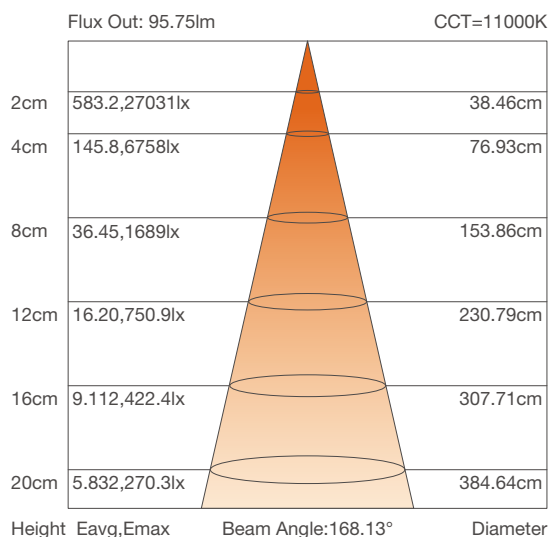

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PT9-2	12V DC	W	6000-6500K	66	100	0.66	2	60pcs
PT9-3	12V DC	W	6000-6500K	100	100	1.00	3	50pcs
		R	620-625nm	22	36	0.60		
		G	520-525nm	52	73	0.72		
		B	460-465nm	11	15	0.72		
PT9-4	12V DC	W	6000-6500K	132	100	1.32	4	40pcs



QG05 SIGN CABINET/Back-lit

- Adopt integrated lens with 180° beam angle
- High efficiency
- Full injection molding, suitable for outdoor use
- Single module cuttable




PROFILE DRAWINGS

Unit:mm/inch

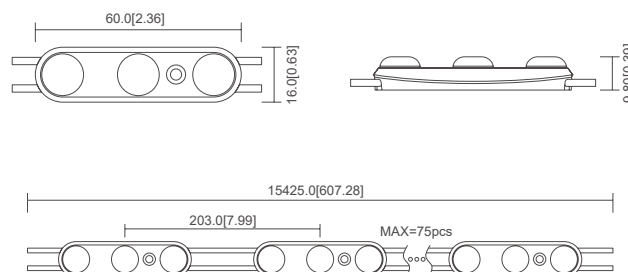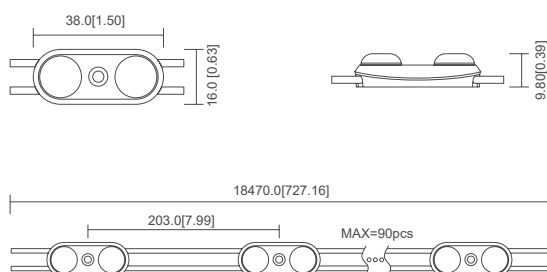


PHOTOMETRIC

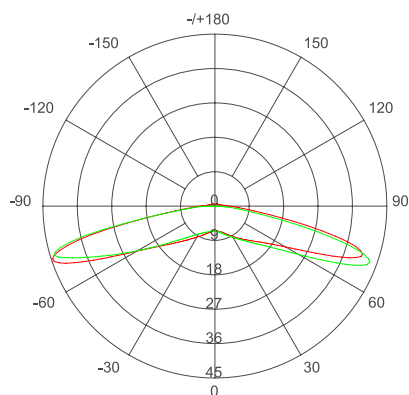

Unit: cd

- C 0/180,183.3°
- C90/270,174.4°

Average Beam Angle (50%):178.8°

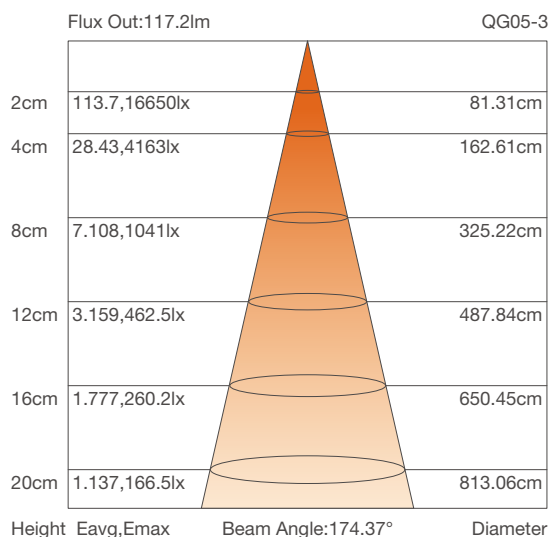

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QG05-2	12V DC	7400-9400K	81	101	0.8	2	90pcs
QG05-3	12V DC	7400-9400K	132	110	1.2	3	75pcs

M10 SIGN CABINET/Back-lit


- Ultra high cost performance
- Adopt integrated lens
- Single module can be cut
- Support customization




 DIMMABLE	 LM-80	 IP65	 LED2835	CRI 80	 160°	 DC12V	 5Years
--	---	--	---	-----------	--	---	--

PROFILE DRAWINGS

Unit:mm/inch

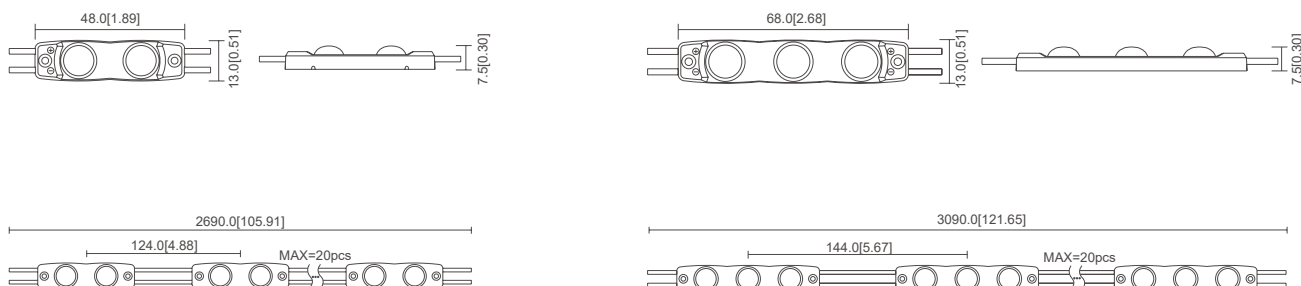


PHOTOMETRIC

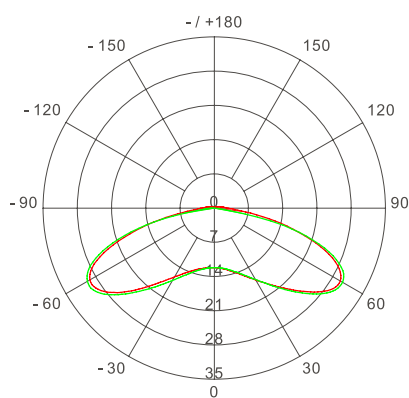

Unit: cd

- C 0/180,165.9°
- C90/270,159.2°

Average Beam Angle (50%):162.5°

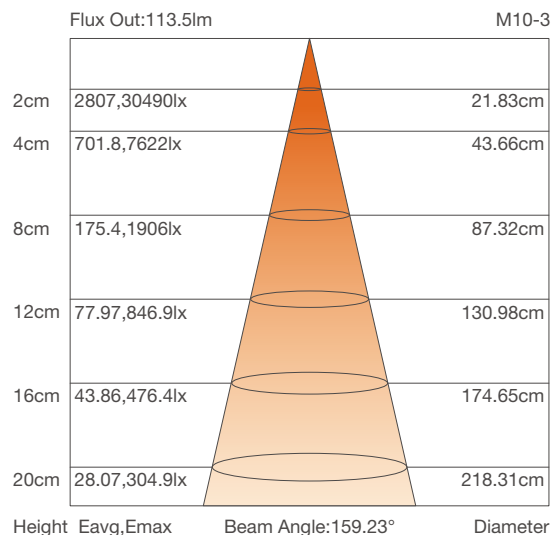

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M10-2	12V DC	9000-12000K	81	97	0.8	2	20pcs
M10-3	12V DC	9000-12000K	118	98	1.2	3	20pcs



M6 SIGN CABINET/Back-lit

- Constant current design
- Self-designed integrated lens with 175° beam angle
- High brightness, stable performance
- Single module cuttable




PROFILE DRAWINGS

Unit:mm/inch

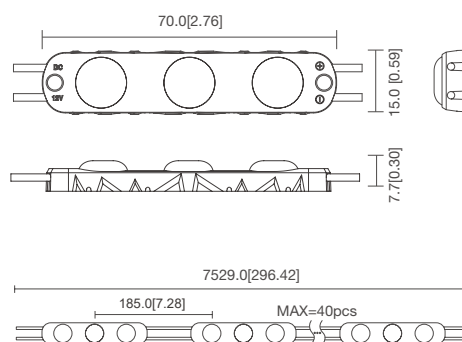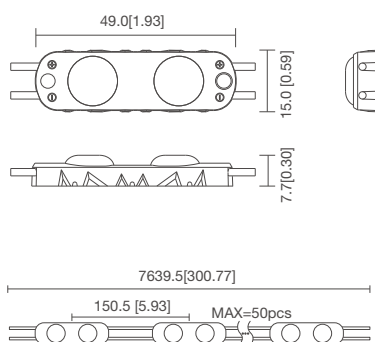

PHOTOMETRIC

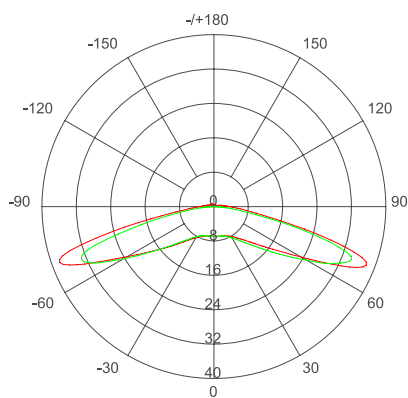


Unit: cd

- C 0/180,180.9°

- C90/270,168.6°

Average Beam Angle (50%):174.7°

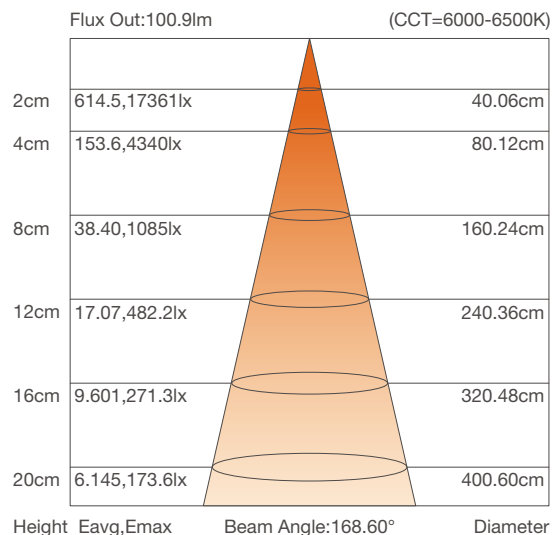


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M6-2	12V DC	6000-6500K	72	100	0.72	2	50pcs
M6-3	12V DC	6000-6500K	110	100	1.1	3	40pcs


SS10 SIGN CABINET/Back-lit

- SDCM < 5, high Rg,Rf value
- Tiny 2835 LED, suitable for mini letters and light box
- Full injection molding, strong weather resistance
- Adopt integrated diffuse lens
- IP68, suitable for outdoor use
- Single module cuttable

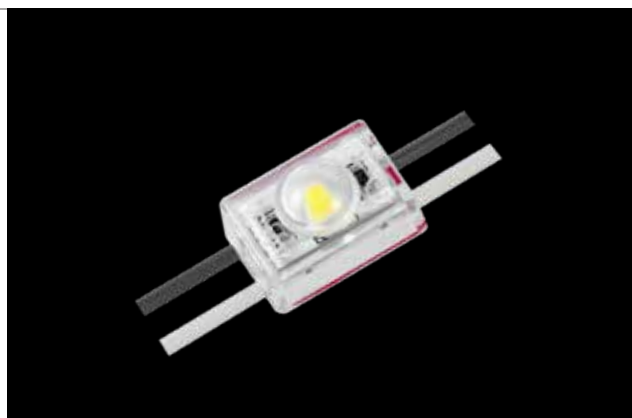


PROFILE DRAWINGS

Unit:mm/inch

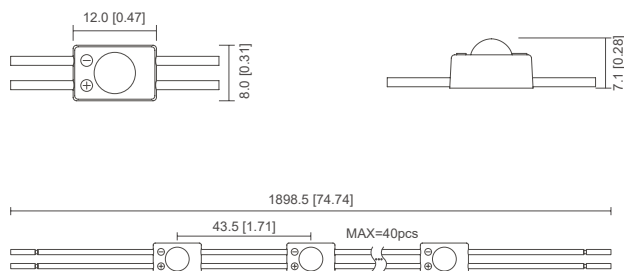

PHOTOMETRIC

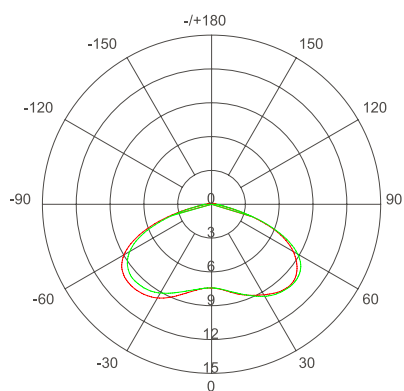

Unit: cd


— C 0/180,147.5°

— C90/270,147.1°

Average Beam Angle (50%):147.3°

Flux Out: 38.30lm

CCT=6422K

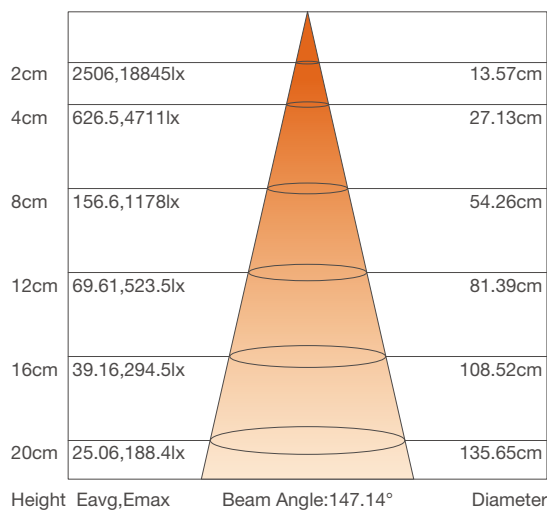

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
SS10	12V DC	2000-12000K	40	110	0.36	1	40pcs

SS208 SIGN CABINET/Back-lit


- Tiny 2835 LED, small and delicate in appearance
- Fully integrated glue filling process, strong weather resistance
- Single module cuttable
- Support PWM, 0-10V, DALI and DMX dimming




 DIMMABLE	 IP68	 LED2835	CRI 80	 120°	 DC12V	 3Years
--	--	---	-----------	---	---	--

PROFILE DRAWINGS

Unit:mm/inch

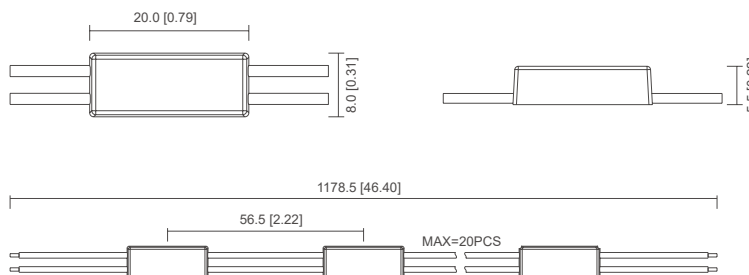

PHOTOMETRIC

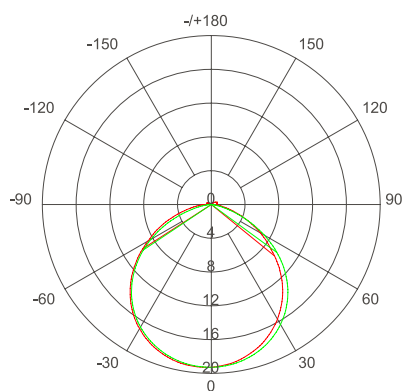

Unit: cd

- C 0/180,108.0°

- C90/270,110.1°

Average Beam Angle (50%):109.1°

Flux Out: 39.03lm		CCT=6166K	
Height	Eavg,Emax	Beam Angle:108.04°	Diameter
2cm	15228,48212lx		5.51cm
4cm	3807,12053lx		11.02cm
8cm	951.7,3013lx		22.04cm
12cm	423.0,1339lx		33.06cm
16cm	237.9,753.3lx		44.08cm
20cm	152.3,482.1lx		55.10cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
SS208	12V DC	6000-7000K	48	100	0.48	2	20pcs

SS308 SIGN CABINET/Back-lit

- Adopt integrated lens;
- Use optical grade transparent PC material;
- A single module can be cut
- Support customization;



IP65

LED2835

CRI
80


145°

DC12V


3Years

PROFILE DRAWINGS

Unit:mm/inch

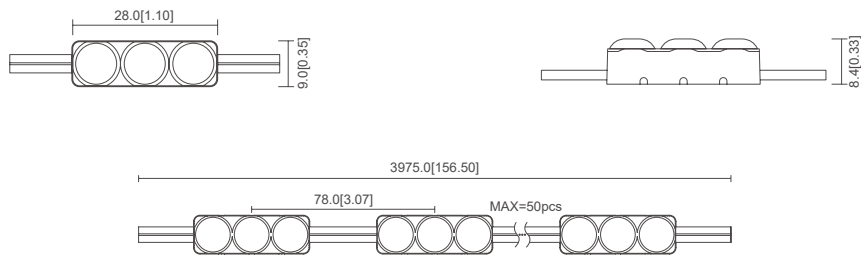

PHOTOMETRIC

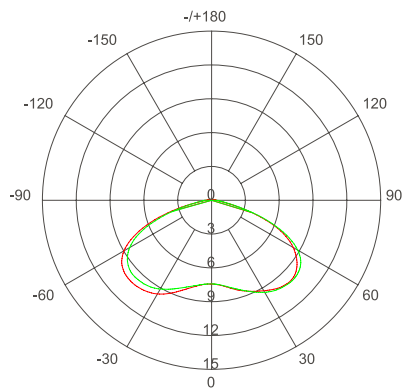

Unit: cd

— C 0/180,150.9°

— C90/270,141.4°

Average Beam Angle (50%):146.2°

Flux Out: 30.58lm		CCT=6314K	
Height	Eavg,Emax	Beam Angle:112.56°	Diameter
2cm	10263,17026lx		5.99cm
4cm	2566,4257lx		11.99cm
8cm	641.4,1064lx		23.97cm
12cm	285.1,473.0lx		35.96cm
16cm	160.4,266.0lx		47.95cm
20cm	102.6,170.3lx		59.93cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
SS308	12V DC	3800-4200K	51	106	0.48	3	50pcs

ST12-B SIGN CABINET/Back-lit



- High brightness
- Great lumen maintenance
- 170°beam angle, uniform lighting
- Excellent heat dissipation, long life span
- 40pcs/string with one end power feed
- Single module cuttable, easy to install




 E318168	 LM-80	 IP65	 LED2835	Ra 80	 170°	 DC12V	 3Years
--	--	---	--	-----------------	---	--	---

PROFILE DRAWINGS

Unit:mm/inch

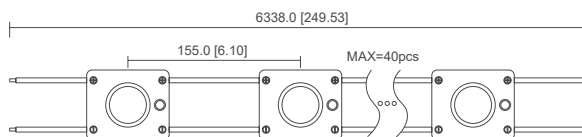

PHOTOMETRIC

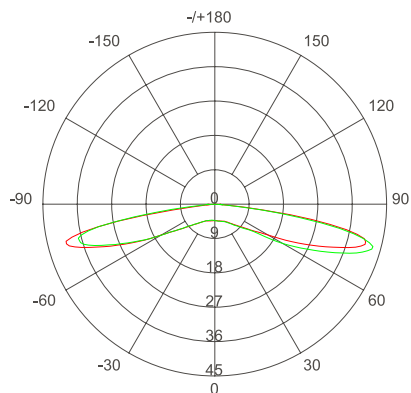

Flux Out: 96.81lm (CCT=6000-7000K)

Height	Eavg, Emax	Beam Angle:170.25°	Diameter
1.0m	0.1507,4.353lx		2344.91cm
2.0m	0.0377,1.088lx		4689.83cm
4.0m	0.0094,0.2721lx		9379.65cm
6.0m	0.0042,0.1209lx		14069.48cm
8.0m	0.0024,0.0680lx		18759.31cm
10.0m	0.0015,0.0435lx		23449.13cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST12-B	12V DC	9000-12000K	108-112	90	1.2	1	40pcs

ST13 2.0 SIGN CABINET/Back-lit


- Adopt Epistar/Sanan LEDs
- 160° beam angle, transmittance up to 97%
- Aluminum PCB is beneficial for heat dissipation of high-power LEDs
- Max run 20pcs with one end power feed
- Great lumen maintenance, IP65 rating
- Support PWM, 0-10V, DALI, DMX dimming




 E318168	 LM-80	 IP65	 LED3030	CRI 70/80	 160°	 DC12V	 3Years
--	--	---	--	---------------------	---	--	---

PROFILE DRAWINGS

Unit:mm/inch

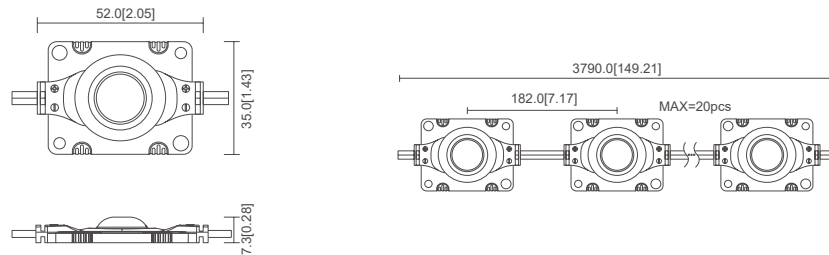

PHOTOMETRIC

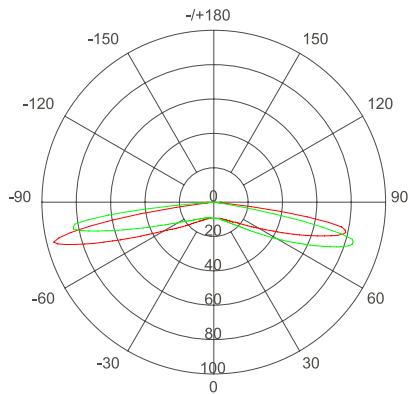


Unit: cd

- C 0/180,167.3°

- C90/270,167.0°

Average Beam Angle (50%):167.1°

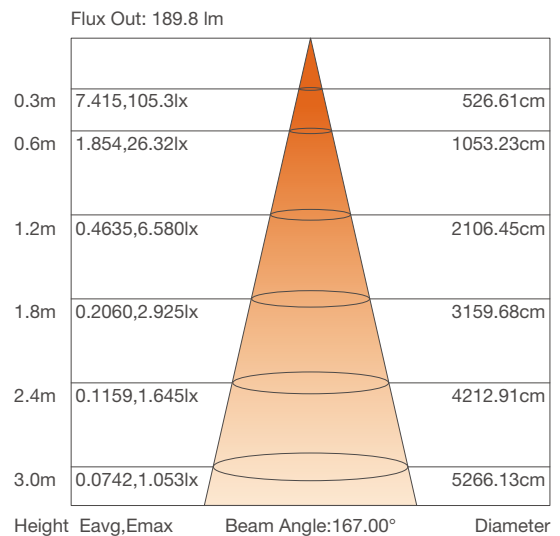


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST13 2.0-2W	12V DC	6500-7040K	189-194	90	2.1	1	20pcs

M8-B SIGN CABINET/Back-lit


- Adopt 2835 LED
- Self designed lens with 170° beam angle for uniform lighting
- High-end design, requiring fewer products per unit area
- Single module cuttable

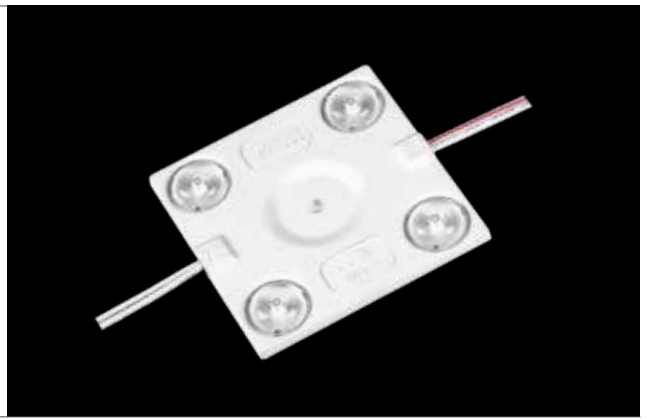


				CRI 80			
--	--	--	--	------------------	--	--	--

PROFILE DRAWINGS

Unit:mm/inch

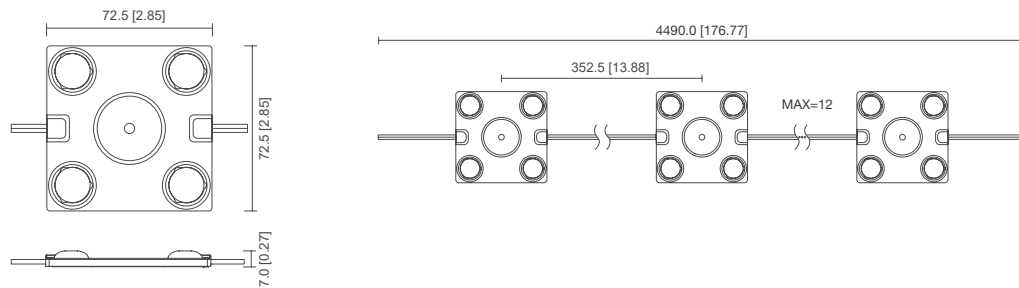

PHOTOMETRIC

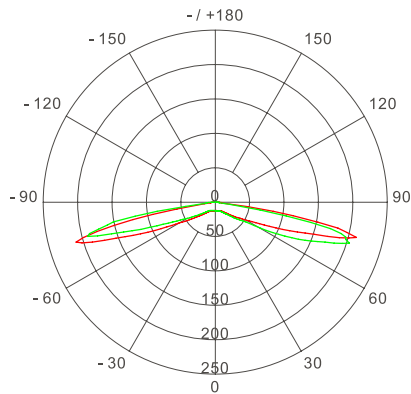


Unit: cd

- C 0/180,173.6°

- C90/270,169.6°

Average Beam Angle (50%): 171.6°

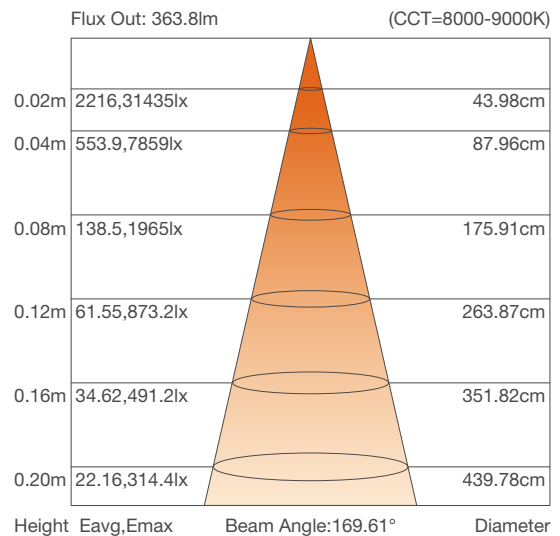


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M8-B	12V DC	8000-9000K	388	97	4	4	12pcs

M8-C SIGN CABINET/Back-lit


- Single module cuttable
- Good waterproof performance

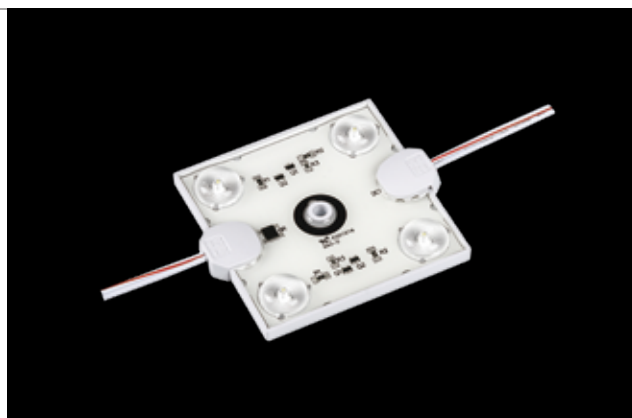


 E318168	 LM-80	 IP66	 LED2835	CRI 80	 170°	 DC12V	 3Years
---	---	--	---	------------------	--	---	--

PROFILE DRAWINGS

Unit:mm/inch

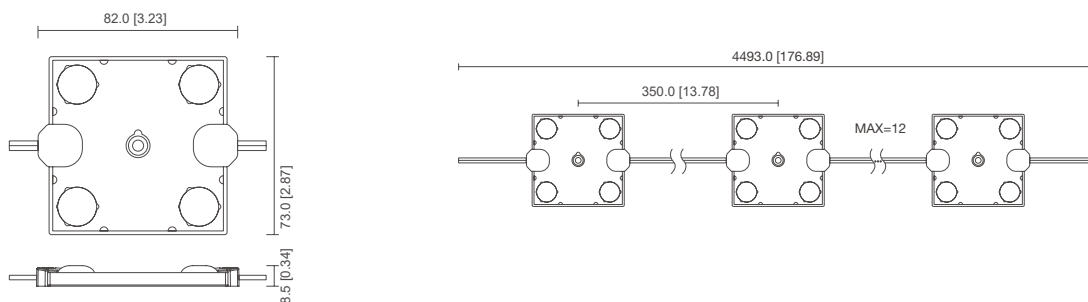

PHOTOMETRIC

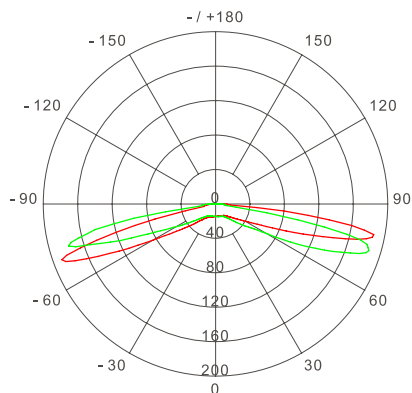


Unit: cd

- C 0/180,177.4°

- C90/270,177.5°

Average Beam Angle (50%): 177.4°

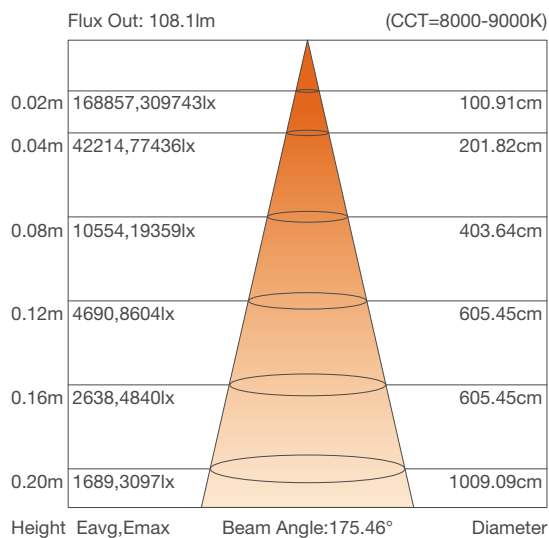

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M8-C	12V DC	8000-9000K	380	95	4	4	12pcs

BV-AL-3030 SIGN CABINET/Back-lit


- Adopt high quality Nichia SMD3030 LED
- 160° beam angle
- Waterproof, IP65 rating
- Aluminum PCB for better heat dissipation




E318168	NICHIA	LM-80	IP65	LED3030	CRI 80	160°	DC24V	5Years

PROFILE DRAWINGS

Unit:mm/inch

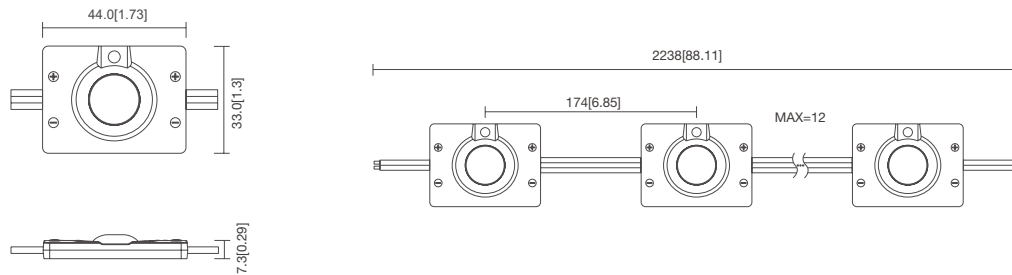

PHOTOMETRIC

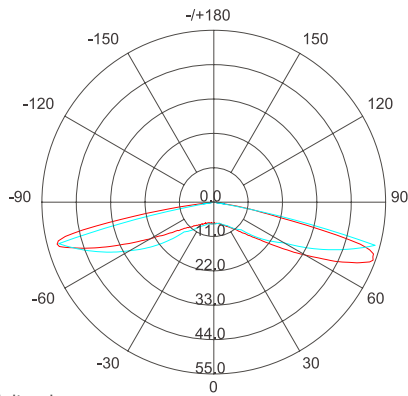


Unit: cd

- C 0/180,163.7°

- C90/270,159.3°

Average Beam Angle (50%):162.4°

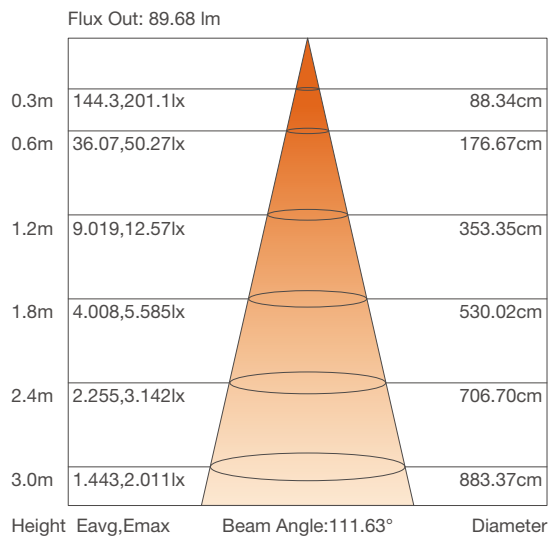

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BV-AL-3030	24V DC	6500-7000K	130	86	1.5	1	12pcs

MZ18-W SIGN CABINET/Side-lit


- Edge-lit optical lens
- Adopt aluminum PCB injection molding process
- Single module cuttable




CE	RoHS	E318168	LM-80	IP65	LED2835	CRI 80	20°30°	DC12V	3Years
----	------	---------	-------	------	---------	--------	--------	-------	--------

PROFILE DRAWINGS

Unit:mm/inch

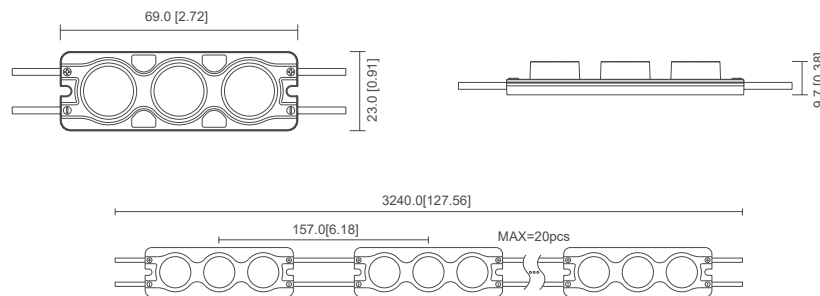

PHOTOMETRIC

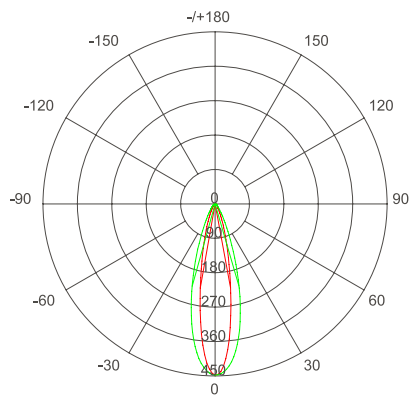


Unit: cd

- C 0/180,20.5°

- C90/270,31.8°

Average Beam Angle (50%):26.2°

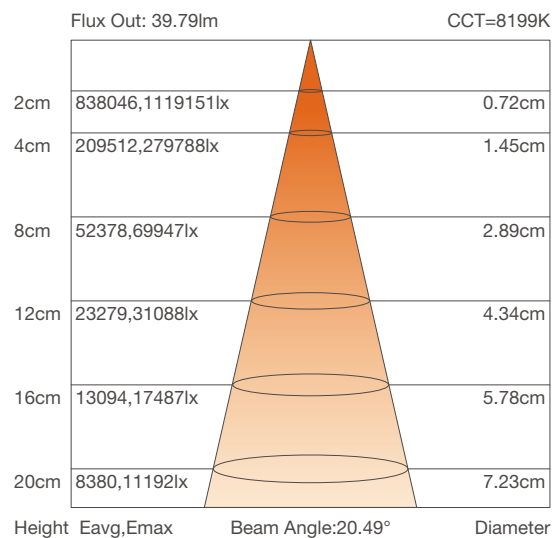

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
MZ18-W	12V DC	7800-9000K	135	90	1.5	3	20pcs

Z18-C SIGN CABINET/Side-lit


- High efficacy 3030 LED
- Injection molding with IP65 water-proof
- Aluminum PCB with excellent heat dissipation
- Special lens with 10*28 deg beam angle
- Each module can be cut




CE	UL E318168	LM-80	IP65	LED3030	CRI 70	10°28°	DC12V	3Years
----	------------	-------	------	---------	--------	--------	-------	--------

PROFILE DRAWINGS

Unit:mm/inch

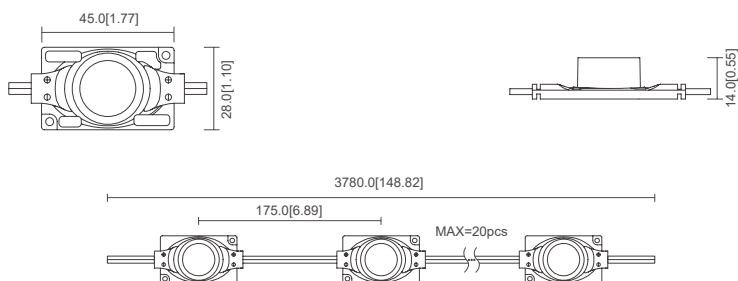

PHOTOMETRIC

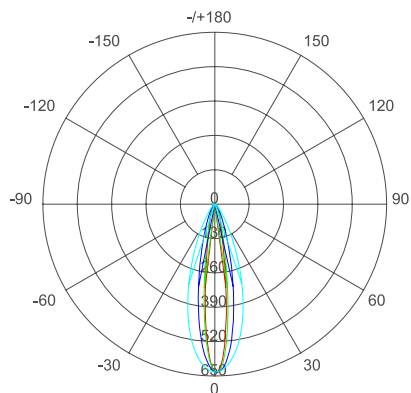

Unit: cd

- C 0/180,14.1°
- C90/270,36.9°

Average Beam Angle (50%):22.7°

Flux Out: 30.73 lm

Height	Eavg,Emax	Beam Angle:14.18°	Diameter
1.0m	495.2,636.2lx		24.88cm
2.0m	123.8,159.0lx		49.76cm
4.0m	30.95,39.76lx		99.51cm
6.0m	13.76,17.67lx		149.27cm
8.0m	7.737,9.940lx		199.03cm
10m	4.952,6.362lx		248.78cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z18-C	12V DC	6500K	184	92	2	1	20pcs

Z18 2.0 SIGN CABINET/Side-lit


- Adopt Epistar/Sanan LEDs
- DC 12V constant voltage input
- Long run length, 20pcs/string with one end power feed
- Adopt UV resistant and flame retardant materials
- Injection molding process, IP65




--	--	--	--	--	--	--	--	--

PROFILE DRAWINGS

Unit:mm/inch

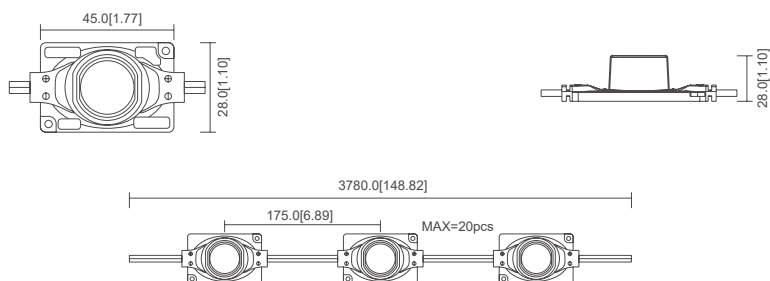

PHOTOMETRIC

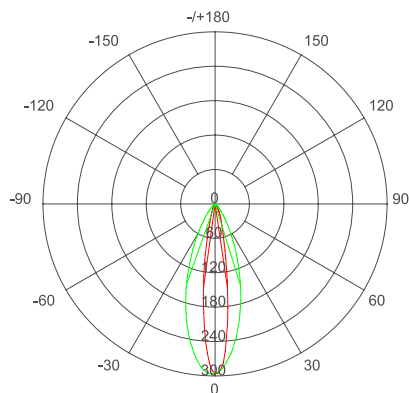

Unit: cd

- C 0/180,16.4°
- C90/270,37.0°

Average Beam Angle (50%):26.7°

Flux Out: 17.89lm

Height	Eavg,Emax	Beam Angle:16.40°	Diameter
1.0m	227.0,296.8lx		28.82cm
2.0m	56.75,74.20lx		57.65cm
4.0m	14.19,18.55lx		115.30cm
6.0m	6.306,8.244lx		172.94cm
8.0m	3.547,4.637lx		230.59cm
10cm	2.270,2.968lx		288.24cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z18 2.0	12V DC	6020-6530K	93-98	93	1	1	20pcs

Z18 4.0 SIGN CABINET/Side-lit


- Edge-lit module with high cost-performance
- Half-encapsulated injection molding design
- Aluminum PCB with excellent heat dissipation
- Support PWM, 0-10V, DALI, DMX dimming
- Single module cuttable and support customization




--	--	--	--	--	--	--	--	--	--

PROFILE DRAWINGS

Unit:mm/inch

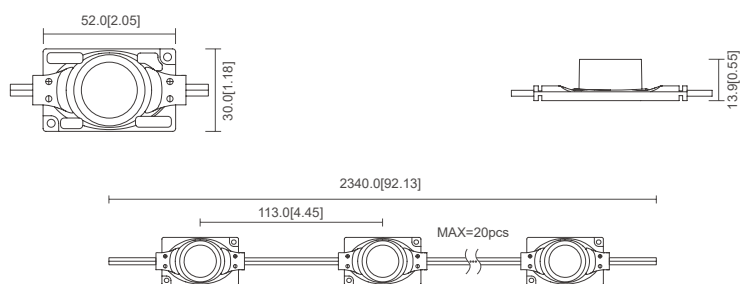

PHOTOMETRIC

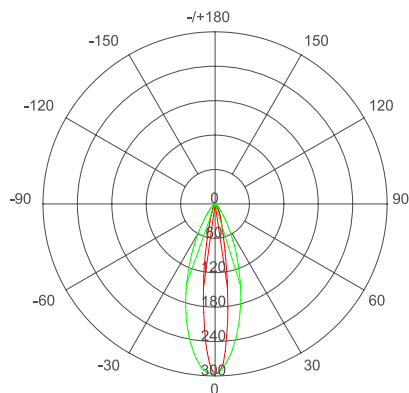

Unit: cd

- C 0/180,18.9°

- C90/270,27.8°

Average Beam Angle (50%):23.3°

Flux Out: 44.29lm

Height	Eavg,Emax	Beam Angle:18.88°	Diameter
0.2m	11335,15266lx		6.65cm
0.4m	2834,3817lx		13.30cm
0.8m	708.4,954.2lx		26.61cm
1.2m	314.9,424.1lx		39.91cm
1.6m	177.1,238.5lx		53.21cm
2.0m	113.3,152.7lx		66.52cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z18 4.0	12V DC	6000-7000K	187	104	1.8	1	20pcs

Z19 4.0 SIGN CABINET/Side-lit


- High light efficiency
- Every 3 modules can be cut;
- Match with aluminum profile can help heat dissipation
- Uniform effect within 3M of the reaching distance
- Support customization




CE	RoHS	UL E318168	LM-80	IP65	LED2020	CRI 70/80	8°20°	DC12V	5Years
----	------	------------	-------	------	---------	-----------	-------	-------	--------

PROFILE DRAWINGS

Unit:mm/inch

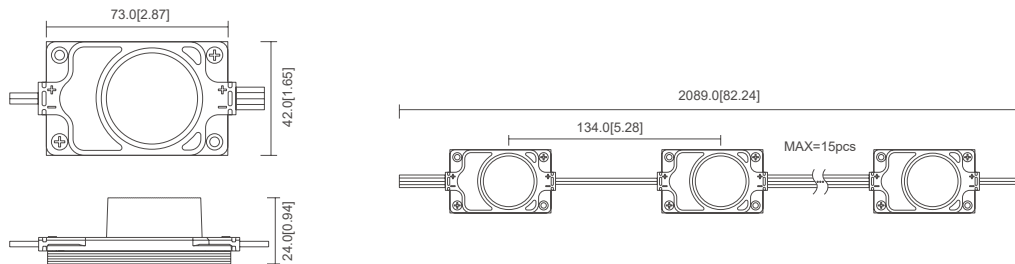


PHOTOMETRIC

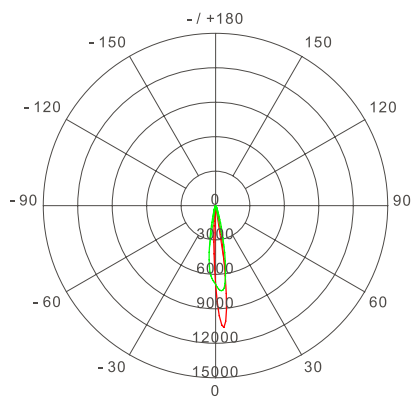

Unit: cd

— C 0/180,9.7°
— C90/270,20.2°

Average Beam Angle (50%):14.9°

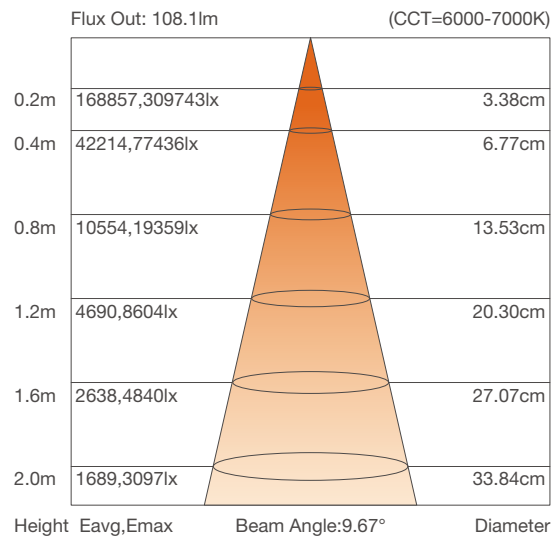


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z19 4.0	12V DC	6000-7000K	380	95	4	1	15pcs

Z20/Z20 PRO SIGN CABINET/Side-lit


- Specially designed side-emitting lens, uniform lighting;
- Adopting aluminum substrate with good heat dissipation effect;
- Injection molding technology, good waterproof performance.
- Single module cuttable, support customization;

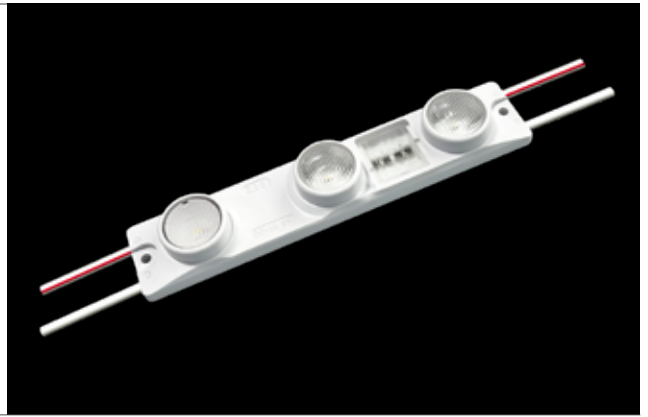


CE	RoHS	UL E318168	IP66	LED3030	CRI 80	12°30'	DC12V	3Years
----	------	------------	------	---------	--------	--------	-------	--------

PROFILE DRAWINGS

Unit:mm/inch

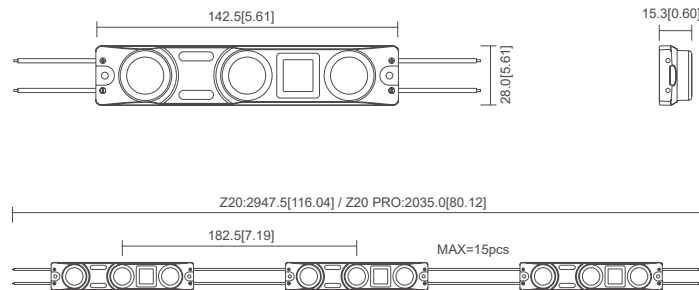

PHOTOMETRIC

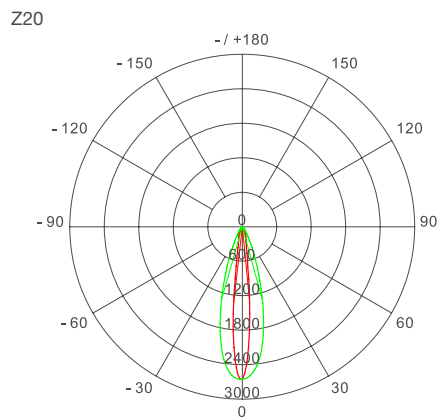

Unit: cd
 - C 0/180,12.2°
 - C90/270,31.4°
 Average Beam Angle (50%):21.8°

Flux Out: 98.81lm (CCT=6000-7000K)			
Height	Eavg,Emax	Beam Angle:12.24°	Diameter
0.2m	5215847,6825261lx		3.38cm
0.4m	1303962,1706315lx		6.77cm
0.8m	325990,426579lx		13.53cm
1.2m	144885,189591lx		20.30cm
1.6m	81498,106645lx		27.07cm
2.0m	52158,68253lx		33.84cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
Z20	12V DC	6000-7000K	502	93	5.4	3	15pcs
Z20 Pro	12V DC	6000-7000K	666	111	6.0	3	10pcs


- Self designed lens with 170° beam angle for uniform lighting
- High efficacy up to 160lm/W
- Adopts full enclosure injection molding
- Single module cuttable




--	--	--	--	--	--	--	--	--	--

PROFILE DRAWINGS

Unit:mm/inch

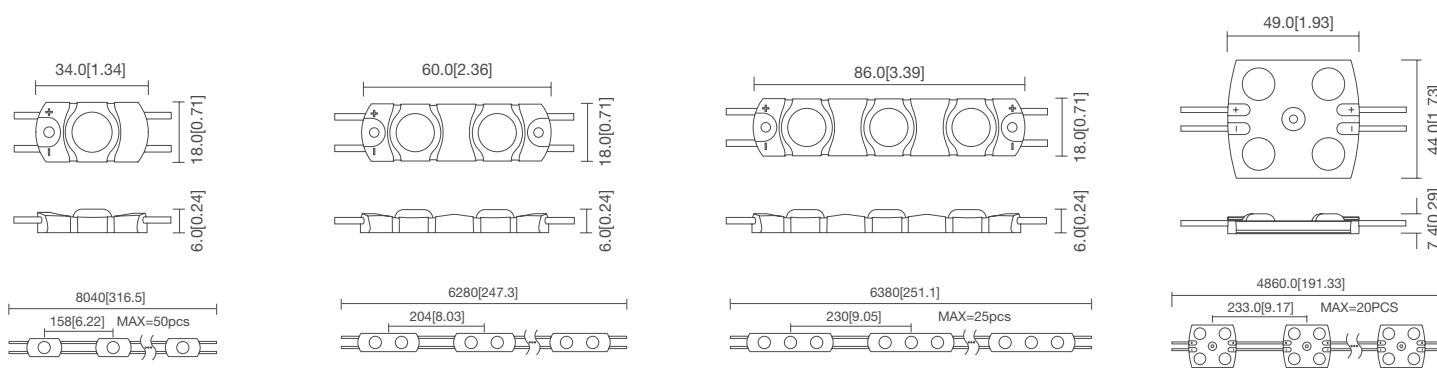


PHOTOMETRIC

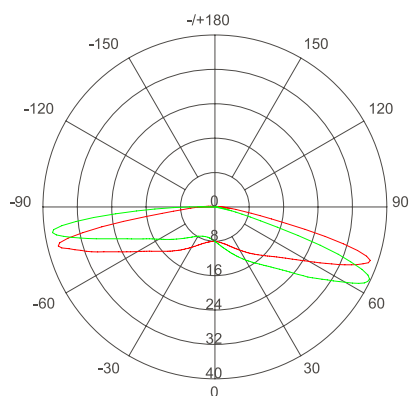

Unit: cd

- C 0/180,173.3°
- C90/270,167.6°

Average Beam Angle (50%):170.5°

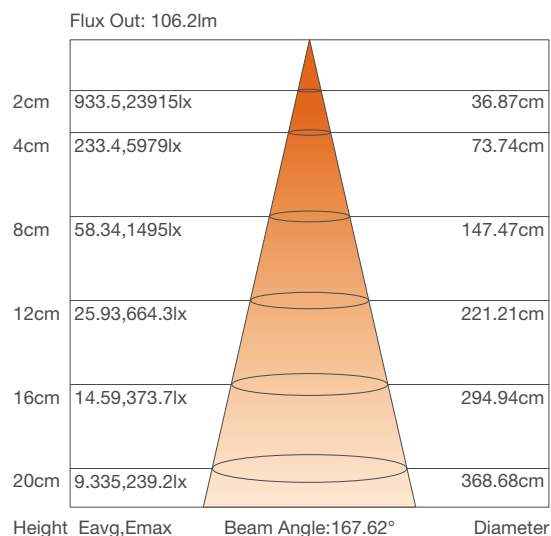

BASIC PARAMETERS



Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-H-1	12V DC	6000-7000K	58	160	0.36	1	50pcs
STL-H-2	12V DC	6000-7000K	115	160	0.72	2	30pcs
STL-H-3	12V DC	6000-7000K	173	160	1.08	3	25pcs
STL-4(square)	12V DC	6000-7000K	223	155	1.44	4	20pcs

- Self designed lens with 170° beam angle for uniform lighting
- High efficacy up to 160lm/W
- Adopts full enclosure injection molding
- Single module cuttable




PROFILE DRAWINGS

Unit:mm/inch

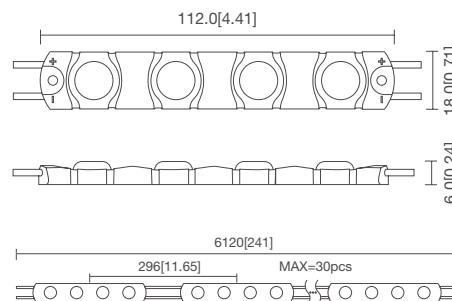


PHOTOMETRIC

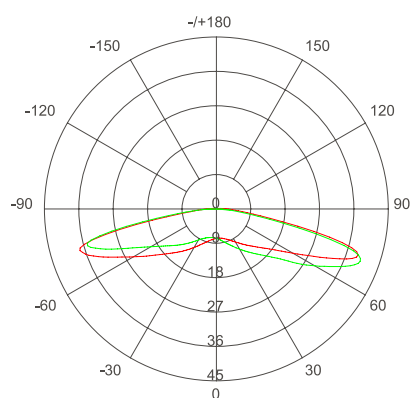

Unit: cd

— C 0/180,174.0°
— C90/270,171.6°

Average Beam Angle (50%):173.2°

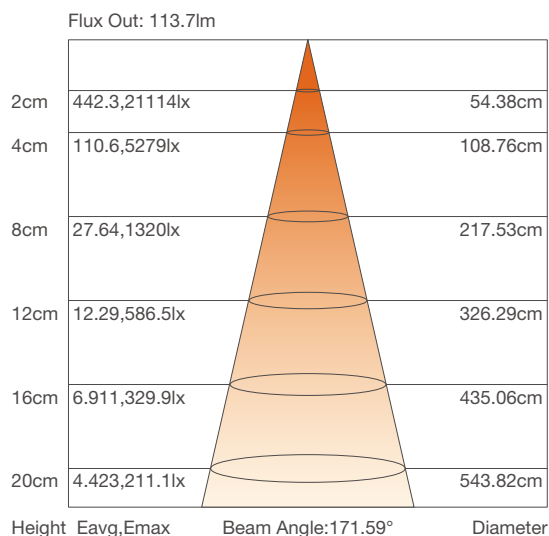

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
STL-H-2	24V DC	6000-7000K	115	160	0.72	2	50pcs
STL-H-4	24V DC	6000-7000K	230	160	1.44	4	30pcs

QG05-H HIGH EFFICIENCY


- High luminous efficiency
- Constant current design, long run series
- Adopt integrated lens
- Full injection molding, suitable for outdoor use
- Single module can be cut, customization available




CE	RoHS	UL E318168	LM-80	IP68	LED2835	CRI 70	180°	DC12V	5Years
----	------	------------	-------	------	---------	--------	------	-------	--------

PROFILE DRAWINGS

Unit:mm/inch

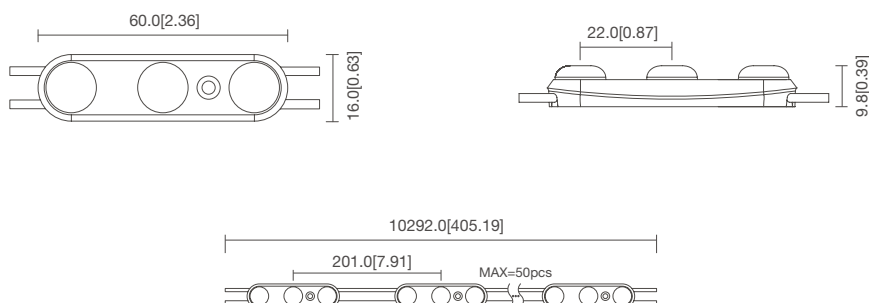

PHOTOMETRIC

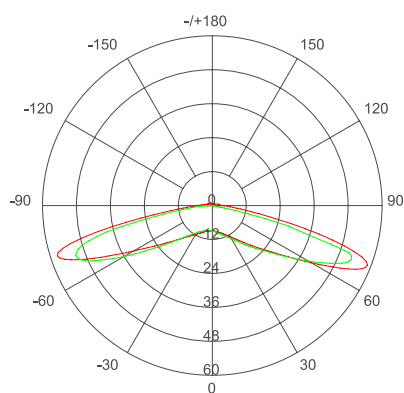


Unit: cd

- C 0/180,180.8°
- C90/270,165.4°

Average Beam Angle (50%):173.1°

Flux Out: 106.2lm

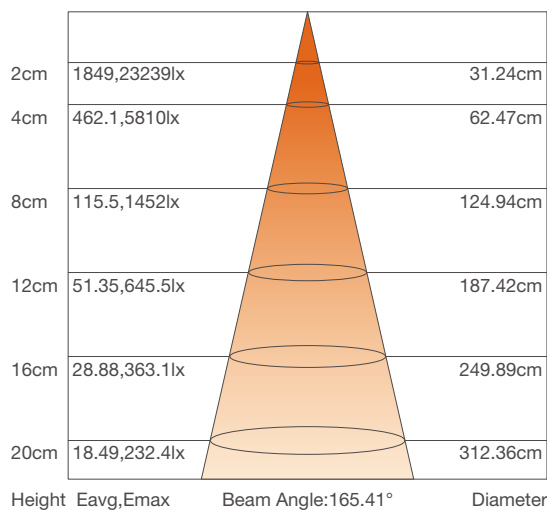

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QG05-H	12V DC	6000-7000K	175	175	1.0	3	50pcs

QG10 HIGH EFFICIENCY


- High luminous efficiency
- Adopt integrated lens
- Full injection molding, suitable for outdoor use
- Single module can be cut




CE	RoHS	E318168	LM-80	IP68	LED2835	CRI 70	180°	DC12V	10Years
----	------	---------	-------	------	---------	--------	------	-------	---------

PROFILE DRAWINGS

Unit:mm/inch

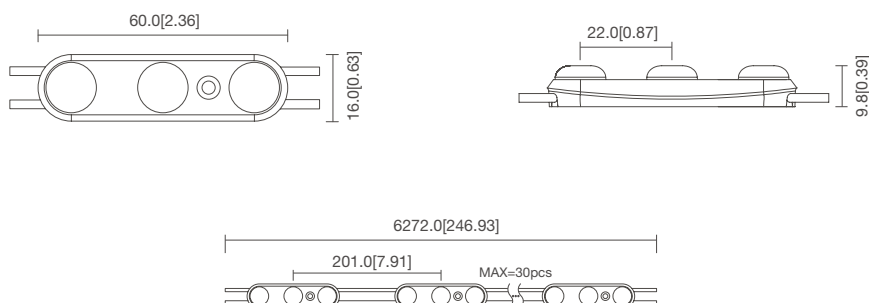

PHOTOMETRIC

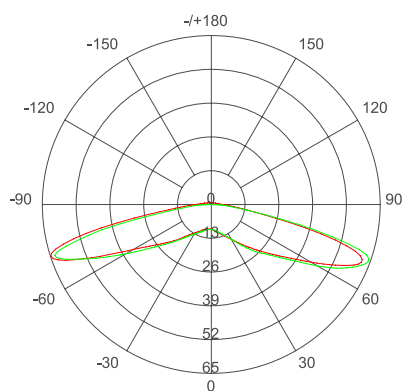


Unit: cd

- C 0/180,182.0°
- C90/270,173.4°

Average Beam Angle (50%):177.7°

Flux Out: 181.5 lm

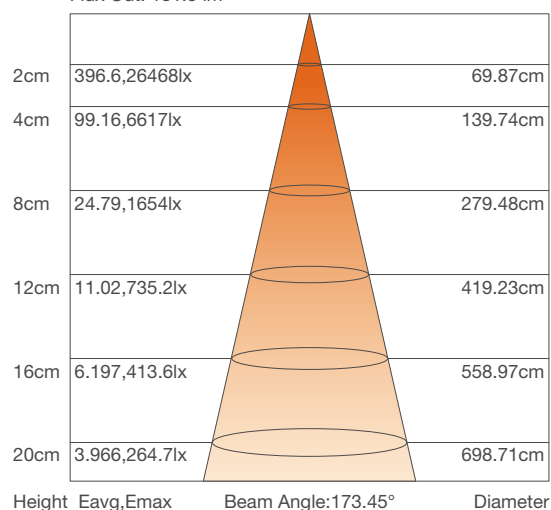

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QG10	12V DC	5900-6100K	192	160	1.2	3	30pcs

M1/M1-H HIGH EFFICIENCY


- 180LM/W high efficiency;
- Adopt diffuse optical lens;
- Full encapsulated injection molding, IP67;
- Single module cuttable, easy to installation;
- Support PWM, DALI dimming;





IP67	LED2835	CRI 70	175°	DC12V	5Years
------	---------	-----------	------	-------	--------

PROFILE DRAWINGS

Unit:mm/inch

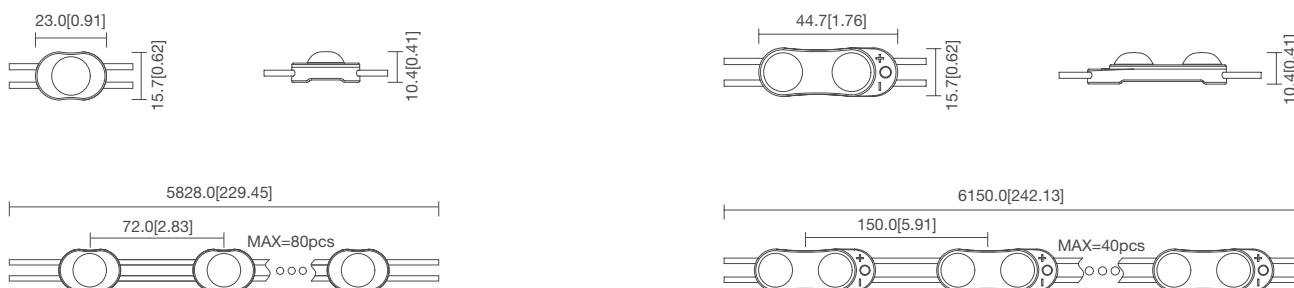

PHOTOMETRIC

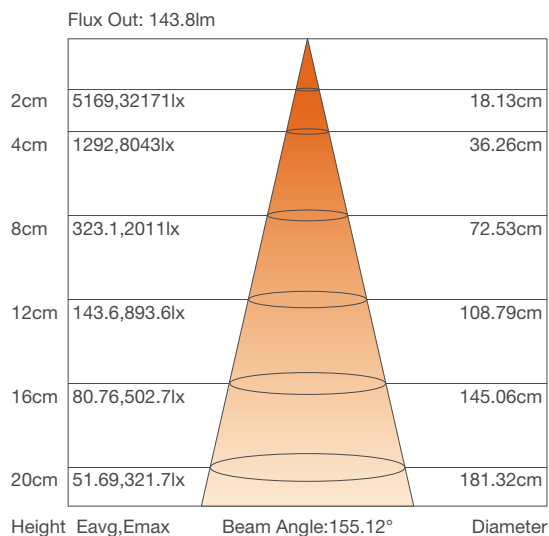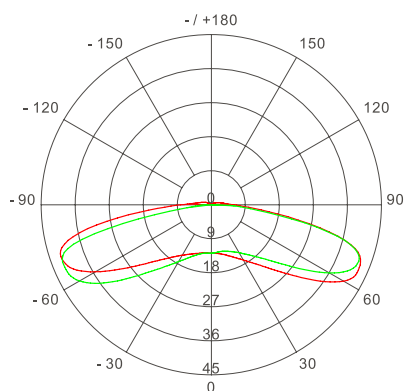

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M1-1	12V DC	6200-6800K	59	165	0.36	1	80pcs
M1-2	12V DC	6200-6800K	119	165	0.72	2	40pcs
M1-H-1	12V DC	6200-6800K	61	170	0.36	1	80pcs
M1-H-2	12V DC	6200-6800K	126	175	0.72	2	40pcs

M1/M1-H HIGH EFFICIENCY

- 180LM/W high efficiency;
- Adopt diffuse optical lens;
- Full encapsulated injection molding, IP67;
- Single module cuttable, easy to installation;
- Support PWM, DALI dimming;



IP67



LED2835

CRI
70



175°





DC12V




5Years

PROFILE DRAWINGS

Unit:mm/inch

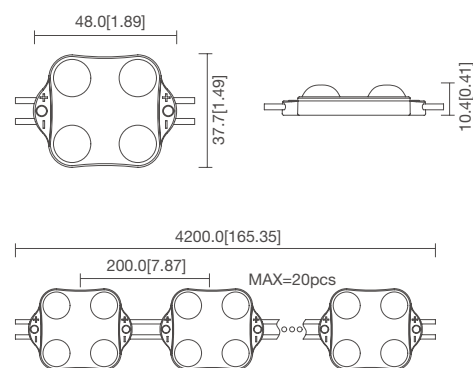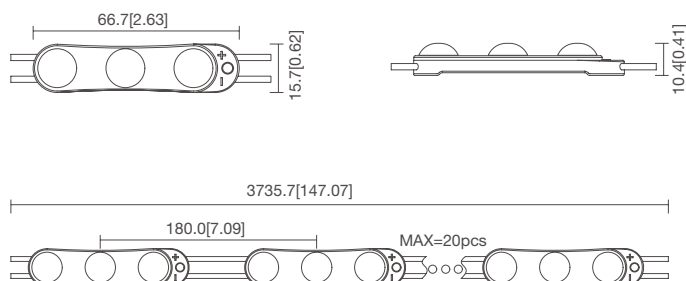

PHOTOMETRIC

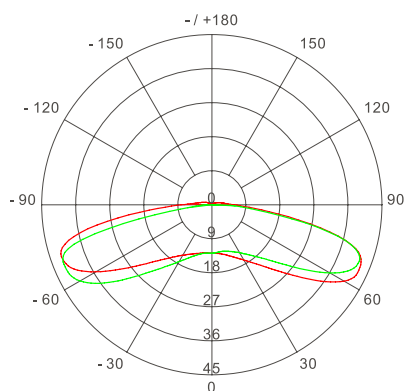


Unit: cd

- C 0/180,181.3°

- C90/270,169.8°

Average Beam Angle (50%):175.5°

Flux Out: 143.8lm

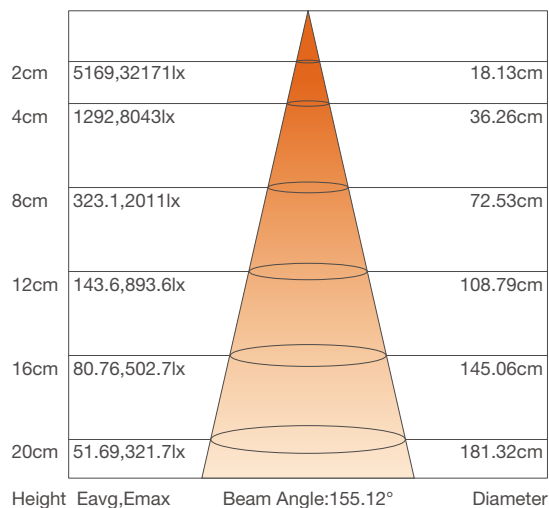

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M1-3	12V DC	6200-6800K	178	165	1.08	3	20pcs
M1-4	12V DC	6200-6800K	238	165	1.44	4	20pcs
M1-H-3	12V DC	6200-6800K	189	175	1.08	3	20pcs
M1-H-4	12V DC	6200-6800K	252	175	1.44	4	20pcs



M1-L HIGH EFFICIENCY

- Long run design;
- Adopt diffuse optical lens;
- Full encapsulated injection molding, IP67;
- Single module cuttable, easy to installation;
- Support PWM, DALI dimming;




IP67	LED2835	CRI 70	175°	DC12V	5Years
------	---------	-----------	------	-------	--------

Unit:mm/inch

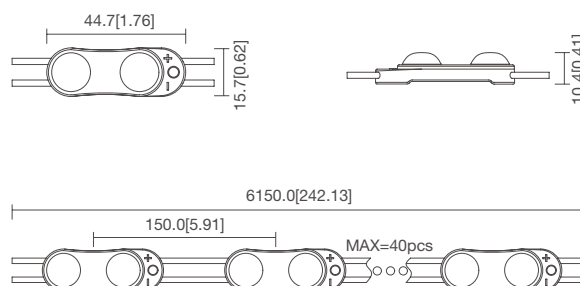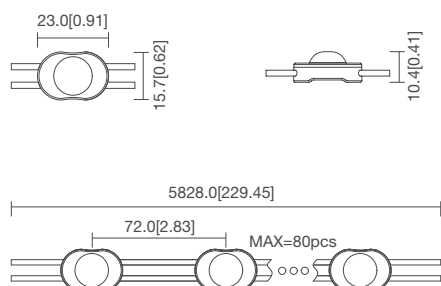

PHOTOMETRIC

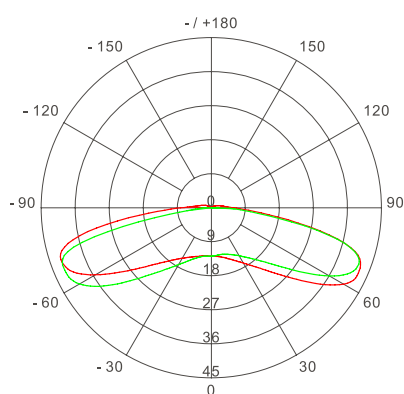


Unit: cd

- C 0/180,181.3°

- C90/270,169.8°

Average Beam Angle (50%):175.5°

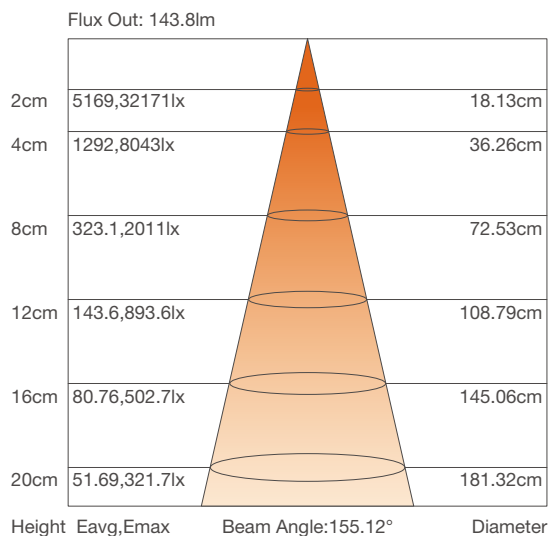

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M1-L-1	12V DC	6200-6800K	47	130	0.36	1	120pcs
M1-L-2	12V DC	6200-6800K	94	130	0.72	2	60pcs

M1-L HIGH EFFICIENCY


- Long run design;
- Adopt diffuse optical lens;
- Full encapsulated injection molding, IP67;
- Single module cuttable, easy to installation;
- Support PWM, DALI dimming;




 IP67	 LED2835	CRI 70	 175°	 DC12V	 5Years
--	---	-----------	--	---	--

PROFILE DRAWINGS

Unit:mm/inch

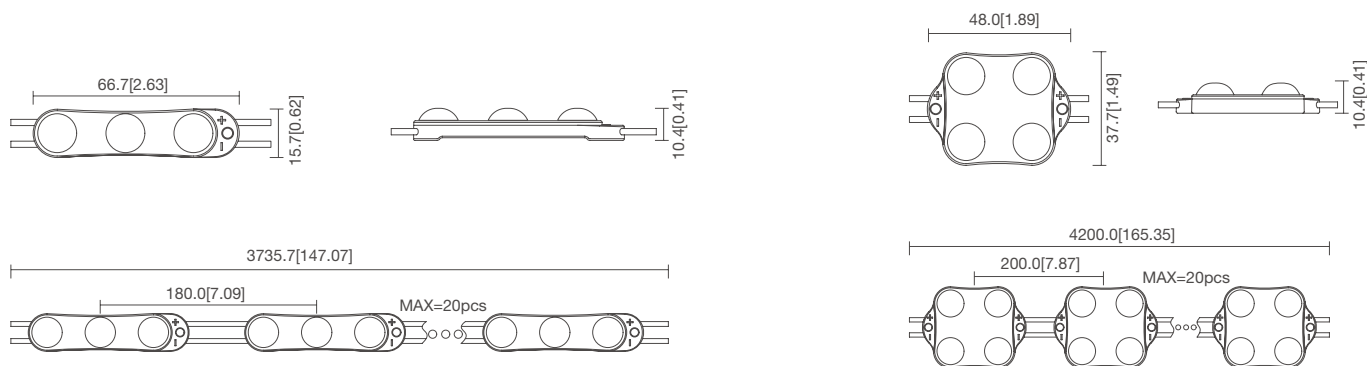

PHOTOMETRIC

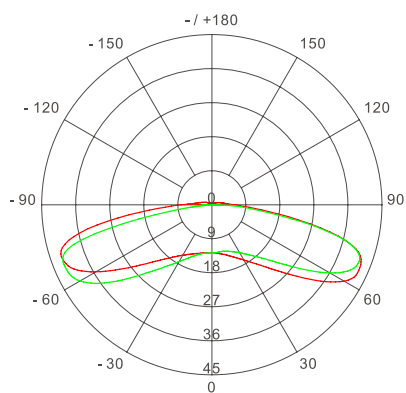


Unit: cd

- C 0/180,181.3°

- C90/270,169.8°

Average Beam Angle (50%):175.5°

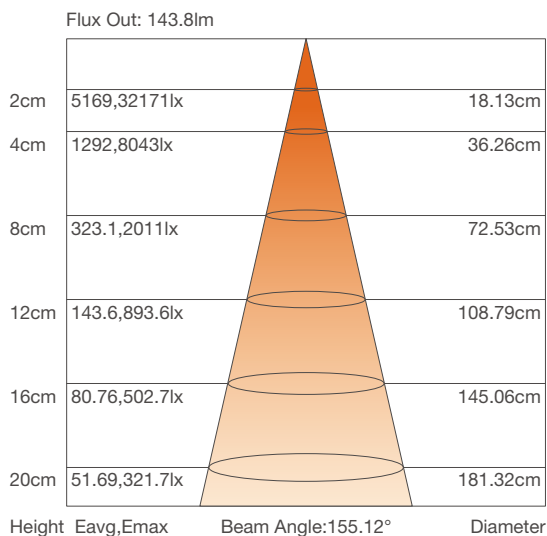

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M1-L-3	12V DC	6200-6800K	140	130	1.08	3	35pcs
M1-L-4	12V DC	6200-6800K	187	130	1.44	4	40pcs


M1 PRO/PRO-H HIGH EFFICIENCY

- 180LM/W high efficiency;
- Adopt diffuse optical lens;
- Full encapsulated injection molding, IP67;
- Single module cuttable, easy to installation;
- Support PWM, DALI dimming;




PROFILE DRAWINGS

Unit:mm/inch

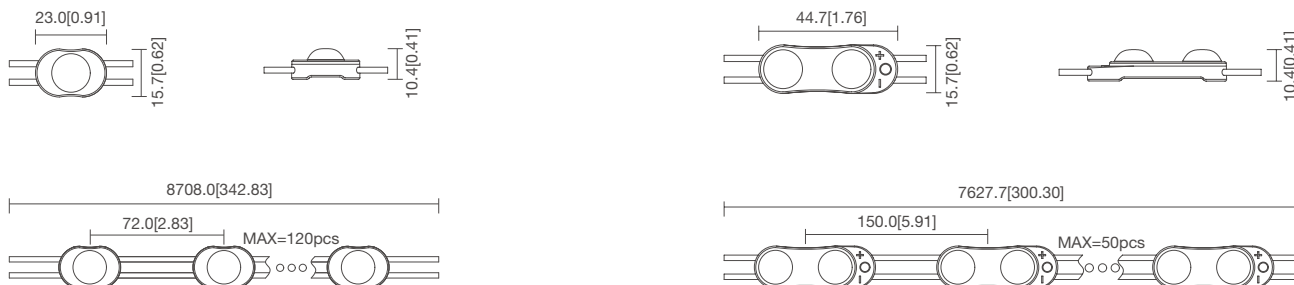

PHOTOMETRIC

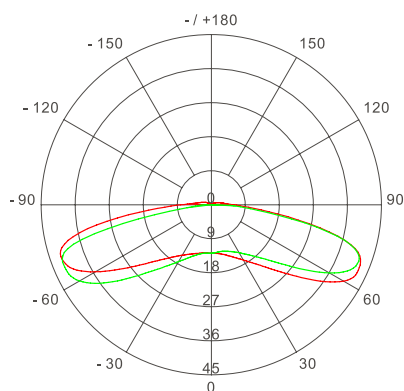


Unit: cd

- C 0/180,181.3°

- C90/270,169.8°

Average Beam Angle (50%):175.5°

Flux Out: 143.8lm

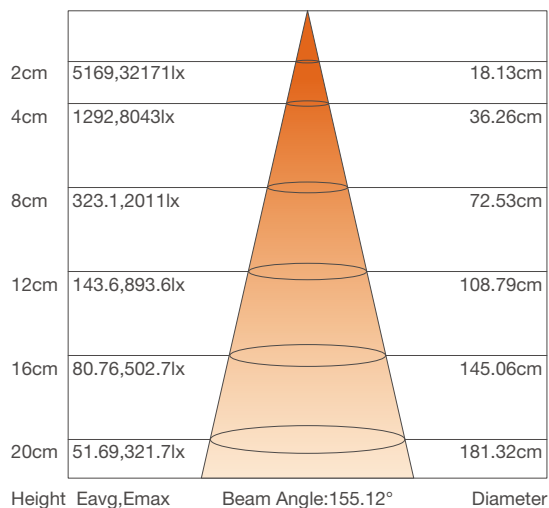

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M1 PRO-1	12V DC	6200-6800K	59	165	0.36	1	120pcs
M1 PRO-2	12V DC	6200-6800K	119	165	0.72	2	50pcs
M1 PRO-H-1	12V DC	6200-6800K	61	170	0.36	1	120pcs
M1 PRO-H-2	12V DC	6200-6800K	126	175	0.72	2	20pcs


M1 PRO/PRO-H HIGH EFFICIENCY

- 180LM/W high efficiency;
- Adopt diffuse optical lens;
- Full encapsulated injection molding, IP67;
- Single module cuttable, easy to installation;
- Support PWM, DALI dimming;




PROFILE DRAWINGS

Unit:mm/inch

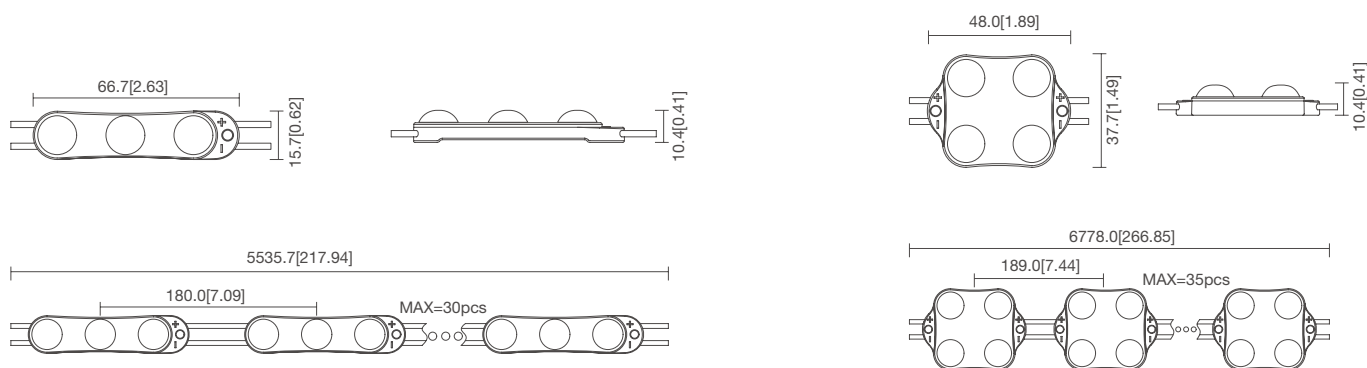

PHOTOMETRIC

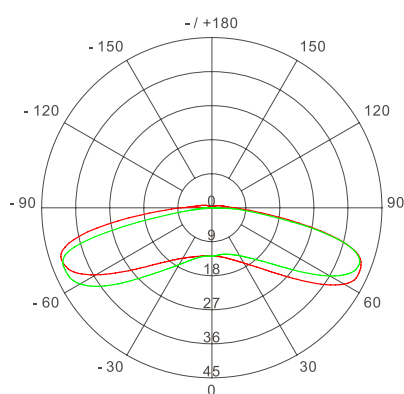


Unit: cd

- C 0/180,181.3°

- C90/270,169.8°

Average Beam Angle (50%):175.5°

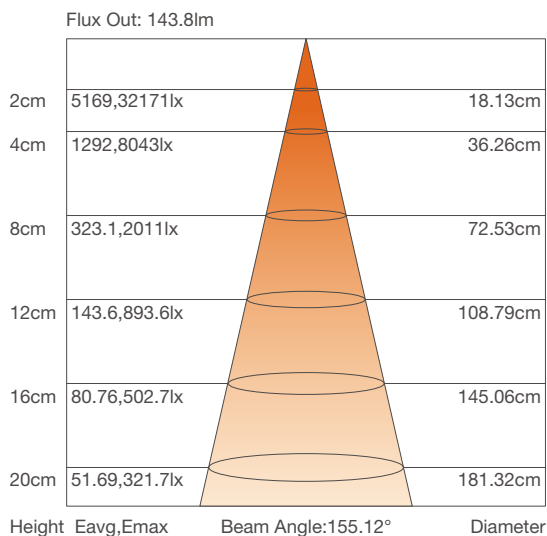

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M1 PRO-3	12V DC	6200-6800K	178	165	1.08	3	30pcs
M1 PRO-4	12V DC	6200-6800K	238	165	1.44	4	50pcs
M1 PRO-1-H-3	12V DC	6200-6800K	189	175	1.08	3	30pcs
M1 PRO-1-H-4	12V DC	6200-6800K	252	175	1.44	4	50pcs


PT10-12V HIGH EFFICIENCY

- Adopt integrated optical lens, super cost-effective;
- Special ultrasonic technology, IP66;
- High luminous efficiency;
- Single module cuttable, support customization;
- Support PWM, 0-10V, DALI and DMX dimming




PROFILE DRAWINGS

Unit:mm/inch

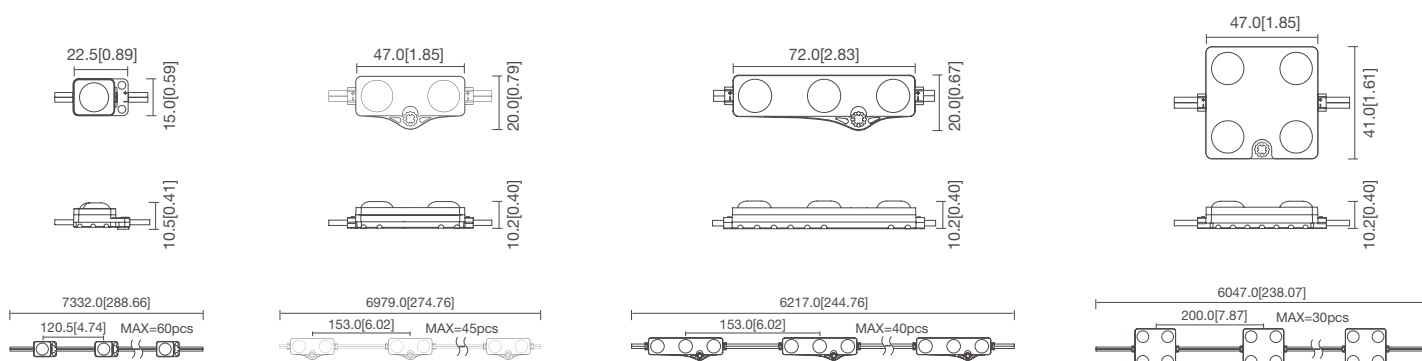

PHOTOMETRIC

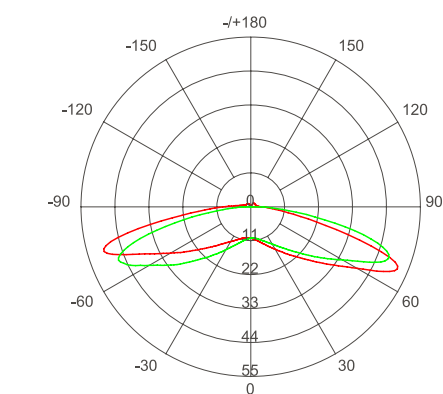


Unit: cd

- C 0/180,182.0°
- C90/270,175.2°

Average Beam Angle (50%):178.6°

Flux Out: 157.5lm

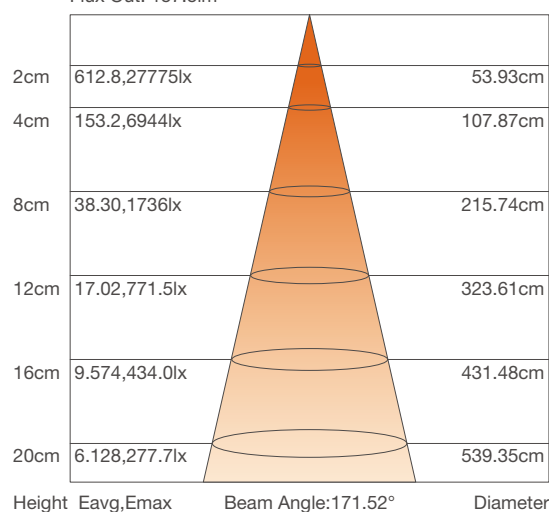

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PT10-1	12V DC	4000K	54	150	0.36	1	60pcs
PT10-2	12V DC	4000K	104	145	0.72	2	45pcs
PT10-3	12V DC	4000K	160	145	1.10	3	40pcs
PT10-4	12V DC	4000K	209	145	1.44	4	30pcs


PT10-24V HIGH EFFICIENCY

- Adopt integrated optical lens, super cost-effective;
- Special ultrasonic technology, IP66;
- High luminous efficiency
- Single module cuttable, support customization;




PROFILE DRAWINGS

Unit:mm/inch

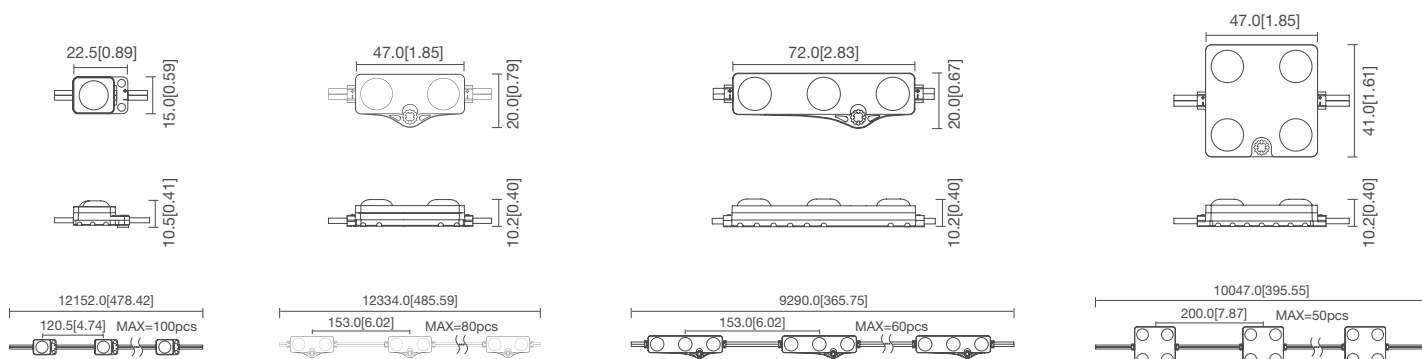


PHOTOMETRIC

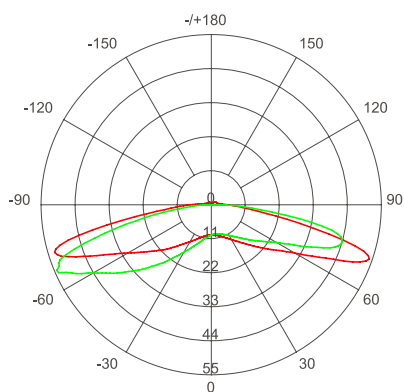

Unit: cd

- C 0/180,183.3°
- C90/270,175.3°

Average Beam Angle (50%):179.3°

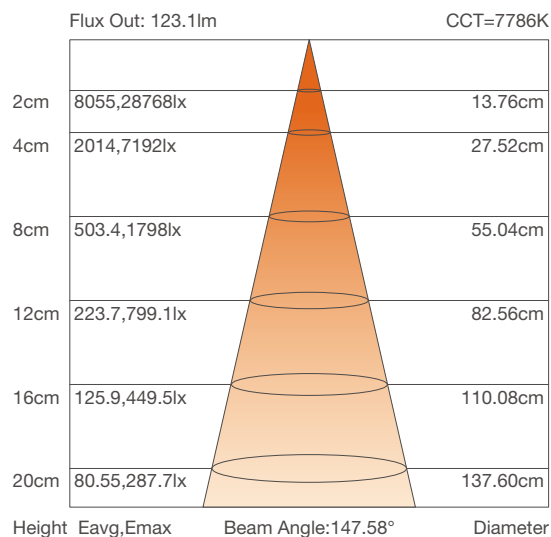

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PT10-1	24V DC	4000K	54	150	0.36	1	100pcs
PT10-2	24V DC	4000K	104	145	0.72	2	80pcs
PT10-3	24V DC	4000K	162	150	1.08	3	60pcs
PT10-4	24V DC	4000K	216	150	1.44	4	50pcs

M2 HIGH EFFICIENCY


- 160LM/W high efficiency;
- Adopt 175° diffuse optical lens;
- Full encapsulated injection molding, IP67;
- Single module cuttable, easy to installation;
- Support PWM, DALI dimming;




IP67	LED2835	Ra 70	175°	DC24V	5Years
------	---------	-----------------	------	-------	--------

PROFILE DRAWINGS


Unit:mm/inch

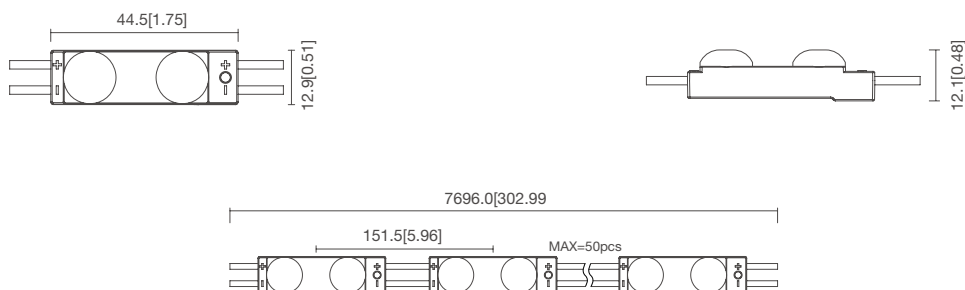

PHOTOMETRIC

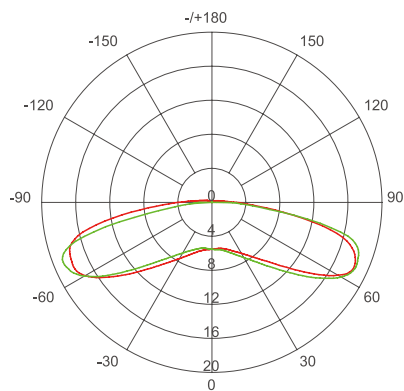

Unit: cd
 - C 0/180,183.5°
 - C90/270,174.0°
 Average Beam Angle (50%):178.8°

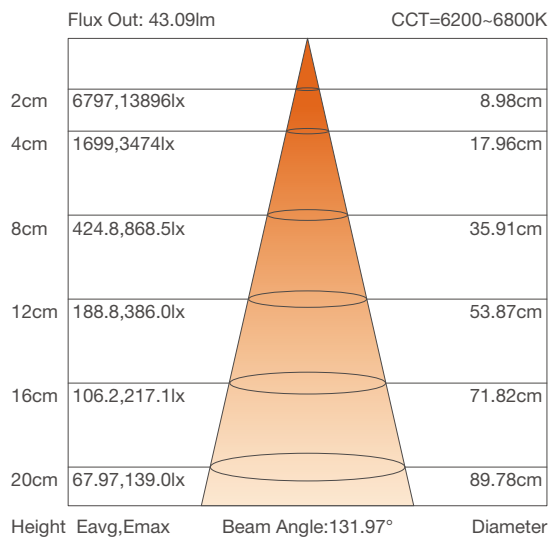

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
M2	24V DC	6200-6800K	80	160	0.5	2	50pcs


ST2-T^{WN}

- High CRI and dual color temperature
- Aluminum PCB injection molding for better outline
- Brightness and color temperature adjustable via controller
- Single module cuttable, support customization




PROFILE DRAWINGS

Unit:mm/inch

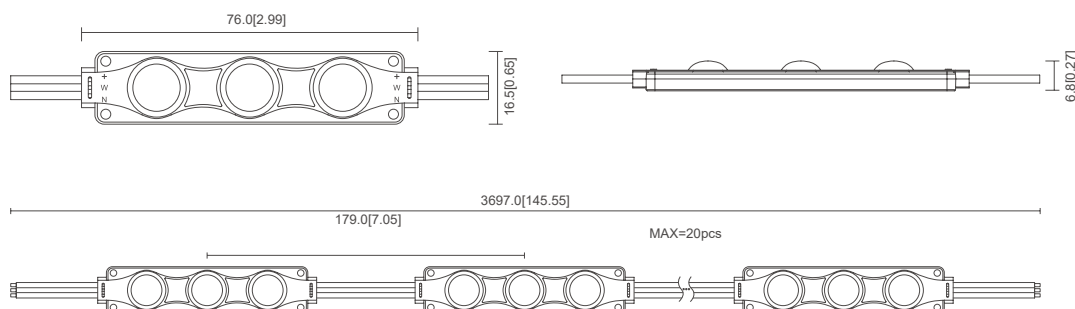

PHOTOMETRIC

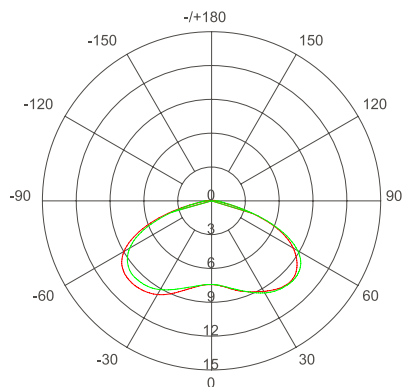


Unit: cd

— C 0/180,158.2°

— C90/270,158.0°

Average Beam Angle (50%):158.1°

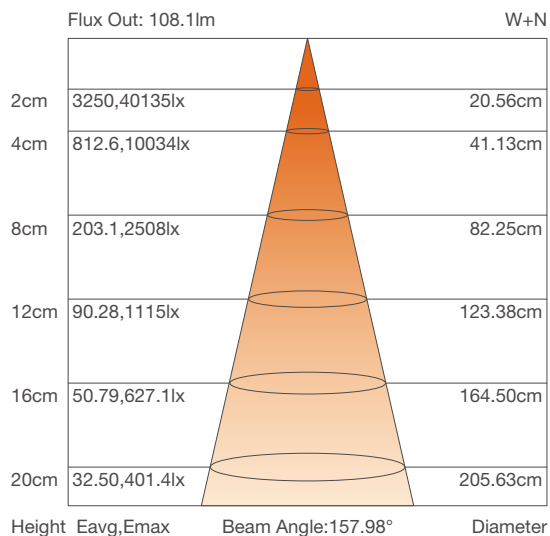

BASIC PARAMETERS

Model No.	Voltage	Light Color	CRI	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
ST2-T	12V DC	W	85	2800-3100K	47	87	0.54	3	20pcs
		N	85	6000-6500K	54	99	0.54		
		W+N	90	4100-4400K	101	93	1.08		

LED MODULE

RGB/RGBW

SERIES




PS5-B RGB/RGBW

- Adopt high quality 5050RGB SMD
- Waterproof IP66 for perfect outdoor use
- Single module cuttable for easier installation




PROFILE DRAWINGS


Unit:mm/inch

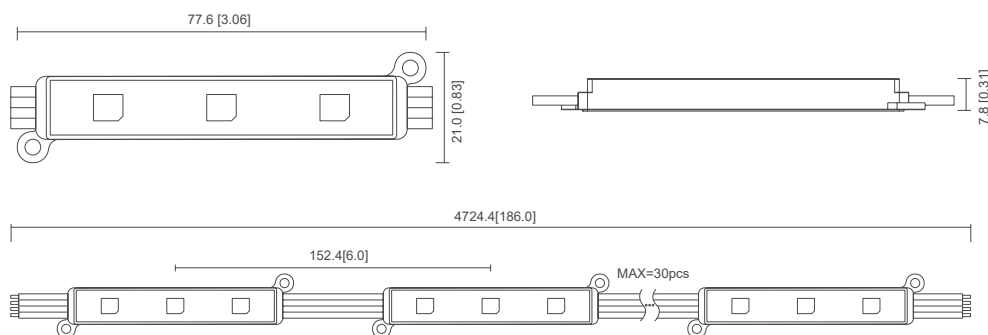

PHOTOMETRIC

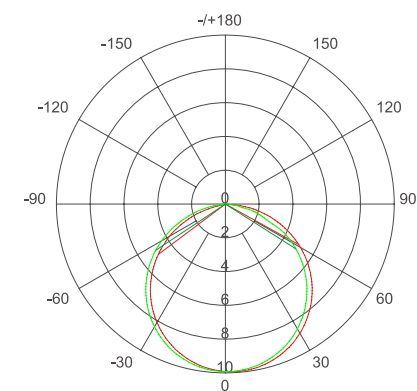

Unit: cd
 - C 0/180,114.1°
 - C90/270,113.8°
 Average Beam Angle (50%): 114.0°

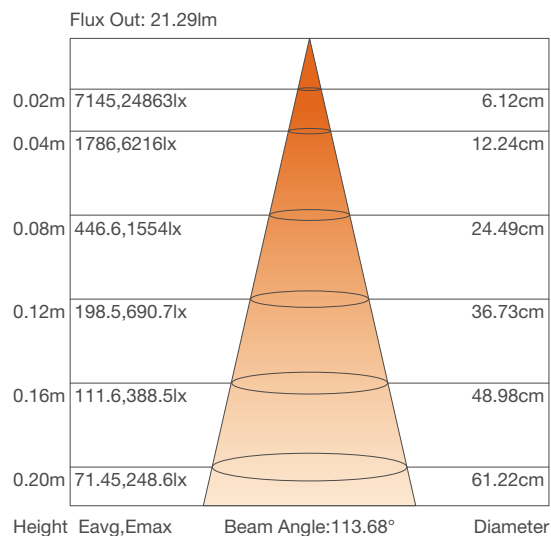

BASIC PARAMETERS


Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PS5-B	12V DC	R	620-625nm	7	27	0.24	3	20pcs
		G	525-530nm	13	52	0.24		
		B	465-470nm	3	13	0.24		
		R+G+B	100000K+	22	30	0.72		

- Adopt integrated lens
- Full injection molding, super environmental adaptability
- Can create reach lighting effects via a controller
- Single module cuttable





PROFILE DRAWINGS

Unit:mm/inch

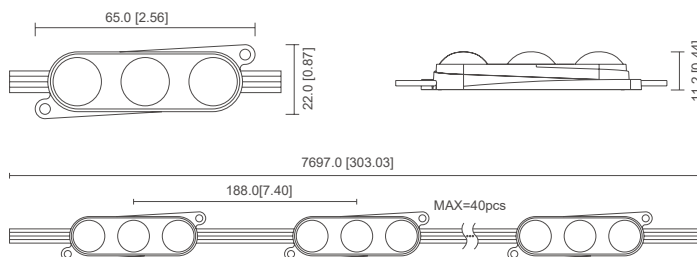

PHOTOMETRIC

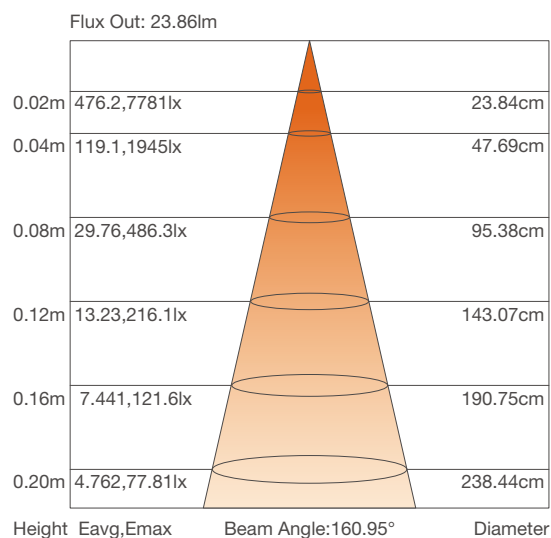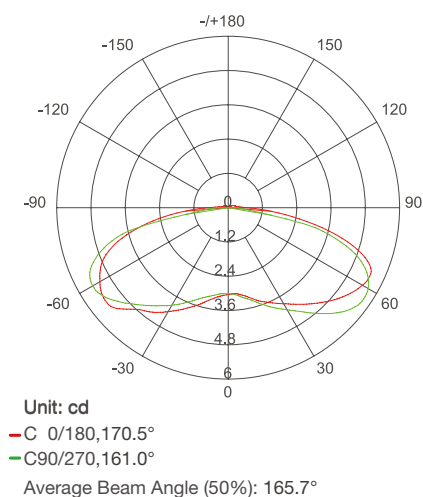

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PS6	12V DC	R	620-625nm	7	30	0.24	3	40pcs
		G	520-525nm	16	68	0.24		
		B	465-470nm	9	15	0.24		
		RGB	100000K+	25	35	0.72		


- Strong anti-pulls ability
- Can create reach lighting effects via a controller
- Long run design, 50pcs/string
- Single module cuttable for easier installation




--	--	--	--	--	--

PROFILE DRAWINGS

Unit:mm/inch

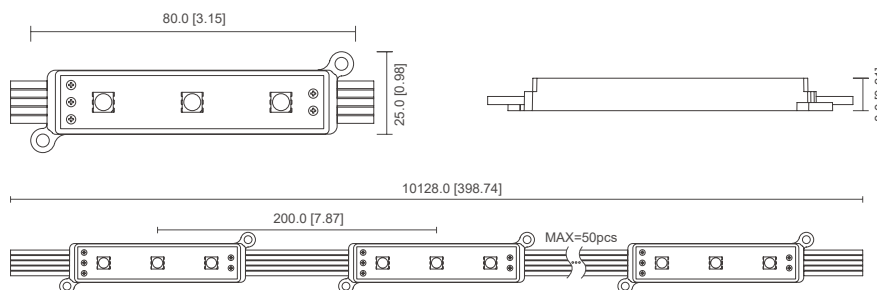

PHOTOMETRIC

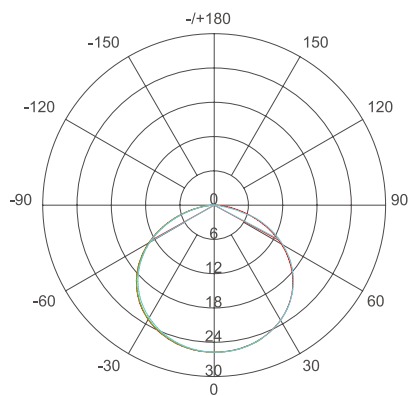


Unit: cd

— C 0/180, 122.2°

— C90/270, 122.4°

Average Beam Angle (50%): 122.5°

Flux Out: 65.86lm

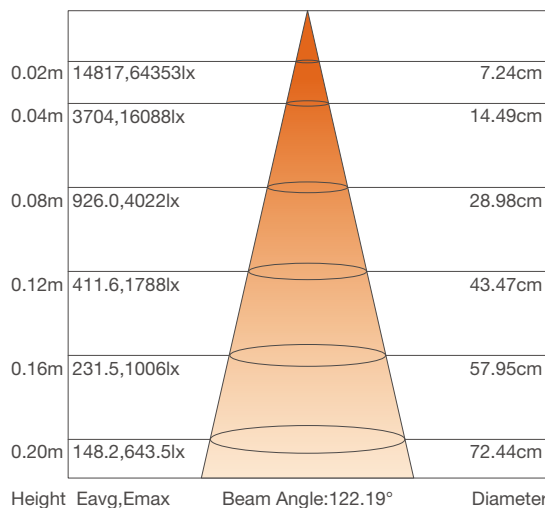

BASIC PARAMETERS


Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PZ5	12V DC	R	620-625nm	/	/	0.24	3	50pcs
		G	515-530nm	/	/	0.24		
		B	465-470nm	/	/	0.24		
		RGB+W	100000K+	36	40	0.96		

- Adopt integrated optical lens
- Great environmental adaptability and UV resistance
- Can create reach lighting effects via a controller
- Single module cuttable, customization available




PROFILE DRAWINGS

Unit:mm/inch

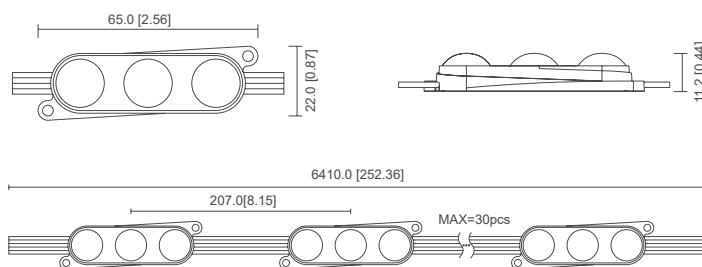

PHOTOMETRIC

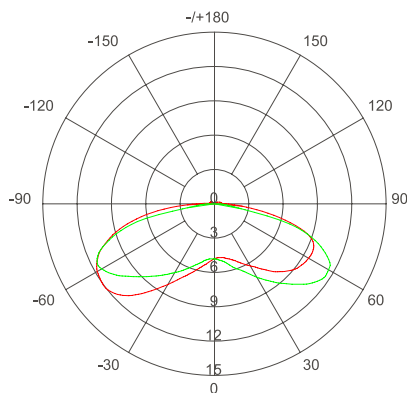


Unit: cd

- C 0/180,172.9°

- C90/270,161.0°

Average Beam Angle (50%): 167.0°

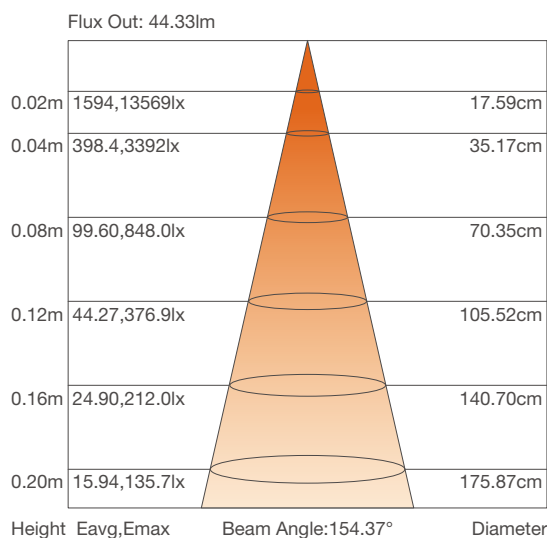


BASIC PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PZ6	12V DC	>80	W	6500K	19	90	0.21	3	30pcs
			R	620-625nm	7	30	0.21		
			G	520-530nm	15	67	0.21		
			B	465-470nm	3	15	0.21		
			RGBW	/	48	55	0.86		

BC6-S2 RGBW MODULE

- Large beam angle;
- Superior weather and UV resistance;
- External controller can be connected to realize rich color changes;
- Single module cuttable, support customization;

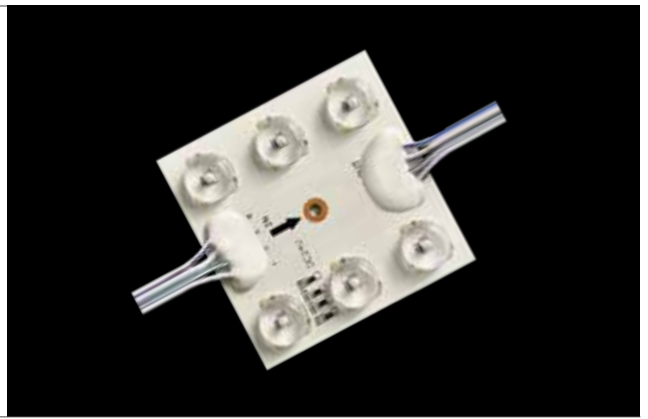

LM-80



IP20



LED3030



175°





DC24V




3Years

PROFILE DRAWINGS

Unit:mm/inch

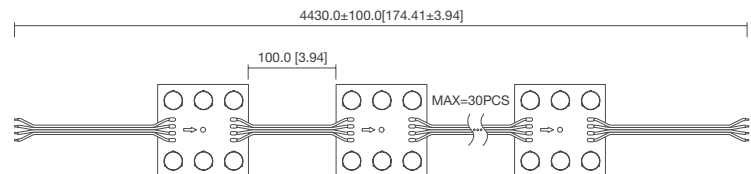

PHOTOMETRIC

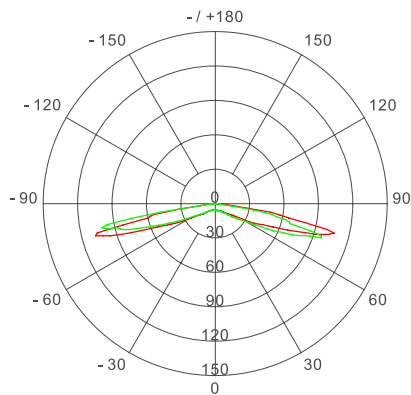


Unit: cd

- C 0/180,177.1°

- C90/270,173.0°


Average Beam Angle (50%): 175.0°

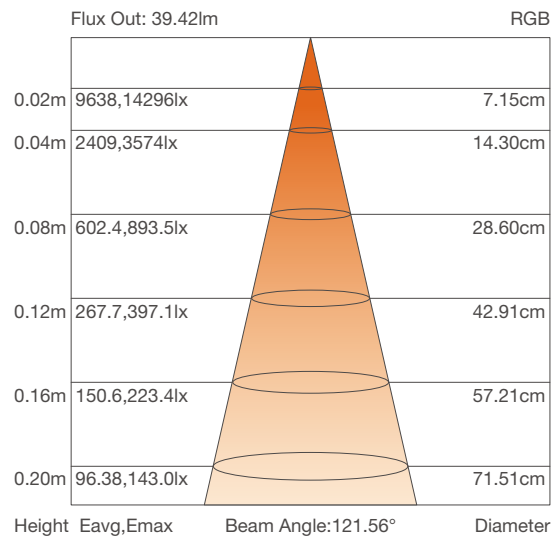

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BC6-S2	24V DC	R	620-625nm	46	36	1.24	6	30pcs
		G	515-530nm	119	78	1.51		
		B	465-470nm	26	19	1.35		
		RGB	\	188	45	4.12		

- Adopt Fresnel lens
- Digital control, constant current drive
- Long run with no brightness drop and signal attenuate
- Signal never rip even foregoing led error
- Single module can be cut, easy to install

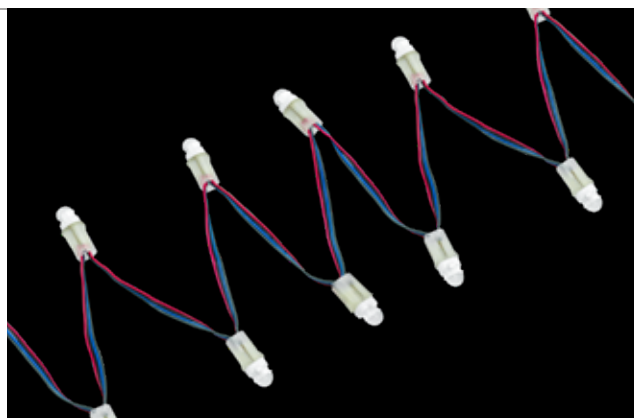

IP67



LED5050



45°






DC5V




3Years

PROFILE DRAWINGS

Unit:mm/inch

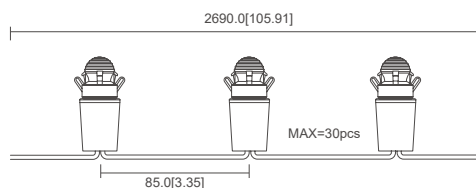

PHOTOMETRIC

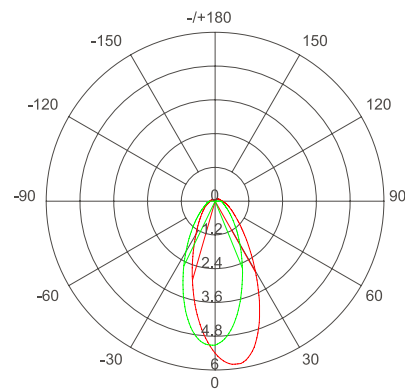


Unit: cd

- C 0/180,45.7°

- C90/270,48.1°

Average Beam Angle (50%): 46.9°


Flux Out: 1.949lm

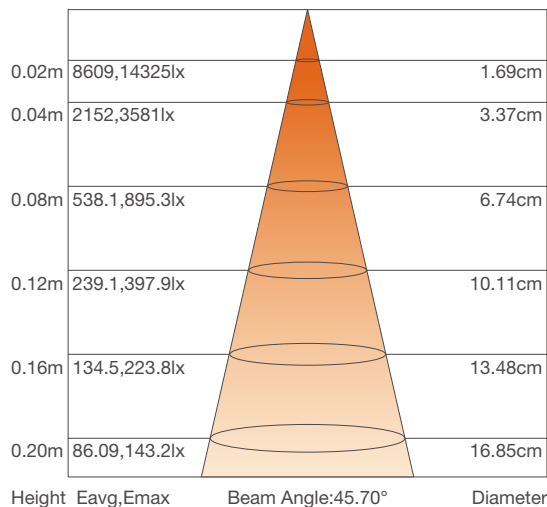

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS6	5V DC	R	620-630nm	2	18	/	1	30pcs
		G	520-530nm	4	35	/		
		B	460-470nm	1	9	/		
		RGB	100000K+	7	25	0.27		

- High quality Fresnel Lens
- Constant current driving
- Uniform lighting with no brightness drop and signal attenuate
- Signal never rip even foregoing led error
- Single module can be cut, easy to install

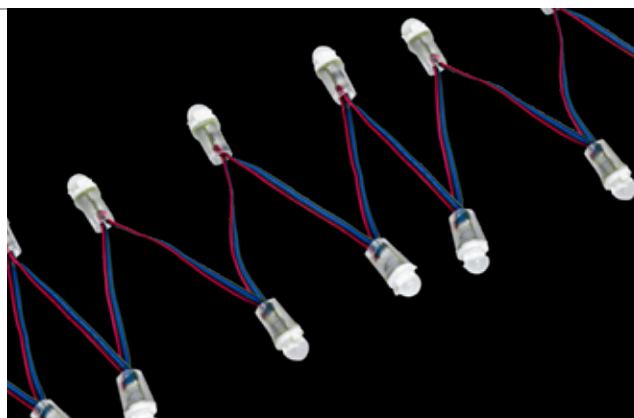

IP67



LED5050



50°




DC5V




3Years

PROFILE DRAWINGS

Unit:mm/inch

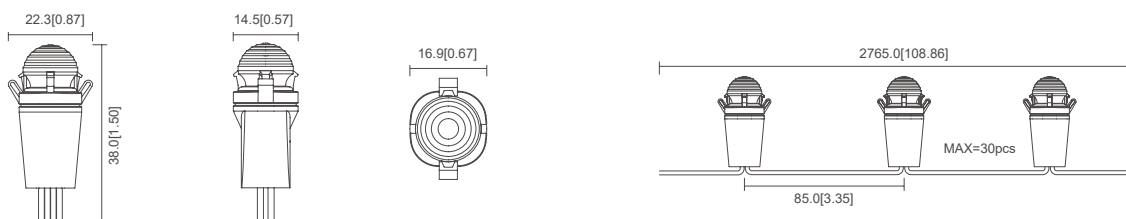

PHOTOMETRIC

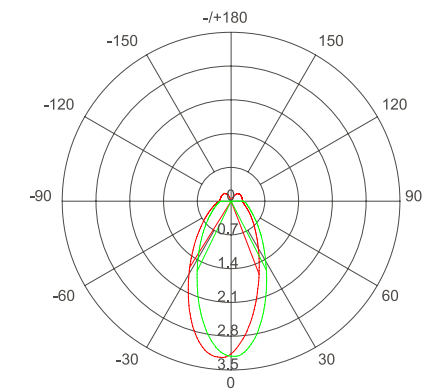


Unit: cd

- C 0/180,53.0°

- C90/270,53.1°

Average Beam Angle (50%): 53.0°

Flux Out: 1.525lm

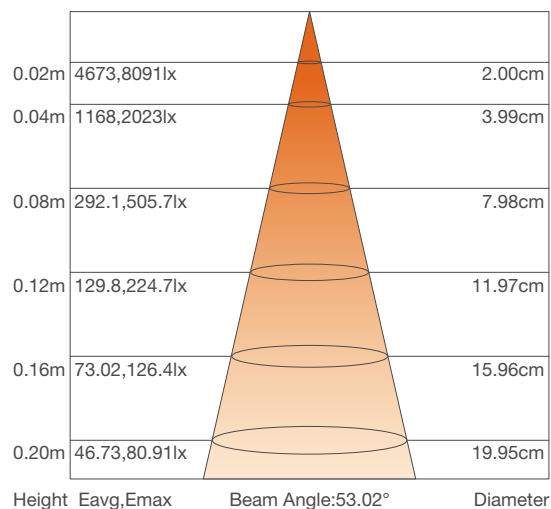

BASIC PARAMETERS


Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS7	5V DC	R	620-625nm	2	16	/	1	30pcs
		G	525-530nm	4	34	/		
		B	465-470nm	1	8	/		
		RGB	100000K+	6	20	0.27		

- Application for outdoor building decoration, large programmed logos or signage, etc
- 3LEDs RGB SMD5050 powered
- Lens with optic function, specially for large logos
- Signal never rip even foregoing led error
- Complied with controller such as BV-T1000\T4000\T8000\MR-318A





PROFILE DRAWINGS

Unit:mm/inch

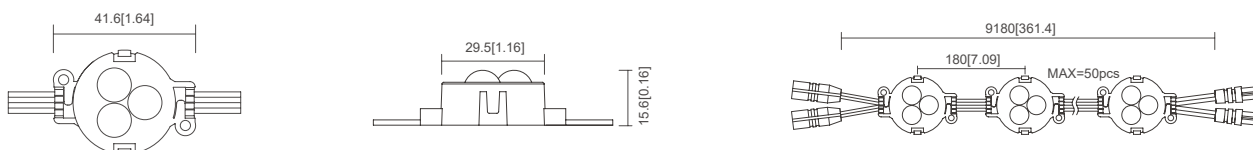

PHOTOMETRIC

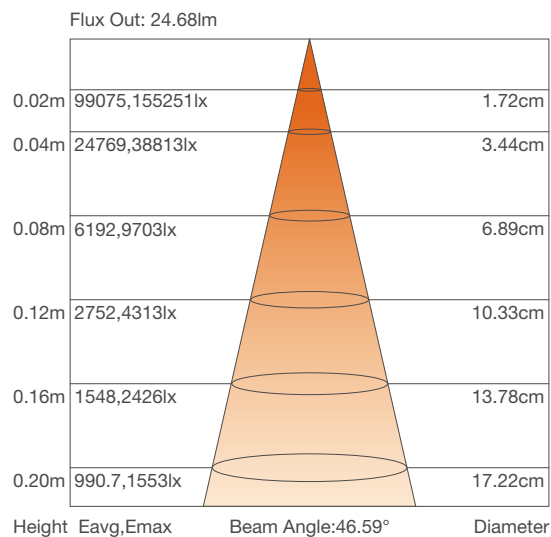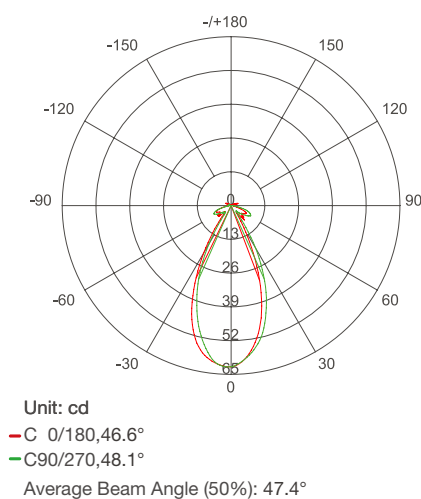

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS8	12V DC	R	620-625nm	19	29	0.65	3	50pcs
		G	525-530nm					
		B	465-470nm					


CS8-A DIGITAL/ADDRESSABLE

- Glue sealing process, IP67 rating
- Adopt auto integer forwarding technology
- Long run design and the signals will not distort and attenuate
- Signal never rip even foregoing led error
- Support multiple controllers to realize various lighting effects





PROFILE DRAWINGS

Unit:mm/inch

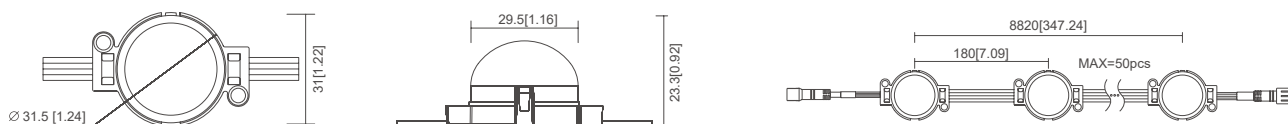

PHOTOMETRIC

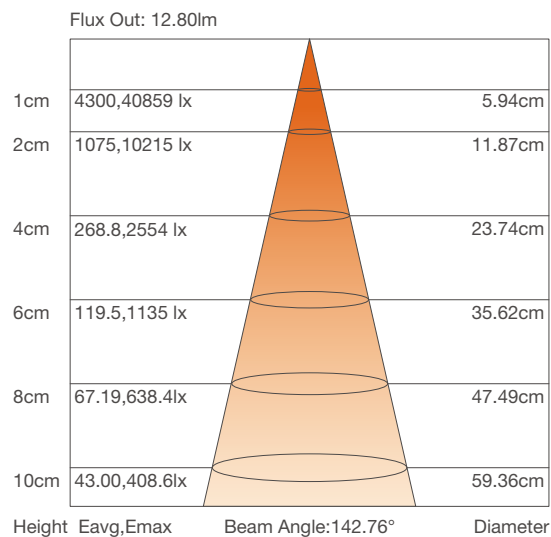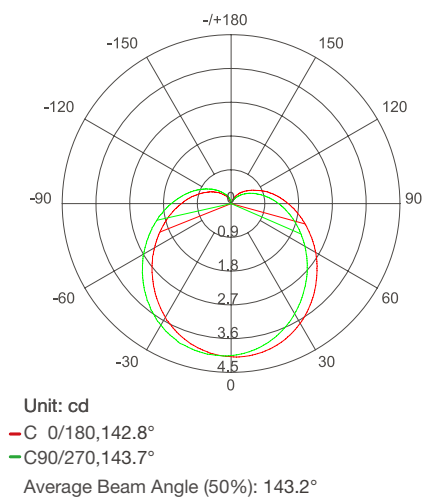

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
CS8-A	12V DC	R	620-625nm	/	/	0.22	3	50pcs
		G	520-525nm	/	/	0.22		
		B	465-470nm	/	/	0.22		
		RGB	100000K+	17	25	0.65		

PQ5-J DIGITAL/ADDRESSABLE

- Signal never rip even foregoing led error
- Support multiple controllers to realize various light effects
- Do not support PWM dimming



LM-80



IP66



LED5050



120°





DC12V





3Years

PROFILE DRAWINGS

Unit:mm/inch

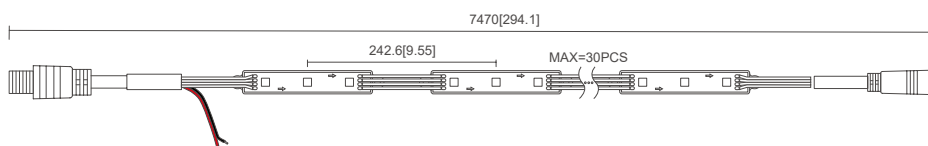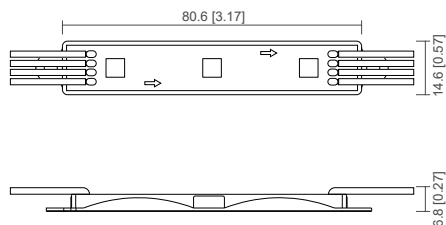

PHOTOMETRIC

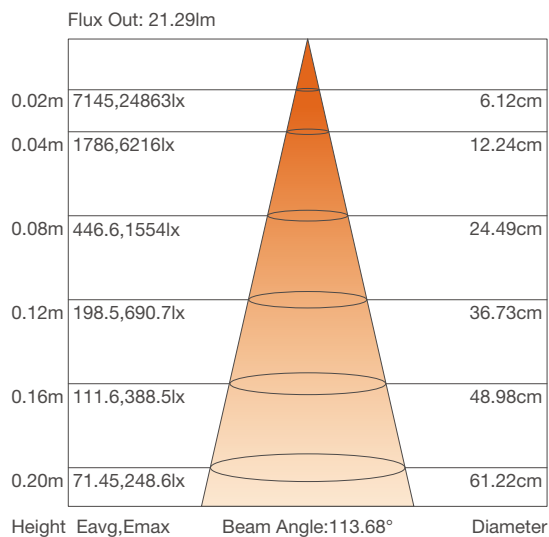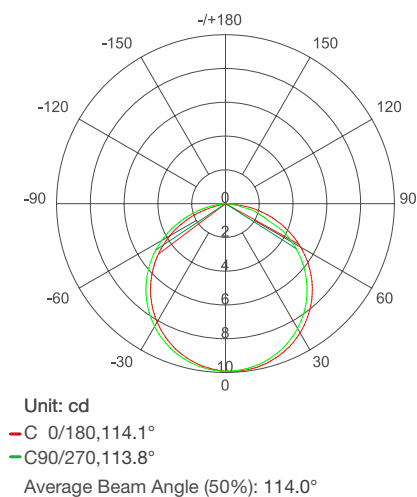

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ5-J-RGB	12V DC	R	620-625nm	5-7	≥24	0.2	3	30pcs
		G	525-530nm	10-12	≥49	0.2		
		B	465-470nm	2-3	≥9	0.2		
		RGB	100000K+	19-21	≥24.5	0.65		
PQ5-J-W	12V DC	W	6500K	19-21	≥95	0.2	3	30pcs


- Adopt integrated optical lens
- Great weather and UV resistance
- Support DMX512
- Can use external controller to achieve multiple color changes
- Single module can be cut, customization available





				CRI 80	 160°		
--	--	--	--	------------------	----------	--	--

PROFILE DRAWINGS

Unit:mm/inch

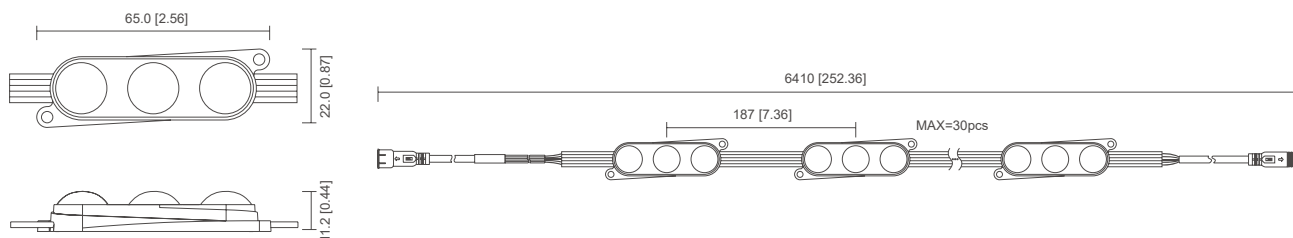

PHOTOMETRIC

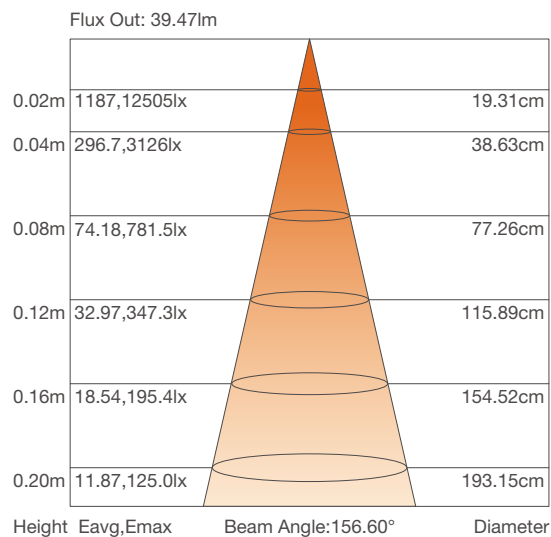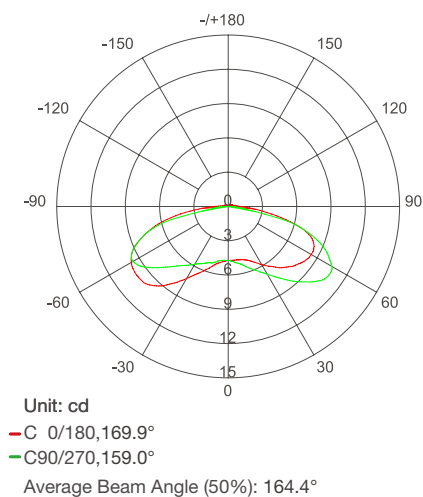

BASIC PARAMETERS


Model No.	Voltage	CRI	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ6	12V DC	>80	W	6500K	17	50	0.33	3	30pcs
		/	R	620-630nm	3	10	0.33		
			G	520-530nm	11	30	0.33		
			B	460-470nm	4	12	0.33		
			RGBW	/	40	40	0.98		

- Adopt integrated lens
- Double glue feeding process, IP68 rating
- Continuous transmission even 1 LED broken
- Great environmental adaptability and UV resistance
- Can create reach lighting effects via a controller, such as SP105E controller
- Single module can be cut




PROFILE DRAWINGS


Unit:mm/inch

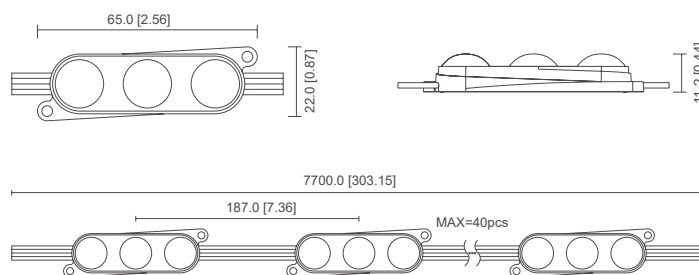

PHOTOMETRIC

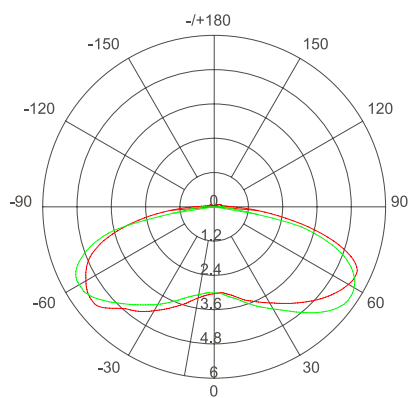

Unit: cd
 - C 0/180, 170.5°
 - C90/270, 161.0°
 Average Beam Angle (50%): 165.7°

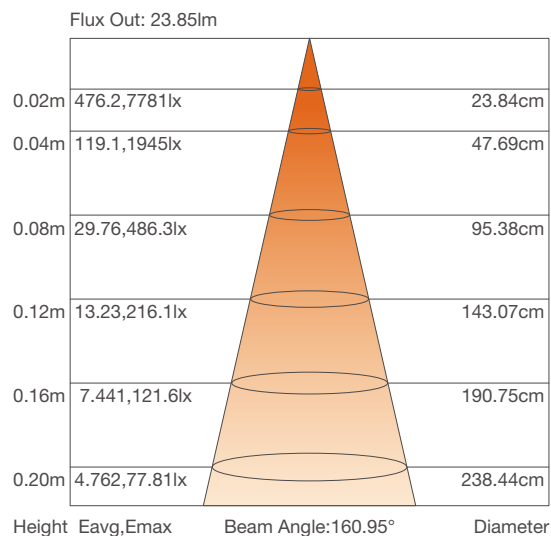

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ7	12V DC	R	620-625nm	6	18	0.21	3	40pcs
		G	520-530nm	14	42	0.21		
		B	460-470nm	3	8	0.21		
		RGB	/	22	23	0.64		


- Adopt integrated lens
- Great environmental adaptability and UV resistance
- Can create reach lighting effects via a controller, such as MR-502 controller
- Single module can be cut




				CRI 80	 150°		
--	--	--	--	------------------	----------	--	--

PROFILE DRAWINGS

Unit:mm/inch

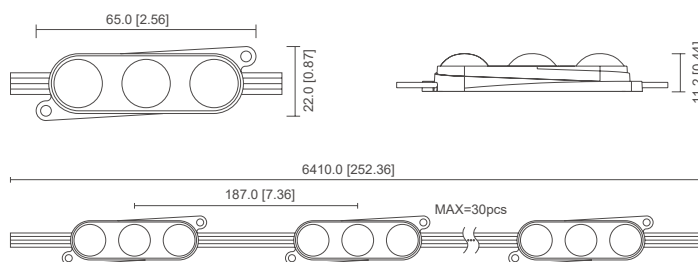

PHOTOMETRIC

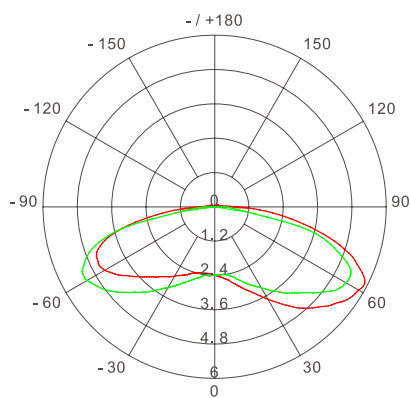


Unit: cd

- C 0/180, 173.9°

- C90/270, 162.6°

Average Beam Angle (50%): 168.2°

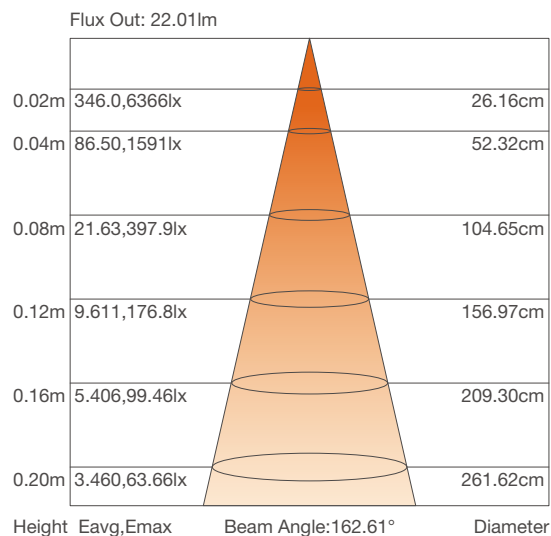


BASIC PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
PQ8	12V DC	>80	W	6500K	10	50	0.2	3	30pcs
		/	R	620-630nm	2	10	0.2		
			G	520-530nm	6	30	0.2		
			B	460-470nm	1	6	0.2		
			RGBW	/	18	30	0.6		

BC6-S1 DIGITAL/ADDRESSABLE

- Large beam angle;
- Superior weather and UV resistance;
- External controller can be connected to realize rich color changes;
- Single module cuttable, support customization;

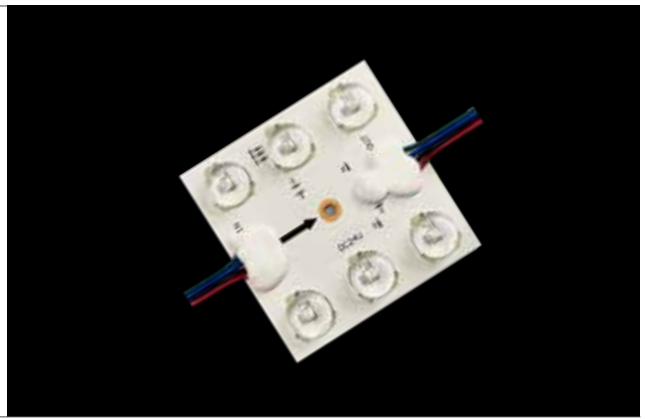

LM-80



IP20



LED3030



170°





DC24V




3Years

PROFILE DRAWINGS

Unit:mm/inch

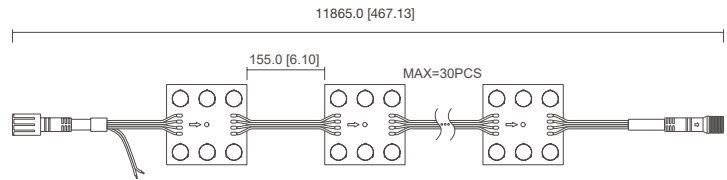

PHOTOMETRIC

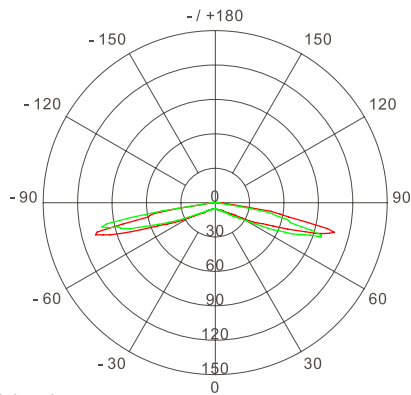


Unit: cd

- C 0/180,177.0°

- C90/270,170.8°

Average Beam Angle (50%): 173.9°

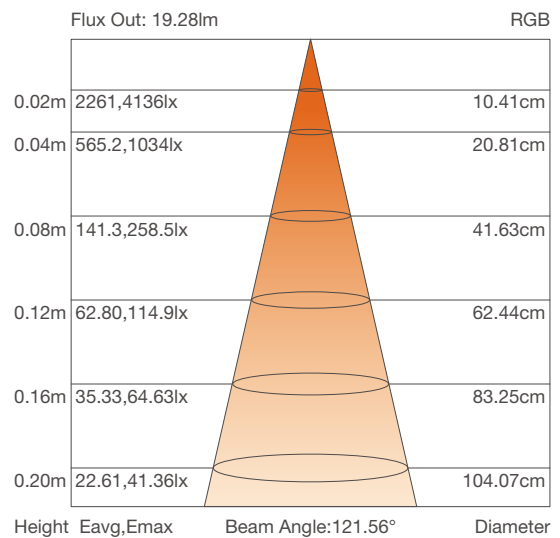

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BC6-S1	24V DC	R	620-625nm	11	16	0.69	6	30pcs
		G	492-577nm	27	39	0.69		
		B	440-475nm	7	10	0.69		
		RGB	\	44	29	1.55		

D20/30/50 DIGITAL/ADDRESSABLE


- Using imported chips with high brightness and long life span
- Adopt wire and cover of cold-resistant, anti-UV, flame retardant
- IP67 rating, perfect for outdoor use
- Beautiful appearance and cost-effective
- Multiple mounting methods



IP67	LED3535	LM-80	120°	DC5V	DC12V	DC24V	3Years
------	---------	-------	------	------	-------	-------	--------

PROFILE DRAWINGS

Unit:mm/inch

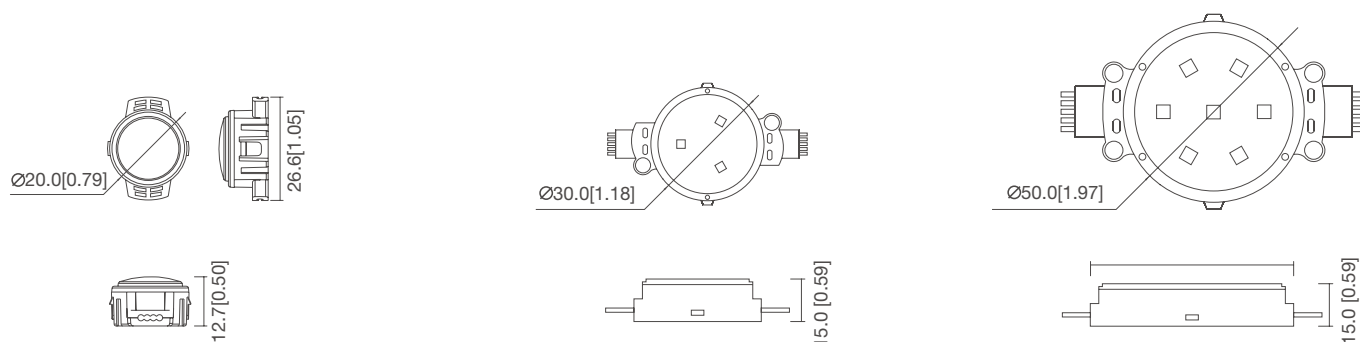

BASIC PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	Gray Level	W/pcs	LED/pc	Max Run
D202-Y	5V DC	Y	2000±200K	18	/	0.26	1	30pcs
D202-W	5V DC	W	2800-6500K	20	/			
D204-RGB	5V DC	RGB	100000K	7	256			

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	Gray Level	W/pcs	LED/pc	Max Run
D302-Y	12V DC	Y	2000±200K	5	/	0.66	3	40pcs
D302-G	12V DC	G	520-525nm	14	/			
D302-B	12V DC	B	465-470nm	3	/			
D302-W	12V DC	W	2800-6500K	42	/			
D302-RGB	12V DC	R+G+B	100000K	22	256			
D302-RGB	12V DC	R+G+B	100000K	22	256/65536			

Model No.	Voltage	Light Color	CCT/Wavelength	LM/pcs	Gray Level	W/pcs	LED/pc	Max Run
D502-Y	24V DC	Y	2000±200K	84	/	1.3	7	20pcs
D502-G	24V DC	G	520-525nm	32	/			
D502-B	24V DC	B	465-470nm	7	/			
D502-W	24V DC	W	2800-6500K	98	/			
D502-RGB	24V DC	R+G+B	100000K	49	256			
D502-RGB	24V DC	R+G+B	100000K	49	256/65536			

RIGID BAR

SERIES

Back-lit light box, double sided
Edge-lit light box



Back-Lit
Side-lit
RGB/RGBW
High Voltage
Dynamic Panel




T12 BACK-LIT

- Double-sided LEDs suitable for double-sided light box
- Adjustable bracket available for easy installation
- Series connection to satisfy different requirements
- High efficacy and reliability with less brightness loss





PROFILE DRAWINGS

Unit:mm/inch

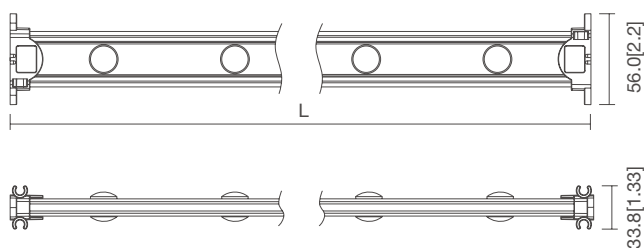

Model No.	L:mm/inch
T12-0306	300[11.81]
T12-0612	600[23.62]
T12-9724	969[38.15]
T12-1224	1200[47.24]

PHOTOMETRIC

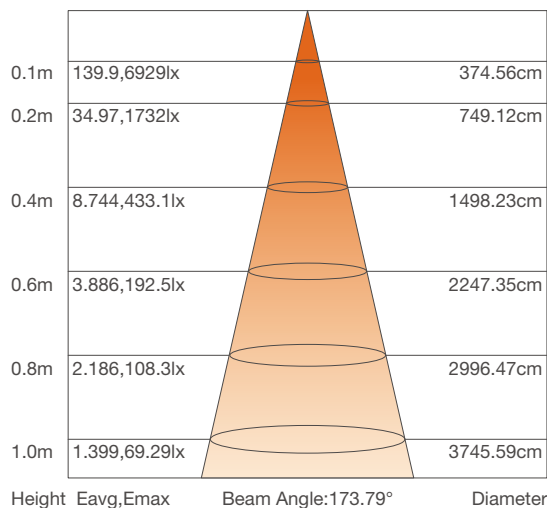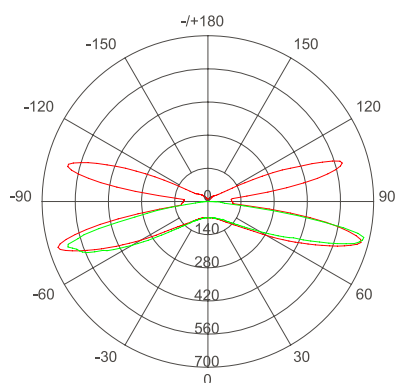

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
T12-0306	24V DC	6500K	818	110	7.5	6	1pcs
T12-0612	24V DC	6500K	1636	110	14.9	12	1pcs
T12-9724	24V DC	6500K	3272	110	29.8	24	1pcs
T12-1224	24V DC	6500K	3272	110	29.8	24	1pcs

H3 BACK-LIT

- Adopt secondary light distribution lens, uniform lighting
- Curtain style for easy mounting
- Single LED can be cut
- Multiple specifications, customization available



IP20



LED3030

CRI
70



180°




DC12/24V



5Years



PROFILE DRAWINGS

Unit:mm/inch

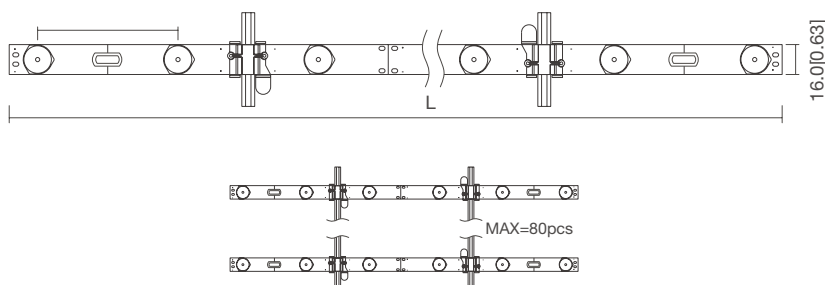

Model No.	L:mm/inch
H3-4807	480[18.90]
H3-5208	515[20.28]
H3-9313	930[36.61]
H3-9314	930[36.61]

PHOTOMETRIC

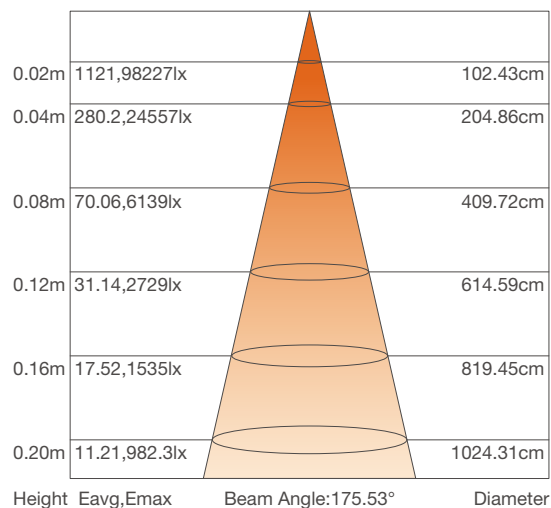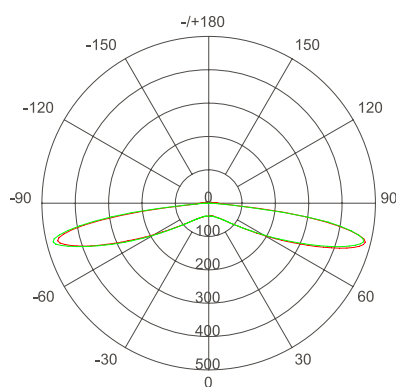

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
H3-4807	12V DC	3000-9000K	780	130	6	7	10pcs
H3-5208	24V DC	3000-9000K	910	130	7	8	10pcs
H3-9313	12V DC	3000-9000K	1430	130	11	13	10pcs
H3-9314	24 V DC	3000-9000K	1560	130	12	14	10pcs

H3 2.0 PRO BACK-LIT

- Self-designed secondary lens for uniform light.
- Aluminum PCB for direct and quick heat dissipation.
- Curtain style for easy mounting.
- Exclusive designed clips for easy installing.
- Multi specifications, support customization.



IP20



LED3030

CRI
80



170°




DC12V




3Years

PROFILE DRAWINGS


Unit:mm/inch

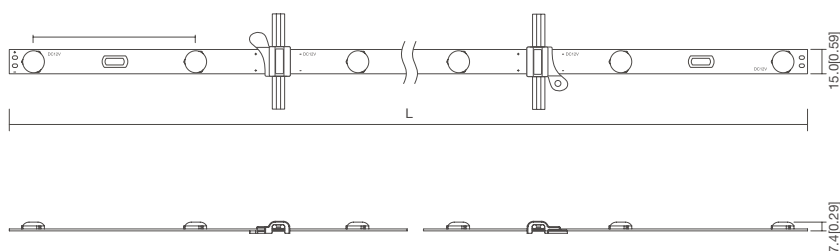

Model No.	L:mm/inch
H3 2.0 Pro-4807	480[18.90]
H3 2.0 Pro-9313	930[36.61]



PHOTOMETRIC

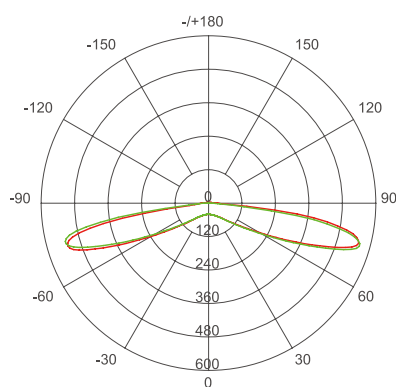


Unit: cd

- C 0/180,187.7°

- C90/270,176.6°

Average Beam Angle (50%): 182.1°

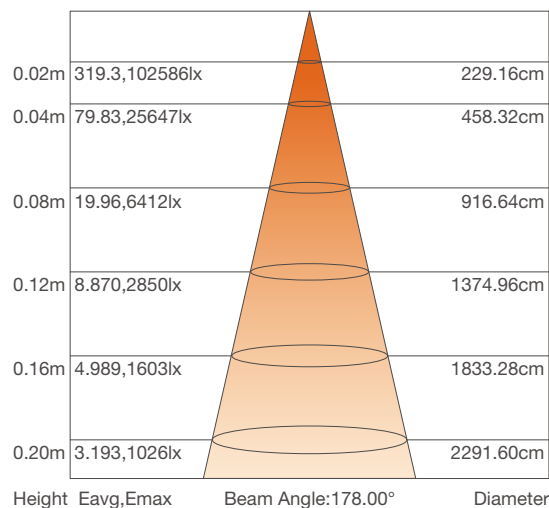

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
H3 2.0 Pro-4807	12V DC	3000-9000K	882	150	5.88	7	10pcs
H3 2.0 Pro-9313	12V DC	3000-9000K	1638	150	10.92	13	10pcs

H20 BACK-LIT

- Self-designed secondary light distribution lens for uniform light.
- Aluminum substrate for quick heat dissipation.
- Curtain style for easy mounting.
- Multiple specifications, customization available.



IP20



LED2835

Ra
80



210°




DC12V




3Years

PROFILE DRAWINGS


Unit:mm/inch

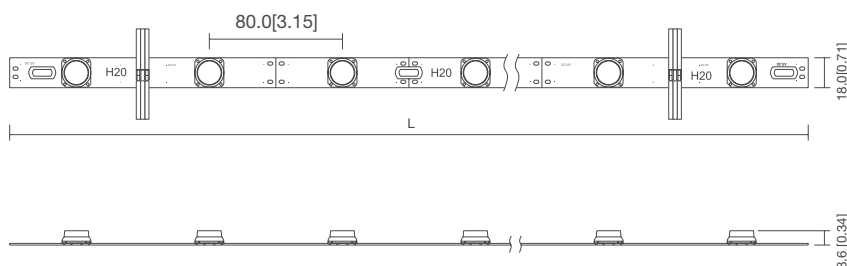

Model No.	L:mm/inch
H20-4806	480[18.90]
H20-9612	960[37.80]
H20-1215	1200[47.24]



PHOTOMETRIC

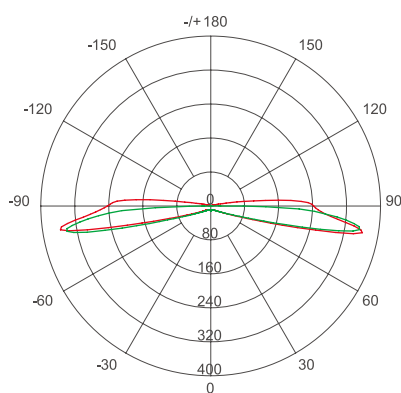


Unit: cd

- C 0/180,227.1°

- C90/270,186.2°

Average Beam Angle (50%): 206.6°

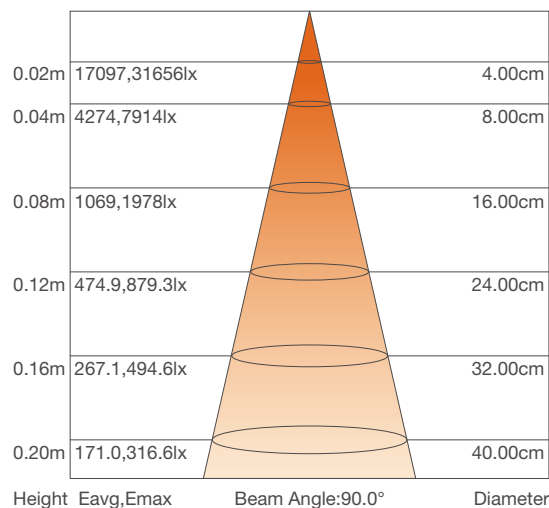

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
H20-4806	12V DC	3000-15000K	454	90	5.04	6	10pcs
H20-9612	12V DC	3000-15000K	907	90	10.08	12	10pcs
H20-1215	12V DC	3000-15000K	1134	90	12.60	15	10pcs

FB-XW BACK-LIT

- Adopt Sanan chips
- Secondary optical design, better wall washing effect
- Aesthetic appearance design
- Uniform light with good linear effect
- Multiple specifications, support customization



IP66



LED2835



99°x104°



CRI
80




DC24V



5Years



PROFILE DRAWINGS

Unit:mm/inch

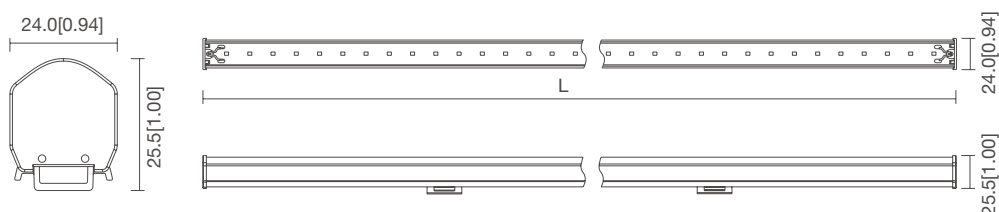

Model No.	L:mm/inch
FB-XW-03030	300[11.81]
FB-XW-10090	1000[39.37]
FB-XW-12108	1200[47.24]
FB-XW-14126	1400[55.12]

PHOTOMETRIC

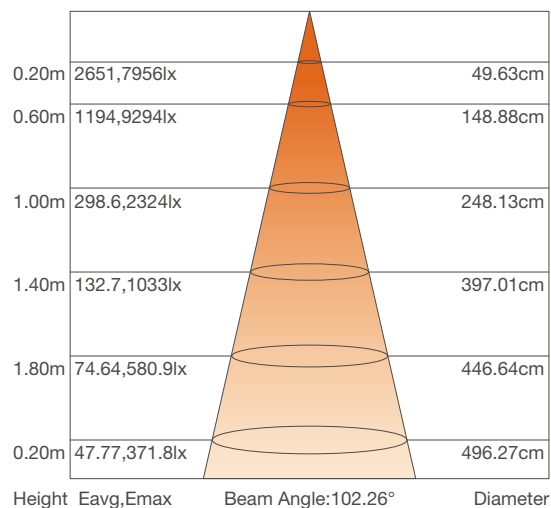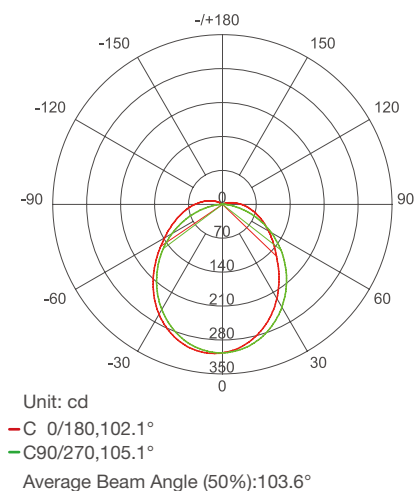

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
FB-XW-03030	24V DC	4000-8000K	266	65	4.10	30	10pcs
FB-XW-10090	24V DC	4000-8000K	870	65	13.50	90	3pcs
FB-XW-12108	24V DC	4000-8000K	1060	65	16.40	108	3pcs
FB-XW-14126	24V DC	4000-8000K	1241	65	19.10	126	2pcs


- Using PC frosted cover, the light is uniform;
- Adopt 2835LED;
- A variety of specifications are optional, support customization;



--	--	--	--	--	--	--	--



PROFILE DRAWINGS

Unit:mm/inch

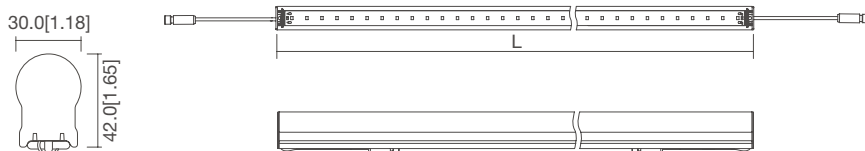

Model No.	L:mm/inch
FB-X-05028	500[19.69]
FB-X-10056	1000[39.37]
FB-X-14084	1400[55.12]
FB-X-27161	2700[106.30]

PHOTOMETRIC

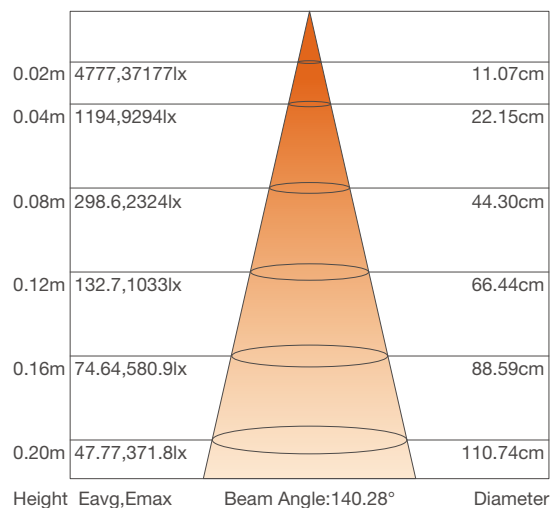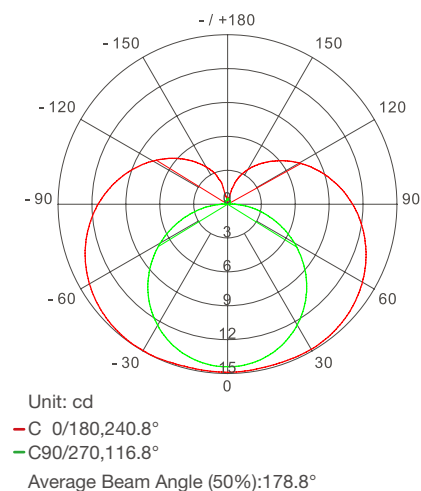

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FB-W-05028	24V DC	W:6700K	319	83	3.84	28	1pcs
FB-R-05028	24V DC	R:620-625nm	134	19			
FB-G-05028	24V DC	G:525-545nm	65	17			
FB-B-05028	24V DC	B:465-470nm	19	5			
FB-Y-05028	24V DC	Y:579-590nm	223	58			

YD2-W BACK-LIT


- Adopt high quality 2835 LED
- High efficacy up to 90lm/W
- Self-designed secondary light distribution lens with 170° beam angle
- Curtain style for easy mounting
- Multiple specification available



IP20	LED2835	LM-80	CRI 80	170°	DC12V	3Years
------	---------	-------	-----------	------	-------	--------


PROFILE DRAWINGS

Unit:mm/inch

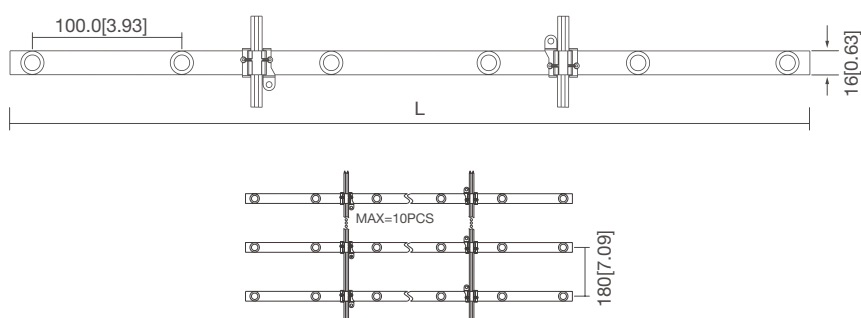

Model No.	L:mm/inch
YD2-W-4305	430[16.93]
YD2-W-5306	530[20.87]
YD2-W-9310	930[36.61]
YD2-W-1212	1130[44.49]

PHOTOMETRIC

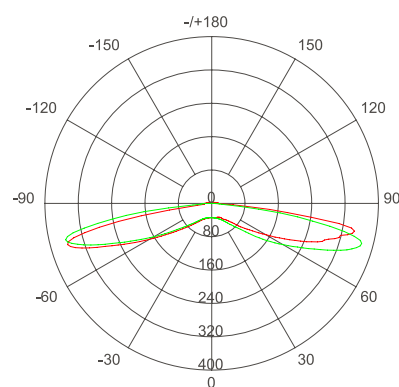

Unit: cd

- C 0/180,177.0°

- C90/270,175.7°

Average Beam Angle (50%):176.4°


Height	Eavg,Emax	Beam Angle:175.61°	Diameter
1cm	3476,349485lx		52.14cm
2cm	869.1,87371lx		104.29cm
4cm	217.3,21843lx		208.58cm
6cm	96.56,9708lx		312.87cm
8cm	54.32,5461lx		417.16cm
10cm	34.76,3495lx		521.44cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD2-W-4305	12V DC	3000-9000K	432	90	4.80	5	10pcs
YD2-W-5306	12V DC	3000-9000K	518	90	5.76	6	10pcs
YD2-W-9310	12V DC	3000-9000K	864	90	9.60	10	10pcs
YD2-W-1212	12V DC	3000-9000K	1037	90	11.52	12	10pcs

YD2-Y 2.0 BACK-LIT


- low light decay, high lumen efficiency, single LED cuttable
- Adopt special secondary optic lens
- Curtain style, exclusive mounting clips
- Aluminum PCB for direct and quick heat dissipation
- Cutting mark available, it can be cut at random
- Multiple spec options, can be customized upon requirements
- Support PWM, 0-10V, DALI and DMX dimming

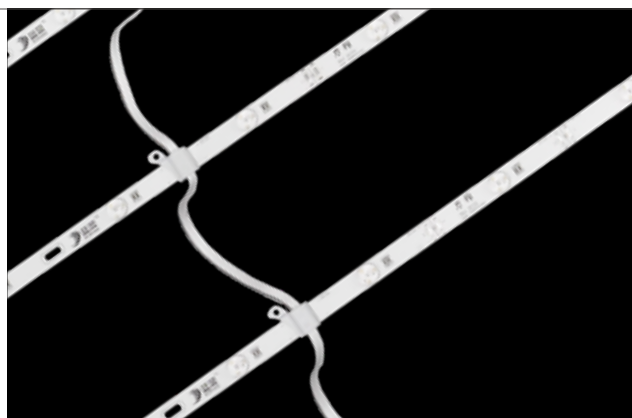

 DIMMABLE	 IP20	 LED2835	 LM-80	CRI 80	 170°	 DC12V	 2Years
--	--	---	---	------------------	--	---	--


PROFILE DRAWINGS

Unit:mm/inch

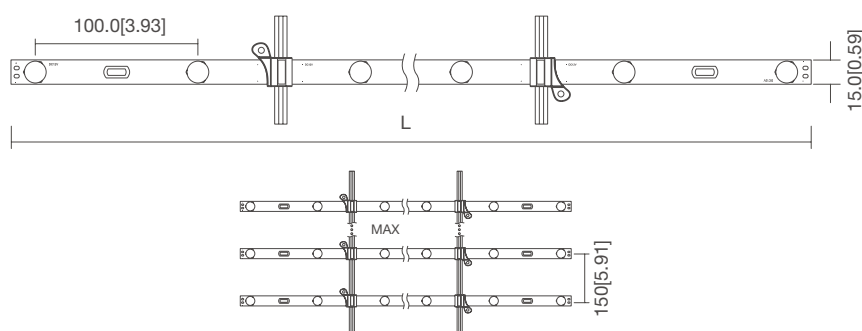

Model No.	L:mm/inch
YD2-Y-4305	430[16.93]
YD2-Y-9310	930[36.61]
YD2-Y-9312	930[36.61]
YD2-Y-1212	1130[44.49]

PHOTOMETRIC

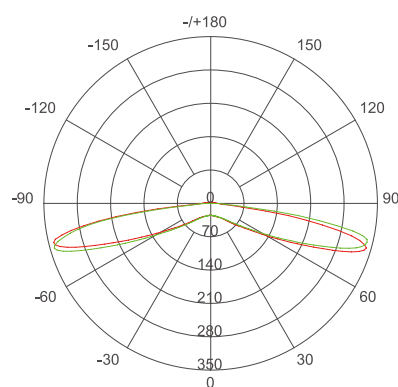


Unit: cd

- C 0/180,187.5°

- C90/270,177.4°

Average Beam Angle (50%):182.4°

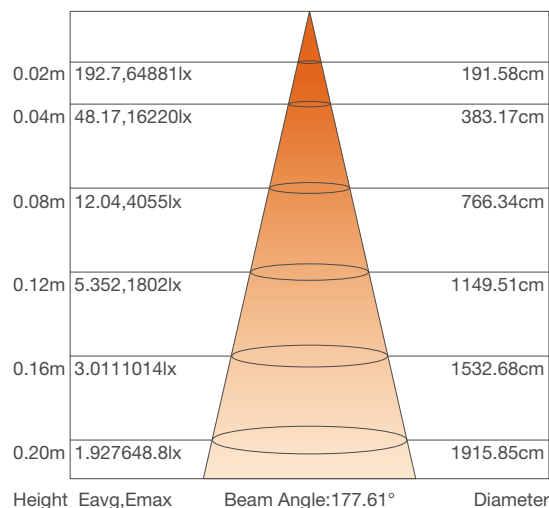

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD2-Y 2.0-4305	12V DC	3000-12000K	432	90	4.80	5	10pcs
YD2-Y 2.0-9310	12V DC	3000-12000K	864	90	9.60	10	10pcs
YD2-Y 2.0-9312	12V DC	3000-12000K	1036	90	11.52	12	10pcs
YD2-Y 2.0-1212	12V DC	3000-12000K	1036	90	11.52	12	8pcs


YD3-A BACK-LIT

- High quality SMD 3030LED
- Adopt secondary light distribution lens, uniform lighting
- Aluminium PCB for better heat dissipation
- 180° wide beam angle helps eliminate wasted light
- Single LED cuttable, customization available




PROFILE DRAWINGS

Unit:mm/inch

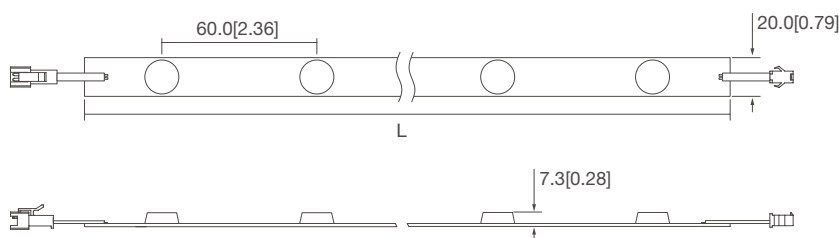

Model No.	L:mm/inch
YD3-A-4806	480[18.90]
YD3-A-9612	960[37.80]

PHOTOMETRIC

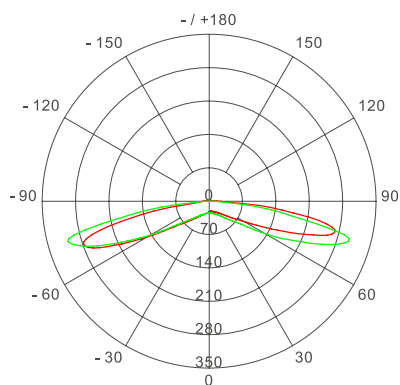


Unit: cd

- C 0/180,185.5°

- C90/270,175.2°

Average Beam Angle (50%):180.3°

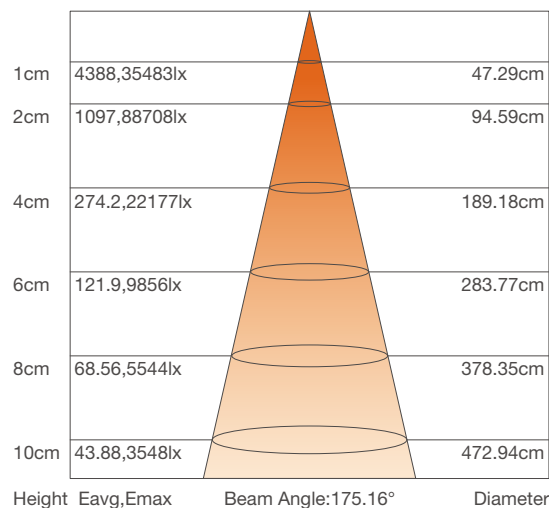


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD3-A-4806	12V DC	3000-9000K	648	90	7.2	6	8pcs
YD3-A-9612	12V DC	3000-9000K	1296	90	14.4	12	4pcs


YD7 3.0 BACK-LIT

- Adopt LUMILEDS 3030SMD
- Aluminum PCB for better heat dissipation
- Back-lit, high brightness, and uniform lighting
- It can be protective when connect the wire inversely or wrong
- Constant current driving with same brightness from end to end

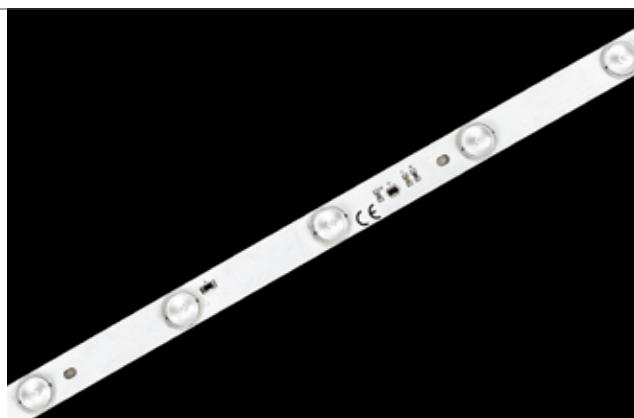


PROFILE DRAWINGS

Unit:mm/inch

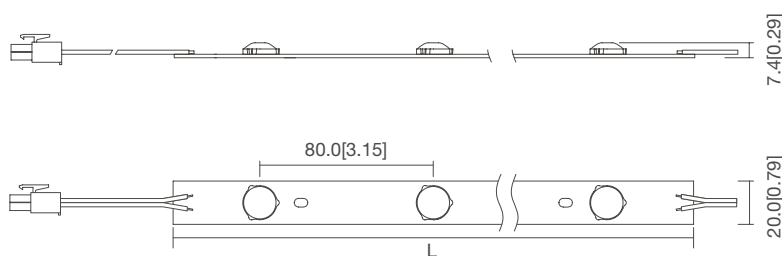

Model No.	L:mm/inch
YD7 3.0-0303	240[9.45]
YD7 3.0-0506	480[18.9]
YD7 3.0-1012	960[37.8]

PHOTOMETRIC

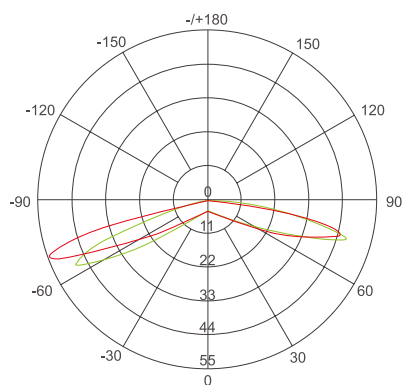


Unit: cd

- C 0/180,168.5°

- C90/270,159.1°

Average Beam Angle (50%):163.5°

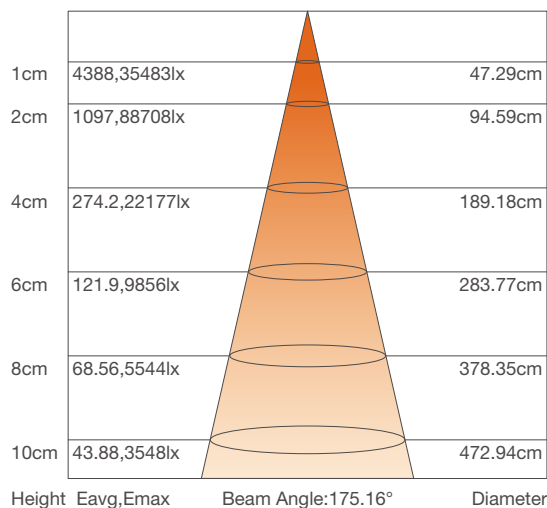


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD7 3.0-0303	24V DC	3000-6500K	333-357	90	3.7	3	8pcs
YD7 3.0-0506	24V DC	3000-6500K	333-357	90	7.5	6	4pcs
YD7 3.0-1012	24V DC	3000-6500K	333-357	90	15	12	2pcs

WN-YD7 3.0 BACK-LIT


- Adopt high quality 3030 LED
- Self-designed lens with 170° beam angle, suitable for slim lightbox
- Aluminum PCB for direct and quick heat dissipation
- Create rich color changing effects via controller

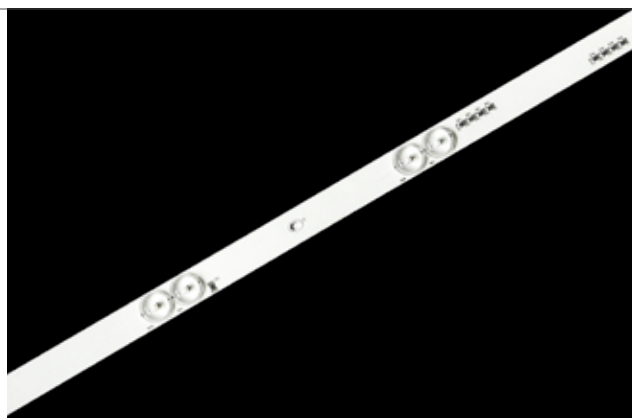

NICHIA	LM-80	IP22	LED3030	CRI 80	170°	DC24V	5Years
--------	-------	------	---------	-----------	------	-------	--------


PROFILE DRAWINGS

Unit:mm/inch

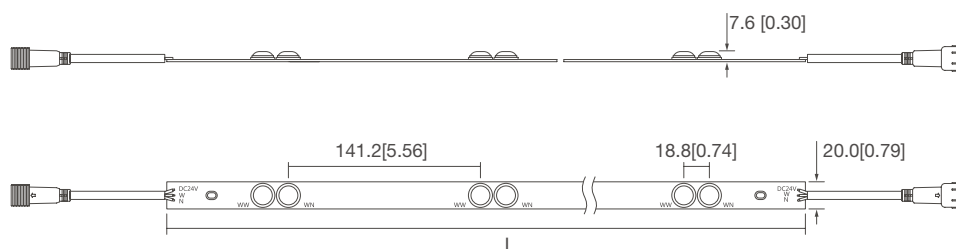

Model No.	L:mm/inch
WN-YD7 3.0-3204	320[12.60]
WN-YD7 3.0-4806	480[18.89]
WN-YD7 3.0-9612	960[37.80]

PHOTOMETRIC

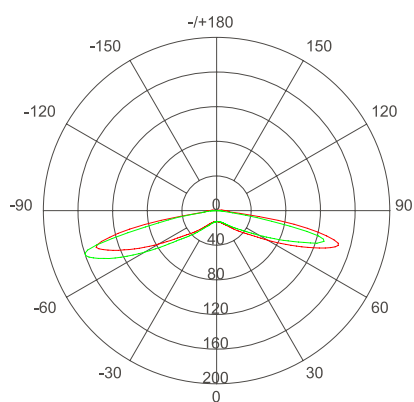

Unit: cd

- C 0/180,188.7°

- C90/270,171.4°

Average Beam Angle (50%):180.0°

2500K			
Height	Eavg,Emax	Beam Angle:171.15°	Diameter
1cm	5608,13854lx		25.83cm
2cm	1402,34636lx		51.67cm
4cm	350.5,8659lx		103.34cm
6cm	155.8,3848lx		155.01cm
8cm	87.62,2165lx		206.68cm
10cm	56.08,1385lx		258.35cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
WN-YD7 3.0-3204	24V DC	2500-6500K	260	70	3.72	4	8pcs
WN-YD7 3.0-4806	24V DC	2500-6500K	335	90	3.72	6	5pcs
WN-YD7 3.0-9612	24V DC	2500-6500K	670	90	7.44	12	3pcs


YD8 1.0 BACK-LIT

- Adopt 3V NICHIA 3030LED
- Secondary light distribution lens, uniform lighting
- Aluminum PCB for better heat dissipation
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

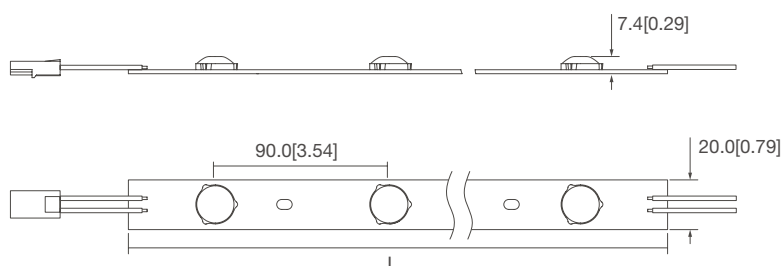

Model No.	L:mm/inch
YD8 1.0-0303	270[10.63]
YD8 1.0-0404	360[14.17]
YD8 1.0-0707	630[24.80]

PHOTOMETRIC

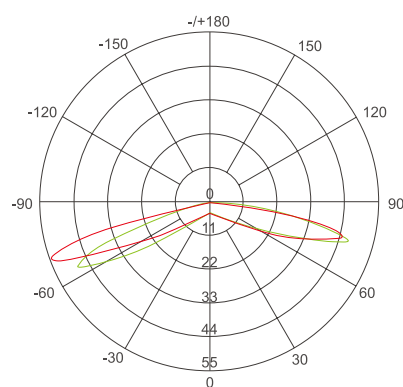

Unit: cd

- C 0/180,168.5°

- C90/270,159.1°

Average Beam Angle (50%):163.5°

Height	Eavg,Emax	Beam Angle:175.16°	Diameter
1cm	4388,35483lx		47.29cm
2cm	1097,88708lx		94.59cm
4cm	274.2,22177lx		189.18cm
6cm	121.9,9856lx		283.77cm
8cm	68.56,5544lx		378.35cm
10cm	43.88,3548lx		472.94cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD8 1.0-0303	24V DC	3000-6500K	158	50	3.1	3	8pcs
YD8 1.0-0404	24V DC	3000-6500K	210	60	3.1	4	8pcs
YD8 1.0-0707	24V DC	3000-6500K	370	116	3.1	7	8pcs


YD8 3.0 BACK-LIT

- Adopt 3V NICHIA 3030SMD
- Back-lit, high brightness, uniform lighting
- It can be protective when connect the wire inversely or wrong
- Adopt SA2-01 connector
- Constant current driving with same brightness from end to end




PROFILE DRAWINGS

Unit:mm/inch

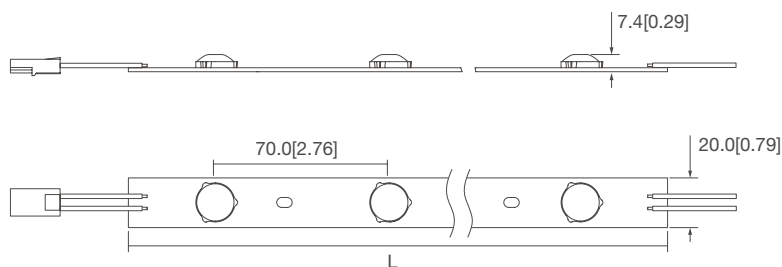

Model No.	L:mm/inch
YD8 3.0-0507	490[19.29]
YD8 3.0-1014	980[38.58]

PHOTOMETRIC

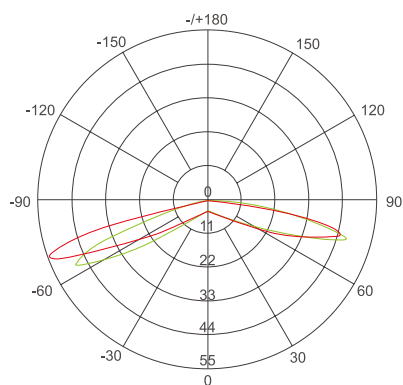


Unit: cd

- C 0/180,168.5°

- C90/270,159.1°

Average Beam Angle (50%):163.5°

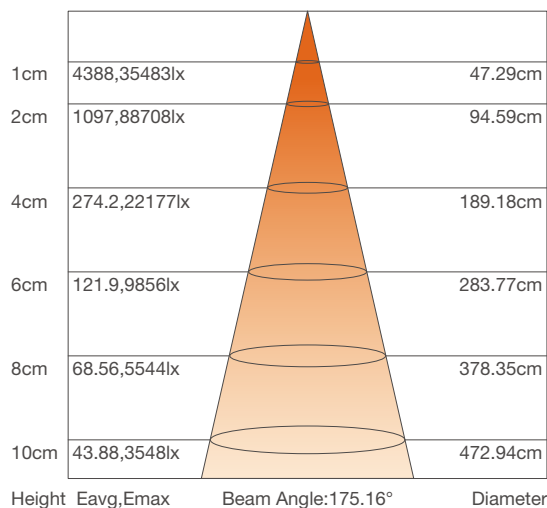

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD8 3.0-0507	24V DC	6000-7000K	366	114	3.1	7	8pcs
YD8 3.0-1014	24V DC	6000-7000K	703	110	6.3	14	4pcs

YD8-J BACK-LIT

- High light efficacy, up to 140lm/w
- Adopt secondary light distribution lens, uniform lighting
- Aluminum PCB for direct heat dissipation
- Multiple specifications available, support customization



IP20



LED2835

CRI
80



180°




DC24V



5Years


PROFILE DRAWINGS

Unit:mm/inch

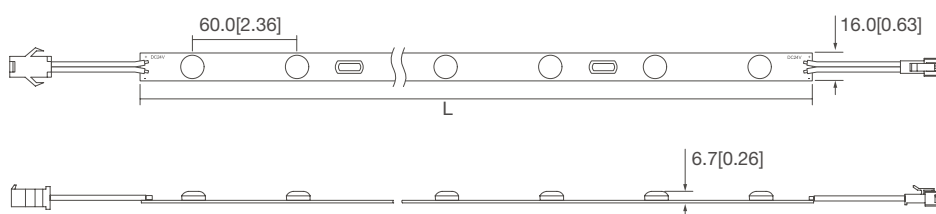

Model No.	L:mm/inch
YD8-J-4808	480[18.90]
YD8-J-9616	960[37.80]

PHOTOMETRIC

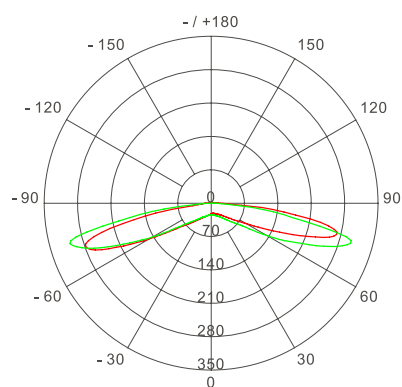


Unit: cd

- C 0/180,184.9°

- C90/270,175.6°

Average Beam Angle (50%):180.2°

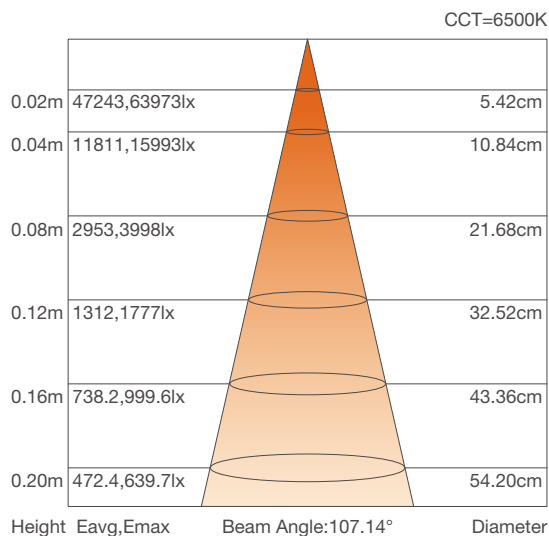


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YD8-J-4808	24V DC	2200-6500K	330	140	2.4	8	1pcs
YD8-J-9616	24V DC	2200-6500K	670	140	4.8	16	1pcs


JYD3-A BACK-LIT

- Adopt 9V 3030 LED
- Specially designed secondary light distribution lens, uniform lighting
- Curtain style for easy mounting
- Support PWM, 0-10V, DALI, DMX dimming
- Multiple specifications available

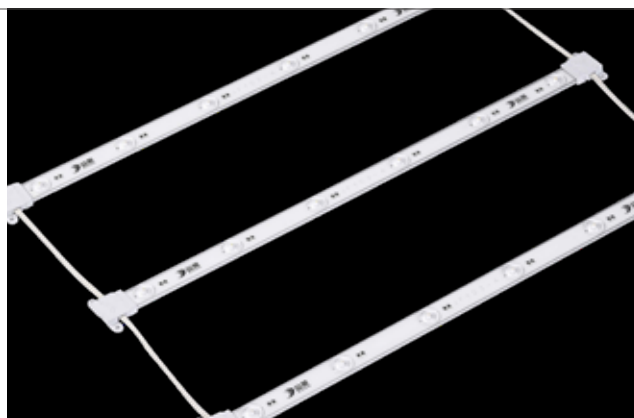


PROFILE DRAWINGS

Unit:mm/inch

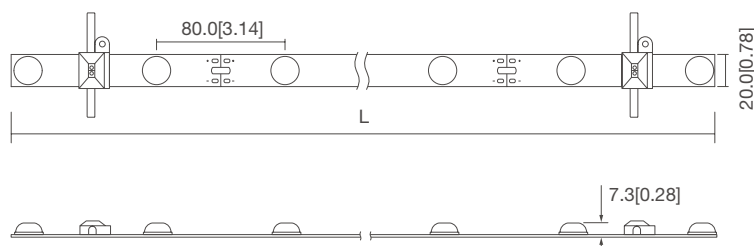

Model No.	L:mm/inch
JYD3-A-2604	260[10.23]
JYD3-A-4206	420[16.53]
JYD3-A-5808	580[22.83]
JYD3-A-9012	900[35.43]

PHOTOMETRIC

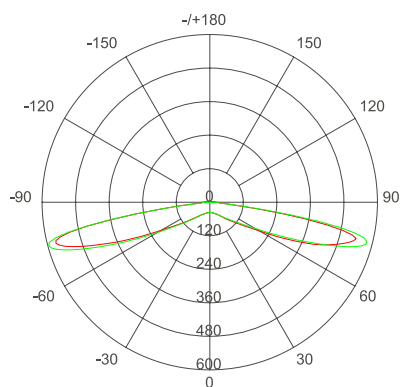


Unit: cd

- C 0/180,186.9°

- C90/270,176.2°

Average Beam Angle (50%):181.6°

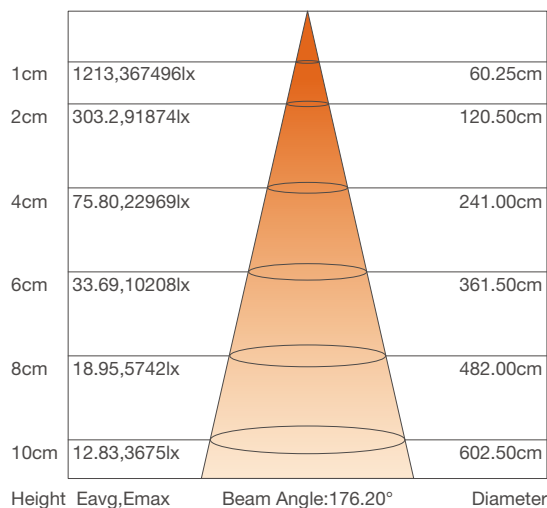

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD3-A-2604	24V DC	7800-9000K	408	85	4.8	4	10pcs
JYD3-A-4206	24V DC	7800-9000K	612	85	7.2	6	10pcs
JYD3-A-5808	24V DC	7800-9000K	816	85	9.6	8	10pcs
JYD3-A-9012	24V DC	7800-9000K	1224	85	14.4	12	10pcs

JYD7 3.0 BACK-LIT



- Adopt 3V Samsung 2323LED
- Specially designed secondary light distribution lens, 172 ° beam angle
- Curtain style for easy mounting
- Multiple specifications available



 IP20	 LED2323	 NICHIA	 CRI 80	 160°	 DC24V	 5Years
--	---	--	--	---	---	--


PROFILE DRAWINGS

Unit:mm/inch

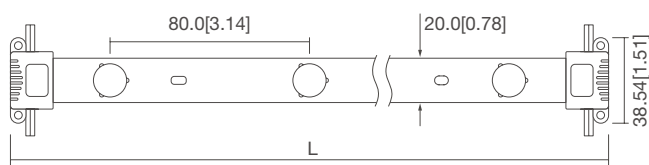

Model No.	L:mm/inch
JYD7 3.0-3030	244[9.60]
JYD7 3.0-0506	484[19.05]
JYD7 3.0-1012	964[37.95]

PHOTOMETRIC

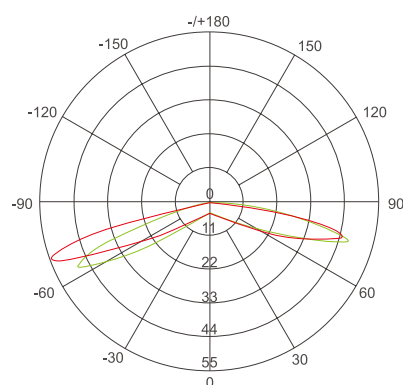

Unit: cd

- C 0/180,168.5°

- C90/270,159.1°

Average Beam Angle (50%):163.5°

Height	Eavg,Emax	Beam Angle:175.16°	Diameter
1cm	4388,3548lx		47.29cm
2cm	1097,88708lx		94.59cm
4cm	274.2,22177lx		189.18cm
6cm	121.9,9856lx		283.77cm
8cm	68.56,5544lx		378.35cm
10cm	43.88,3548lx		472.94cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD7 3.0-0303	24V DC	3000-6500K	333	90	3.7	3	/
JYD7 3.0-0506	24V DC	3000-6500K	666	90	7.5	6	/
JYD7 3.0-1012	24V DC	3000-6500K	1332	90	15	12	/



JYD8 1.0 BACK-LIT

- Adopt 3V NICHIA 3030 LED
- Uniform lighting, suitable for lightbox with depth of 5-10cm
- Curtain style for easy mounting
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

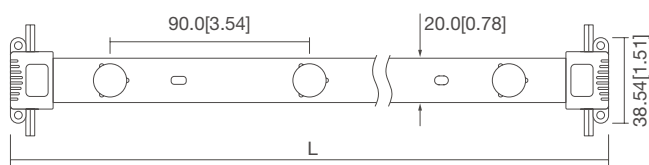

Model No.	L:mm/inch
JYD8 1.0-3030	270[10.63]
JYD8 1.0-0404	360[14.17]
JYD8 1.0-0707	630[24.80]

PHOTOMETRIC

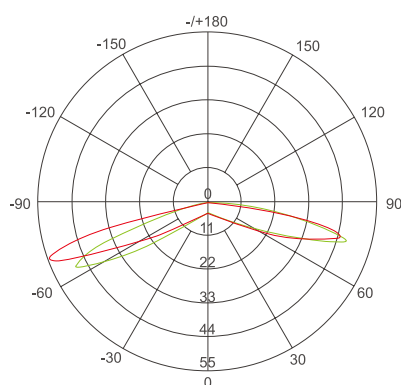


Unit: cd

- C 0/180,168.5°

- C90/270,159.1°

Average Beam Angle (50%):163.5°

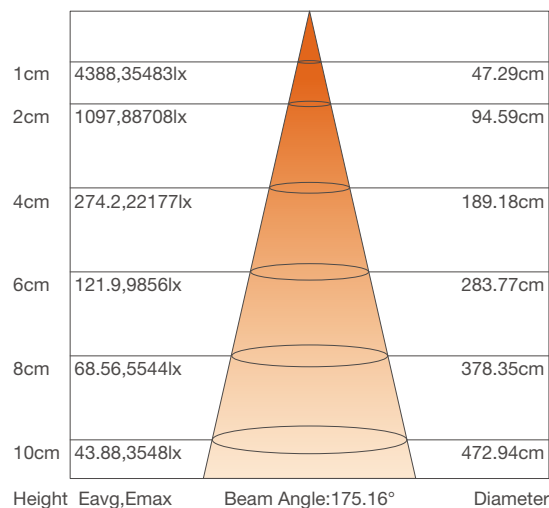


BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JYD8 1.0-0303	24V DC	6000-7000K	158	50	3.1	3	8pcs
JYD8 1.0-0404	24V DC	6000-7000K	210	66	3.1	4	8pcs
JYD8 1.0-0707	24V DC	6000-7000K	370	116	3.1	7	8pcs


FYD2-E BACK-LIT

- High efficacy 2835LED
- Special optical lens for uniform lighting
- Aluminium PCB for excellent heat dissipation
- 170° wide beam angle helps eliminate wasted light
- Multiple specifications available

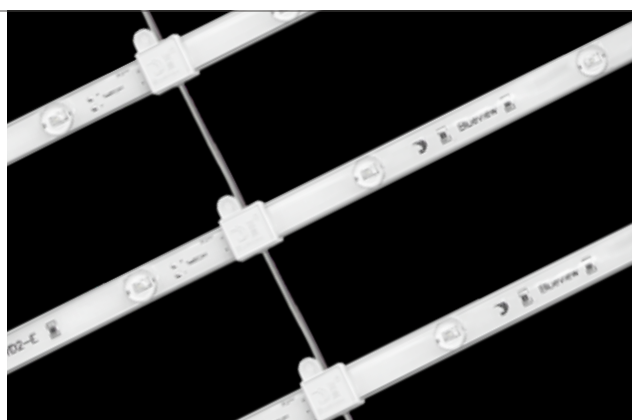


PROFILE DRAWINGS

Unit:mm/inch

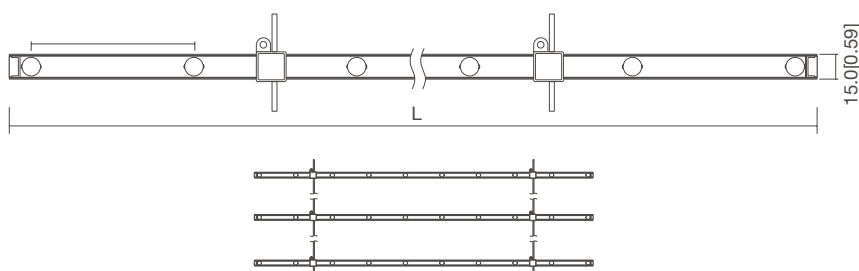

Model No.	L:mm/inch
FYD2-E-0506	520[20.47]
FYD2-E-0910	910[35.83]
FYD2-E-1112	1110[43.70]

PHOTOMETRIC

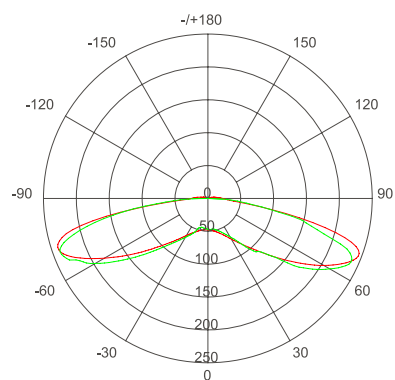

Height	Eavg,Emax	Beam Angle:176.11°	Diameter
1cm	798.6,486568lx		58.86cm
2cm	199.7,121642lx		117.71cm
4cm	49.91,30410lx		235.42cm
6cm	22.18,13516lx		353.14cm
8cm	12.48,7603lx		470.85cm
10cm	7.986,4866lx		588.56cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD2-E-0506	24V DC	7836-9000K	432	85	5	6	15pcs
FYD2-E-0910	24V DC	7836-9000K	714	85	8.4	10	10pcs
FYD2-E-1112	24V DC	7836-9000K	850	85	10	12	10pcs


FYD3-A BACK-LIT

- Adopt 9V 3030 LED
- Specially designed secondary light distribution lens, uniform lighting
- Adopt aluminum PCB & aluminum channel for better heat dissipation
- Support PWM, 0-10V, DALI, DMX dimming
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

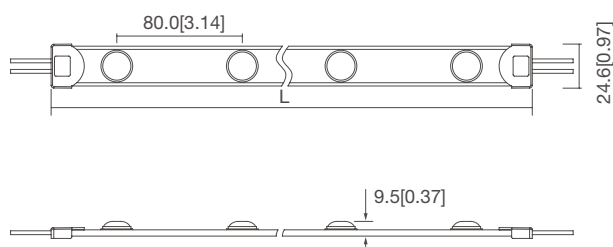

Model No.	L:mm/inch
FYD3-A-2503	970[38.19]
FYD3-A-4906	490[19.29]
FYD3-A-9712	250[9.84]

PHOTOMETRIC

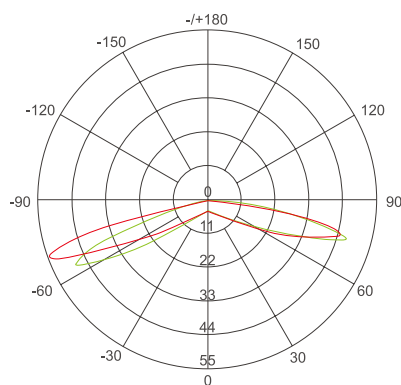


Unit: cd

- C 0/180,168.5°

- C90/270,159.1°

Average Beam Angle (50%):163.5°

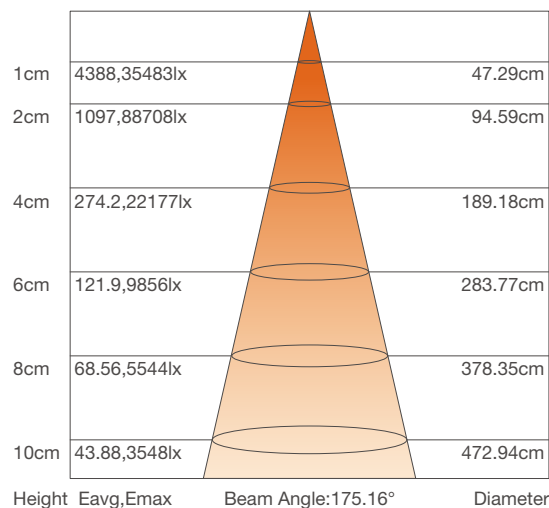

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD3-A-2503	12V DC	7836-9000K	324	90	3.6	12	10pcs
FYD3-A-4906	12V DC	7836-9000K	648	90	7.2	6	8pcs
FYD3-A-9712	12V DC	7836-9000K	1296	90	14.4	3	4pcs


FYD7 3.0 BACK-LIT

- Aluminum PCB & glue filled aluminum channel, better heat dissipation
- High brightness, uniform lighting
- Constant current driving with same brightness from end to end
- Reverse connection of the wire will be protected




PROFILE DRAWINGS

Unit:mm/inch

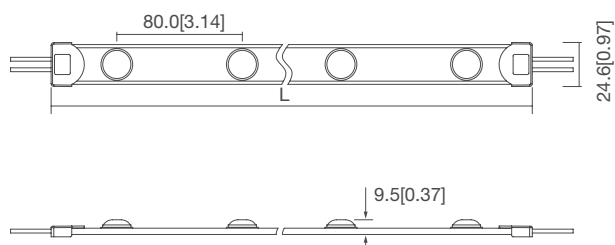

Model No.	L:mm/inch
FYD7 3.0-0303	252[9.92]
FYD7 3.0-0506	492[19.37]
FYD7 3.0-1012	972[38.27]

PHOTOMETRIC

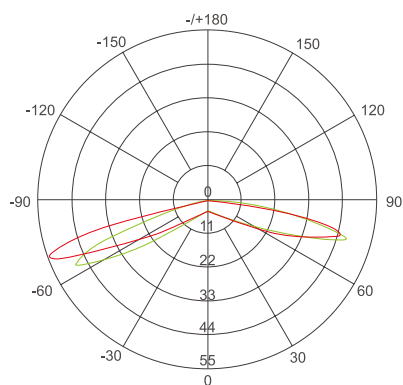

Unit: cd

- C 0/180,168.5°

- C90/270,159.1°

Average Beam Angle (50%):163.5°

Height	Eavg,Emax	Beam Angle:175.16°	Diameter
1cm	4388,3548lx		47.29cm
2cm	1097,88708lx		94.59cm
4cm	274.2,22177lx		189.18cm
6cm	121.9,9856lx		283.77cm
8cm	68.56,5544lx		378.35cm
10cm	43.88,3548lx		472.94cm

BASIC PARAMETERS


Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD7 3.0-0303	24V DC	3000-6500K	333	90	3.7	3	/
FYD7 3.0-0506	24V DC	3000-6500K	666	90	7.5	6	/
FYD7 3.0-1012	24V DC	3000-6500K	1332	90	15	12	/

- Adopt 3V NICHIA 3030LED
- Aluminum PCB & glue filled aluminum channel, better heat dissipation
- Constant current driving with same brightness from end to end




PROFILE DRAWINGS

Unit:mm/inch

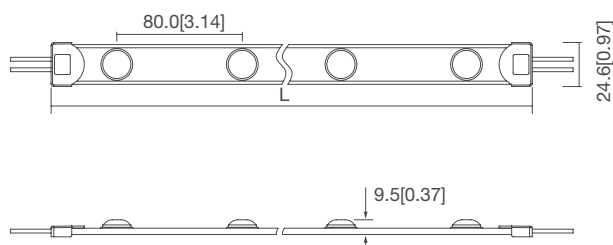

Model No.	L:mm/inch
FYD8-0303	282[11.10]
FYD8-0303	372[14.65]
FYD8-0707	642[25.28]

PHOTOMETRIC

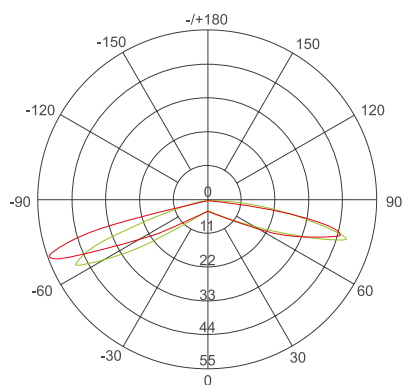

Height	Eavg,Emax	Beam Angle:175.16°	Diameter
1cm	4388,35483lx		47.29cm
2cm	1097,88708lx		94.59cm
4cm	274.2,22177lx		189.18cm
6cm	121.9,9856lx		283.77cm
8cm	68.56,5544lx		378.35cm
10cm	43.88,3548lx		472.94cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
FYD8-0303	24V DC	6000-7000K	158	50	3.1	3	10pcs
FYD8-0404	24V DC	6000-7000K	210	66	3.1	4	8pcs
FYD8-0707	24V DC	6000-7000K	370	116	3.1	7	5pcs

JFYD3-A | BACK-LIT



- Adopt 9V 3030 LED
- Secondary light distribution lens, uniform lighting
- Aluminum PCB + metal channel, better heat dissipation
- Curtain style for easy mounting
- Support PWM, 0-10V, DALI, DMX dimming




		CONSTANT VOLTAGE						CRI 80		
--	--	------------------	--	--	--	--	--	--------	--	--

PROFILE DRAWINGS

Unit:mm/inch

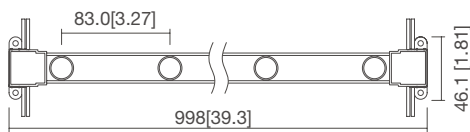

PHOTOMETRIC

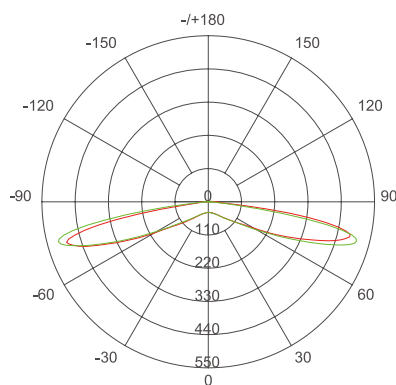

Height	Eavg,Emax	Beam Angle:175.16°	Diameter
1cm	4388,35483lx		47.29cm
2cm	1097,88708lx		94.59cm
4cm	274.2,22177lx		189.18cm
6cm	121.9,9856lx		283.77cm
8cm	68.56,5544lx		378.35cm
10cm	43.88,3548lx		472.94cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JFYD3-A-1012	24V DC	6500K	1296	90	14.4	12	10pcs


JFYD7 3.0 BACK-LIT

- Adopt high quality 3030 LED
- Secondary light distribution lens, uniform lighting
- Aluminum PCB for better heat dissipation
- Curtain style + clips, easy to install




PROFILE DRAWINGS

Unit:mm/inch

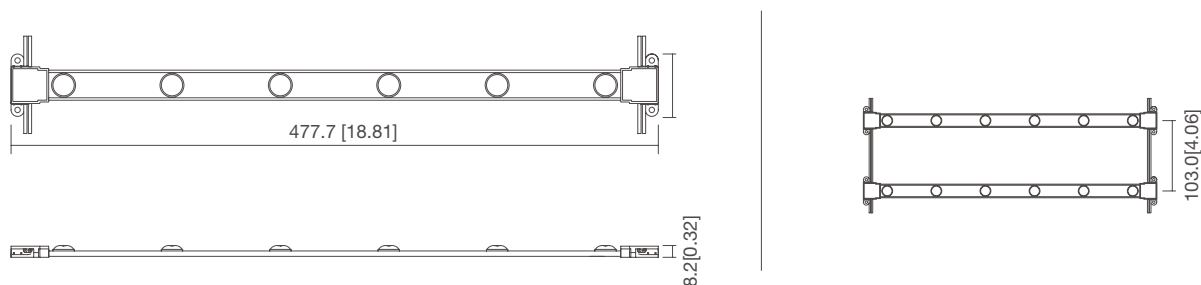

PHOTOMETRIC

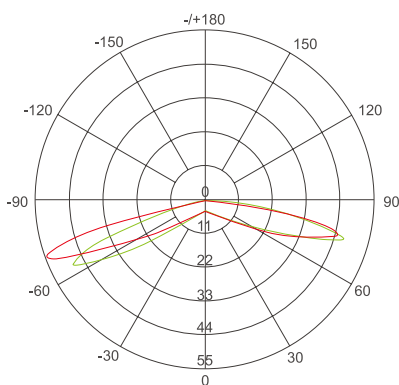


Unit: cd

- C 0/180,168.5°

- C90/270,159.1°

Average Beam Angle (50%):163.5°

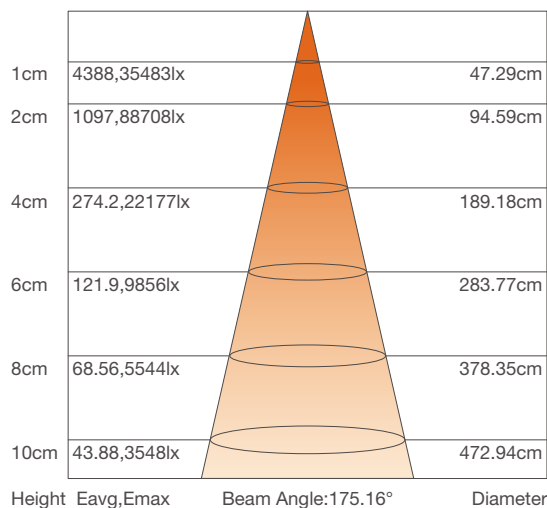

BASIC PARAMETERS



Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JFYD7 3.0-0303	24V DC	3000-6500K	333	90	3.7	3	10pcs
JFYD7 3.0-0506	24V DC	3000-6500K	666	90	7.5	6	10pcs
JFYD7 3.0-1012	24V DC	3000-6500K	1332	90	15	12	8pcs

- Adopt high quality 3030 LED
- 160° wide beam angle
- Secondary light distribution lens, uniform lighting
- Aluminum PCB for better heat dissipation
- Curtain style, easy to install





PROFILE DRAWINGS

Unit:mm/inch

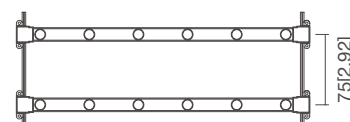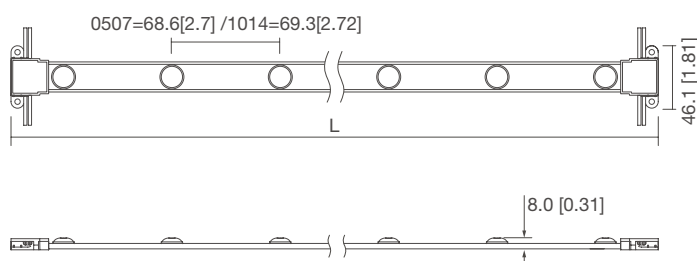

Model No.	L:mm/inch
JFYD8-0507	492[19.4]
JFYD8-1014	982[38.7]

PHOTOMETRIC

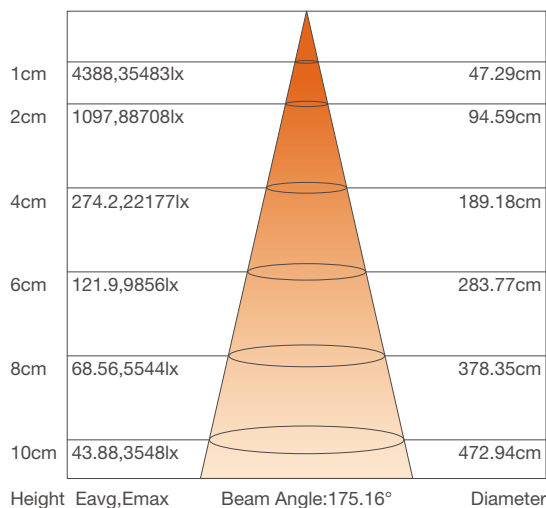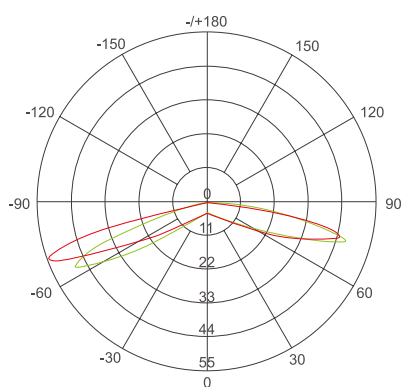

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
JFYD8-4907	24V DC	3000-6500K	352	110	3.2	7	/
JFYD8-9814	24V DC	3000-6500K	704	110	6.4	14	/

BPS300 SIDE-LIT


- Adopt high quality 3535 LED
- High brightness of single bar
- Secondary optical lens for uniform light
- Stable and reliable performance, easy installation



			Ra 80	 8°15°	CRI 70	 DC24V	 4Years
--	--	--	-----------------	-----------	------------------	-----------	------------


PROFILE DRAWINGS

Unit:mm/inch

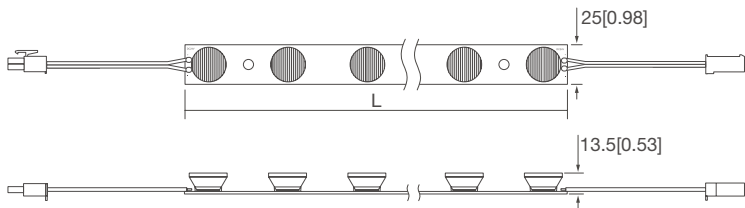

Model No.	L:mm/inch
BPS300-0205	250[9.84]
BPS300-0510	480[18.90]


PHOTOMETRIC

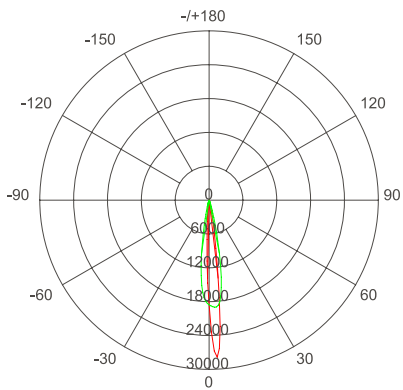

Unit: cd

- C 0/180,7.2°
- C90/270,17.9°

Average Beam Angle (50%):12.5°

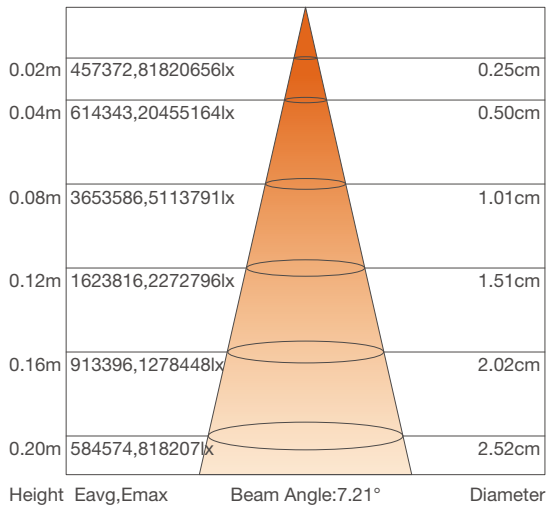

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BPS300-0205	24V DC	6500K	810	75	10.8	5	4pcs
BPS300-0510	24V DC	6500K	1620	75	21.6	10	3pcs


BPS300-C SIDE-LIT

- Adopt high quality 3535 LED
- High brightness up to 1944lm/pcs with competitive price
- Secondary light distribution lens,no dark area
- Stable and reliable performance, easy to install





PROFILE DRAWINGS

Unit:mm/inch

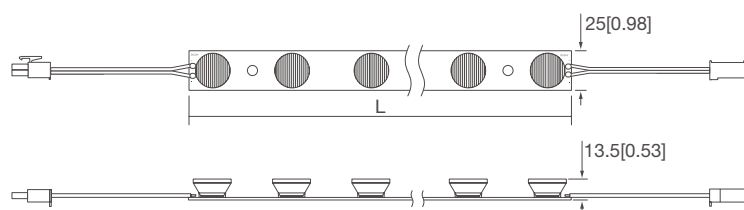

Model No.	L:mm/inch
BPS300-C-0205	250[9.84]
BPS300-C-0510	480[18.90]

PHOTOMETRIC

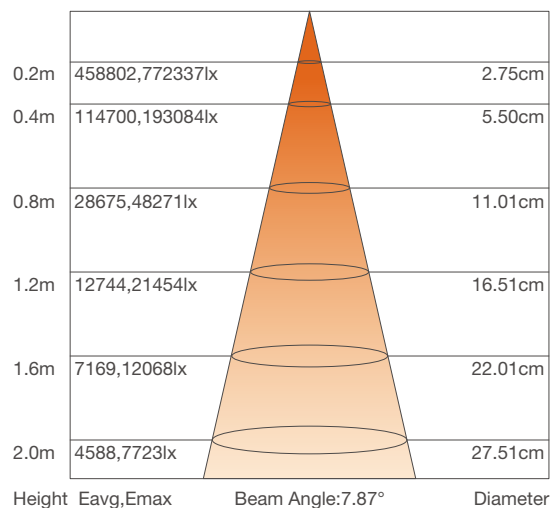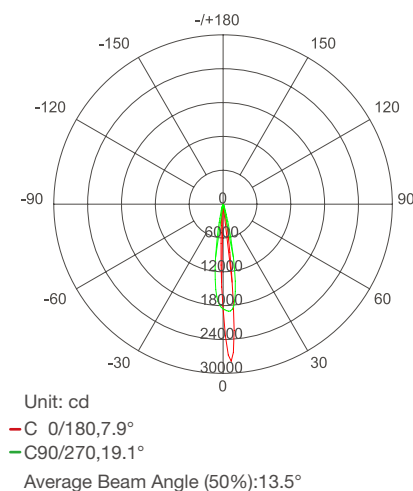

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BPS300-C-0205	24V DC	3000-6500K	972	90	10.8	5	4pcs
BPS300-C-0510	24V DC	3000-6500K	1944	90	21.6	10	3pcs


BPS300-S SIDE-LIT

- Imported high-power SMD 3535Led
- Adopt special secondary light distribution lens
- Uniform light distribution, no dark spots or stripes




PROFILE DRAWINGS

Unit:mm/inch

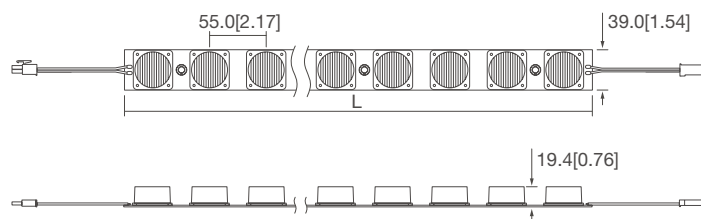

Model No.	L:mm/inch
BPS300-S5	275[10.83]
BPS300-S10	550[21.65]

PHOTOMETRIC

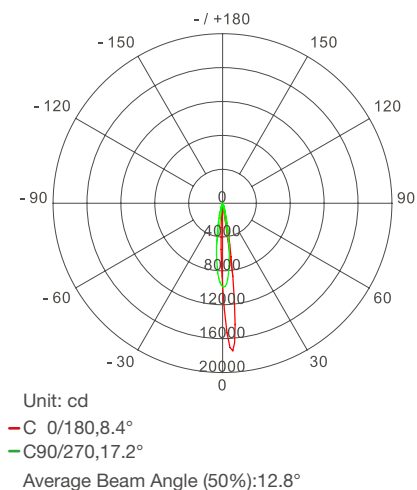

Height	Eavg,Emax	Beam Angle:8.42°	Diameter
0.2m	242486,447787lx		2.94cm
0.4m	60621,111947lx		5.89cm
0.8m	15155,27987lx		11.78cm
1.2m	6736,12439lx		17.67cm
1.6m	3789,6997lx		23.56cm
2.0m	2425,4478lx		29.44cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BPS300-S5	24V DC	6000-7000K	1188	110	10.8	5	5pcs
BPS300-S10	24V DC	6000-7000K	2376	110	21.6	10	3pcs


BPS1-S SIDE-LIT

- High efficacy up to 120 lm/W
- High brightness and small voltage drop of single bar, radiation-free
- Stable and reliable performance, easy to install
- Multiple specifications available




PROFILE DRAWINGS

Unit:mm/inch

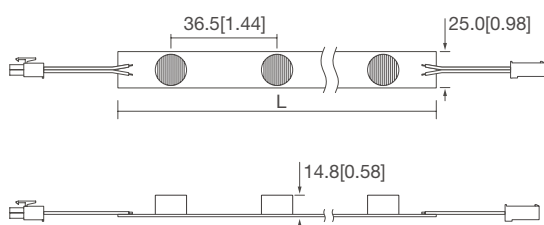

Model No.	L:mm/inch
BPS1-S3	219[8.62]
BPS1-S5	365[14.37]
BPS1-S6	438[17.24]
BPS1-S8	360[14.17]

PHOTOMETRIC

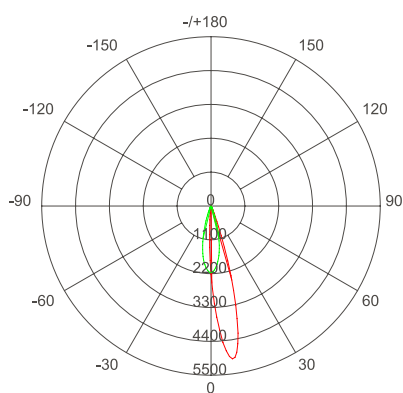

Unit: cd

- C 0/180,15.0°

- C90/270,27.6°

Average Beam Angle (50%):21.3°

Height	Eavg,Emax	Beam Angle:15.05°	Diameter
1m	2161,4868lx		26.42cm
2m	540.3,1217lx		52.84cm
4m	135.1,304.3lx		105.69cm
6m	60.04,135.2lx		158.53cm
8m	33.77,76.07lx		211.38cm
10m	21.61,48.68lx		264.22cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BPS1-S3	24V DC	>6400K	984	120	8.2	3	10pcs
BPS1-S5	24V DC	>6400K	1620	120	13.5	5	6pcs
BPS1-S6	24V DC	>6400K	1872	120	15.6	6	5pcs
BPS1-S8	24V DC	>6400K	2160	120	18.0	8	4pcs

BP2-W SIDE-LIT


- Suitable for edge-lit lightbox with width less than 2m
- Secondary light distribution lens, uniform lighting
- Cuttable and easy to install
- Multiple specifications, support customization



CE	LM-80	IP20	LED3030	12°24°	CRI 70	DC24V	3Years
----	-------	------	---------	--------	-----------	-------	--------


PROFILE DRAWINGS

Unit:mm/inch

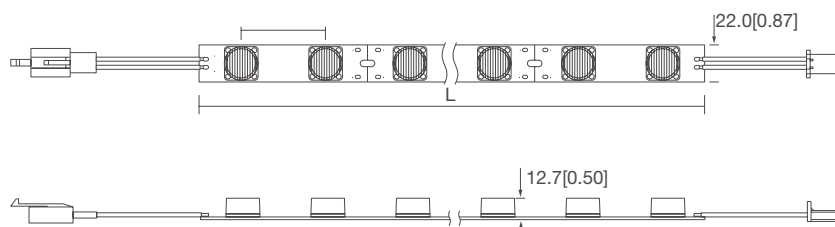

Model No.	L:mm/inch
BP2-W-0510	500[19.69]
BP2-W-0918	900[35.43]

PHOTOMETRIC

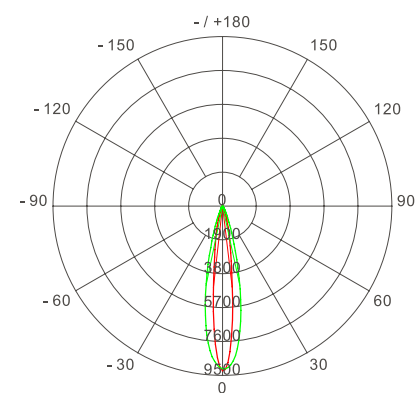

Unit: cd

- C 0/180,13.3°

- C90/270,24.1°

Average Beam Angle (50%): 18.7°

Height	Eavg,Emax	Beam Angle:13.33°	Diameter
0.2m	180823,231036lx		4.67cm
0.4m	45206,57759lx		9.35cm
0.8m	11301,14440lx		18.70cm
1.2m	5023,6418lx		28.05cm
1.5m	3215,4107lx		35.06cm
2.0m	1808,2310lx		46.75cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BP2-W-0510	24V DC	6400-7700K	1482	95	15.60	10	4pcs
BP2-W-0918	24V DC	6400-7700K	2668	95	28.08	18	2pcs

BP2-WN SIDE-LIT


- Suitable for side-emitting lightbox with width less than 2m.
- Secondary optical lens for uniform light
- Aluminum PCB for quick heat dissipation
- Multiple size optional,customizable
- Support PWM, 0-10V, DALI and DMX dimming



 DIMMABLE	 IP20	 LED3030	 12°24°	 CRI 80	 DC24V	 3Years
--	--	---	--	--	---	--


PROFILE DRAWINGS

Unit:mm/inch

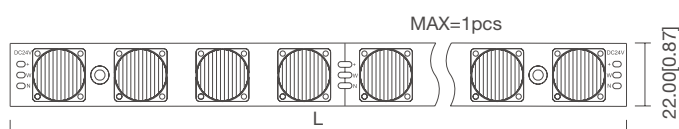

Model No.	L:mm/inch
BP2-WN	500.00[19.69]

PHOTOMETRIC

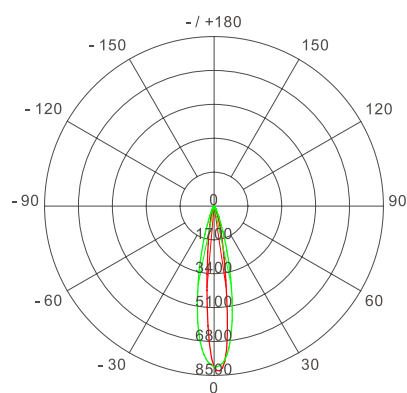


Height	Eavg,Emax	Beam Angle:13.00°	Diameter
0.2m	345758,459610lx		4.56cm
0.4m	86439,114903lx		9.11cm
0.8m	21610,28726lx		18.23cm
1.2m	9604,12767lx		27.34cm
1.6m	5402,7181lx		36.46cm
2.0m	3458,4596lx		45.57cm

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BP2-WN	24V DC	W: 3500K N: 6500K	1300	90	14.4	16	1pcs

BP2-J SIDE-LIT


- Adopt secondary light distribution lens.
- Single LED cuttable.
- Support PWM, 0-10V, DALI and DMX dimming.
- Multiple specifications, support customization.

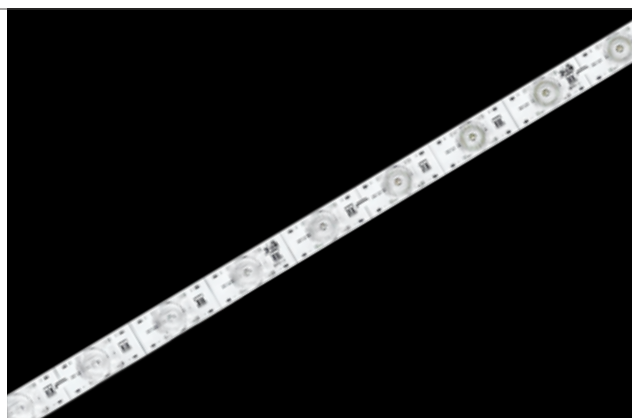

	DIMMABLE	IP20	LED2835	12°24°	CRI 80	DC12V	2Years


PROFILE DRAWINGS

Unit:mm/inch

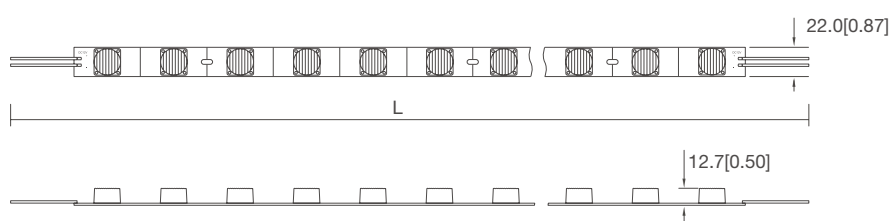

Model No.	L:mm/inch
BP2-J-0510	500[19.69]
BP2-J-0918	900[35.43]

PHOTOMETRIC

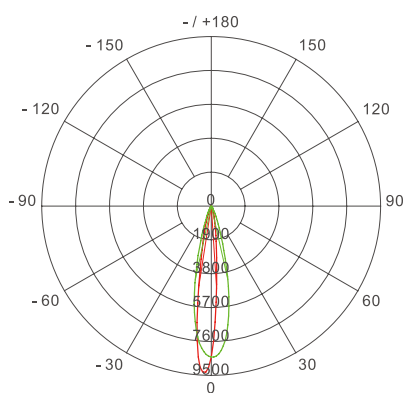

Unit: cd
 - C 0/180, 12.5°
 - C90/270, 25.0°
 Average Beam Angle (50%): 18.8°

Height	Eavg, Emax	Beam Angle:13.22°	Diameter
0.2m	171071,230496lx		4.64cm
0.4m	42768,57624lx		9.27cm
0.8m	10692,14406lx		18.54cm
1.2m	4752,6403lx		27.81cm
1.6m	2673,3602lx		37.09cm
2.0m	1711,2305lx		46.36cm

BASIC PARAMETERS



Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Max Run
BP2-J-0510	12V DC	3500-9000K	860	90	9.60	10	3pcs
BP2-J-0918	12V DC	3500-9000K	1550	90	17.28	18	2pcs

- Support dimming
- Use aluminum cover, better heat dissipation
- Adopt secondary light distribution lens
- Multiple specifications, support customization





PROFILE DRAWINGS

Unit:mm/inch

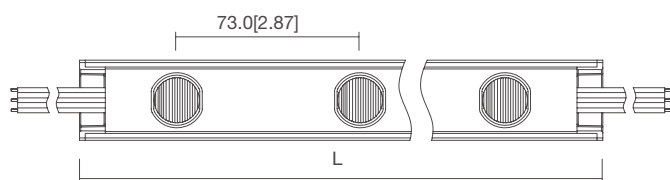

Model No.	L:mm/inch
YZ9-3	223.6[8.80]
YZ9-5	369.6[14.55]
YZ9-6	442.6[17.43]

PHOTOMETRIC

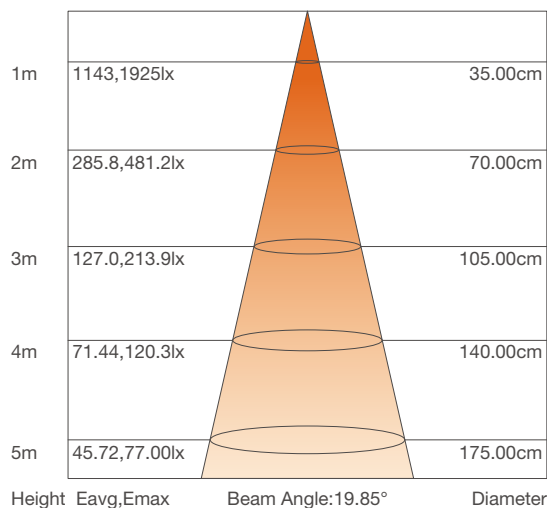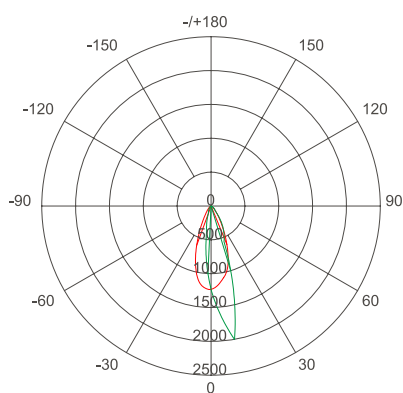

BASIC PARAMETERS

Model No.	Voltage	CCT	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
YZ9-3	24V DC	3000-6500K	741	103	7.20	3	7pcs
YZ9-5	24V DC	3000-6500K	1235	105	11.76	5	5pcs
YZ9-6	24V DC	3000-6500K	1424	106	13.44	6	4pcs

QYD8 RGB/RGBW


- Adopt OSRAM LED with high stability
- 170 ° beam angle, suitable for thin lightbox
- Aluminum PCB for better heat dissipation



OSRAM	LM-80	IP20	LED3030	170°	ONE BIN ONLY	DC24V	3Years
-------	-------	------	---------	------	--------------	-------	--------


PROFILE DRAWINGS

Unit:mm/inch

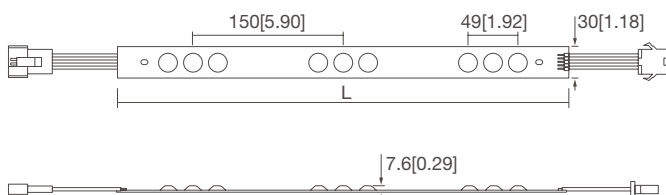

Model No.	L:mm/inch
QYD8-0509	450[17.71]

PHOTOMETRIC

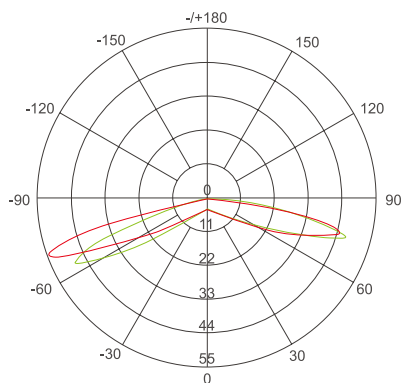

Height	Eavg,Emax	Beam Angle:175.16°	Diameter
1cm	4388,35483lx		47.29cm
2cm	1097,88708lx		94.59cm
4cm	274.2,22177lx		189.18cm
6cm	121.9,9856lx		283.77cm
8cm	68.56,5544lx		378.35cm
10cm	43.88,3548lx		472.94cm

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QYD8-0509	24V DC	R:620nm G:540nm B:450nm	500	42	12	8	8pcs

BQ5-A RGB/RGBW


- Adopt RGB 3in1 2830 LED
- Good color-mixing effect and stability
- Special lens with 170° beam angle, suitable for thin light box
- Create rich color changing effects via controller
- Adopt standard terminals for easy mounting



NICHIA	LM-80	IP20	LED2830	170°	DC24V	3Years
--------	-------	------	---------	------	-------	--------


PROFILE DRAWINGS

Unit:mm/inch

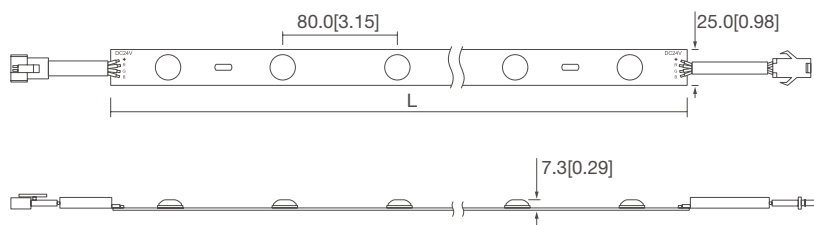

Model No.	L:mm/inch
BQ5-A	480[18.90]

PHOTOMETRIC

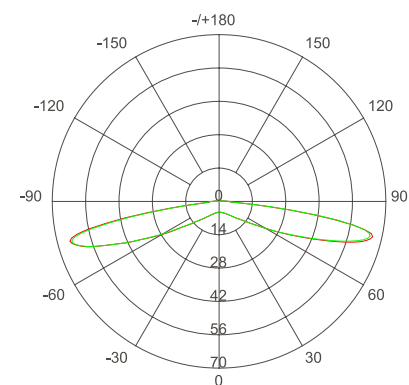

Unit: cd
 - C 0/180,187.7°
 - C90/270,187.6°
 Average Beam Angle (50%): 187.7°


RGB			
Height	Eavg,Emax	Beam Angle: 90.00°	Diameter
0.01m	2161,4868lx		2.00cm
0.02m	540.3,1217lx		4.00cm
0.04m	135.1,304.3lx		8.00cm
0.06m	60.04,135.2lx		12.0cm
0.08m	33.77,76.07lx		16.0cm
0.10m	21.61,48.68lx		20.0cm

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
BQ5-A	24V DC	R:620nm	48	30.0	1.92	6	1pcs
		G:540nm	77	48.2	1.92		
		B:450nm	25	15.7	1.92		
		RGB:100000K	142	29.6	5.76		

RGBW-YD8 RGB/RGBW


- Adopt high quality 3030LED
- 170° large beam angle
- Create rich color changing effects via controller

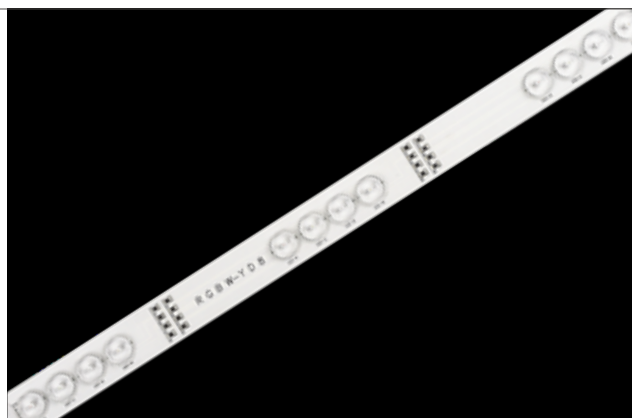

NICHIA	LM-80	IP20	LED3030	CRI 70	170°	DC24V	3Years
---------------	-------	------	---------	------------------	------	-------	--------


PROFILE DRAWINGS

Unit:mm/inch

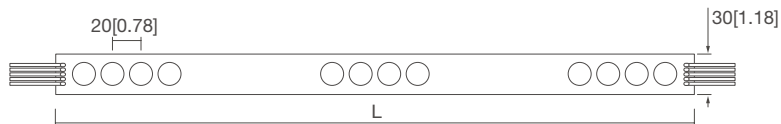

Model No.	L:mm/inch
RGBW-YD8	450[17.71]

PHOTOMETRIC

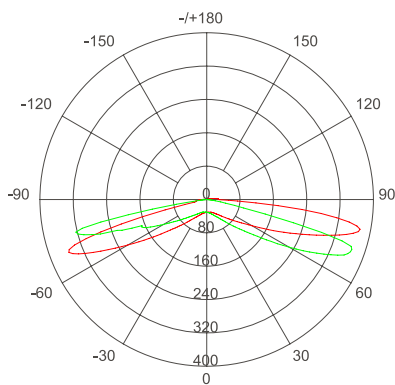

Unit: cd
 - C 0/180,187.3°
 - C90/270,164.4°
 Average Beam Angle (50%):175.9°

Height	Eavg,Emax	Beam Angle:164.54°	Diameter
0.1m	383.2,3566lx		147.29cm
0.2m	95.80,891.5lx		294.59cm
0.4m	23.95,222.9lx		589.18cm
0.6m	10.64,99.05lx		883.77cm
0.8m	5.987,55.72lx		1178.36cm
1.0m	3.832,35.66lx		1472.95cm

BASIC PARAMETERS

Model No.	Voltage	CRI	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
RGBW-YD8	24V DC	/	R:620nm	500	42	≤15	12	3pcs
		/	G:540nm	500	42			
		/	B:450nm	500	42			
		>80	W:6500K	162	90			

- Adopt CREE LEDs with good stability
- Great lighting effect, long reach distance
- Aluminum PCB for better heat dissipation
- Create rich color changing effects via controller



CREE



LM-80



IP20



LED2525



ONE BIN ONLY



10°60°




DC24V



3Years

PROFILE DRAWINGS



Unit:mm/inch

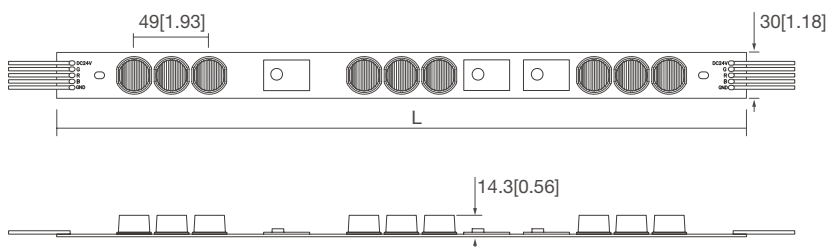

Model No.
QBPS-0509

L:mm/inch
450[17.72]

PHOTOMETRIC

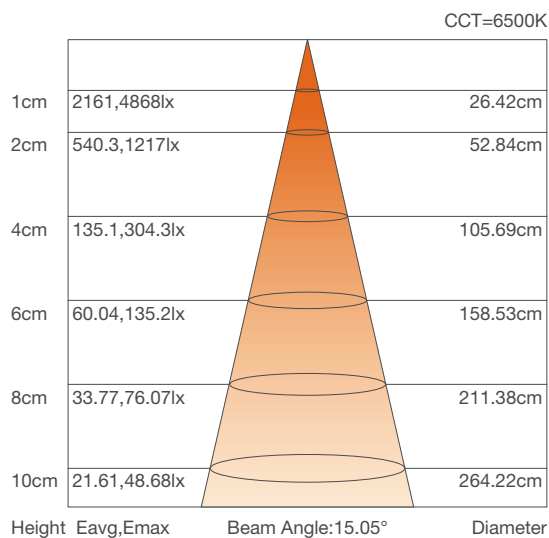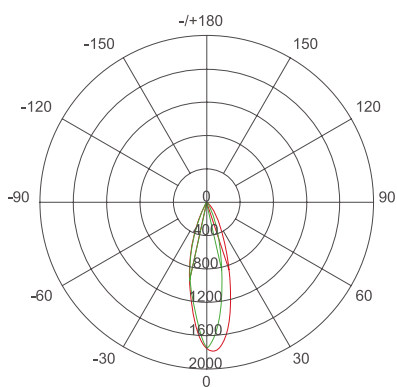

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QBPS-0509	24V DC	R:620-625nm G:520-525nm B:465-470nm	800	42	≤19	9	4pcs

QBPS-C RGB/RGBW


- Special optical lens is used
- Adopt aluminum PCB for better heat dissipation
- Create rich color changing effects via controller
- Multiple specifications, support customization



 LM-80	 IP20	 LED3535	 10°20°	 CRI 70	 DC24V	 3Years
---	--	---	--	--	---	--


PROFILE DRAWINGS

Unit:mm/inch

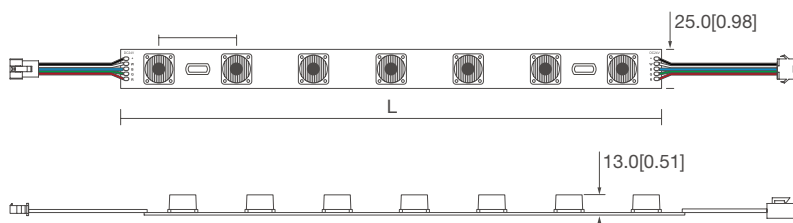

Model No.	L:mm/inch
QBPS-C	350[13.78]

PHOTOMETRIC

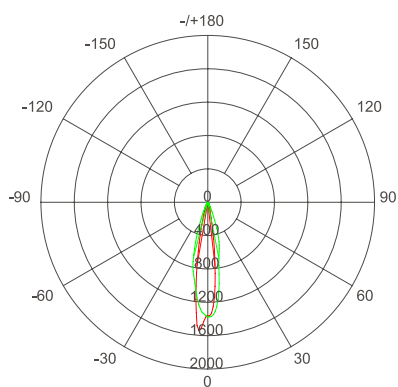

Unit: cd

- C 0/180,16.2°
- C90/270,25.8°

Average Beam Angle (50%): 21.0°

Height	Eavg,Emax	Beam Angle: 16.19°	Diameter
0.2m	28444,38332lx		5.69cm
0.4m	7111,9583lx		11.38cm
0.8m	1778,2396lx		22.76cm
1.2m	790.1,1065lx		34.14cm
1.6m	444.4,598.9lx		45.52cm
2.0m	284.4,383.3lx		56.90cm

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
QBPS-C	24V DC	W:6500K	243	86	3	7	3pcs
		R:615-625nm	138	45	3		
		G:515-530nm	247	83	3		
		B:450-460nm	38	14	3		
		RGB:100000K	409	46	9		
		RGBW:100000K	630	53	12		

A0-FT HIGH VOLTAGE

- Using PC optical lens for more uniform lighting;
- Constant current driver ensures stable operating current;
- High voltage AC 220V input;
- Adopt curtain style, 10pcs bars per string ;
- Various specification, support customization;



IP67



LED2835



170°

Ra
70





AC220V



3Years


PROFILE DRAWINGS

Unit:mm/inch

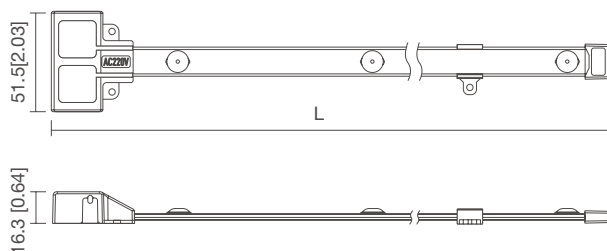

Model No.	L:mm/inch
A0-FT-0303	285[11.22]
A0-FT-0606	571[22.48]
A0-FT-0909	856[33.70]
A0-FT-1212	1136[44.72]

PHOTOMETRIC

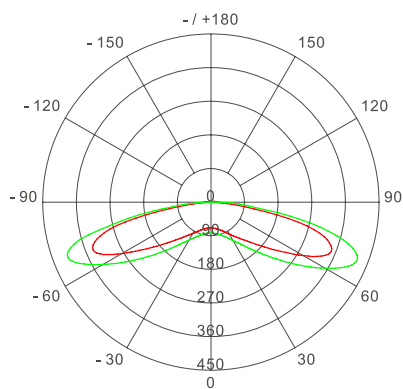


Unit: cd

- C 0/180,171.0°

- C90/270,175.3°

Average Beam Angle (50%): 173.2°

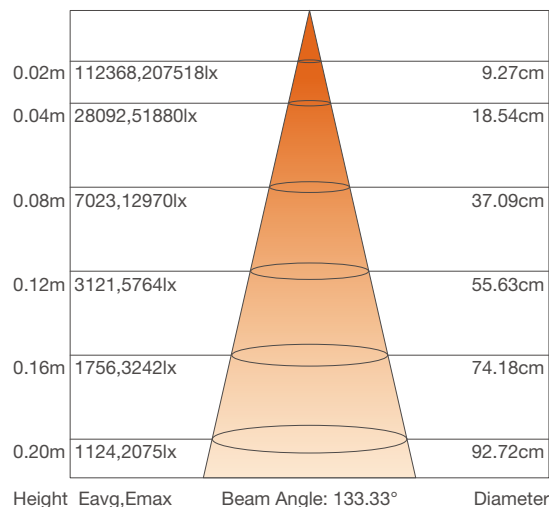

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A0-FT-0303	220V AC	6000-12000K	320	130	2.46	3	10pcs
A0-FT-0606	220V AC	6000-12000K	672	140	4.79	6	
A0-FT-0909	220V AC	6000-12000K	995	138	7.19	9	
A0-FT-1212	220V AC	9000-12000K	1276	138	9.19	12	

A2 2.0 HIGH VOLTAGE



- Wide input voltage range from 90-265V AC
- High power factor with $PF \geq 0.9$
- Curtain style for easy mounting
- Aluminum PCB for better heat dissipation



 INDOOR	 OUTDOOR	 LM-80	 IP66	 LED2835	 120°	CRI 70	 AC90-265V	 3Years
--	---	---	--	---	--	------------------	---	--


PROFILE DRAWINGS

Unit:mm/inch

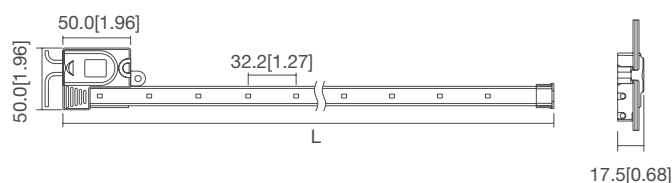

Model No.	L:mm/inch
A2 2.0-0309	306[12.05]
A2 2.0-0618	596[23.46]
A2 2.0-0927	886[34.88]
A2 2.0-1236	1176[46.30]

PHOTOMETRIC

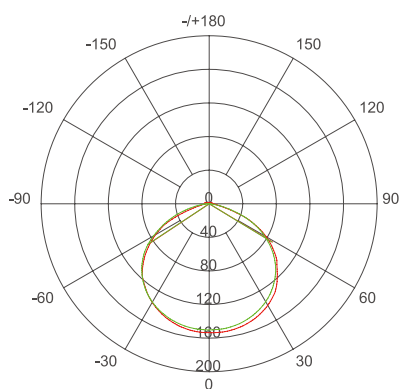

Unit: cd

- C 0/180,114.4°
- C90/270,111.8°

Average Beam Angle (50%): 112.5°

Height	Eavg, Emax	Beam Angle: 115.06°	Diameter
1cm	490682,1760174lx		3.14cm
2cm	122671,440044lx		6.28cm
4cm	30668,110011lx		12.14cm
6cm	13630,48894lx		18.86cm
8cm	7667,27503lx		25.15cm
10cm	4907,17602lx		31.43cm

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A2 2.0-0309	90-265V AC	9000-11000K	225	75	3	9	6pcs
A2 2.0-0618	90-265V AC	9000-11000K	450	75	6	8	
A2 2.0-0927	90-265V AC	9000-11000K	675	75	9	27	
A2 2.0-1236	90-265V AC	9000-11000K	900	81	11	36	

A4-W HIGH VOLTAGE



- AC 220V input
- Self-designed optical lens for uniform lighting
- Do not support PWM dimming
- Multiple specifications, support customization



INDOOR	LM-80	IP20	LED2835	180°	CRI 80	AC220V	3Years
--------	-------	------	---------	------	-----------	--------	--------


PROFILE DRAWINGS

Unit:mm/inch

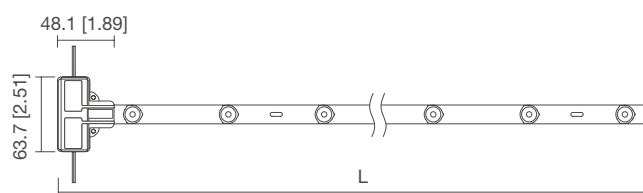

Model No.	L:mm/inch
A4-W-0606	590[23.23]
A4-W-0909	890[35.04]
A4-W-1212	1190[46.85]


PHOTOMETRIC

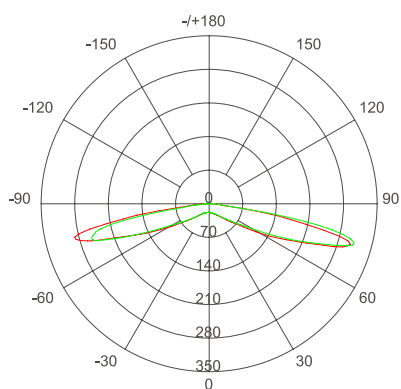

Unit: cd

- C 0/180,186.5°
- C90/270,176.0°

Average Beam Angle (50%): 181.2°

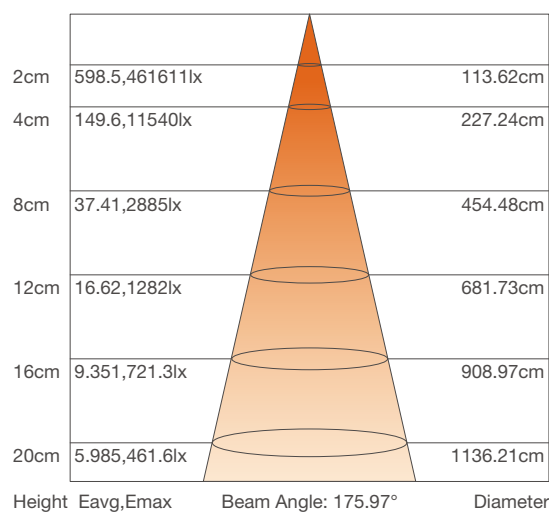

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A4-W-0606	220V AC	2700-12000K	599	106	6	6	6pcs
A4-W-0909	220V AC	2700-12000K	890	101	9	9	
A4-W-1212	220V AC	2700-12000K	1108	102	11	12	

A4-FW HIGH VOLTAGE



- 220V AC input
- Self-designed 170° wide beam angle for uniform lighting
- IP67 suitable for outdoor use
- Carton style ,6pcs/string for easy installation
- Four length for option,customization available



 LM-80	 IP66	 LED2835	 170°	 CRI 80	 AC220V	 4Years
---	--	---	--	--	--	--


PROFILE DRAWINGS

Unit:mm/inch

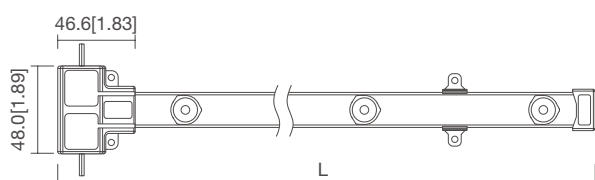

Model No.	L:mm/inch
A4-FW-0303	285[11.22]
A4-FW-0606	570[22.44]
A4-FW-0909	855[33.66]
A4-FW-1212	1150[45.28]

PHOTOMETRIC

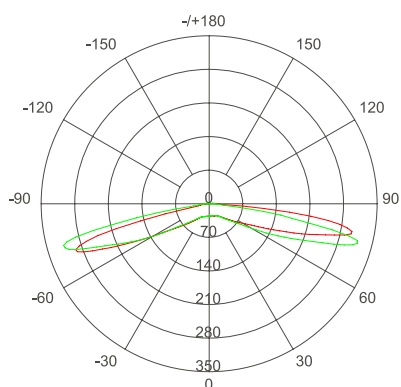

Unit: cd

- C 0/180,176.4°
- C90/270,174.8°

Average Beam Angle (50%): 175.6°


Height	Eavg,Emax	Beam Angle: 174.29°	Diameter
2cm	628.5,64893lx		80.21cm
4cm	157.1,16223lx		160.41cm
8cm	39.28,4056lx		320.83cm
12cm	17.46,1803lx		481.24cm
16cm	9.820,1014lx		641.66cm
20cm	6.285,648.9lx		802.07cm

BASIC PARAMETERS

Model No.	Voltage	CCT/Wavelength	LM/pcs	LM/W	W/pcs	LED/pc	Standard Run
A4-FW-0303	220V AC	3000-12000K	309	99	3	3	10pcs
A4-FW-0606	220V AC	3000-12000K	608	104	6	6	
A4-FW-0909	220V AC	3000-12000K	906	104	9	9	
A4-FW-1212	220V AC	3000-12000K	1188	105	12	12	


NW-B WHITE

- Can play various media files smoothly
- To get better picture quality than display screen with less cost
- Low-power consumption with timing control
- Suitable for lightbox with a depth of 6cm or more
- Highly modular, easy to install and maintain

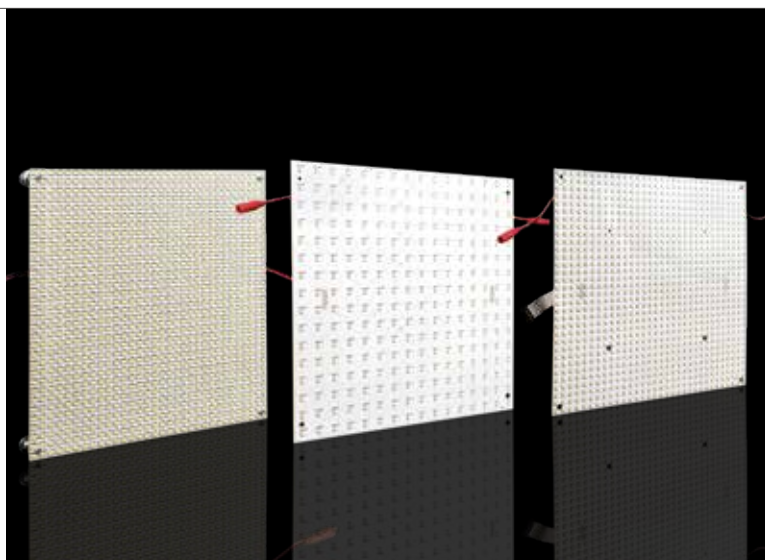

PROFILE DRAWINGS

Unit:mm/inch

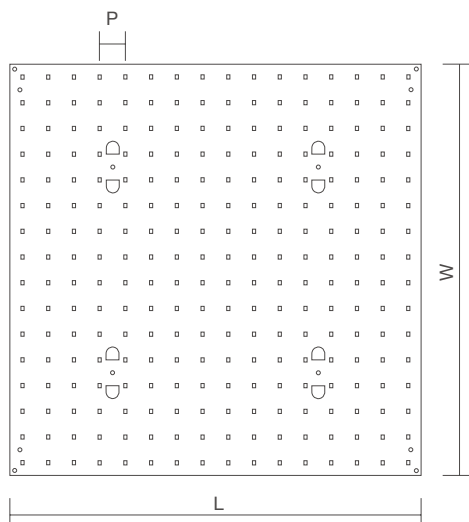


Model No.	L :mm/inch	W :mm/inch	P :mm/inch
NW128-B-P20-A1	320[12.90]	320[12.90]	20[0.79]
NW260-B-P10-A1	320[12.90]	320[12.90]	10[0.39]
NW260-B-P12-A1	384[15.12]	384[15.12]	12[0.47]
NW260-B-P6.5-A1	384[15.12]	384[15.12]	6.5[0.26]

BASIC PARAMETERS

Model No.	Voltage	Light Color	LM/pcs	Max. Current	Max.Power	LED-to-Canvas Distance
NW128-B-P20-A1	5V DC	W	1000	2.56 A/piece	12.8 W/piece	30-40mm
NW260-B-P10-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	25-30mm
NW260-B-P12-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	25-35mm
NW260-B-P6.5-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	20-25mm


- This system could play various media files smoothly
- Various expressions and vivid contents with powerful visual impact
- To get better picture quality than display screen with less cost
- Low-power consumption with timing control
- Suitable for light boxes with a depth of 6CM or more
- Highly modular, easy to install and maintain

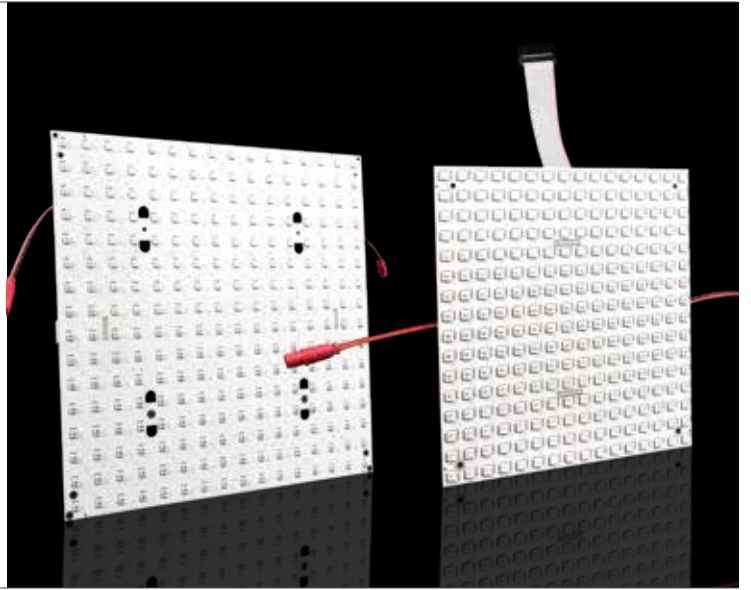


PROFILE DRAWINGS

Unit:mm/inch

NW128-B-P20-A1

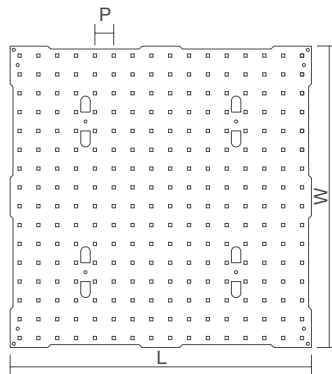

NW260-B-P10-A1

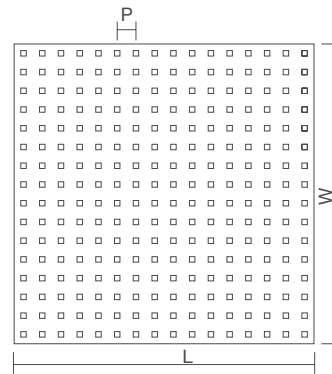

Model No.	L :mm/inch	W :mm/inch	P :mm/inch
NF230-B-P20-B1	320[12.90]	320[12.90]	20[0.79]
NF230-B-P12-B1	192[7.56]	192[7.56]	12[0.47]

BASIC PARAMETERS

Model No.	Voltage	Light Color	LM/pcs	Max. Current	Max.Power	LED-to-Canvas Distance
NW128-B-P20-A1	5V DC	W	1000	2.56 A/piece	12.8 W/piece	30-40mm
NW260-B-P10-A1	5V DC	W	2000	5.2 A/piece	26 W/piece	25-30mm



Blueview Elec-Optic Tech Co., Ltd

Tel: +86-28-8148 0011

Fax: +86-28-8148 1258

Web: www.blueviewled.com

Email: sales@blueviewled.com

© No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Zone, Chengdu, Sichuan, China