



BETTER LIGHTING LESS DISTRACTIONS GREATER PRODUCTIVITY



BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011
Fax: +86-28-8148 1258
Mail: support@bvinspiration.com
Web: www.bvinspiration.com
Web: www.blueviewled.com

Add: No. 1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Shuangliu, Chengdu, Sichuan, China.610207



ZHONGSHAN LINEAR DIVISION

Add: No. 1 TianQin St., Wusha Industrial Zone, Henglan Town, ZhongShan, Guangdong, China



ABOUT US

BVInspiration is a brand extension of Blueview established in 2016 which specializes incommercial architectural luminaires.

We deliver high performance LED luminaires for offices, commer cial, educational institution, recreational and hospitality spaces. We provide a range of innovative solutions to satisfy most of our client's ever-changing requirement of today's project including design and build-to-order custom lighting solutions.


BVInspiration is the best for our forward-thinking capabilities and innovativeness. We work closely with ourclients and stakeholders to develop products that are in trend to deliver functional and aesthetical advantages. All of our products are designed and engineered with the principles of captivating, ease of installa tion, usage and maintenance.

WHY BVINSPIRATION

Our product's engineering design was covered every link from material, production feasibility, transportation, inventory, to in field installation. We are in close contact with designers, suppliers, and assembly workers to build products that are realistic, superiorin design, functionality, and flexible luminaire systems.

We provide more optical options with Direct Lighting, Direct & Indirect Lighting, Asymmet-ric, Double Asymmetric lighting with PC /PMMA lens, TIR, Reflector, Louver. Beamangle from 15° to 110°. More LED options inCRI 95+,90+ in around 10 CCT options from1800K to 6500k, Tunable white, Dim to Warm. More dimming methods 0-10V, DALI, DMX, Triac forward/Reverse Phase.



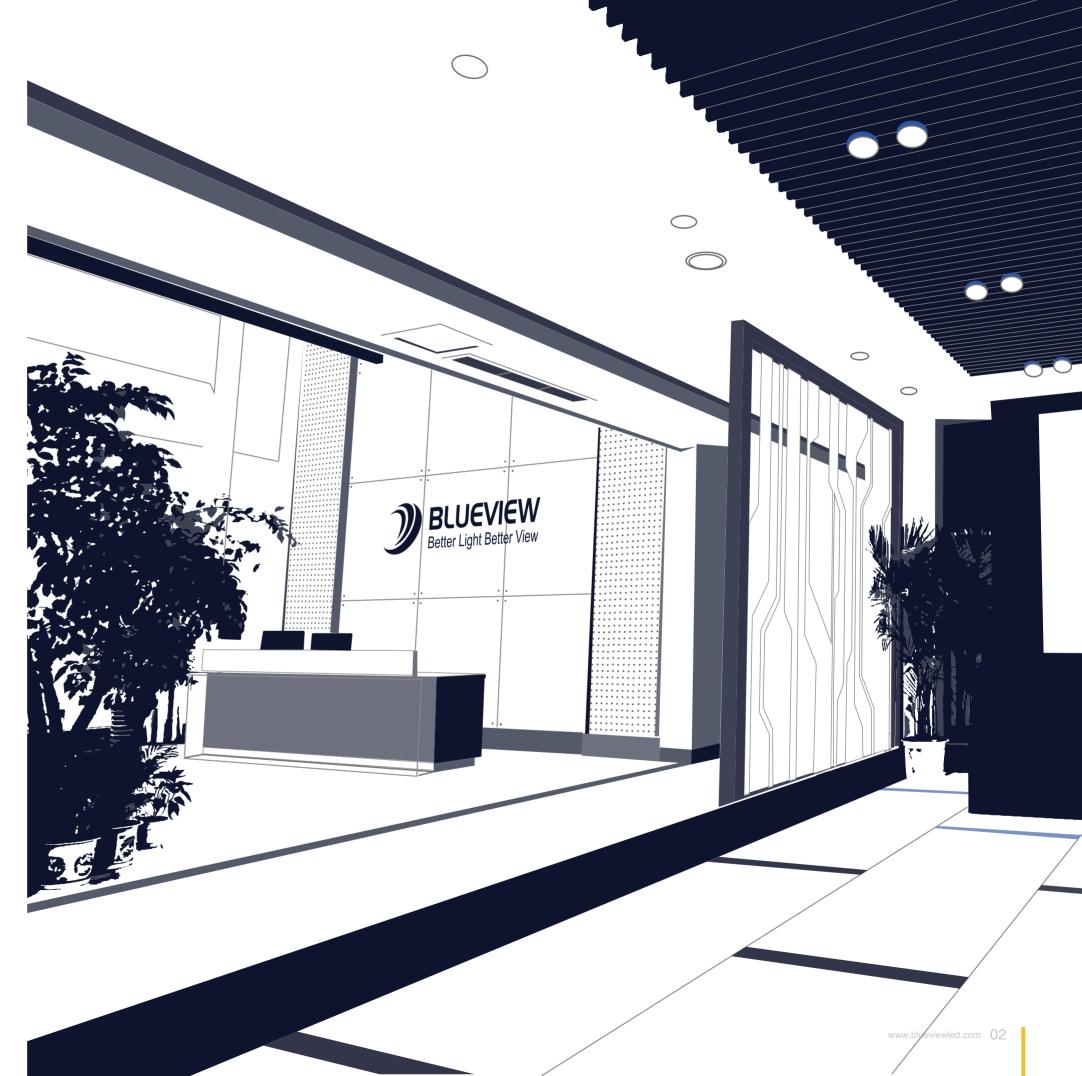

Innovating Sound Solutions

Our Acoustical Laboratories

BVI's Acoustical Laboratories

where innovation meets acoustics.

As pioneers in the field, we take pride in being the first lighting manufacturer to house an in-house acoustical laboratory. Our commitment to sound excellence has earned us global recognition as a trusted source of valid acoustical data. Partnering with prestigious universities, our laboratory plays a pivotal role in advancing noise abatement solutions.

Professional Acoustic Lighting Manufacturer

Transforming Sound into Illumination

BVI is not just lighting experts; we are pioneers in the fusion of light and sound.

As a professional acoustic lighting manufacturer, we have redefined the way you experience both. Our commitment to excellence shines through in every product we create, blending aesthetics with acoustics to create innovative lighting solutions that elevate your space.



Why Choose BVI?

- The Preferred Choice for Acoustical Solutions.
- Unmatched expertise in acoustical testing.
- Cutting-edge facilities equipped with the latest technology.
- Globally recognized and accredited.
- A commitment to advancing noise abatement solutions.

Producing the parts Testing Sound Creating Silence

Our state-of-the-art laboratory specializes in soundtransmission, absorption, and intensity analysis. It serves as the corner-stone of our research and development efforts to combat noise pollution.

A central control room continuously monitors various acoustical tests.





Key Tests Conducted

Pushing Boundaries in Acoustical Testing

Reverberation chambers are the heart of our laboratory, enabling tests such as sound absorption, transmission loss, impact sound transmission, sound power, sound pressure, and dB(A) measurements.

This 200 cubic meters (over 7,000 cubic foot) chamber designed to reflect sound and used for material and buck testing. The hard, non-porous walls with stationary and rotating sound wave diffusers allow our team of experts to evaluate different acoustic treatments by testing for Sound Transmission Loss (STL), sound absorption, and sound power.







Product Testing Capabilities:



Sound Quality

Our in-house Acoustics Lab is the only lab specifically designed for testing Acoustic Lighting and a rchitecture products.



Sound Transmission Loss

We accurately measure the sound energy from the source and determine whether it meets noise and sound quality goals.

Material Testing Capabilities:



Noise Control Optimization

Our team uses the latest technology todetermine your product's base-line soundlevels and will then map all sound sourcesand paths.



Sound Absorption


Using our in-house, echo-free Hemi-Anechoic Chamber, we can isolate and analyze the acoustical composition and impact of noise structures.

Accreditation & Standards

Setting the Standard for Acoustical Excellence

Our Acoustic Testing Facility is designed to comply with ISO 354 standards. Our laboratory proudly carries accreditation from the China Inspection Body and Laboratory Mandatory Approval (CMA).

Our adherence to established standards ensures the accuracy and reliability of our testing services.

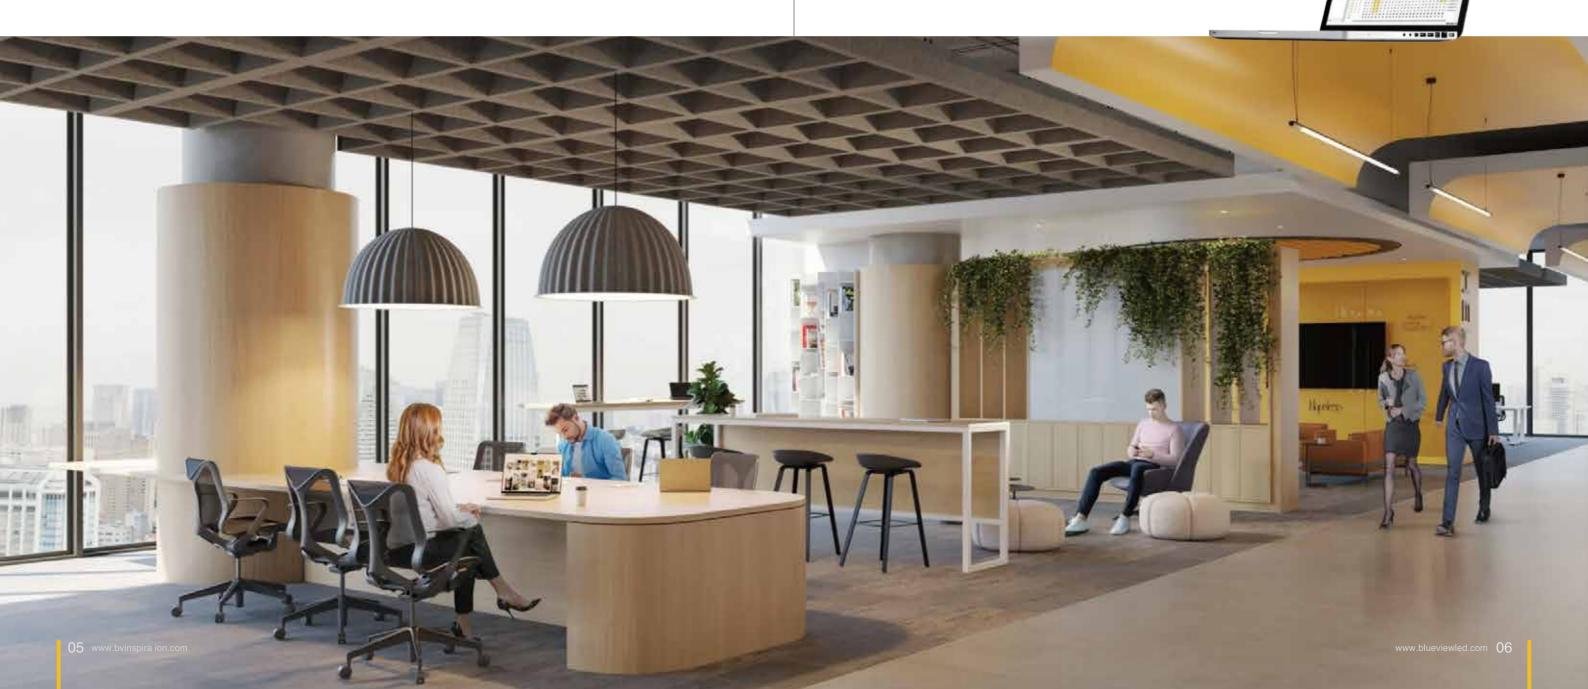

FOR LIGHT & SOUND




Our goal is offering the integrated solution for light & Sound, which will create a comfort lighting environment, and also clear out the background noise, and deliver better acoustics to your room.

Determine the ideal reverberation time (RT60) using global building standards such as ANSI, WELL Building Standard™ (WELL) and the Leadership in Energy and Environmental Design™ (LEED®) and required light using the IESNA.

These standards are driving change to balance health and wellness in commercial building design by providing recommendations for reducing noise in various environments.

Ssh! Ceiling and Luminaires system is ideal for open, multi-use or any interior spaces. It's a flexible system enable the optimization of sound and light.

DESIGN REFERENCE

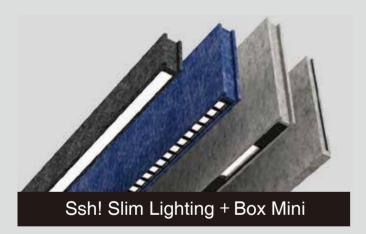

Ssh-Slim a marvel of engineering design with a slender 35mm width (53mm total). This luminaire offering unmatched flexibility.

Choose from 9 options, asymmetric, PC lens, TIR, reflector and louver, with beam angles from 15° to 110°.

Enjoy a wide range of LED options with CRI values of 95+ and 90+ across 10 CCT options (1800K to 6500K), including tunable white. Multiple dimming methods (0-10V, DALI, DMX, Triac forward/reverse phase) are available.



CALCULATION INFO

Ceiling Height: 4m


Space Dimenssions: L15m x W9m


Box Mini Size: W33 \times L1800 \times H381mm Lighting Size: W53 \times L1800 \times H381mm


Sabins/ft² based on: 1000Hz

SPACE SURFACE INFO

Floor: Carpet, heavy on concrete
Ceiling: Gypsum board, 5/8 in think, 1layer
Wall: Concrete block, painted Concrete, rough
Window: Glass, heavy, large panes, sealed











U/ www.bvinspiration.com www.bvinspiration.com

FOR LIGHT & SOUND




SPACE INFO

Area: L1500mm × W900mm × H400mm Floor: Carpet, heavy on concrete Ceiling: Gypsum board, 5/8 in think, 1layer Wall: Concrete block, painted Concrete, rough Window: Glass, heavy, large panes, sealed




INSTALLATION

On-center (OC) spacing: 195mm x 3400mm
Sabins / ft²: 0.8
Ssh-Blade-T9mm QTY: 148pcs —
Ssh-Luz Luminaire-T68mm QTY: 16pcs —



INSTALLATION


On-center (OC) spacing: 190mm x 3400mm
Sabins / ft²: 0.8
Ssh-Blade-T9mm QTY: 148pcs —
Ssh-Slim Luminaire-T53mm QTY: 20pcs —



INSTALLATION


On-center (OC) spacing: 360mm x 3400mm Sabins / ft²: 0.8
Ssh-Mini Box-T33mm QTY: 76pcs —
Ssh-Luz Luminaire-T68mm QTY: 16pcs —

FOR LIGHT & SOUND




INSTALLATION

On-center (OC) spacing: 400mm x 3400mm Sabins / ft²: 0.8
Ssh-Slim Box-T53m QTY: 76pcs —
Ssh-Slim Luminaire-T53mm QTY: 20pcs —




INSTALLATION

On-center (OC) spacing: 400mm x 3400mm Sabins / ft²: 0.8 Ssh-Slim Box-T53m QTY: 68pcs —— Ssh-Luz Luminaire-T68mm QTY: 16pcs ——



INSTALLATION


On-center (OC) spacing: 400mm x 3400mm Sabins / ft²: 0.8
Ssh-Luz Box-T68m QTY: 68pcs —
Ssh-Luz Luminaire-T68mm QTY: 16pcs —



INSTALLATION

On-center (OC) spacing: 420mm x 3400mm
Sabins / ft²: 0.8
Ssh-Slim Box-T53m QTY: 68pcs —
Ssh-Hong Luminaire-T93mm QTY: 8pcs —


FOR LIGHT & SOUND



INSTALLATION


On-center (OC) spacing: 175mm x 3400mm Sabins / ft²: 0.8

Ssh-Blade-T9mm QTY: 176pcs —
Ssh-Hong Luminaire-T93mm QTY: 8pcs —



INSTALLATION


On-center (OC) spacing: 420mm x 3400mm
Sabins / ft²: 0.8
Ssh-Luz Box-T68m QTY: 68pcs —
Ssh-Hong Luminaire-T93mm QTY: 8pcs —



INSTALLATION

On-center (OC) spacing: 380mm x 3400mm Sabins / ft²: 0.8
Ssh-Mini Box-T33mm QTY: 80pcs

Ssh-Hong Luminaire-T93mm QTY: 8pcs —



INSTALLATION

On-center (OC) spacing: 570mm x 3400mm Sabins / ft²: 0.8

Ssh-Hong Box-T93m QTY: 52pcs — Ssh-Hong Luminaire-T93mm QTY: 8pcs —

contrioning Editiniano Toomini at it. opeo =

Acoustic Lighting


People believe that lighting and acoustics are the most important factors affecting their health in the workplace. Studies have shown that the acoustics of a room can affect productivity, the overall quality of human-computer interaction, and personal health. We are developing a product portfolio in which lighting and acoustics can work harmoniously.


Acoustic lighting can create the best lighting conditions and maintain the indoor acoustic balance, thereby enhancing human health. It is not only to create a well functioning working environ ment, but also involves the overall concept, in which the room has sustainable value.

As an acoustic solution, sound-absorbing luminaires provide the best solution to the common high noise levels and reverberation problems in open multi-functional spaces. The integrated system simplifies specification, procurement and installation, and obtains a unified appearance, thereby enhancing the architecture of each interior space. Not only can the sound level be controlled, but the optimal illumination can also be achieved, thereby increasing the comfort and happiness of people living in the space. Consistent with our commitment to excellence in engineering and workman ship, every acoustic product and acoustic panel companion is designed with lamps as a platform.


This "lamp first" approach ensures that technology and lighting quality are not sacrificed. Instead, it optimizes the aesthetics and comfort of each space through beautiful, coordinated lighting and acoustic solutions.



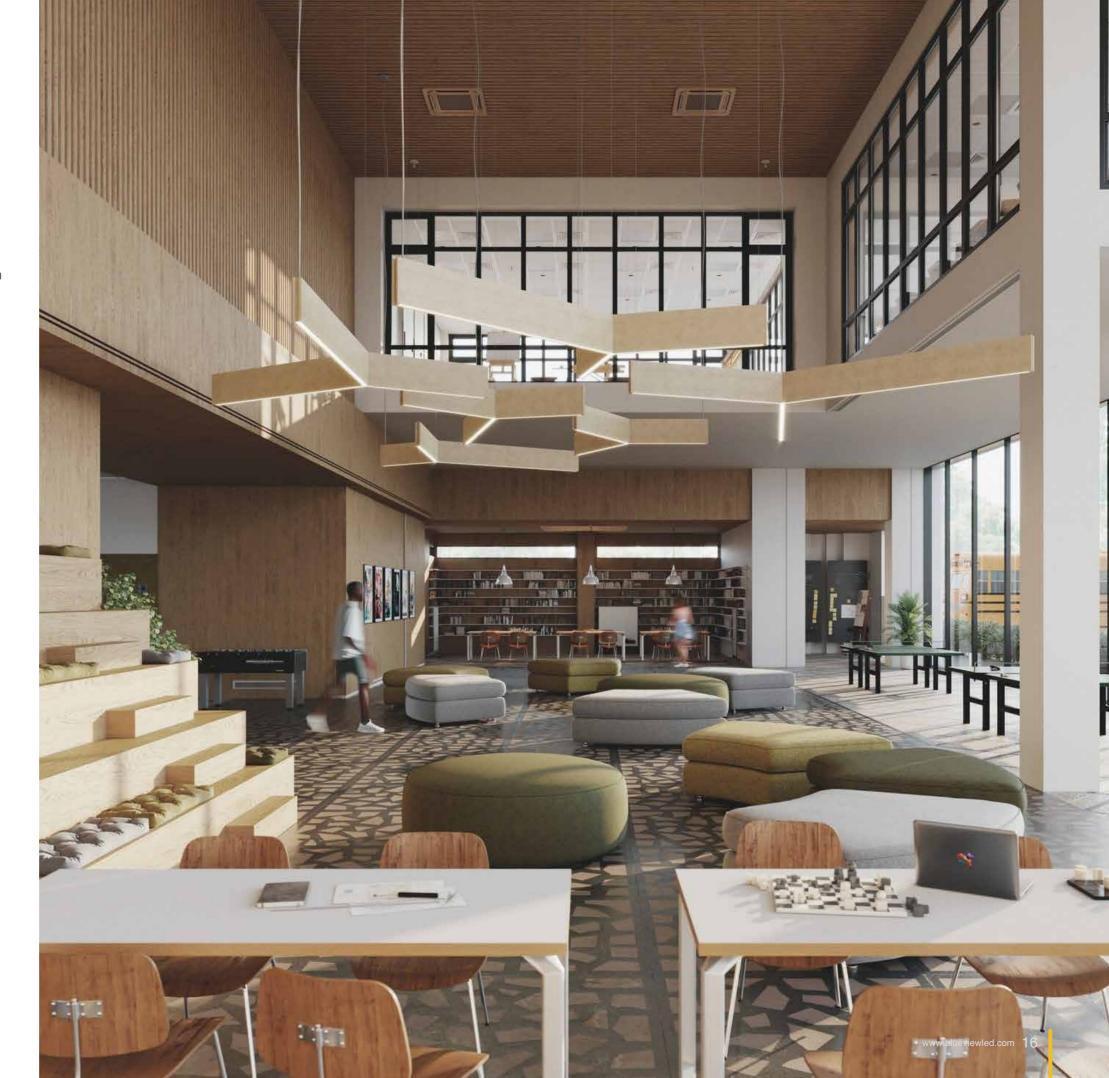

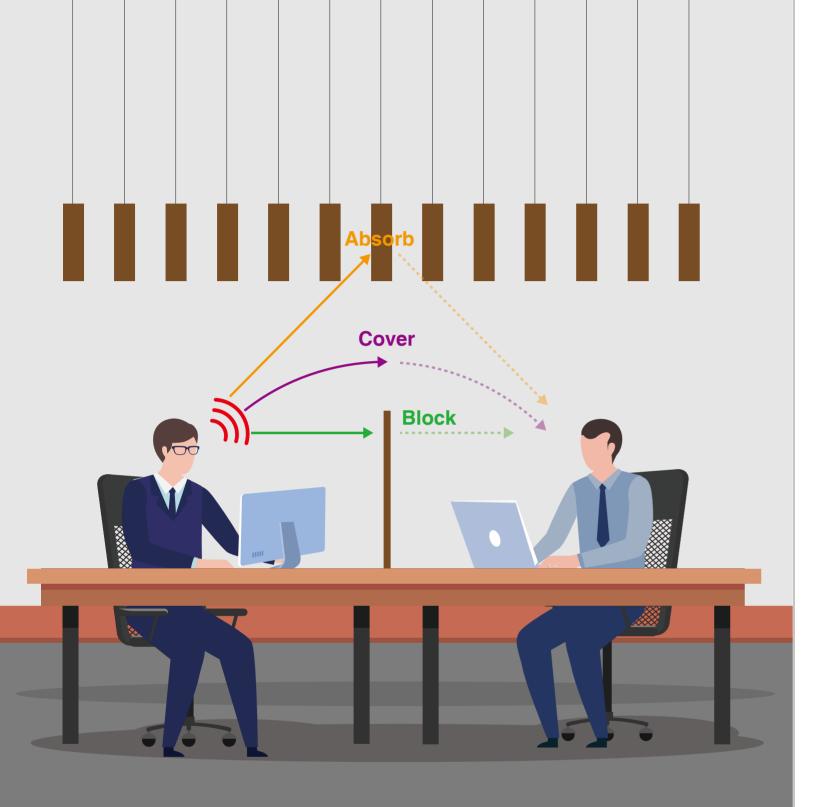

Combining standard-compliant LED workplace lamps with flexible sound insulation panels can best illuminate one or two workplaces while minimizing reverberation and achieving an ideal balance between sound absorption and sound insulation. An optional desk screen separates spaces that require extra privacy. The simple lamp design uses discreet colors to ensure visual tranquility.

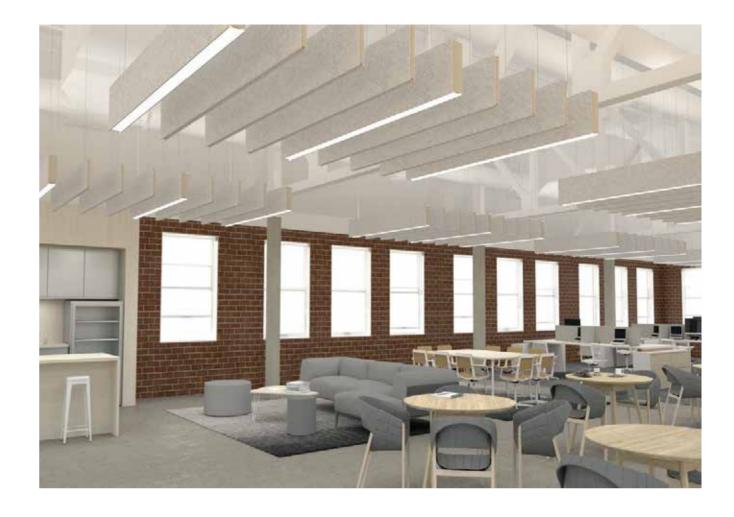

Better Lighting Less Disractions Greater Productivity

Lighting and acoustics are the basic factors of space planning. The planned complete solution combines the required performance into one system. According to space requirements, all lamps and acoustic components can be flexibly placed and expanded. The existing lighting system of our company can also be supplemented by the corresponding series of acoustic components. At the same time, the system solution allows the light body and the sound body to be assembled separately, so that at the end of the construction phase and in the already arranged room, the dust-sensitive acoustic components can be optimally arranged. To create the best lighting conditions and a pleasant working atmosphere, space acoustics should be considered in the early stages of the planning process, because the product and its location in the room are of utmost importance.


Applications

Open Office Spaces
Conference Rooms
Hospitality & Healthcare
Educational Institutions
Retail Stores
Entertainment Spaces
Commercial Spaces
Restaurants and Cafes
Gymnasium
Government buildings
Theater and museums
Audio visual



Eco-friendly

Take a look at the BVInspiration sustainable supply chain

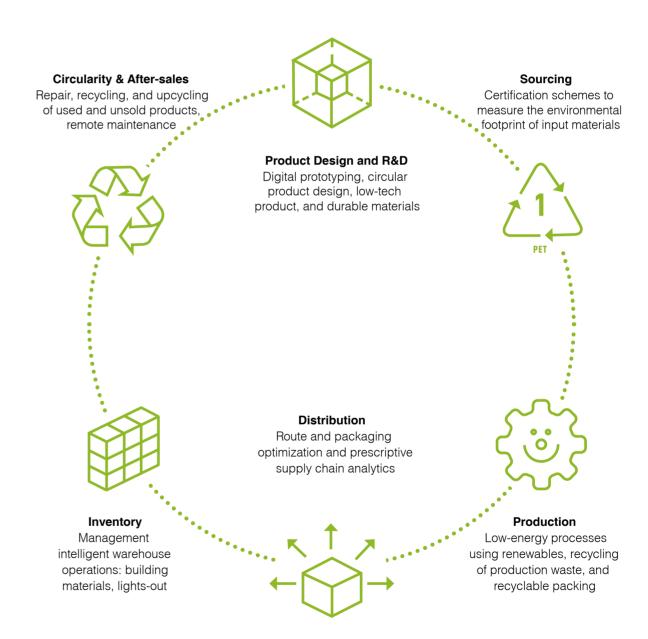

EcoPET

Take action for a more sustainable and prosperous tomorrow with BVInspiration.

ECoPET is the material that we use to produce every luminaire from the Acoustic Lighting.

It is made from collected, compressed, shredded, and meltedre cycled plastic bottles to produce plastic fibers, which are pressed together in layers to make a sturdy sheet of felt.

EcoPET is a green product manufactured free of addedchemicals, binders, adhesives and dyes. The products is very adaptable, it can be cut, notched ortimed for installation purpose. Nearly every environment interacts with sound, EcoPET can achieve a triple purpose-functionally acoustic innature, enhanced design of any space and environmental consciousness.

What are the advantages of using BVInspiration EcoPET in our acoustic lighting?



Class A Fire Retardant

Incorporating Class A fire-retardant materials, our lights prioritize safety.



High Sound Absorption

Provides excellent sound absorption properties.



Care About Our Planet

Materials is conforms to V7-0, Good sustainable development.



Eco-friendly Materials

It is made from recycled materials and is fully recyclable.



Well-being and Health

No VOCs or formaldehyde binders.



Class A Fire Retardant

Does not degrade, crumble or rot.

QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS

Camel Brown

China Red





ACOUSTIC SEAMLESS LUMINAIRE & CEILING SYSTEM

Ssh! Acoustic Seamless Luminaire & Ceiling System delivers high performance noise reduction and sleek integrated illumination in a single cost-effective, versatile product. Choose from an assortment of lengths, widths, and depths, in various beam-angled linear luminaire configurations, with power integrated into its suspension cable, simplifying installation, and removing the unsightly clutter of cords.

Units are available in a wide range of colors, it can be easily mixed and arranged as desired to achieve an endless array of dynamic layouts. The Seamless joiner system also brings an impactful combination of style & function to your next project.



■ Integrated Luminaire's Options

Ssh! Acoustic Seamless offers various luminaire solutions which is satisfying for most of Office, Hospitality & Healthcare, Schools, Gymnasium, Government buildings etc.

■ Versatile Endcaps & Universal Seamless Joiner

Choose end caps that blend with your color choice or choose a color scheme that works with the branding of the space. Combine Acoustic Box and Luminaires with joiner brackets, resulting in a seamless acoustic beam.



■ Range of Profiles & Expanding

Ssh! Acoustic Seamless is available in a range of lengths, widths, and configurable options, giving you complete design flexibility in any space.

■ Minimal Hanging & Power Hardware

Ssh! Acoustic Seamless reduces the visual clutter of hanging and luminaire cables with one powered cable on each end.

Seamless Acoustic Box & Luminaire Joining











23 www.bvinspiration.com www.blueviewled.com 24


Standard Acoustic Box & Luminaire Dimensions

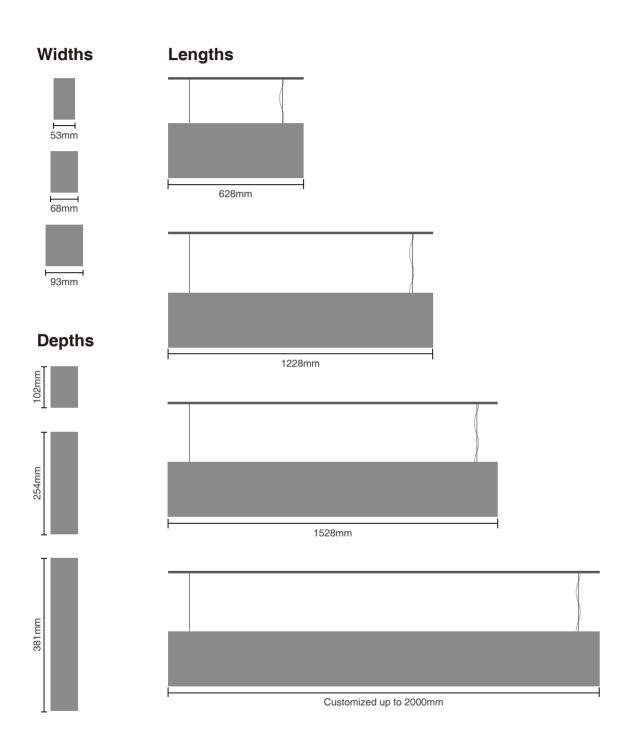



■ Multiple Installation Options

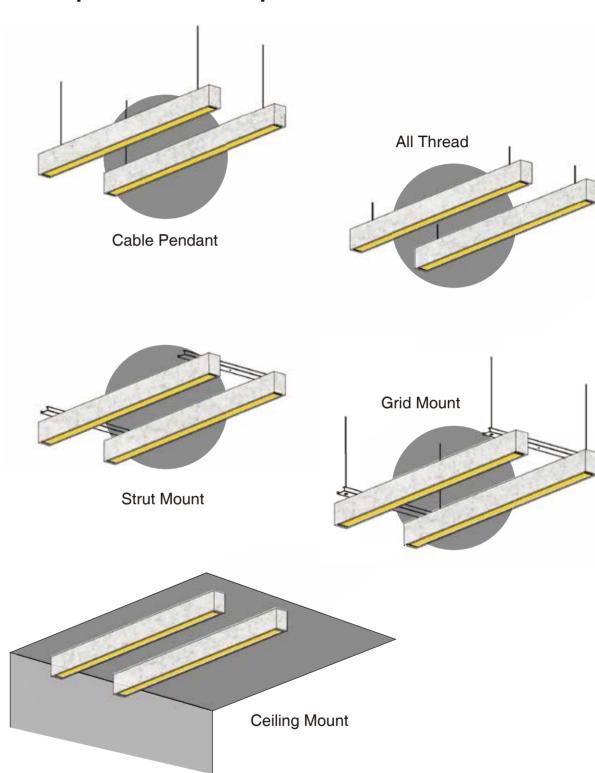


Joining Options [Example]

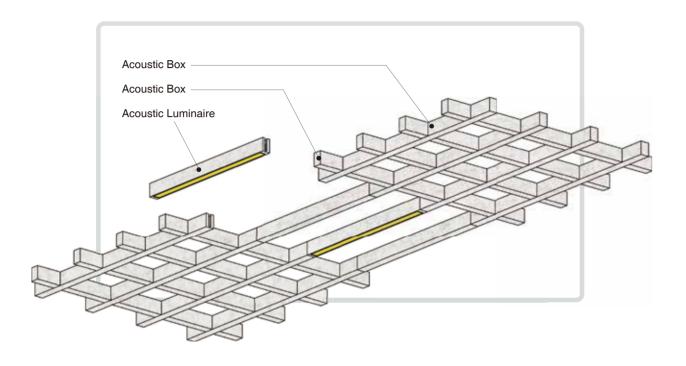

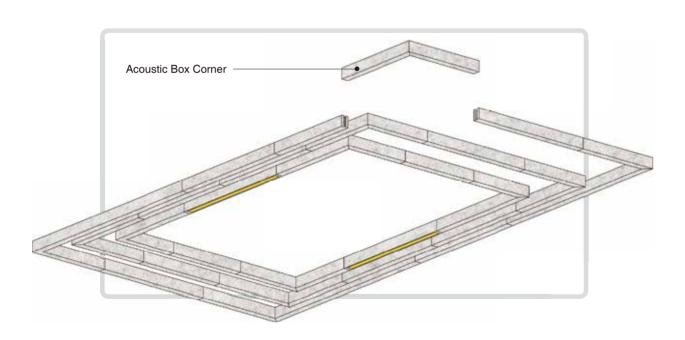

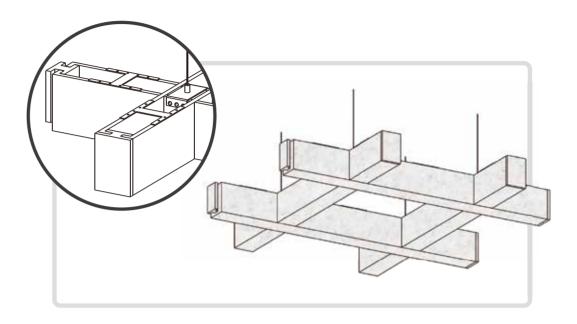

Acoustic boxes will be unrolled to save shipping costs

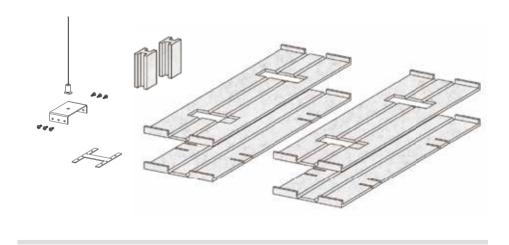


Our Customized Service

Brings Your Ideas to Life


We love people with imagination. A blank page can be both freedom and torment. Yet it begins with an idea. A vision. Order another espresso. Then start with a napkin sketch.


We're built for out-of-the-box thinkers. Bring your impossible ideas to us. We're setup to design, prototype, manufacture and build from concept to final product. Look to us to take direct participation in your project. To ease the process. And to rarely say "that's impossible."

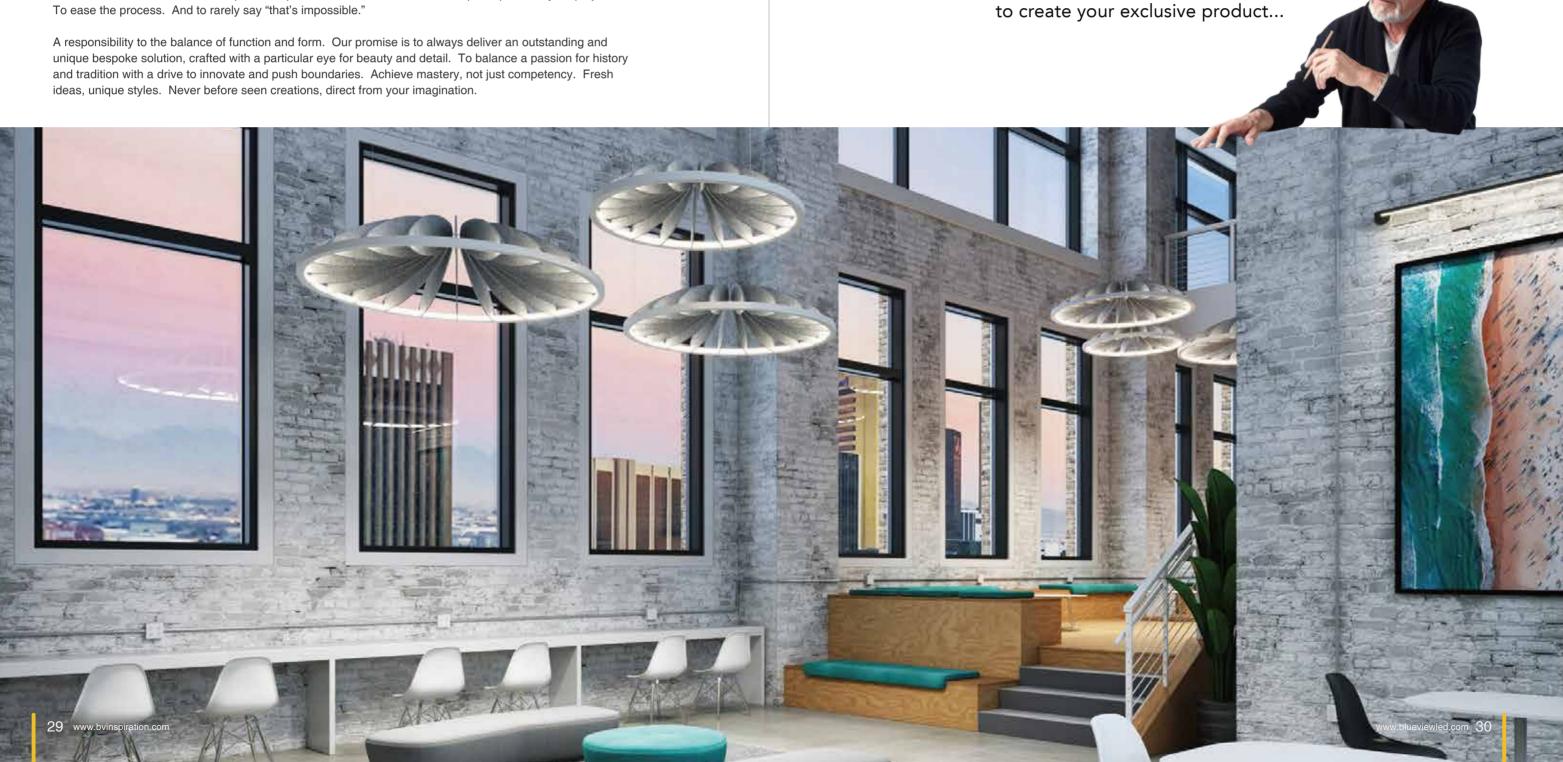


Reach out to us

Product View

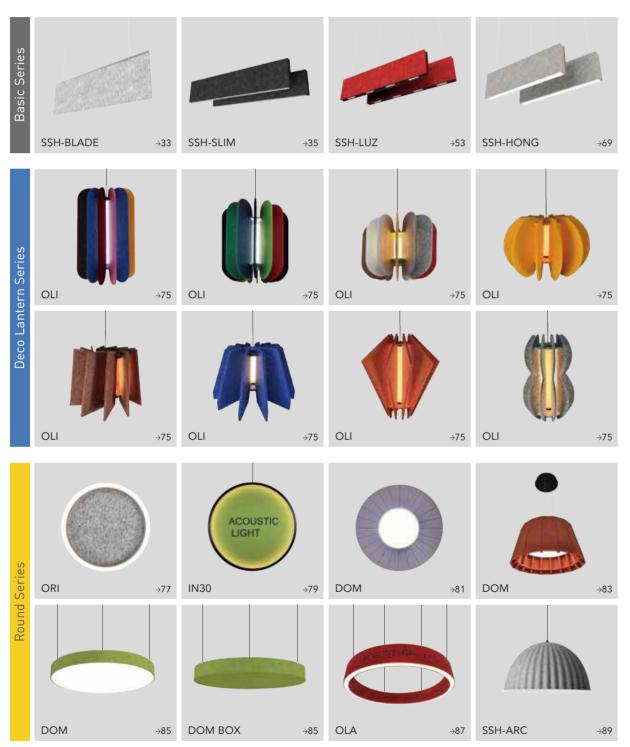

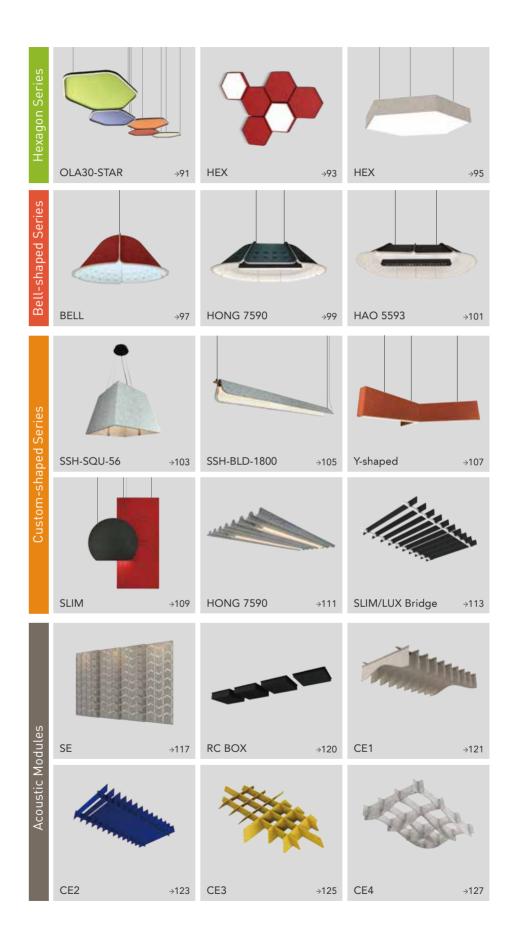

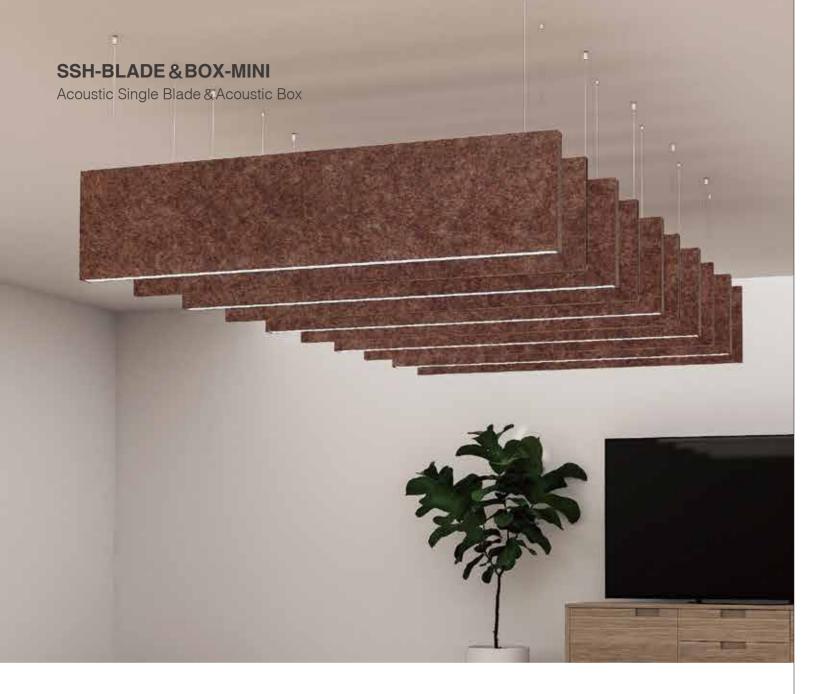



ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	LENGTH	HEIGHT	INSTALL ACCS.
SSH-Blade SSH- Box-Mini	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	01- 628mm 02- 1228mm 03- 1528mm 04- 1828mm 05- 2408mm xx- Customized	01- 450mm xx- Customized	P- Aircraft cable pendant

SSH-BLADE & BOX-MINI

Acoustic Single Blade & Acoustic Box

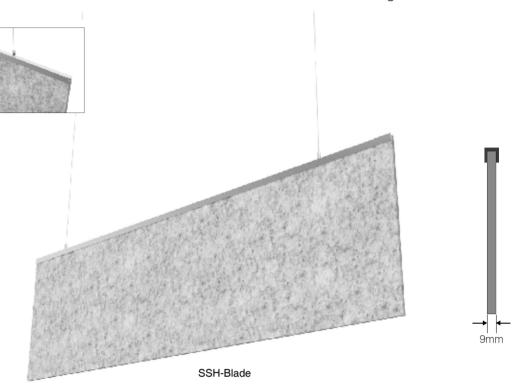

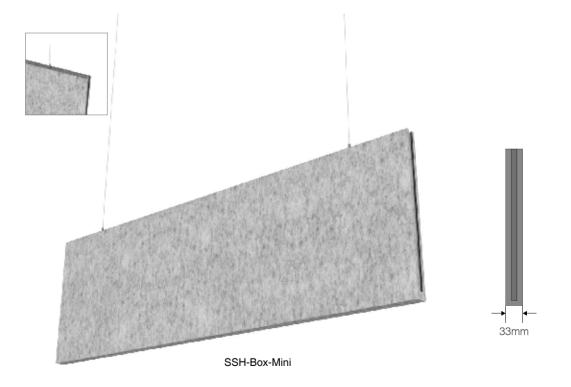

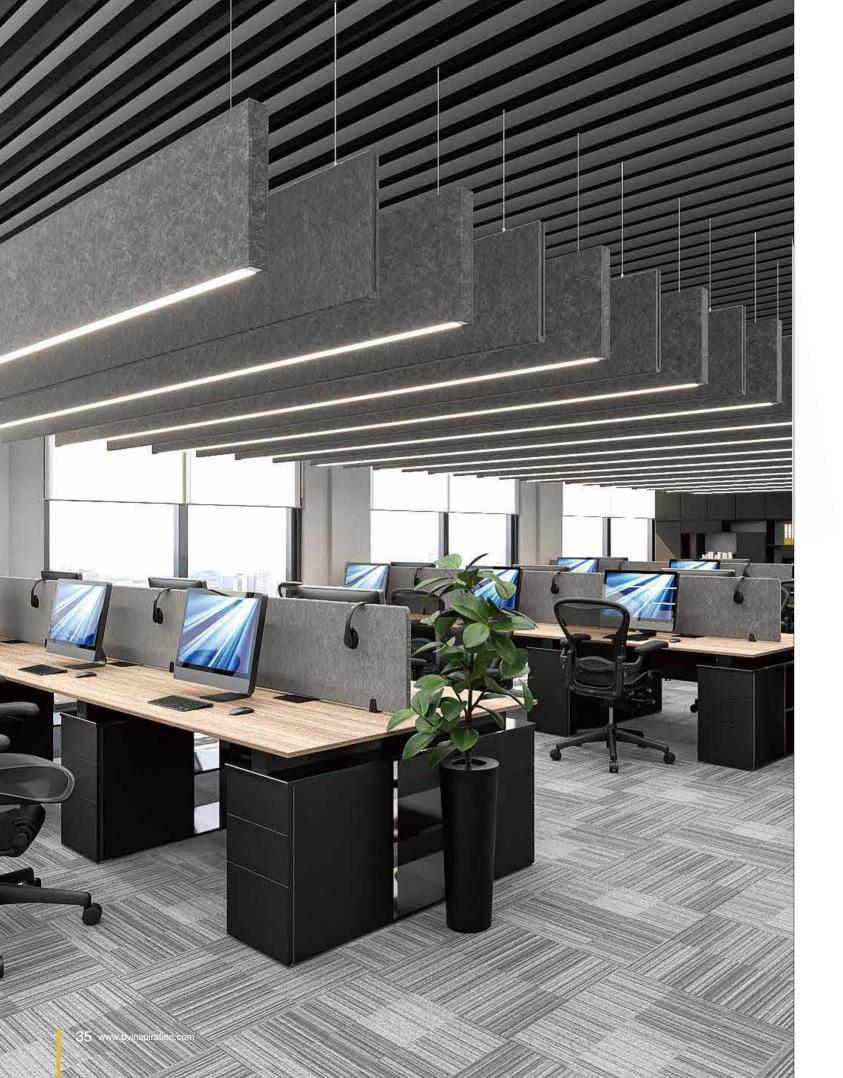



QUICK SHIPPING COLOR ITEMS













OTHER COLOR OPTIONS










AC23 AC24 Light Coral Gold



AC25 Orange Red

SSH-SLIM SERIES

Acoustic Slim Lighting-Silicone Lens

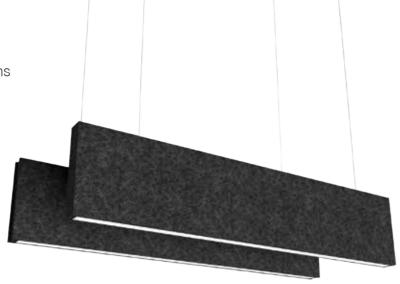

ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Slim	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	D- Diffuser S- Silicone	2- 628mm 4- 1228mm 5- 1528mm Custom	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	90- 90+ CRI 95- 95+ CRI

VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 12.5W 2- 17.5W	1- 1030lm/m 2- 1160lm/m 3- 1442lm/m 4- 1622lm/m 5- 1802lm/m	100- 100lm/W 110- 110lm/W	<24	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off


Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.


SSH-SLIM SERIES

Acoustic Slim Lighting-Silicone Lens


DIMENSIONS (customize size is preferred)

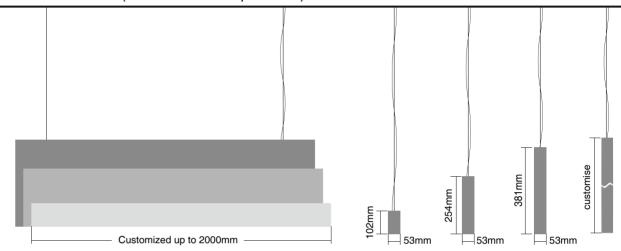

LUMINAIRE DIMENSION

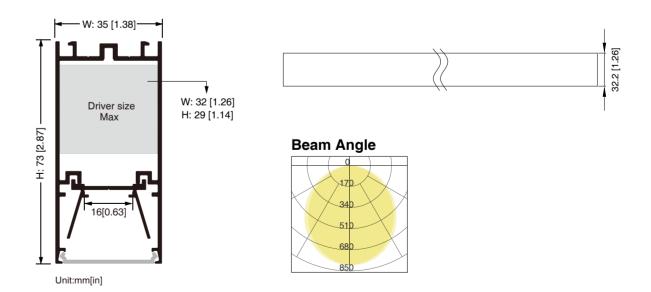



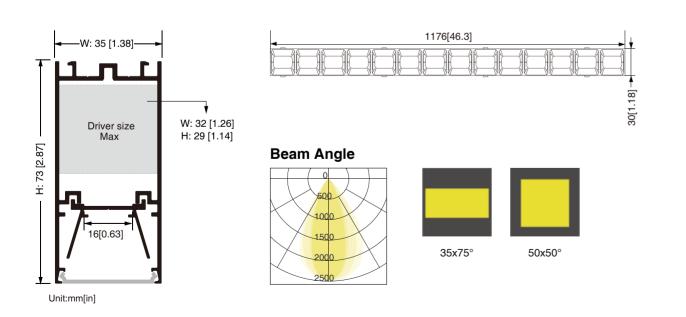

SSH-SLIM SERIES

Acoustic Slim Lighting-TIR Lens



ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Slim-3575 SSH- Slim-5050	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	T3575- 35° x 75° TIR Lens in Rectangle Louver	4- 1228mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI

VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 17.5W 2- 25.0W	1- 1622lm/m 2- 2317lm/m	100 - 100lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

Note

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.



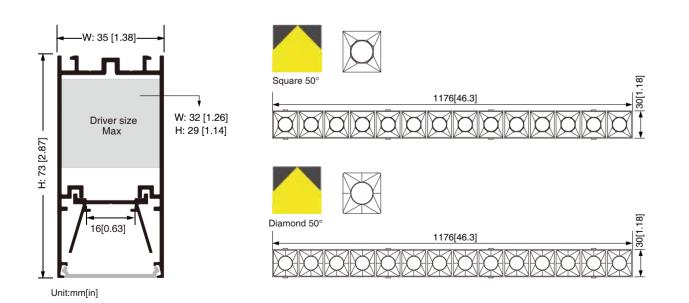

SSH-SLIM SERIES

Acoustic Slim Lighting-TIR Lens



ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Slim-50S SSH- Slim-50D	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	T50R- Round in Square 50° TIR Lens in Square Louver T50D- Round in Diamond 50° TIR Lens in Diamond Louver	4- 1228mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI

VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 17.5W 2- 25.0W	1- 1622lm/m 2- 2317lm/m	100 - 100lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on $\,$ luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.



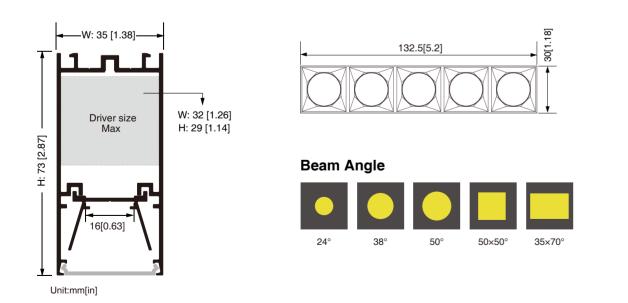

SSH-SLIM SERIES

Acoustic Slim Lighting-5IN1 TIR Louver



ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Slim-G5IN1	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	24- 24Deg. 38- 38Deg. 50- 50Deg. 5050- 50×50Deg. 3570- 35×70Deg.	4- 1228mm xx- Custom	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI


VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC -	1 17.5W 2- 25.0W	1- 1622lm/m 2- 2317lm/m	100- 100lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

Note

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

43 www.blueviewled.com 44



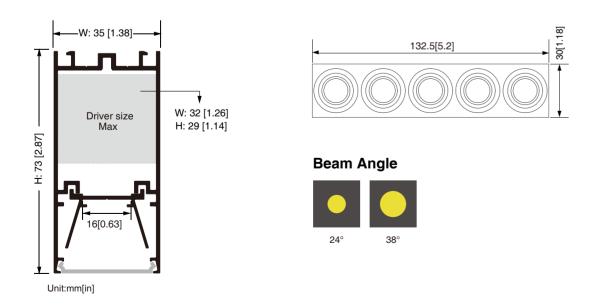

SSH-SLIM SERIES

Acoustic Slim Lighting-Cone Louver



ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Slim-CL5IN1	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	24- 24Deg. 38- 38Deg.	4- 1228mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI

VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 17.5W 2- 25.0W	1- 1622lm/m 2- 2317lm/m	100- 100lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

Note

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.



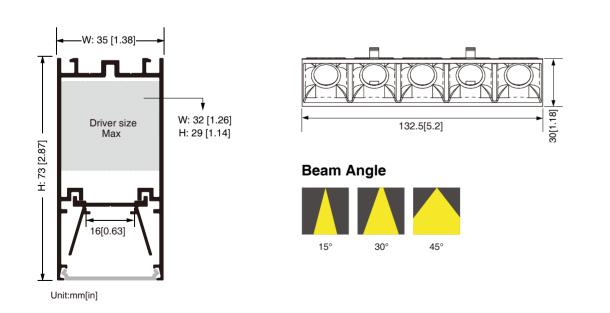

SSH-SLIM SERIES

Acoustic Slim Lighting-Reflector Louver



ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Slim-RL	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	15- 15Deg. Reflector Louver 30- 30Deg. Reflector Louver 45- 45Deg. Reflector Louver	4- 1228mm xx- Custom	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI

١	VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
2	220V-240VAC	1- 17.5W 2- 25.0W	1- 1622lm/m 2- 2317lm/m	100 - 100lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.



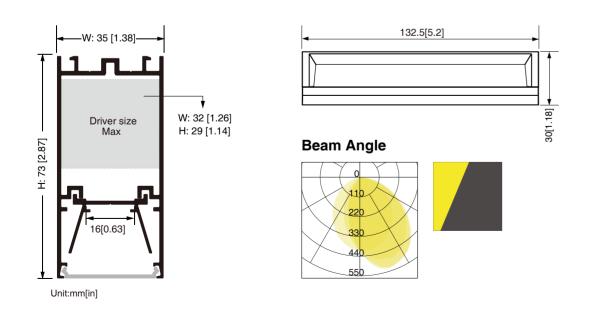

SSH-SLIM SERIES

Acoustic Slim Lighting-Wall Washer




ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Slim-WW	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	W- Wall Washer Kit	4- 1228mm xx- Custom	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI

VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 17.5W 2- 25.0W	1- 992lm/m 2- 1417lm/m	100 - 100lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

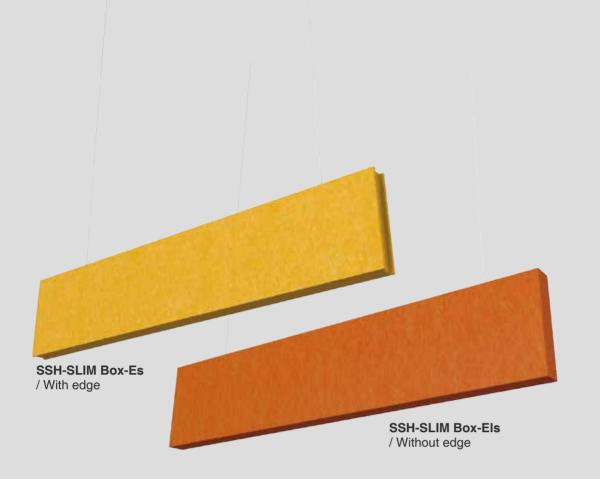

SSH-SLIM SERIES


53mm Cavity Acoustic Box



ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	LENGTH	HEIGHT	WIDTH	INSTALL ACCS.
SSH- SLIM Box-Es SSH- SLIM Box-Els	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	01- 628mm 02- 1228mm 03- 1528mm 04- 1828mm Customized- up to 2000mm	01- 102mm 02- 254mm 03- 381mm xx- Customized	01- 53mm xx- Customized	P- Aircraft cable pendant


QUICK SHIPPING COLOR ITEMS




OTHER COLOR OPTIONS




DIMENSIONS (customize size is preferred)

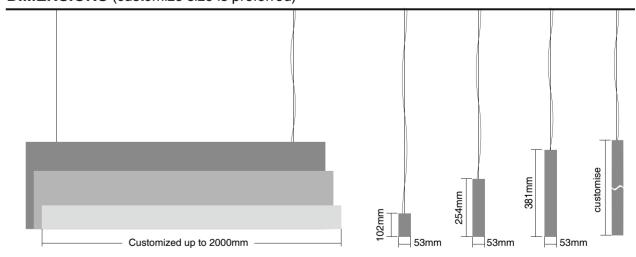

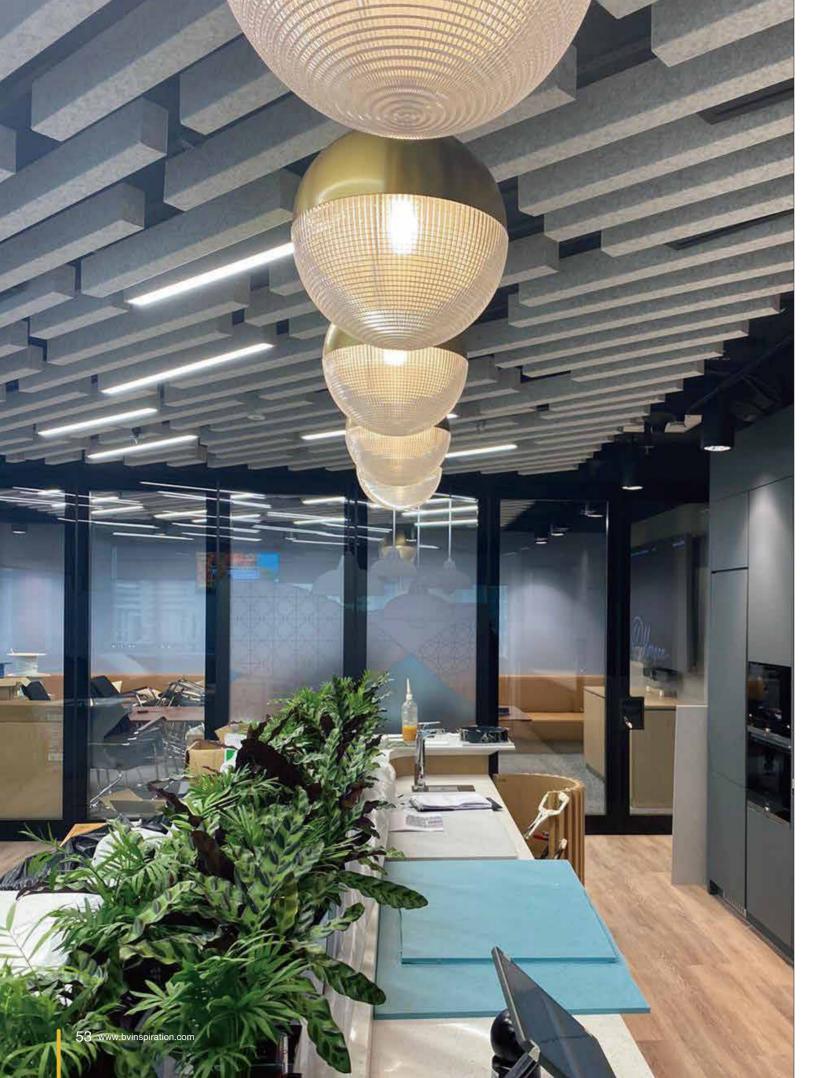



QUICK SHIPPING COLOR ITEMS


















OTHER COLOR OPTIONS




















Slate Grey





AC25 Orange Red

AC19 Bisque

SSH-LUZ SERIES

Acoustic Luz Lighting-PC Diffuser Lens



ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Luz-PC	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	D- Diffuser A- Anti-Glare Film P- Prismetic Lens	2- 628mm 4- 1228mm 5- 1528mm Custom	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	90- 90+ CRI 95- 95+ CRI

VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 12.5W 2- 22.5W 3- 29.2W	1- 1159lm/m 2- 1417lm/m 3- 1674lm/m 4- 2086lm/m 5- 2549lm/m 6- 2704lm/m 7- 3012lm/m 8- 3305lm/m 9- 3906lm/m	110- 110lm/W 120- 120lm/W	<26	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off


Note

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.


SSH-LUZ SERIES

Acoustic Luz Lighting-Silicone Lens


DIMENSIONS (customize size is preferred)

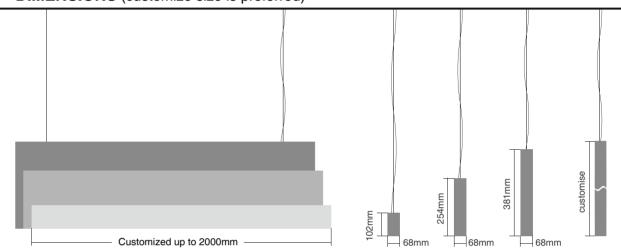


LUMINAIRE DIMENSION

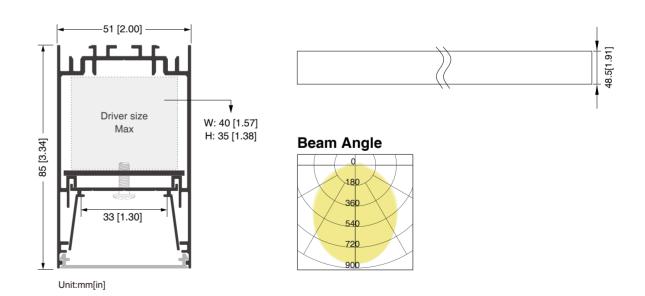







Beam Angle











SSH-LUZ SERIES

Acoustic Luz Lighting-Louver Lens



ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Luz-RL	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	12- 12Deg. 24- 24Deg. 38- 38Deg. 3575- 35×75Deg. 5050- 50×50Deg. Reflector Louver	4- 1228mm xx- custom	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI


VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 20.8W 2- 30.0W	1- 1974lm/m 2- 2038lm/m 3- 3121lm/m 4- 3244lm/m	100- 100lm/W 103- 103lm/W 110- 110lm/W 114- 114lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.


57 www.bvinspiration.com www.blueviewled.com 58







Beam Angle





SSH-LUZ SERIES

Acoustic Luz Lighting-Wall Washer



ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Luz-WW	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	W- Wall Washer Kit	4- 1228mm xx- custom	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80- 80+ CRI 90- 90+ CRI

VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 20.8W 2- 30.0W	1- 1287lm/m 2- 2039lm/m	100- 100lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

59 www.bvinspiration.com www.blueviewled.com 60



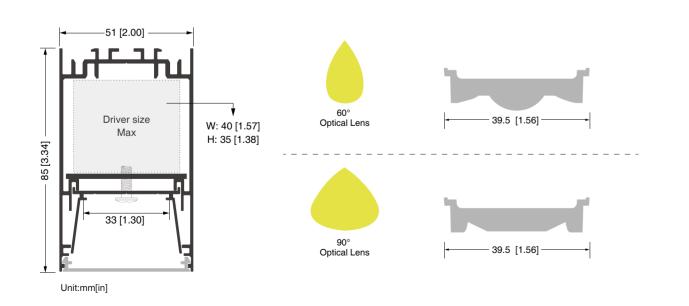

SSH-LUZ SERIES

Acoustic Luz Lighting-TIR Lens



ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Luz-D60T SSH- Luz-D90T	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	60- 60Deg. Tir Lens 90- 90Deg. Tir Lens	4- 1228mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	90- 90+ CRI

VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 17.5W 2- 25.0W	1- 1802im/m 2- 2575im/m	100- 100lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off


Note

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.









SSH-LUZ SERIES

Acoustic Luz Lighting-TIR Lens




ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Luz-BAT	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	BAT- Batwing Tir Lens	4- 1228mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	90- 90+ CRI


VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 17.5W 2- 25.0W	1- 1802lm/m 2- 2575lm/m	100- 100lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

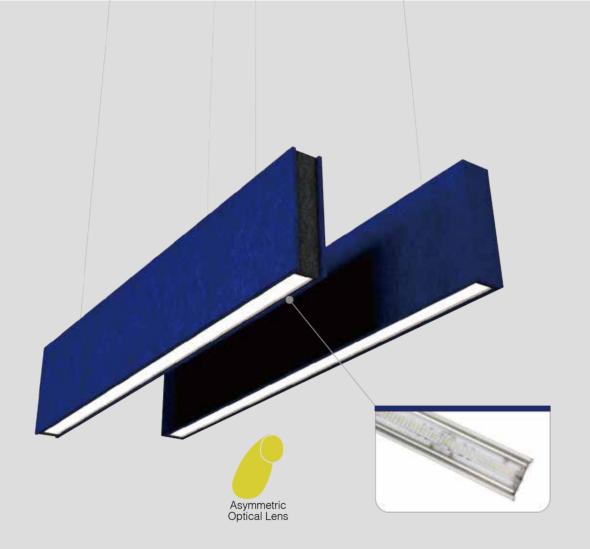





Beam Angle

SSH-LUZ SERIES

Acoustic Luz Lighting-TIR Lens




ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Luz-ASY	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	AS- Asymmetric Tir Lens	4- 1228mm Fixed length only	3- 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	90- 90+ CRI


VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 17.5W 2- 25.0W	1- 1802lm/m 2- 2575lm/m	100- 100lm/W	<19	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.

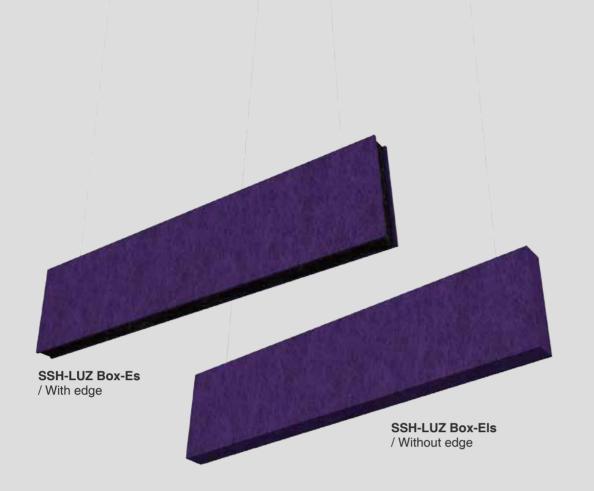

QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS



SSH-LUZ SERIES

68mm Cavity Acoustic Box




ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	LENGTH	HEIGHT	WIDTH	INSTALL ACCS.
SSH- LUZ Box-Es SSH- LUZ Box-Els	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	01- 628mm 02- 1228mm 03- 1528mm 04- 1828mm xx- Customized	01- 102mm 02- 254mm 03- 381mm xx- Customized	01- 68mm xx- Customized	P- Aircraft cable pendant


DIMENSIONS (customize size is preferred)



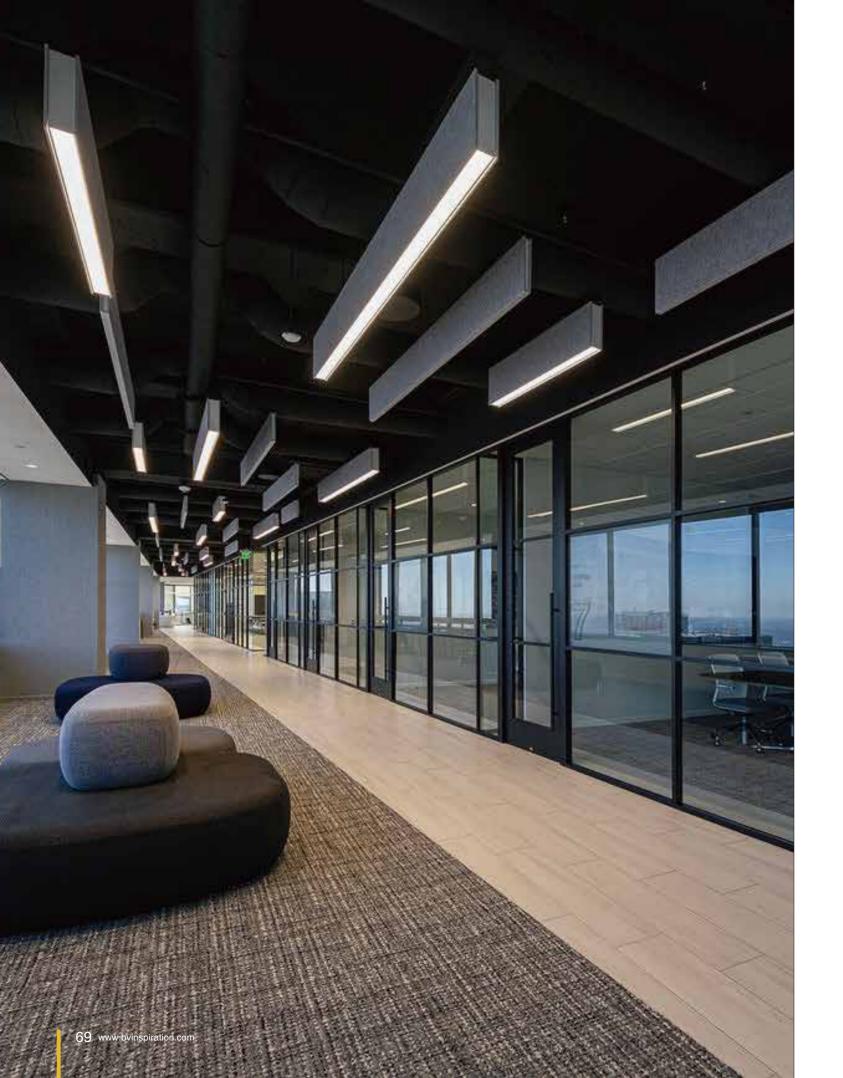



QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS



SSH-HONG SERIES

Acoustic Hong Lighting-PC Diffuser



ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Hong- PC	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Anodized	D- Diffuser A- Anti-Glare Film	2- 628mm 4- 1228mm 5- 1528mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	90- 90+ CRI 95- 95+ CRI

VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 22.5W 2- 30.0W 3- 37.5W	1- 2086lm/m 2- 2549lm/m 3- 3012lm/m 4- 2781lm/m 5- 3399lm/m 6- 4017lm/m 7- 3477lm/m 8- 4249lm/m 9- 5022lm/m	110- 110lm/W 120- 120lm/W	<26	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off


Note

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.


SSH-HONG SERIES

Acoustic Hong Lighting-Silicone Lens

DIMENSIONS (customize size is preferred)

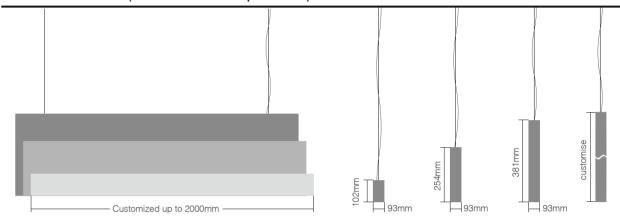

LUMINAIRE DIMENSION

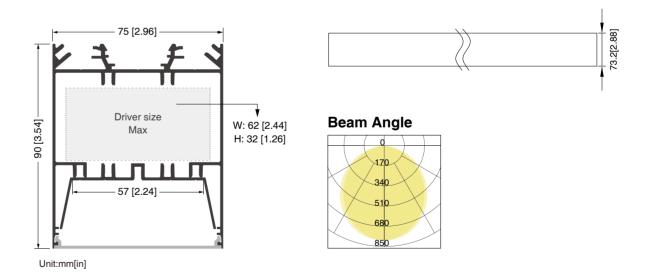

71 www.blueviewled.com 72



SSH-HONG SERIES


93mm Cavity Acoustic Box



ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	LENGTH	HEIGHT	WIDTH	INSTALL ACCS.
SSH- HONG Box-Es SSH- HONG Box-Els	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	01- 628mm 02- 1228mm 03- 1528mm 04- 1828mm xx- Customized	01- 102mm 02- 254mm 03- 381mm xx- Customized	01- 93mm xx- Customized	P- Aircraft cable pendant


QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS




DIMENSIONS (customize size is preferred)

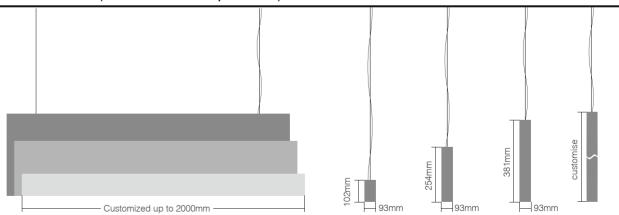

SSH-OLI6

Deco Lantern Acoustic Light


DIMENSION

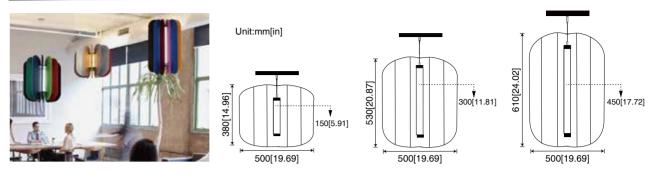






























ORDERING INFORMATION

LUMINAIRE LENS ANGLE DIMENSION (LIGHT SOURCE) COLOR QUALITY TEMP CRI INSTALL ACCS. GRADE OPTOINS SSH-OLI6 PC Diffuser Diffuser			_						
Diffuser Φ63×H180mm MacAdam Cable Pendant G2- 0-10V Φ63×H300mm Φ63×H330mm G3- DALI	LUMINAIRE	LENS	ANGLE			CRI			
	SSH-OLI6		360Deg	Φ63×H180mm Φ63×H300mm Φ63×H330mm	4000K	90+	Cable	IP22	G2- 0-10V

SPECIFICATIONS

Voltage	220V-240\	220V-240VAC						
Dimension(Light Source)	Ф63×H mr	Φ63×H mm						
Power	5W/pc	10W/pc	15W/pc					
Efficacy Up to	100lm/W							
LED								








Round Acoustic Llight

AVAILABLE SIZE






ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	FIXTURE FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI
SSH- Ori	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	B- Textured Black W- Textured White S- Silver Grey	S- Silicone	6- Φ600mm 9- Φ900mm 12- Φ1200mm	3- 3-Step MacAdam Ellipse 5- 5-Step MacAdam Ellips	27- 2700K 30- 3000K 35- 3500K 40- 4000K 50- 5000K 60- 6000K 65- 6500K	80- 80+ CRI 90- 90+ CRI 95- 95+ CRI

VOLTAGE	POWER	LUMEN	EFFICIENCY	UGR	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
220V-240VAC	1- 25.0W 2- 50.0W 3- 75.0W	1- 1288lm/m 2- 2575lm/m 3- 3863lm/m	50- 50lm/W	<26	P- Aircraft cable pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off



QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS



Internal Illuminated Acoustic Llight



ORDERING INFORMATION

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-IN30	Silicone	100Deg	Φ450mm Φ600mm Φ800mm Φ1000mm Φ1200mm	3-Step MacAdam	2700K 3000K 4000K	80+ 90+	Aircraft Cable Pendant	IP22	G1- On/Off G2- 0-10V G3- DALI


- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.


SPECIFICATIONS

Voltage	90-265 VA	AC .			
Dimension	Φ450mm	Ф600mm	Ф800mm	Ф1000mm	Ф1200mm
Power	20W	30W	40W	50W	60W
Lumen	900lm	1350lm	1800lm	2250lm	2700lm
Efficacy Up to	100lm/W				
Control	Dali , 0-10	V, on/Off			




DIMENSION





QUICK SHIPPING COLOR ITEMS






Sun Flower Acoustic Llight




Voltage	220V-240VAC	
Dimension	Ф260mm	Ф375mm
Power	20W	30W
Lumen	2000lm	3000lm
Efficacy Up to	100lm/w	
LED	2835 SMD	
Control	On/Off, 0-10V, Dali	




DIMENSION








QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS

									The same
AC11 Cocoa Brown	AC12 Maroon	AC13 Beaver	AC14 Bistre	AC15 Dark Green	AC16 Forest Green	AC17 Yellow Green	AC18 Wheat	AC19 Bisque	AC20 White Smoke
AC21 Slate Grey	AC22 Blue Violet	AC23 Light Coral	AC24 Gold	AC25 Orange Red	-				

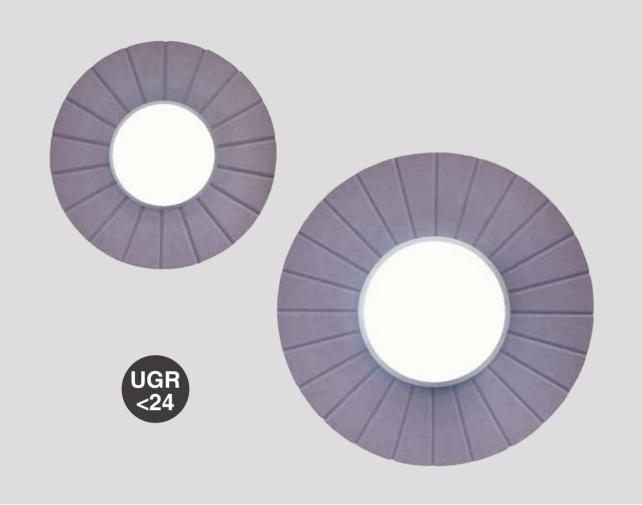


ORDERING INFORMATION


LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-DOM	PC Diffuser	110Deg	Φ 260mm Φ 375mm	3-Step MacAdam	4000K	90+	Wall Mounting	IP22	G1- On/Off G2- 0-10V G3- DALI

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.



QUICK SHIPPING COLOR ITEMS





















AC16





OTHER COLOR OPTIONS

AC12

AC17

Cocoa Brown Maroon



AC18

Beaver



AC19

Bisque





AC15 Dark Green

AC20

White Smoke



Round Acoustic Down Llight

ORDERING INFORMATION


LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-DOM	PC Diffuser	90Deg	Φ400mm Φ600mm	3-Step MacAdam	4000K	90+	Aircraft Cable Pendant	IP22 IK06	G1- On/Off G2- 0-10V G3- DALI

SPECIFICATIONS

Voltage	220V-240VAC	
Dimension	Ф400 mm	Ф600 mm
Power	40W	60W
Lumen	3160lm	4740lm
Efficacy Up to	80lm/w	
LED	2835 SMD	
Control	On/Off, 0-10V,	Dali



DIMENSION

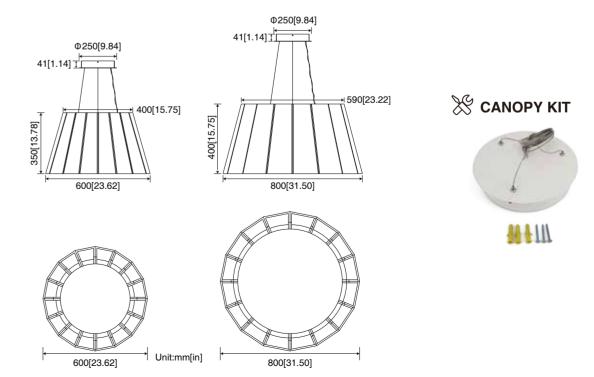

AC09 China Red AC10 Camel Brown AC25 Orange Red Ocean Blue Navy Blue Stone Blue Slate Grey Blue Violet Light Coral

SSH-DOM

Acoustic Light With Diffuser / 3D Box

SPECIFICATIONS





SUSPENDED MOUNTING





Type A(Central Axis Canopy System)


Type B (Vertical Installation System)


ORDERING INFORMATION

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-DOM	Diffuser	110Deg	Φ450mm Φ600mm Φ750mm Φ900mm Φ1200mm	3-Step MacAdam 5-Step MacAdam	3000K 4000K 6000K	80+	Aircraft Cable Pendant	IP22	G1- On/Off G2- 0-10V G3- DALI

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

DIMENSION






SSH-HEX BOX



QUICK SHIPPING COLOR ITEMS




OTHER COLOR OPTIONS






Direct & Indirect Linear Ring Acoustic Light



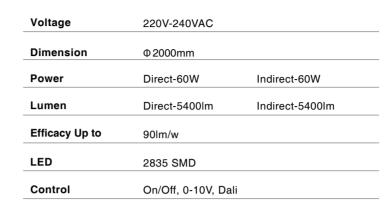




DIMENSION

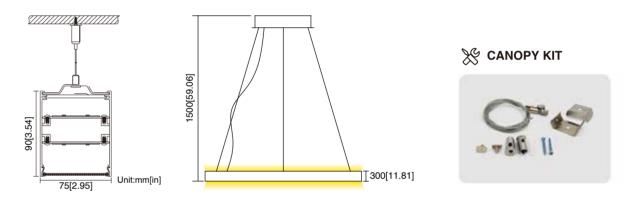

QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS

UINER	JULUR U	PHONS							
								W. S	The state of
AC11 Cocoa Brown	AC12 Maroon	AC13 Beaver	AC14 Bistre	AC15 Dark Green	AC16 Forest Green	AC17 Yellow Green	AC18 Wheat	AC19 Bisque	AC20 White Smoke
AC21 Slate Grey	AC22 Blue Violet	AC23 Light Coral	AC24 Gold	AC25 Orange Red					



ORDERING INFORMATION

LU	IMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
	6H- .A7590	Direct- Prismatic Indirect- Silicone	Direct- 83Deg Indirect- 83Deg	Ф2000mm	3-Step MacAdam	4000K	90+	Aircraft Cable Pendant	IP22	G1- On/Off G2- 0-10V G3- DALI

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.




Decorative 3D Bell Acoustic Pendant Light




Voltage	220V-240VAC		
Dimension(mm)	Ф350 × H180	Ф550 × H300	Φ770 × H400
Power	10W	15W	20W
Lumen	1200lm	1800lm	2400lm
Efficacy Up to	120lm/W		
Control	Dali , 0-10V, On	/Off	





DIMENSION











■ RANGE OF APPLICATIONS

General or local lighting in Office, Educational Institutions, Healthcare, Theater & Museums, etc.

■ ELECTRIC GEAR

Constant current 0-10V / DALI / Non-dim dirvers,

ORDERING INFORMATION

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH- ARC-350 SSH- ARC-550 SSH- ARC-770	PC Diffuser	90Deg	350- Φ350×H180 550- Φ550×H300 770- Φ770×H400	3-Step MacAdam	4000K	90+	Aircraft Cable Pendant	IP22	G1- On/Off G2- 0-10V G3- DALI

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.





ORDERING INFORMATION

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
OLA-Star	Silicone	103Deg	L600mm L900mm L1200mm	3-Step MacAdam	4000K	90+	Aircraft Cable Pendant	IP22 IK06	G1- On/Off G2- 0-10V G3- DALI

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SSH-OLA30-STAR


Hexagonal Acoustic Light

SPECIFICATIONS

Voltage	220V-240VAC		
Dimension	L600×W557×H39mm	L900×W836×H39mm	L1200×W1114×H39mm
Power	35W	50W	75W
Lumen	2800lm	4000lm	6000lm
LED	2835 Epistar		
Control	On/Off, 0-10V, Dali		




DIMENSION








Aircraft Cable Pendant Kit





39[1.53]

Acoustic Light With Prismatic Lens / 3D Box



Prismatic Lens



ORDERING INFORMATION

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-HEX	Prismatic Lens Silicone	90Deg 83Deg	L450mm	3-Step MacAdam	4000K	90+	Wall Mounting	IP22	G1- On/Off G2- 0-10V G3- DALI


- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SPECIFICATIONS

Voltage	220V-240VAC
Dimension	L450mm
Power	50W
Lumen	4500lm
Efficacy Up to	90lm/w
LED	2835 Epistar
Control	On/Off, 0-10V, Dali



DIMENSION



LED CHIPS AND DRIVER OPTIONS





Stone Blue

AC03 AC04 AC05 Concrete Grey Silver Grey Indigo Blue

China Red

QUICK SHIPPING COLOR ITEMS

AC01 AC02 Cloudy Black Moon Grey

Navy Blue

Ocean Blue

OTHER COLOR OPTIONS

	AC11	AC12	AC13	AC14	AC15
	Cocoa Brown	Maroon	Beaver	Bistre	Dark Green
AC05	AC16	AC17	AC18	AC19	AC20
Indigo Blue	Forest Green	Yellow Green	Wheat	Bisque	White Smoke
是					
AC10	AC21	AC22	AC23	AC24	AC25
Camel Brown	Slate Grey	Blue Violet	Light Coral	Gold	Orange Red

1. Blueview's standard is 3-Step MacAdam

SSH-HEX

Acoustic Light With Diffuser / 3D Box

SPECIFICATIONS

Voltage	90-265 VAC				
Dimension	L745mm	L1200mm			
Power	72W	142W			
Lumen	6312lm	12356lm			
Efficacy	87lm/W	88lm/W			
Control	Dali , 0-10V, On/Off				



SUSPENDED MOUNTING





Type A(Central Axis Canopy System)


Type B (Vertical Installation System)


ORDERING INFORMATION

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-HEX	Diffuser	110Deg	L745mm L1200mm	3-Step MacAdam 5-Step MacAdam	3000K 4000K 6000K	80+	Aircraft Cable Pendant	IP22	G1- On/Off G2- 0-10V G3- DALI

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

DIMENSION






SSH-DOM BOX



QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS



SSH-DOM

Bell Shaped Acoustic Light

ORDERING INFORMATION

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-DOM	PC Diffuser	90Deg	Φ150mm	3-Step MacAdam	4000K	90+	Aircraft Cable Pendant	IP22 IK06	G1- On/Off G2- 0-10V G3- DALI


SPECIFICATIONS

Voltage	220V-240VAC
Dimension	Φ150mm
<u> </u>	Ψ130ΠΙΙΠ
Power	15W
Lumen	1500lm
Efficacy Up to	100lm/w
LED	2835 SMD
Control	On/Off, 0-10V, Dali





DIMENSION









QUICK SHIPPING COLOR ITEMS















OTHER COLOR OPTIONS



AC15





Stone Blue





Bistre Dark Green AC20 White Smoke AC19 Bisque AC23 Light Coral AC25 Orange Red

AC14




Direct & Indirect Bell Shaped Acoustic Light




Voltage	220V-240VAC	
Dimension	L800×W75×H90mm	
Power	Direct-15W	Indirect-5W
Lumen	Direct-1500lm	Indirect-500lm
		mancer 300mi
Efficacy Up to	100lm/w	
LED	2835 SMD	
Control	On/Off, 0-10V, Dali	



DIMENSION





LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-7590	Direct- Prismatic Indirect- Diffuser	Direct- 85Deg Indirect- 105Deg	L800mm	3-Step MacAdam	4000K	90+	Aircraft Cable Pendant	IP22	G1- On/Off G2- 0-10V G3- DALI

1. Blueview's standard is 3-Step MacAdam

ORDERING INFORMATION

- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS



AC25

Orange Red

Direct & Indirect Bell Shaped Acoustic Light





Voltage	220V-240VAC	
Dimension	L1100×W55×H93mm	
Power	Direct-20W	Indirect-10W
Lumen	Direct-2000lm	Indirect-1000lm
Efficacy Up to	100lm/w	
LED	Bridgelux 5050	
Control	On/Off, 0-10V, Dali	



DIMENSION

Ocean Blue Navy Blue



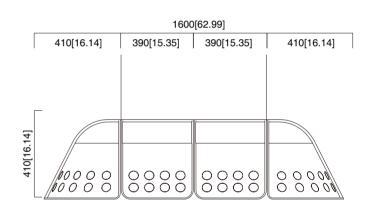

ORDERING INFORMATION

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-5593	Louver & Reflector	Direct- 12Deg Indirect- 24Deg	L1100mm	3-Step MacAdam	4000K	90+	Aircraft Cable Pendant	IP22	G1- On/Off G2- 0-10V G3- DALI

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

OTHER COLOR OPTIONS AC11 AC12 AC13 AC14 AC15 Cocoa Brown Maroon Dark Green Bistre Beaver **QUICK SHIPPING COLOR ITEMS** AC03 AC04 AC05 AC16 AC17 AC19 AC20 Cloudy Black Moon Grey Concrete Grey Silver Grey Indigo Blue Forest Green Yellow Green Wheat Bisque White Smoke

AC21

Slate Grey

Blue Violet

Light Coral

AC09

China Red


Stone Blue


AC10

Camel Brown



QUICK SHIPPING COLOR ITEMS





















AC16





OTHER COLOR OPTIONS

AC12

AC17

Forest Green Yellow Green Wheat

Cocoa Brown Maroon



Beaver

AC18



AC14

Bistre

AC19

Bisque





AC15 Dark Green

AC20

White Smoke



Square Acoustic Down Llight

ORDERING INFORMATION


LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH- SQU-56	PC Diffuser	90Deg	L560mm	3-Step MacAdam	4000K	90+	Aircraft Cable Pendant	IP22 IK06	G1- On/Off G2- 0-10V G3- DALI

SPECIFICATIONS

Voltage	220V-240VAC
Dimension	L560 × W560 × H422mm
Power	18W
Lumen	1800lm
Efficacy Up to	100lm/w
Control	On/Off, 0-10V, Dali



DIMENSION

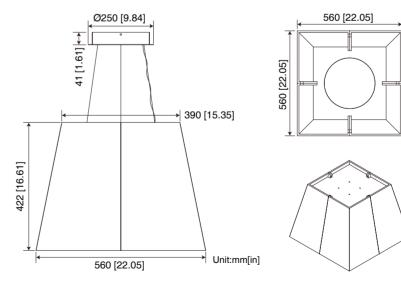






Elegant Acoustic Pendant Light







DIMENSION

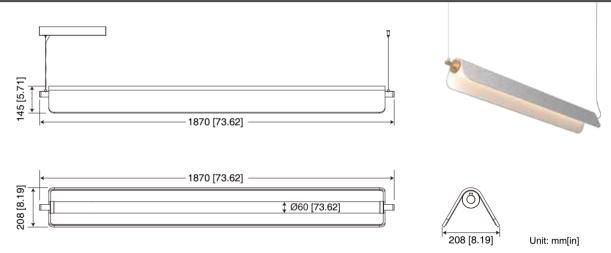

QUICK SHIPPING COLOR ITEMS

			A CONTRACTOR OF THE PARTY OF TH						
AC01	AC02	AC03	AC04	AC05	AC06	AC07	AC08	AC09	AC10
Cloudy Black	Moon Grey	Concrete Grey	Silver Grey	Indigo Blue	Ocean Blue	Navy Blue	Stone Blue	China Red	Camel Brown

OTHER	OTHER COLOR OPTIONS											
								7	The state of			
AC11 Cocoa Brown	AC12 Maroon	AC13 Beaver	AC14 Bistre	AC15 Dark Green	AC16 Forest Green	AC17 Yellow Green	AC18 Wheat	AC19 Bisque	AC20 White Smoke			
AC21 Slate Grey	AC22 Blue Violet	AC23 Light Coral	AC24 Gold	AC25 Orange Red								



ORDERING INFORMATION

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH- BLD-1800	PC Diffuser	90Deg	L1870mm	3-Step MacAdam	4000K	90+	Aircraft Cable Pendant	IP22	G1- On/Off G2- 0-10V G3- DALI

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.


Y-shaped Acoustic Linear Light







DIMENSION








ORDERING INFORMATION

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-Y	PC Diffuser	110Deg	L1115 ×W965 ×H200	3-Step MacAdam 5-Step MacAdam	2700K 3000K 4000K	90+	Aircraft Cable Pendant	IP22	G1- On/Off G2- 0-10V G3- DALI

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS



SSH-SLIM 3572


Acoustic Light With Silicone Lens or PC Diffuser


SPECIFICATIONS

Voltage	220V-240VAC					
Dimension	L450mm	L600mm				
Difficusion	L430IIIII	LOUUIIIII				
Power	10.5W	15.0W				
Lumen	1050lm	1500lm				
Efficacy Up to	100lm/w					
LED	2835 SMD					
Control	On/Off, 0-10V, Da	ıli				



DIMENSION






ORDERING INFORMATION

Silicone Lens / PC Diffuser Available

LUMINAIRE	LENS	ANGLE	DIMENSION (mm)	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP/IK GRADE	CONTROL OPTOINS
SSH-SLIM	Silicone Lens	105Deg	L450mm	3-Step MacAdam	4000K	90+	Aircraft Cable	IP22	G1- On/Off
	Lens		L600mm	MacAuam			Pendant		G2- 0-10V
	PC Diffuser								G3- DALI

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

QUICK SHIPPING COLOR ITEMS







SSH-3030P


Wave Board Acoustic Light


SPECIFICATIONS


Voltage	220V-240VAC
Dimension	L1200mm
Power	50W/pc
Lumen	5500lm
Efficacy Up to	110lm/W
Control	Dali , 0-10V, On/Off




DIMENSION






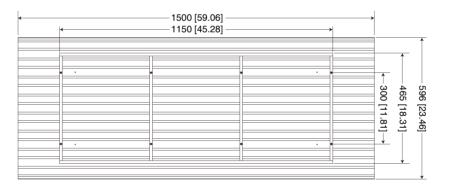








ORDERING INFORMATION

LUMINAIRE FIXTURE FINISH LENS ANGLE CRI COLOR COLOR QUALITY GRADE INSTALL ACCS. SSH- 3030P Textured Black Textured White Silver Grey Textured White Silver Grey LENS ANGLE CRI COLOR QUALITY GRADE INSTALL ACCS. 4000K 3-Step MacAdam Ellipse Rendant	OHDEHIII								
3030P Textured White Diffuser Diffuser Ellipse Cable Pendant	LUMINAIRE		LENS	ANGLE	CRI				
		Textured White		360Deg	90+CRI	4000K	MacAdam	IP22	Cable

- 1. Blueview's standard is 3-Step MacAdam
- 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
- 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

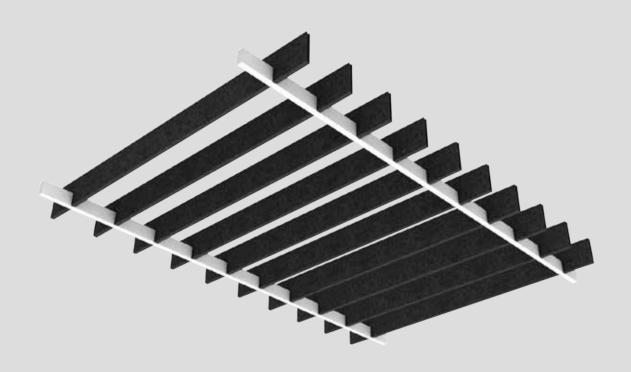



AC06 AC07 Ocean Blue Navy Blue



Stone Blue

AC09 China Red

AC10 Camel Brown

OTHER COLOR OPTIONS


SSH-SLIM-BRIDGE

Acoustic Modules with Slim linear lighting system


ORDERING INFORMATION

LUMINAIRE	ACOUSTIC BOX	LENS	LENGTH	INSTALL ACCS.	IP GRADE	CONTROL OPTIONS
SSH- Slim Bridge	MINI33- Box Mini W: 33mm ES53- Box Es W: 53mm ELS53- Box Els W: 53mm xx- Custom	C- Check the options of Slim series	2- 628mm 4- 1228mm 5- 1528mm 6- 1828mm xx- Custom	P- Aircraft Cable Pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off


DIMENSIONS (customize size is preferred)

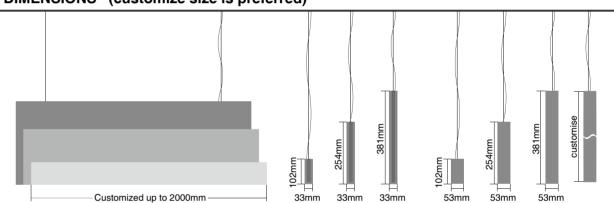


LUMINAIRE DIMENSION





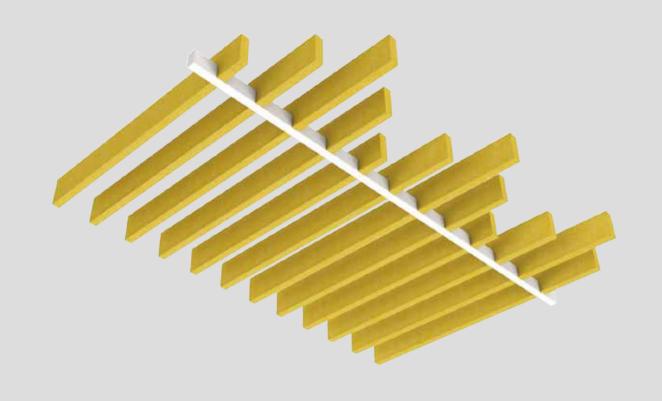





AC06 AC07 Ocean Blue Navy Blue AC09 AC10 Stone Blue China Red Camel Brown

OTHER COLOR OPTIONS




SSH-LUZ-BRIDGE

Acoustic Modules with Luz linear lighting system


ORDERING INFORMATION

LUMINAIRE	ACOUSTIC BOX		LENGTH		IP GRADE	CONTROL OPTIONS
SSH- Luz Bridge	ES53- Box Es W: 53mm ELS53- Box Els W: 53mm ES68- Box Es W: 68mm ELS68- Box Els W: 68mm xx- Custom	C- Check the options of Luz series	2- 628mm 4- 1228mm 5- 1528mm 6- 1828mm xx- Custom	P- Aircraft Cable Pendant	22- IP22	D1- DALI D2- 0-10V D3- On/Off

DIMENSIONS (customize size is preferred)

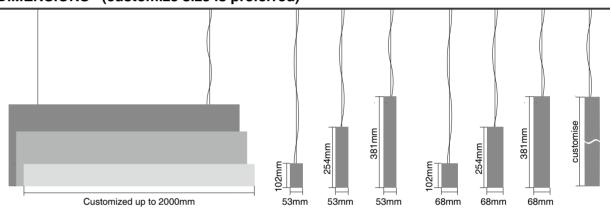

LUMINAIRE DIMENSION








QUICK SHIPPING COLOR ITEMS



























OTHER COLOR OPTIONS



















Forest Green Yellow Green Wheat










SSH-SE

Acoustic Separator


ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	PATTERN OPTIONAL	HEIGHT	INSTALL ACCS.	IP GRADE
SSH- SE	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	01- Ca01 02- Ca02 03- Ca03 04- Ca04 33- Ca33 34- Ca34	2- 628mm 4- 1228mm 5- 1528mm	P- Aircraft cable pendant	22 - IP22

PATTERN OPTIONAL

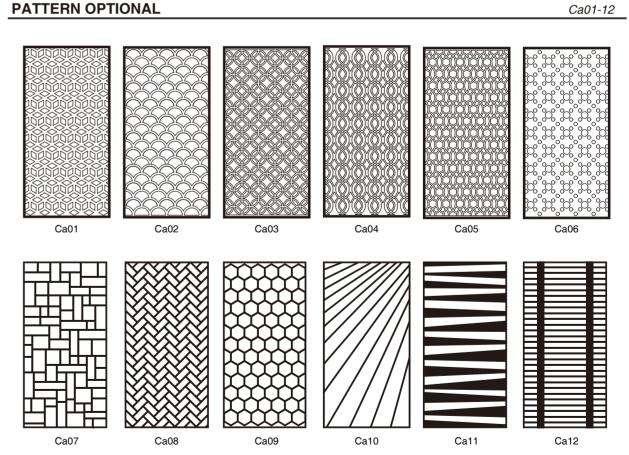


PATTERN OPTIONAL Ca12-34

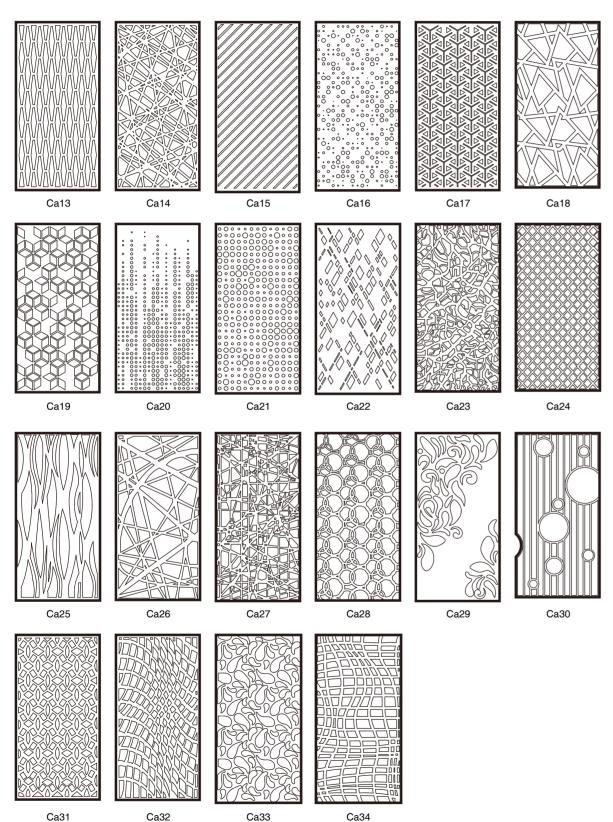

SSH-RC BOX

Acoustic T-bar Recessed 3D box

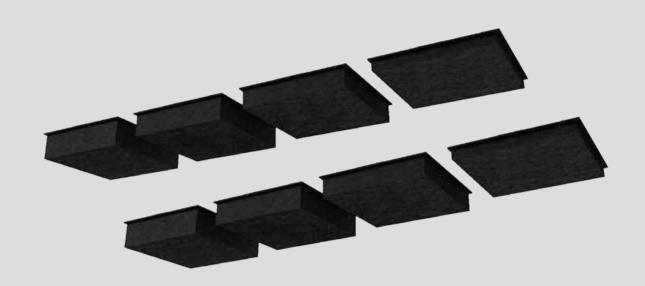

ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	LENGTH	HEIGHT	WIDTH	INSTALL ACCS.
SSH- RC box	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	EU/AR- L600×W600mm NA- L603×W603mm	01- 50mm 02- 101mm 03- 127mm 04- 152mm	01- 60mm	TD- Tirmed Recessed

^{1.} Blueview's standard is 3-Step MacAdam

^{2.} The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.


^{3:} Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

SSH-CE1

Acoustic Ceiling Modules



QUICK SHIPPING COLOR ITEMS




OTHER COLOR OPTIONS





ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	LENGTH	INSTALL ACCS.	IP GRADE
SSH- CE1	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	2- L1200×H300mm	P- Aircraft cable pendant	22- IP22

DIMENSIONS (customize size is preferred)

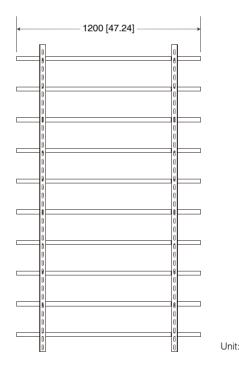









Acoustic Ceiling Modules

ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	LENGTH	INSTALL ACCS.	IP GRADE
SSH- CE2	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	2- L2400mm×H400mm 4- L4480mm×H300 xx - Custom	CM - Ceiling Mounted	22- IP22

DIMENSIONS (customize size is preferred)

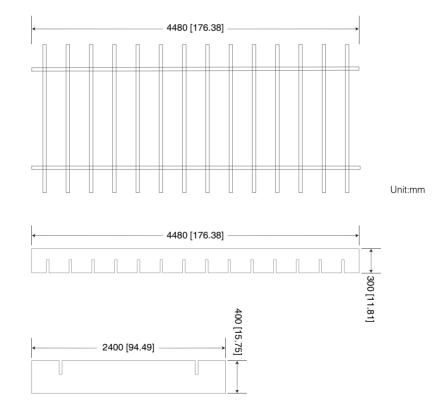

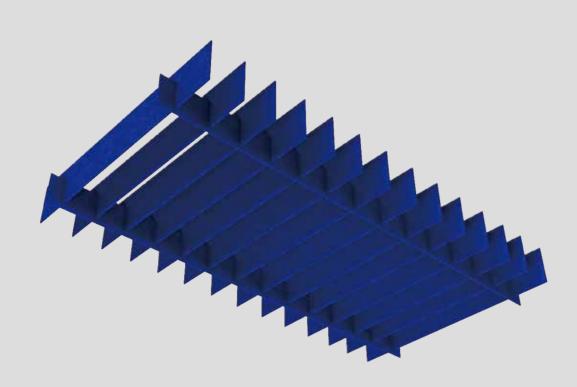

QUICK SHIPPING COLOR ITEMS



OTHER COLOR OPTIONS




SSH-CE3


Acoustic Ceiling Modules




LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	LENGTH	INSTALL ACCS.	IP GRADE
SSH- CE3	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	01- 668mm 02- 728mm 03- 758mm 04- 1260mm 05- 1800mm xx- Customized	P- Aircraft cable pendant	22- IP22


DIMENSIONS (customize size is preferred)

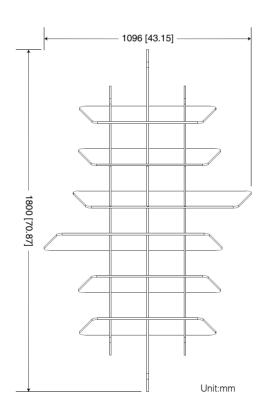

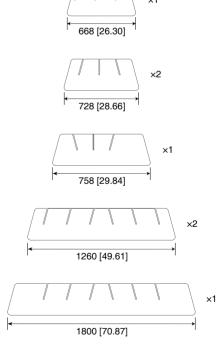

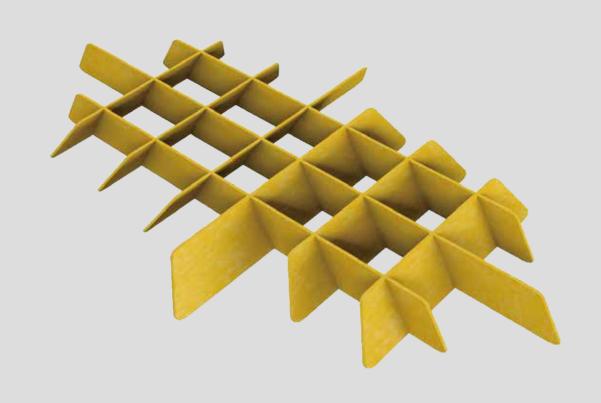

QUICK SHIPPING COLOR ITEMS




OTHER COLOR OPTIONS



SSH-CE4



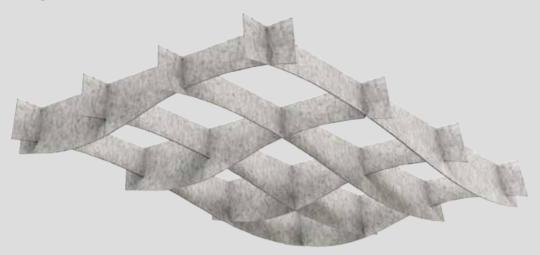

ORDERING INFORMATION

LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	LENGTH	INSTALL ACCS.	IP GRADE
SSH-CE4	AC01- Cloudy Black AC02- Moon Grey AC03- Concrete Grey AC04- Silver Grey AC05- Indigo Blue AC06- Ocean Blue AC07- Navy Blue AC08- Stone Blue AC09- China Red AC10- Camel Brown etc.	01- 1500mm 02- 2400mm xx- Customized	P- Aircraft Cable Pendant	22- IP22

DIMENSIONS (customize size is preferred)

