

LED • STRIP • LIGHT

STRIP

CATALOG

BETTER LIGHT BETTER VIEW

◀2025▶

Blueview Elec-Optic Tech Co., Ltd



BETTER LIGHT BETTER VIEW

COMPANY PROFILE

BLUEVIEW ELEC-OPTIC TECH CO.,LTD. is a pioneer developer in China's LED signage lighting and linear lighting market, not only participating but also promoting the development of the entire LED industry.

Blueview has been offering professional integrated and ingenious solutions with abundant products including signage, lighting products and others since 2004.

To lead the innovation trend, Blueview introduced "Smart Control" to its products which triggered a major breakthrough for the whole LED industry. Blueview aims to provide customers with complete LED smart lighting system solutions, from lamps to systems to IOT, everything.

We always pursuit the faith that Better light could bring Better life and we never slow down the path for innovation&creation.



CULTURE&VALUES

Perfectionism.

We always treat every detail with rigorous and severe attitude.

Consumer Satisfaction .

We always provide customization and circumspect lighting solution services for each individual project.

Innovation .

We always challenge ourselves and exploit new path to "Blue Sea".

High Performance Cost Ratio.

We always require our products possessed with remarkable performance and reasonable cost.

STRENGTH

Meticulous Quality Control system.

High reputation around the world.

Seasoned and professional project experiences .

Persistent Research&Development.

MISSIONS

Lead the development for LED industry while shouldering the social responsibilities.

Bring the maximum profits to our consumers while maintaining the highest level of lighting solution services.

COMPANY INTRODUCTION

Embranchment

50 directly affiliated offices in China, 19 branches

Product Lines

LED Signage,LED Lightbox ,LED Smart Lighting System ,LED Commercial Lighting

Management System

Acquired international management system certification of TUV,ISO9001,ISO14001,ISO45001,quality,environment, occupational health and safety

Employees

1,300+

Scale

40,000m²

Certificates

CE,UL,3C,FCC,ROHS etc.

Market Share

Own the largest market shares for LED advertising signage lighting

Global Business

Domestic: 55%,Overseas:45%

TOP TEN REASONS TO SELECT BLUEVIEW

Wide Products Options

Wide Color Temperature Options In Only One Bin

High Efficient Leading Time

ODM&OEM Capacity

Reliable High Standard

Best-In-Class Services


Experience

One Of The 1St Movers For Led Tape Light

Strict Quality Control

Leading Industry Warranty Up To 10 Yrs

PRODUCTION BASE IN

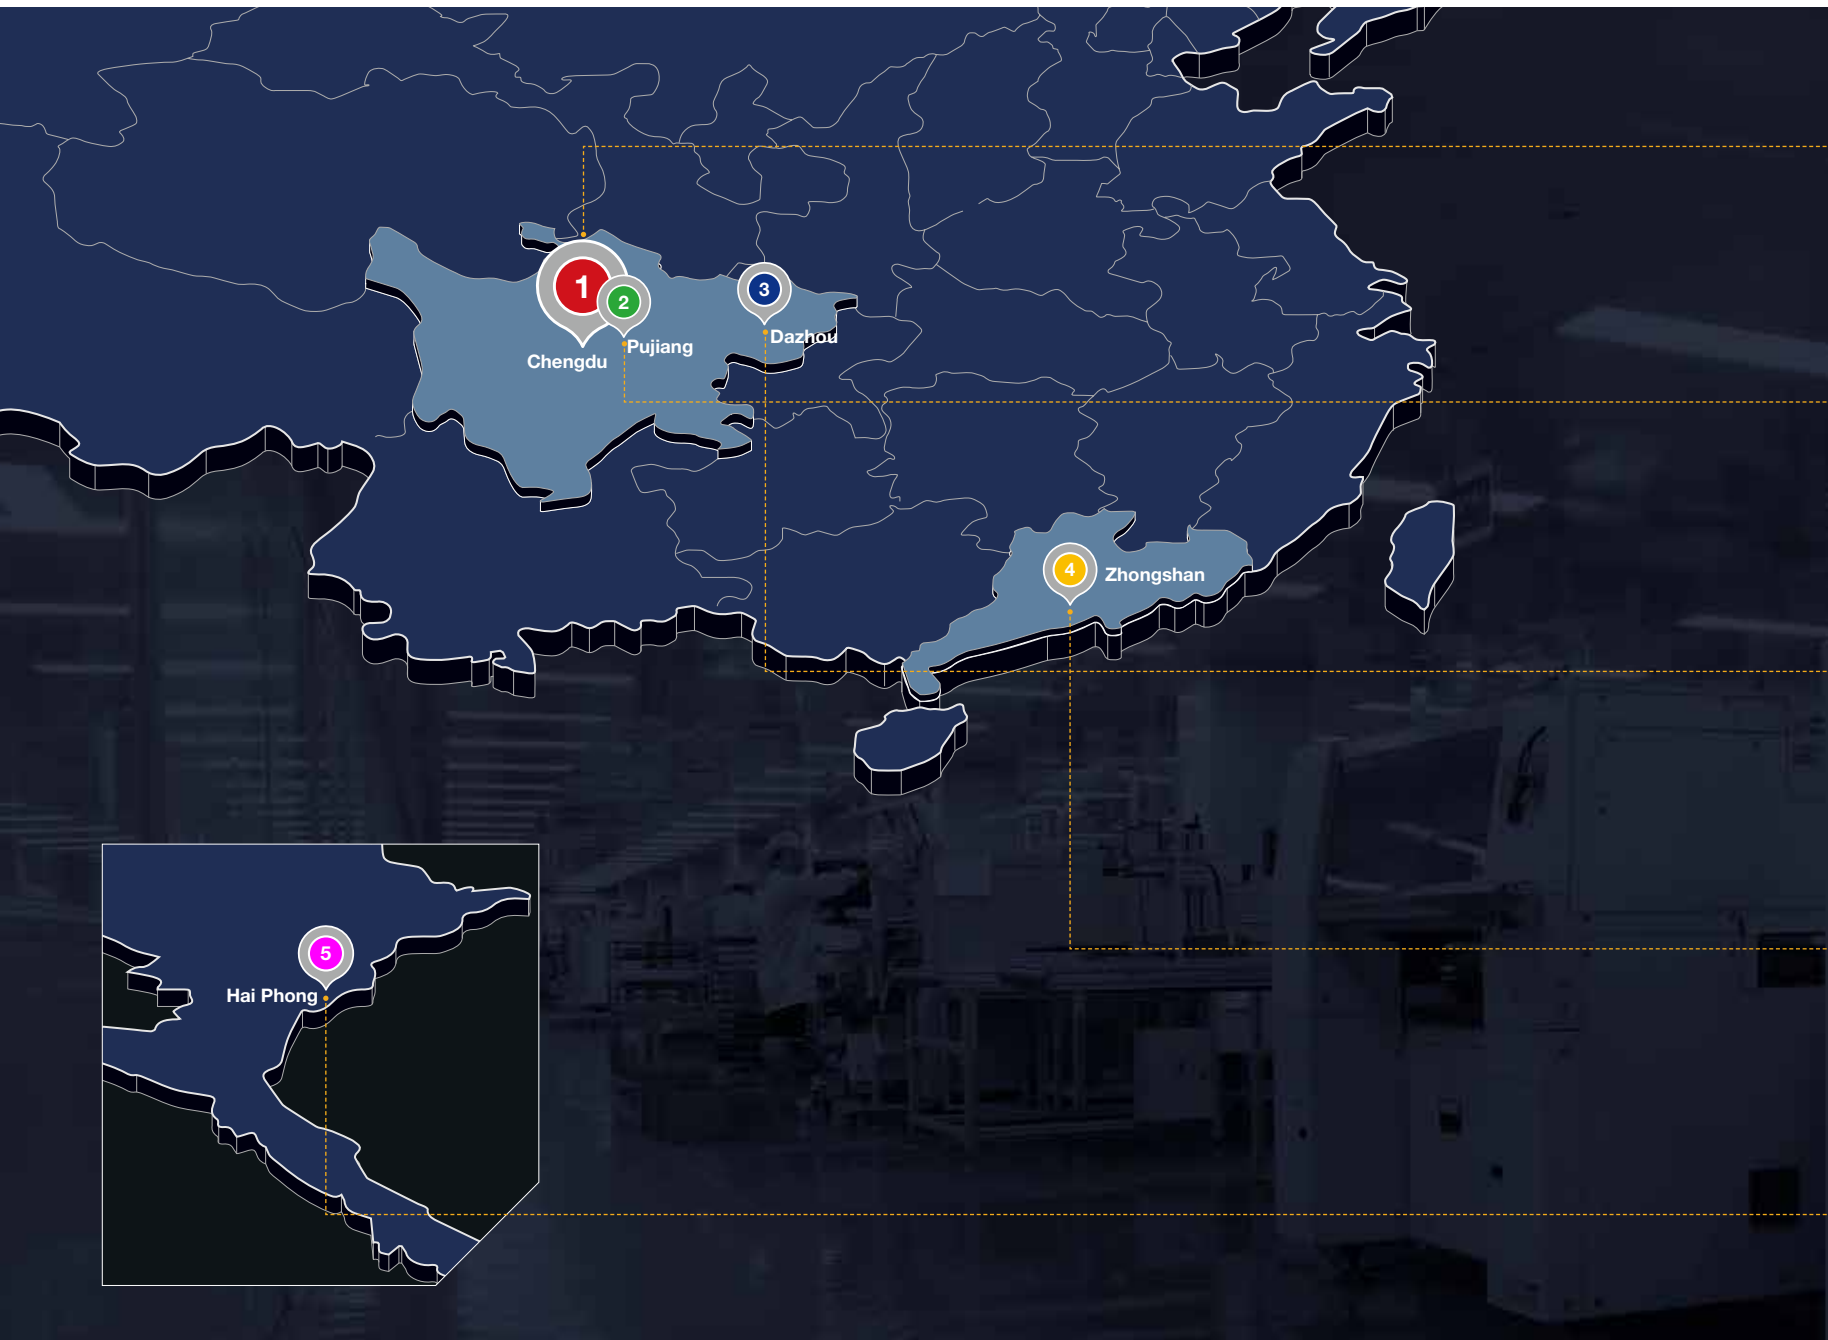

1 Chengdu, Sichuan



2 Puijiang, Sichuan



3 Dazhou, Sichuan



4 Zhongshan, Guangdong



5 Hai Phong, Vietnam



PRODUCTION BASE IN
HAI PHONG, VIETNAM



AUG 2023

Blueview Vietnam Production Base was officially completed and started operation in August 2023. It is the first oversea production base of Blueview.


Located in Hai Phong, Vietnam's second-largest port city. Covering with 2500m² workshop.

20+ sets of machines, professional management team from headquarters and over 40 skillful workers, we aim for consistent product quality and fast leading time for customer.


AUTOMATIC PRODUCTION LINE



HISTORY & EVENTS

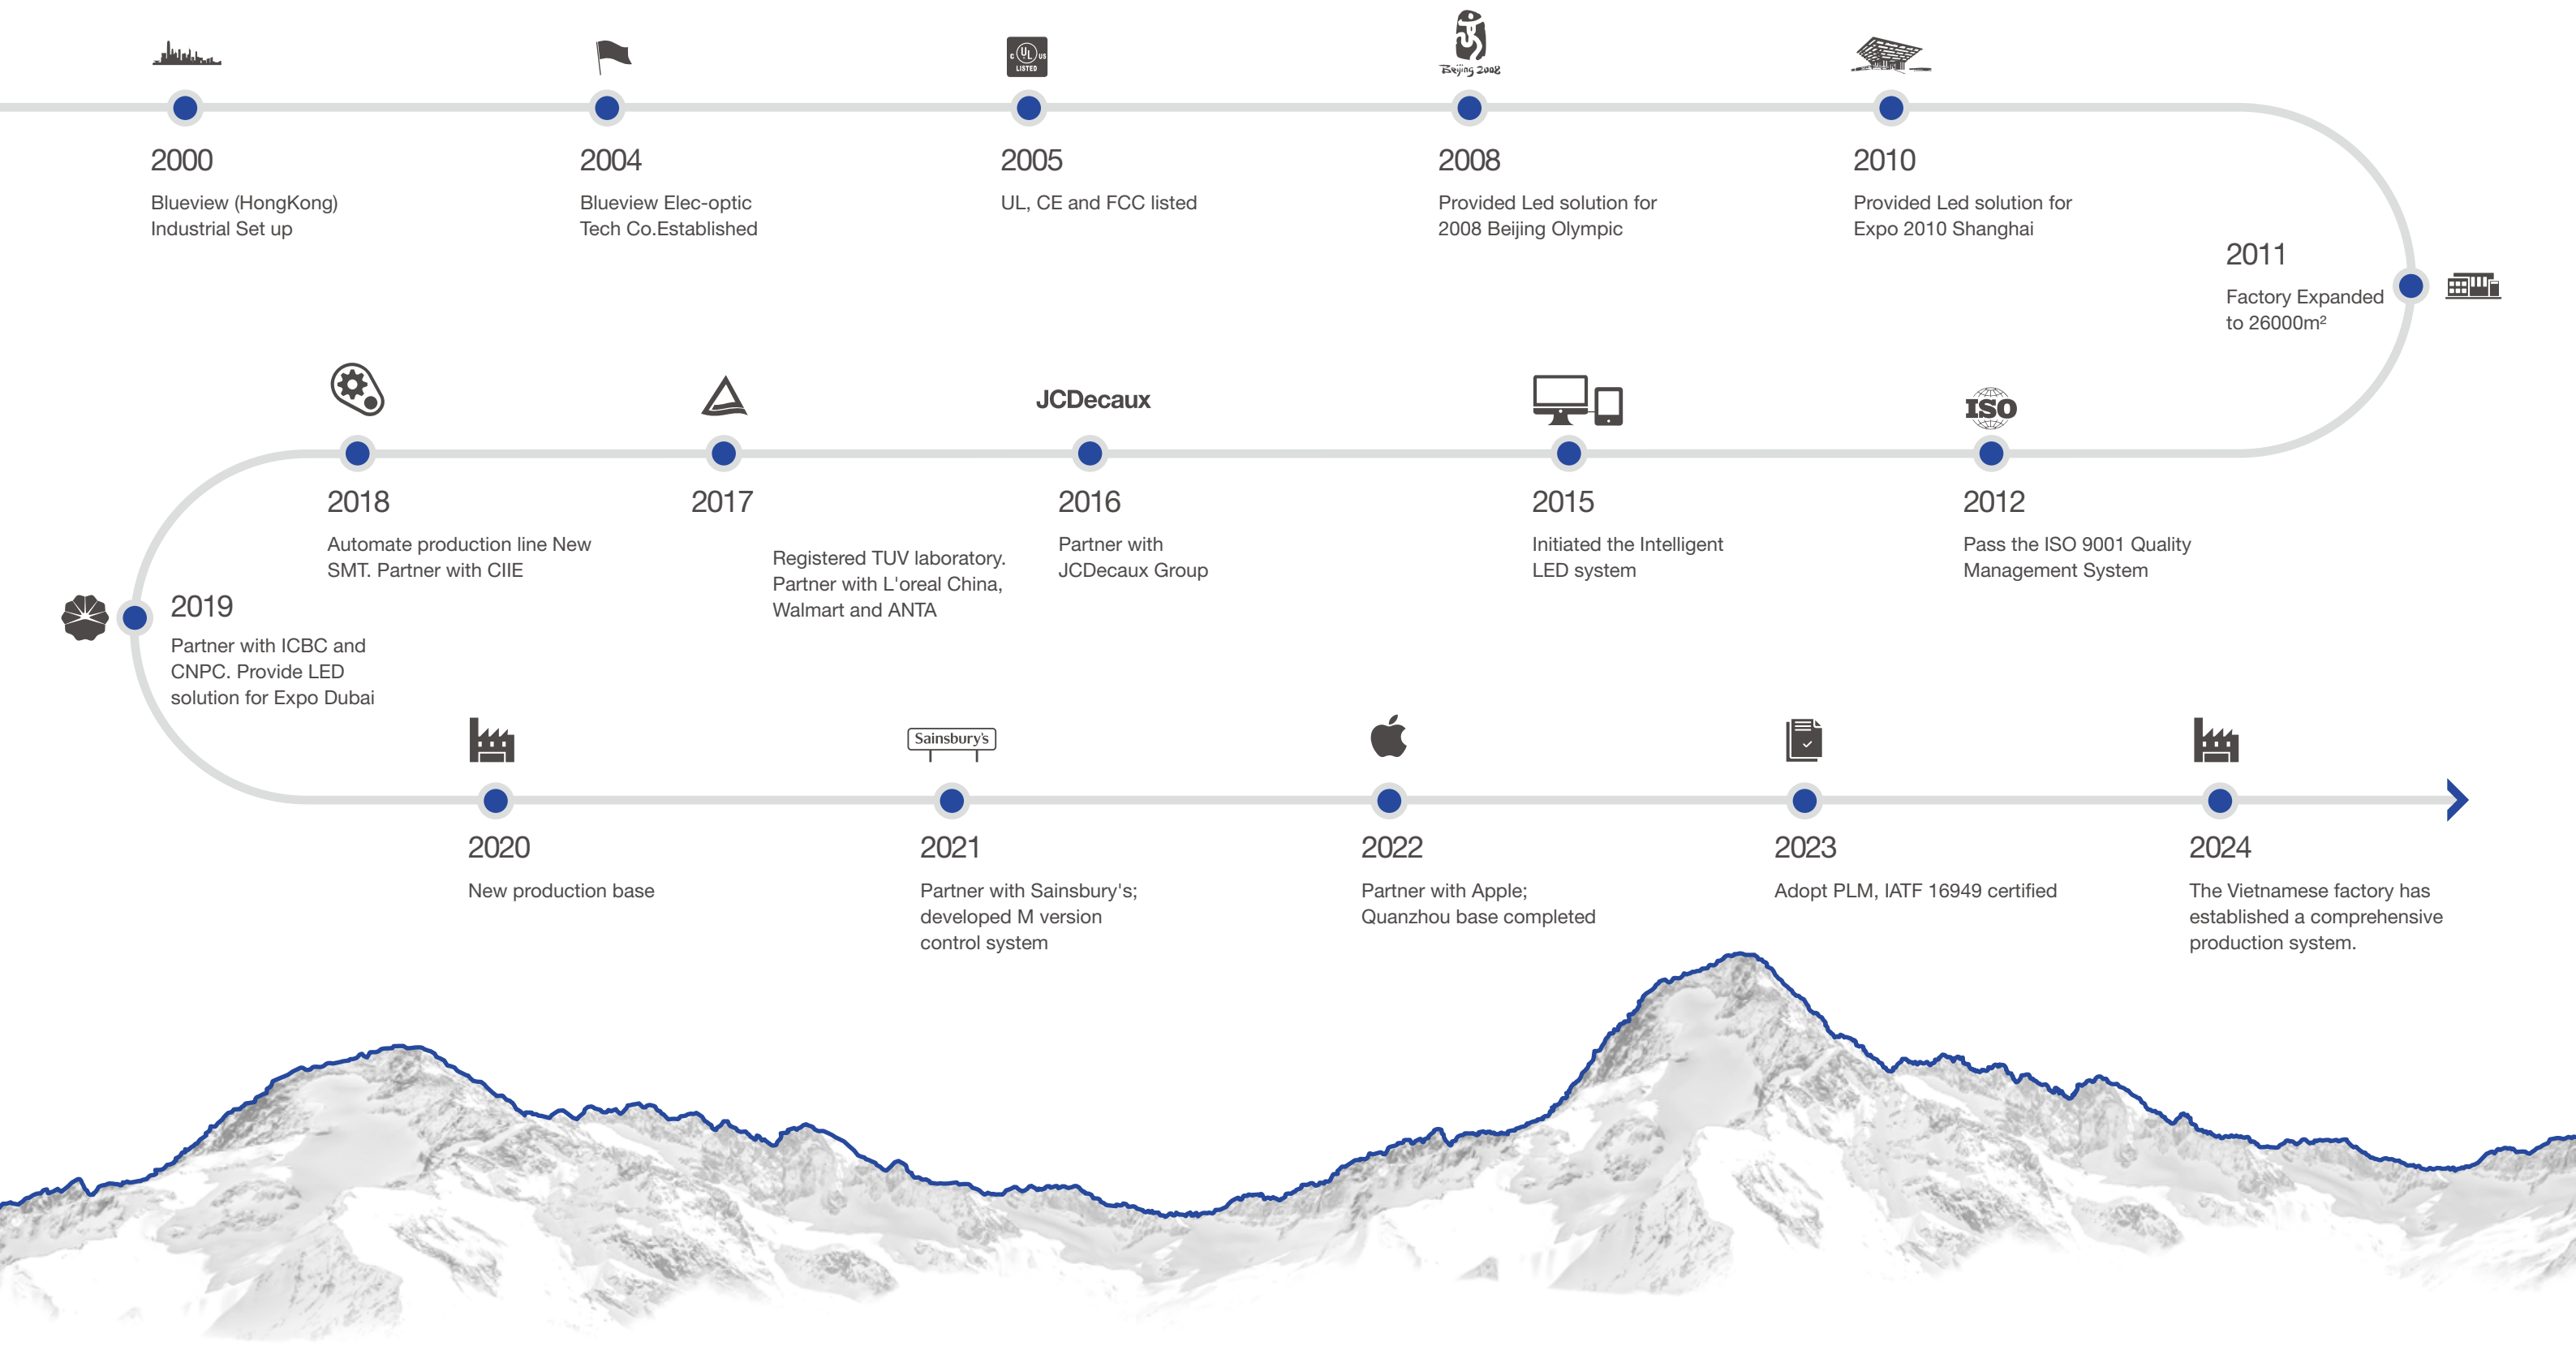

R&D INVESTMENT

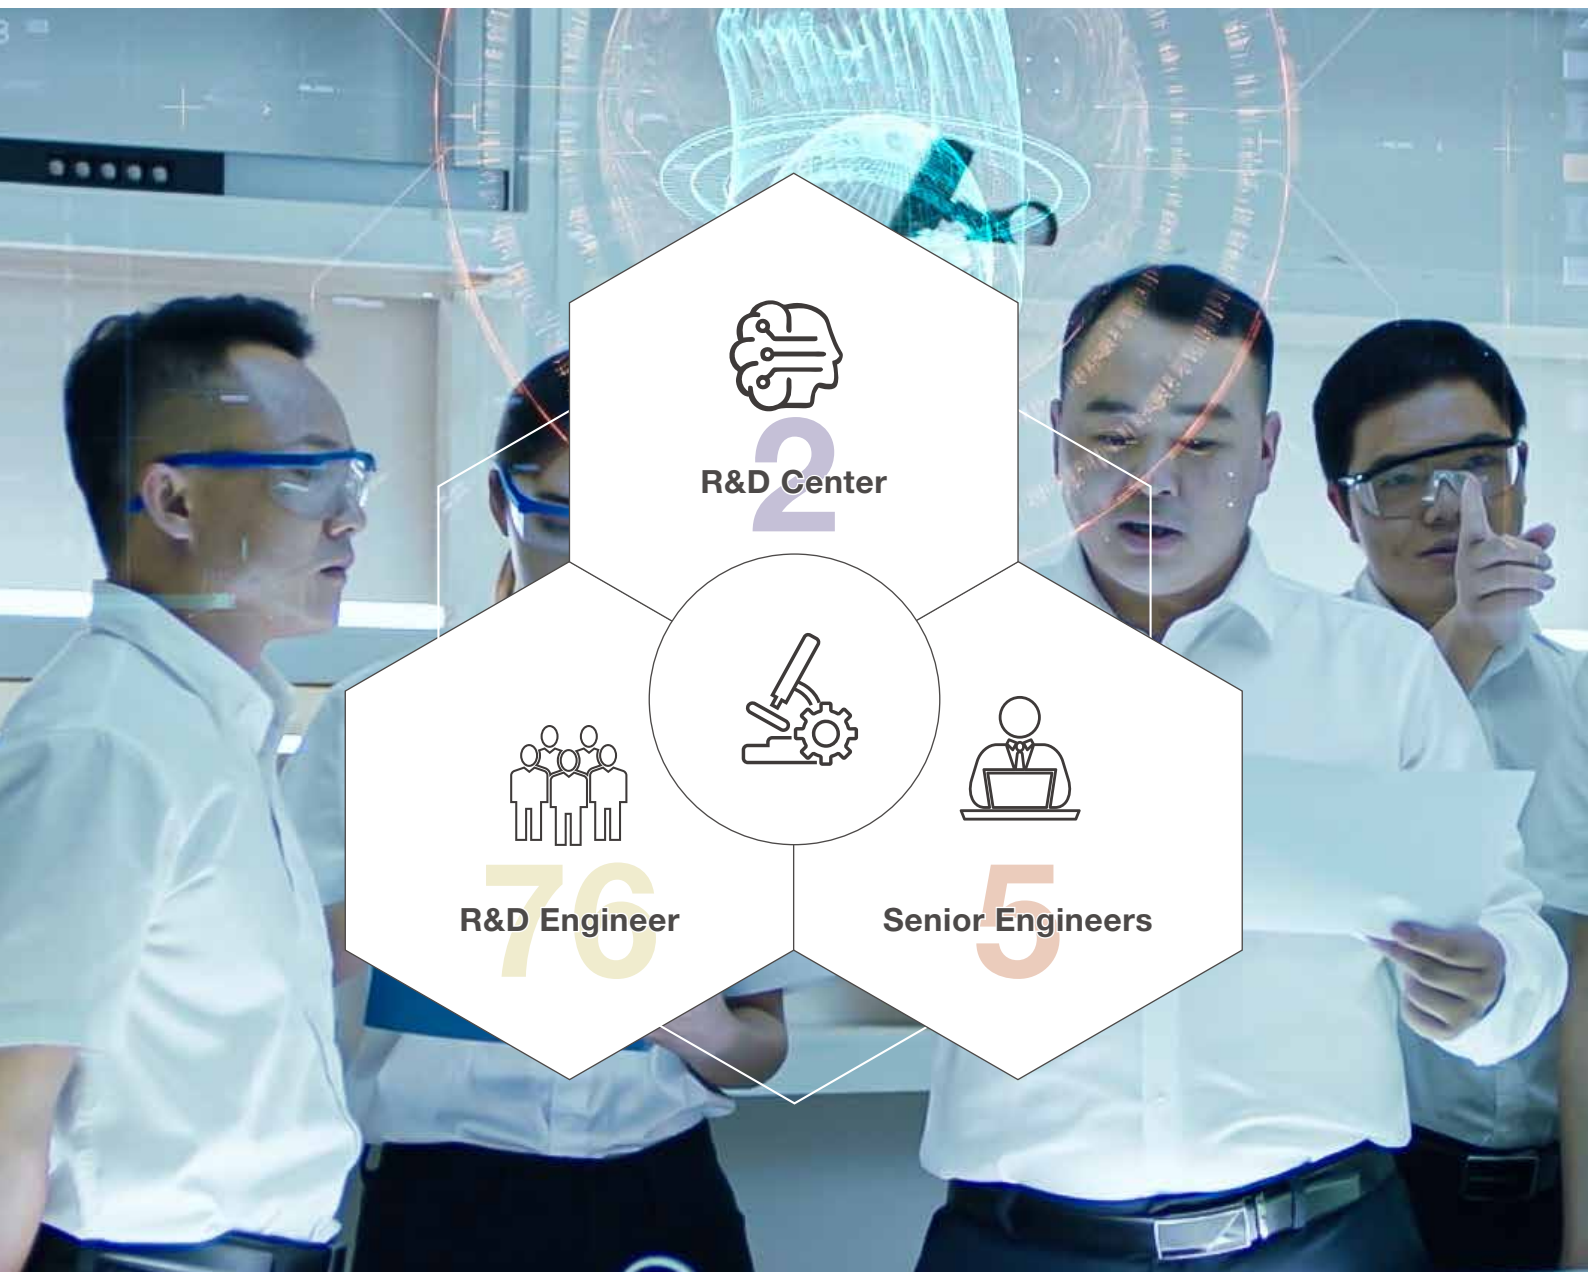

Chengdu R&D Center

Developing the entire industry chain system, including smart systems and supporting devices.



Zhongshan R&D Center

Developing commercial lighting and LED linear lighting products





SGS AUTHORIZED FIRST-CLASS LABORATORY

It has a complete set of testing equipment, which can independently undertake products testings



ACOUSTICAL LABORATORY

Our Acoustic Testing Facility is designed to comply with ISO 354 standards. Our laboratory proudly carries accreditation from the China Inspection Body and Laboratory Mandatory Approva (CMA).

PATENT&CERTIFICATE



21 innovation patents [partly]



24 appearance design patents [partly]



passed [partly]

CE, ROHS, UL, FCC, 3C certification, SGS, TUV and UL official test laboratory certification.



79 utility model patents [partly]

Acquired international management system certification of energy saving, environment, occupational health and safety

PATENT & CERTIFICATE



Domestic Certificates

CCC, CQC, energy-saving, environmental protection, explosion-proof,etc

International Certificates

UL, NA, ENEC, CE, CB, UKCA, BSCI, FCC, REACH, RoHS, ErP, TITLE 24, etc

MANAGEMENT SYSTEM

- ISO 9001 QMS
- ISO 14001 EMS
- ISO 45001 OH&S

IATF 16949 Automotive Quality Management

ISO 14064 Greenhouse Gas

PAS 2060 Carbon-neutral

BSCI



120+

Reliability Tests

Including lifespan test, reliability test, safety test, IP test, optical test, material test etc., laying the foundation for the product quality.

60+

Test Equipment

We have high-precision and fast spectral analyzers, X-RAY testing equipment, Rohs testers, IP rating testers, lightning surge testers, drop testers, and twisting machines, among other testing equipment, to comprehensively assess product reliability.



Mechanical Strength
IEC60598 4.13




Temperature -40~80°C
336 hours



X-Ray Test
welding quality inspection



Xenon Lamp Test
336 hours

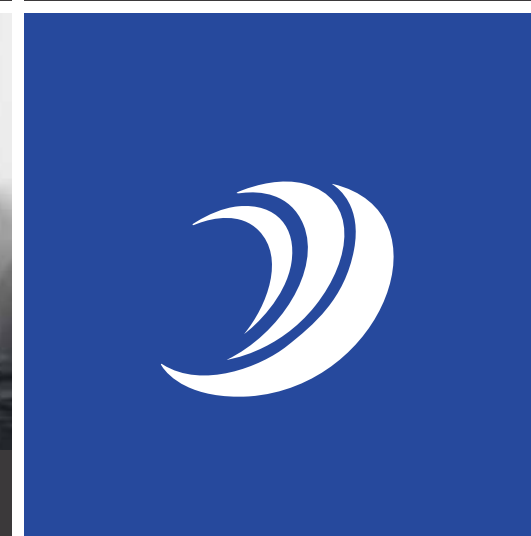

Water spray IPX5/6 standard
336 hours



Corrosion Resistance Test
72 hours



No-load/Load Capacity Test
within±0.5V



Long-term indoor aging
8,500 hours

COMPREHENSIVE PRODUCTION LINE

Production environment meets ISO 7 standard of number of particles per cubic meter, temperature and humidity.



SMT Dust-free Workshop



Continuous Quality Improvement




Lead-free Workshop





INTERNATIONAL TRADE FAIR



Blueview attaches great importance to the development of the global market, So it has actively participated in foreign exhibitions for many years, including exhibitions in Dubai, hte United States, the United Kingdom, Germany, India and other countries.

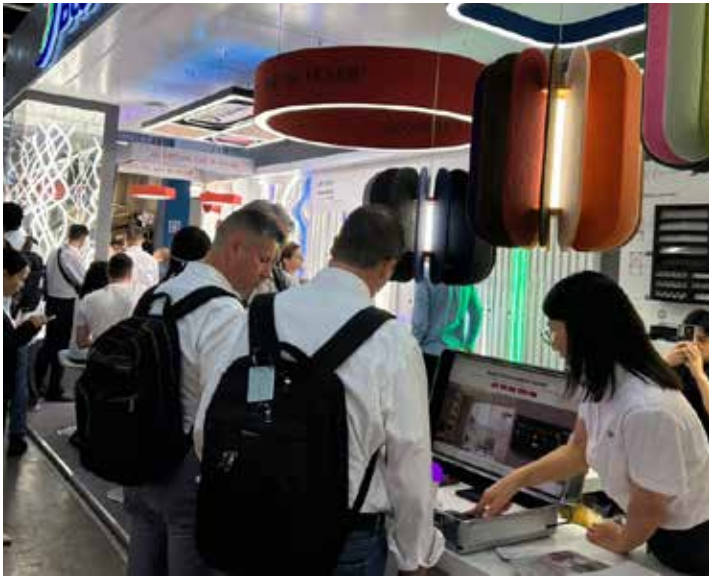

Long Run & High efficiency series	LN-H2835Z-XXX-24-XXX-----	029
High efficiency series	FN-H2835Z-XXX-24 -----	031
	FN-H2835V-XXX-24-----	032
	FN-H2835V-288-24 -----	033
	FN-H2835K-XXX-24 -----	034
	FN-H2835(K+)-XXX-24 -----	035
	FN-H2835T-XXX-24 -----	036
	FN-H2835T-XXX-24 -----	037
	FN-H2835O-XXX-24 -----	038
	FN-HD2835O-XXX-24 -----	039
COB Series	FN-FC-XXX-XX(HS) -----	041
	MN-FC-480-12(HS)-4mm -----	042
	LN-FC-384-24(HS) -----	043
	SN-FC-XXX-XX(HS) -----	044
	TN-FC-896-24-RGBW (HS) -----	045
	DN-FC-XXX-XX(HS)-----	046
	DN-FC-XXX-XX(HS)-----	047
	HN-FC-480-24(HS) -----	048
	EN-FC-528-24(HS)-----	049
	GN-FC-320-24(HS) -----	050
	VN/VMN-FC-320-24(HS) -----	051
Multi Power Strip	FN-XS2835T-XXX-XX -----	053
S-TYPE STRIP	SN-2835A-120-12 -----	055
	GF2835C-60-12 -----	056
	SNF2835-140-24-----	057
Mini Wall Washer	WHE2014 -----	059
Classical Series	F2-J-2835-XXX-XX-----	061
	FJN-H2835T-XXX-XX -----	062
	FN-2835T-70/126/210-24 -----	063
	FN-2835T-XXX-12/24 -----	064
	FN-2835T-XXX-XX -----	065
	FN-H2835L-XXX-24-----	066
	FN-H2835L-XXX-24-----	067
	FN-1612-XXX-24 -----	068
Long Run Series	LN-2835T-XX-XX -----	070
	LN-2835A-XXX-24 -----	071
	LN-2835T-168-24-WN -----	072
	LN-5050B-60-24-RGB-A/B -----	073
Flexible optical strip	DFO-XXXX-XXX-XX -----	075
	DFO-XXXX-XXX-XX -----	076
	P2-8 -----	077
	P2-8 -----	078
	P2-8pro -----	079
	SFO1616-3030-XX-24 -----	080
	SFO2317-XXXX-XXX-XX-----	081
	FNO5050-XXX-XX-----	082
	TNO5050-XXX-XX-----	083
	ST9 3.0-----	084
	FO-XXXX-XXX-XX-WN-----	085



Short-Cuttable	TN-H2835C+-XXX-24-WN -----	087
	FN-HG2835C+-XXX-24-----	088
Full Spectrum	FN/CN-2835G-XXX-24 -----	090
	FN/CN-2835E-XXX-24-----	091
Constant Current Series	CCN-G/F2835-XXX-36 -----	093
	TCCN-H2835-XXX-XX-WN -----	094
Narrow Series	MN-2016A-182-24 -----	096
	MN-1612-280-24-----	097
	MN-2110-238-24-----	098
	MN-2835A-120-12/24 -----	099
	MN-2835T-182-24 -----	100
	MN-2016A-XXX-24 -----	101
	MN-2110-280-24-WN -----	102
	MN-4040-120-24-RGB -----	103
	TN-2020-192-24-WN -----	104
	MN-4040-96-24-RGB-----	105
Side View Series	FN-SV3014P-XXX-24 -----	107
	TN-SV4713-XXX-24-RGB -----	108
48V Series	FN-F2835-80-48 -----	110
	FN-H2835T-150-48 -----	111
	LN-2835T-XXX-48-----	112
	TN-F5050-56-48-RGBW -----	113
Multi-color series	PTW-2835T-168-24-WN -----	115
	PTW-2016A-224-24-WN -----	116
	TN-H2835T-XXX-24-WN-----	117
	TN-2016A-XXX-XX-WN-----	118
	TN-2835RGB-XXX-24 -----	119
	TN-4040A-120-24-RGB -----	120
	F5H-XXX-XX-RGB -----	121
	TN-F5050-60-12/24-RGBW -----	122
	F5H-120-24-RGBW-----	123
	TN-F4040-120-24-RGBW -----	124
	TN-42T-192-24-RGB+W-----	125
	TN-50AA-60-12/24-RGB+W -----	126
	TN-50AA-120-24-RGB+W -----	127
	TN-S5050-60-24-RGBWN -----	128
	TN-566-180-24-RGB+W+N -----	129
	DN-5050A-60-12/24-RGB/W-D-----	130
	DN-5050C-XXX-12-RGB-D -----	131
	DN-5050C-XXX-24-RGB-D -----	132
	DN-2835-120-24-W-D-----	133
	DN-S43528-XXX-XX-WN-D -----	134
	DN-N5-120-24-RGB-DD -----	135
	DMXN-5050A-XX-XX-W -----	136
	DMXN-5050-XX-XX-RGB-----	137
	DMXN-F5050-XX-XX-RGBW-----	138
Flexible Panel Series	H150-W-FN-H2835T-200-24-----	140
	H150-W-FN-HG2835C+-XXX-24 -----	141
	H150-WN-TN-2835-324-24 -----	142
	H150-RGB-TN-4040-162-24-----	143
	H150-RGBW-TN-F5050-162-24-----	144
	H150-RGB+W-TN-42T-576-24-----	145
	H150-RGB+W+N-TN-522-864-24-----	146
	H150-D4-DN-52-256-24-RGB+W -----	147



LONG RUN &
HIGH EFFICIENCY
SERIES



High efficiency up
to 180lm/W




Max Run 15m



CRI90+ & CRI95+
Optional



Long Run & High efficiency series

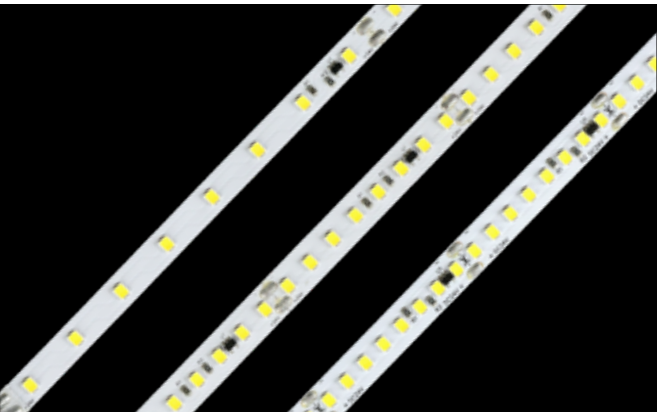

LN-H2835Z-XXX-24-XXX





- High efficiency, up to 180lm/W;
- Max run 15m with one end power feed;
- CRI≥90/CRI≥95 optional;
- Support PWM, DALI and DMX dimming;
- Multiple specifications and support customization;



Unit: mm

BASIC PARAMETERS


Size: 15000*8 / 12000*10 / 10000*10 mm
LED/unit: 8 LED
Input Voltage: DC 24V
LED Qty: 64/128/128/160 LED/m
Max Run: 15/12/10/10 m




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
LN-H2835Z-64-24-3.2W	24V DC	>90/95	4000K	575/540	180 /170	3.2
LN-H2835Z-128-24-6.4W	24V DC	>90/95	4000K	1135/1080	180 /170	6.4
LN-H2835Z-128-24-9.0W	24V DC	>90/95	4000K	1600/1530	178 /170	9.0
LN-H2835Z-160-24-12.0W	24V DC	>90/95	4000K	2135/2040	178 /170	12.0


ALUMINUM PROFILE

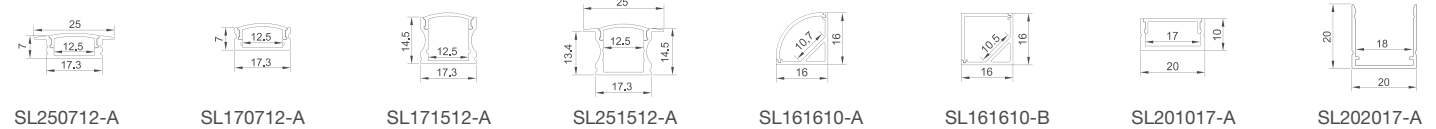

QUICK CONNECTOR

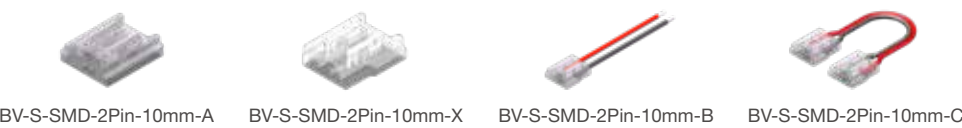

WIRE



Suitable for 10mm width product with LED density less than 120 LEDs/m.

High Efficiency Series

Z/V/KING/THOR/ODIN




High light efficiency
up to 215lm/W



High CRI
90+ or 95+



Color consistency
SDCW < 3

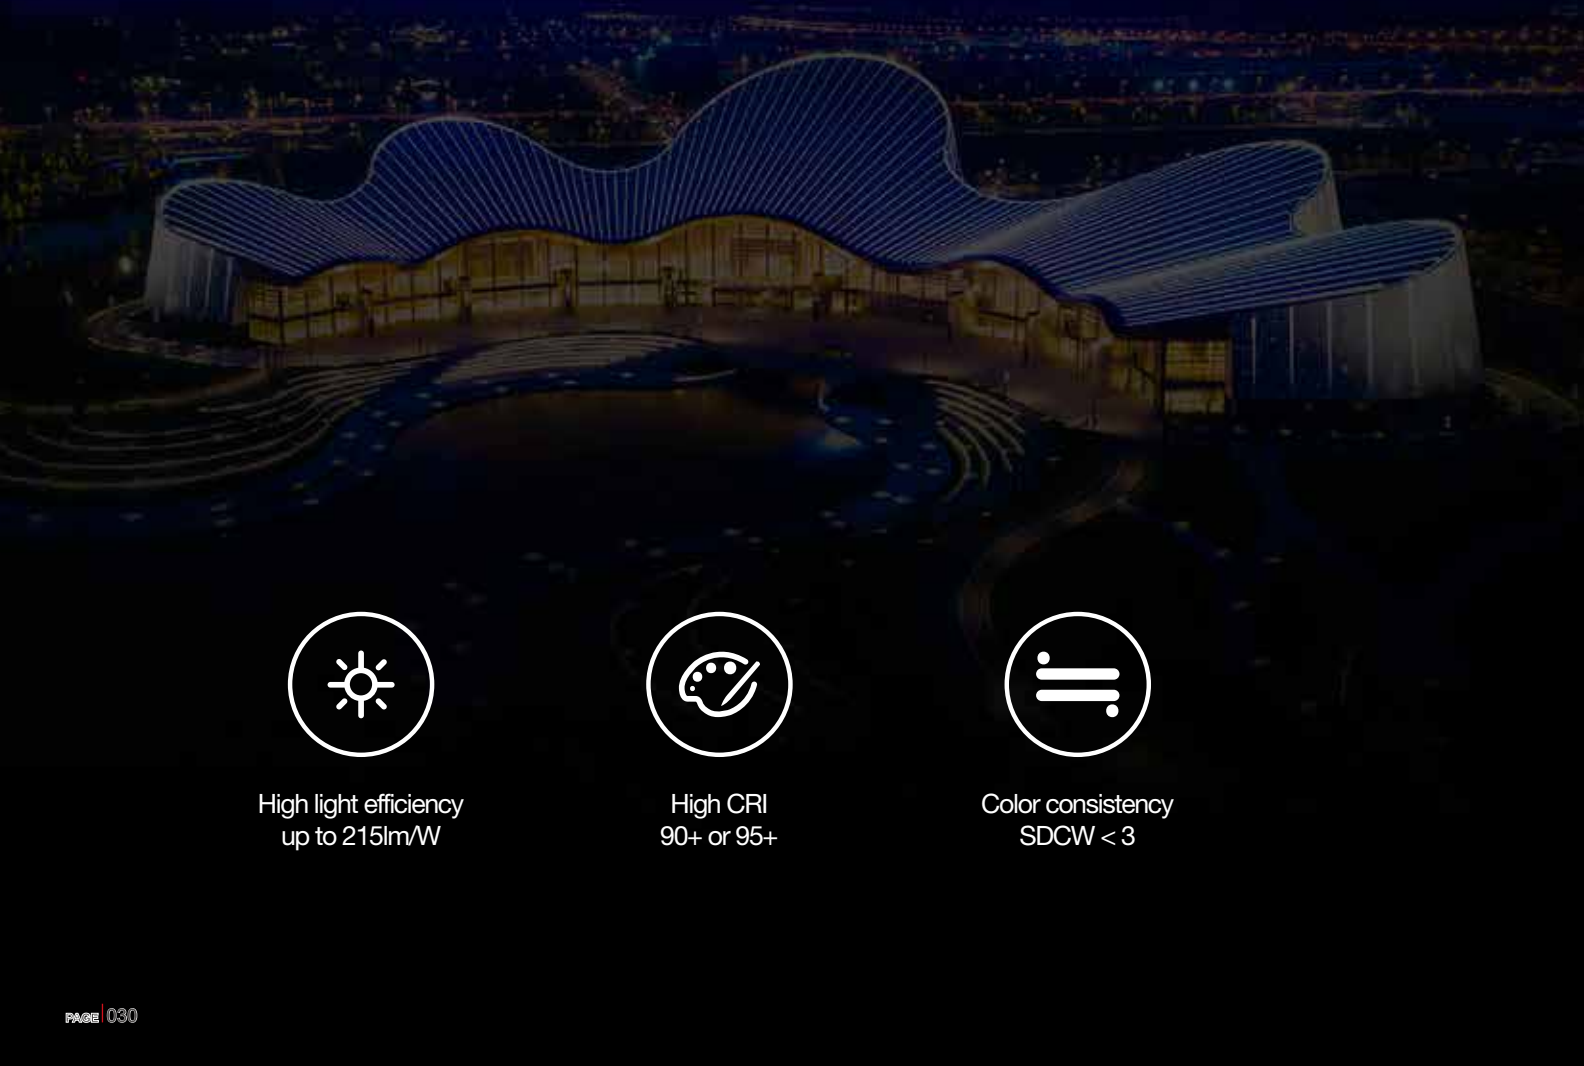

Z Series

FN-H2835Z-XXX-24

- CRI90, CRI95 optional; SDCM≤5
- High efficiency, up to 190lm/w
- Long run design, low voltage drop
- IP20 non-waterproof, IP65 spray silicone coating and IP67 silicone tube optional
- Multiple specifications, support customization

Unit: mm

BASIC PARAMETERS

Size: 5000X10mm
LED/unit: 8LED
Input Voltage: DC24V
LED Qty: 80/128/160/240 LED/m
Max Run: 10/8/10/6.5/5m

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-H2835Z-80-24	24V DC	>90/95	4000K	1800/1725	188/180	9.6
FN-H2835Z-128-24	24V DC	>90/95	4000K	1800/1725	188/182	11.52
FN-H2835Z-160-24	24V DC	>90/95	4000K	1800/1765	188/184	9.6
FN-H2835Z-160-24	24V DC	>90/95	4000K	2705/2620	188/182	14.4
FN-H2835Z-240-24	24V DC	>90/95	4000K	4100/3970	190/184	21.6

ALUMINUM PROFILE

QUICK CONNECTOR

WIRE

Suitable for 10mm width product with LED density less than 120 LEDs/m.


PAGE 030

PAGE 031





FN-H2835V-XXX-24

- SDCM<3, Ra 90+
- High light efficiency 160+ lm/W
- 2cm mini cutting unit
- Support a variety of production processes: spray glue coated, silicone tube waterproof, and etc
- Multiple specifications, support customization



BASIC PARAMETERS


Size: 5000X10/14mm
LED/unit: 4LED
Input Voltage: DC24V
LED Qty: 64/80/128/160/192/240 LED/m
Max Run: 6/5/4.5/4/3/2.5/4m

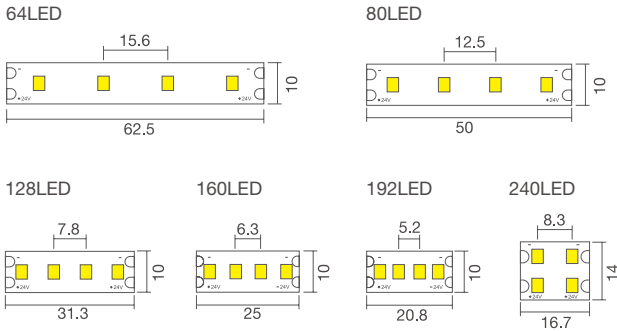

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-H2835V-64-24	24V DC	>90	4000K	1240	162	7.68
FN-H2835V-80-24	24V DC	>90	4000K	1550	162	9.60
FN-H2835V-128-24	24V DC	>90	4000K	1840	152	11.52
FN-H2835V-160-24	24V DC	>90	4000K	2300	160	14.40
FN-H2835V-192-24	24V DC	>90	4000K	2730	158	17.28
FN-H2835V-240-24	24V DC	>90	4000K	3450	160	21.60

ALUMINUM PROFILE

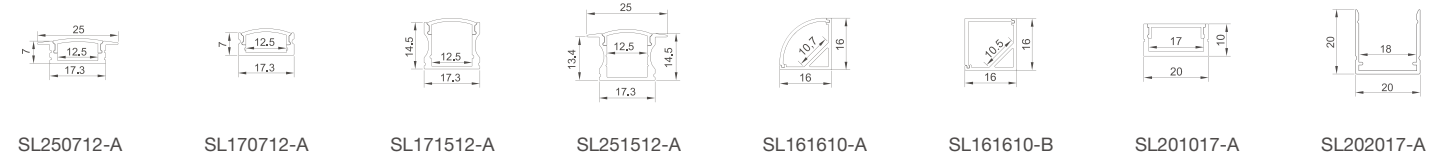


QUICK CONNECTOR




Suitable for 10mm width product with LED density less than 120 LEDs/m.

WIRE





FN-H2835V-288-24

- SDCM<3, Ra 90+
- High light efficiency 160+ lm/W
- Mini cutting unit
- Support a variety of production processes: spray glue coated, silicone tube waterproof, and etc



BASIC PARAMETERS


Size: 5000X22mm
LED/unit: 12LED
Input Voltage: DC24V
LED Qty: 288 LED/m
Max Run: 3m



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-H2835V-288-24	24V DC	>90	4000K	4140	160	25.92

ALUMINUM PROFILE

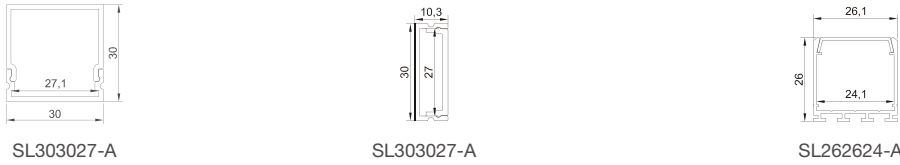


Note: Only limited profile models illustrated, please check our profile catalog for more information.





FN-H2835K-XXX-24

- Color consistency : SDCM < 3;
- High light efficiency, up to 215lm/W;
- Support a variety of production processes;
- Multiple specifications, support customization;



BASIC PARAMETERS

Size: 5000X10mm
LED/unit: 9LED
Input Voltage: DC24V
LED Qty: 90/144/180 LED/m
Max Run: 4/3/2.5m

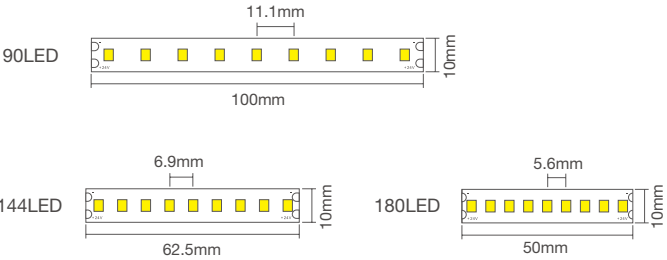


Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-H2835K-90-24	24V DC	>80/90	4000K	1042/922	217 /192	4.80
FN-H2835K-144-24	24V DC	>80/90	4000K	1650/1475	215 /192	7.68
FN-H2835K-180-24	24V DC	>80/90	4000K	2044/1820	213 /190	9.60


ALUMINUM PROFILE

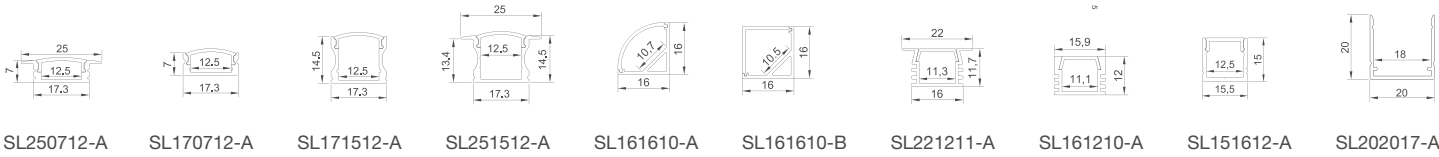


QUICK CONNECTOR



WIRE




Suitable for 10mm width product with LED density less than 120 LEDs/m.

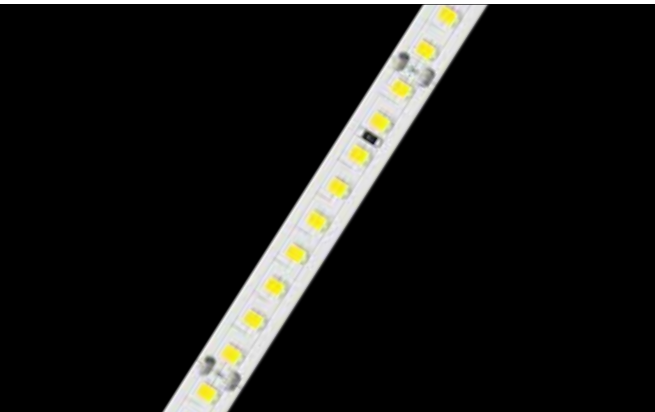



FN-H2835(K+)-XXX-24

- High efficiency, up to 200lm/w
- SDCM<3, One Bin Shipment
- Support a variety of production processes
- Multi specifications, support customization



BASIC PARAMETERS

Size: 5000X8mm
LED/unit: 9LED
Input Voltage: DC24V
LED Qty: 72/144/180 LED/m
Max Run: 4.5/3/2.5m

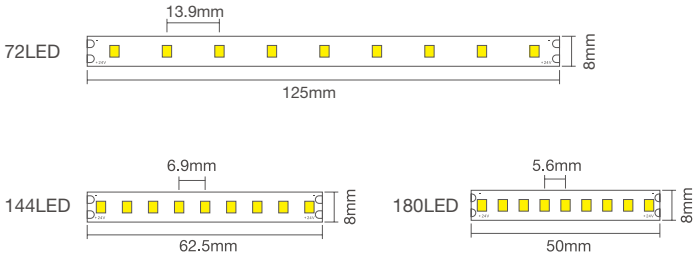


Unit: mm


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-H2835(K+)-72-24	24V DC	>80/90	4000K	768/650	200 /166	3.84
FN-H2835(K+)-144-24	24V DC	>80/90	4000K	1550/1274	202 /166	7.68
FN-H2835(K+)-180-24	24V DC	>80/90	4000K	1920/1612	200 /167	9.60


ALUMINUM PROFILE

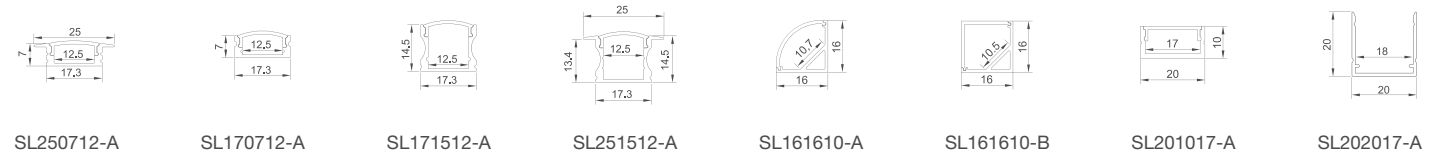


QUICK CONNECTOR

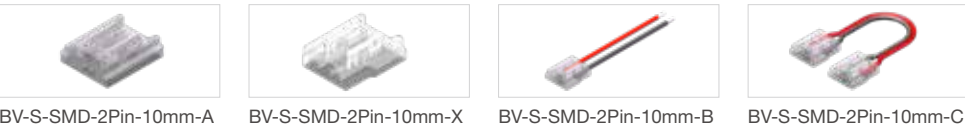

WIRE




Suitable for 10mm width product with LED density less than 120 LEDs/m.

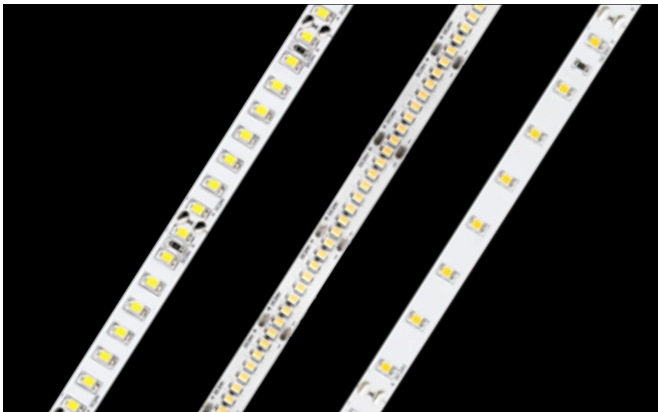


FN-H2835T-XXX-24

- High CRI @ 90+/95+
- Color Consistency : 3SDCM (typical)
- Multiple specifications are available



BASIC PARAMETERS

Size: 5000X10/14mm
LED/unit: 8LED
Input Voltage: DC24V
LED Qty: 64/128/160/240 LED/m
Max Run: 6/4.5/4/4m

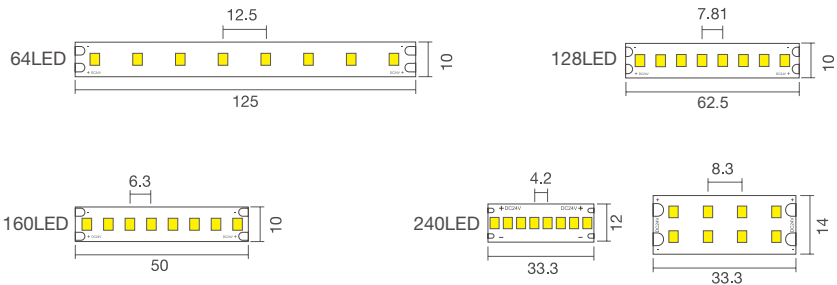


Unit: mm


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-H2835T-64-24	24V DC	>90/95	4000K	1128/975	147/127	7.68
FN-H2835T-128-24	24V DC	>90/95	4000K	1728/1475	150/128	11.52
FN-H2835T-160-24	24V DC	>90/95	4000K	2131/1800	148/125	14.40
FN-H2835T-240-24	24V DC	>90/95	4000K	3240/2678	150/124	21.60

ALUMINUM PROFILE


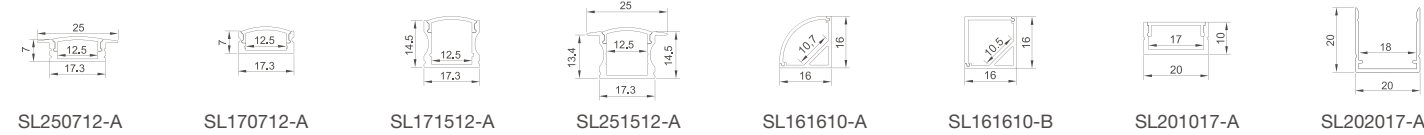


QUICK CONNECTOR

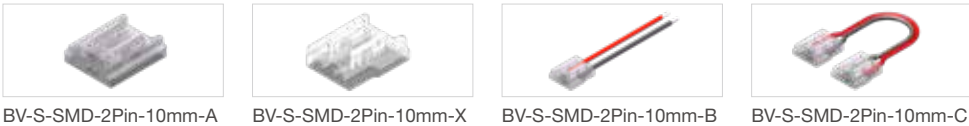


Suitable for 10mm width product with LED density less than 120 LEDs/m.

WIRE

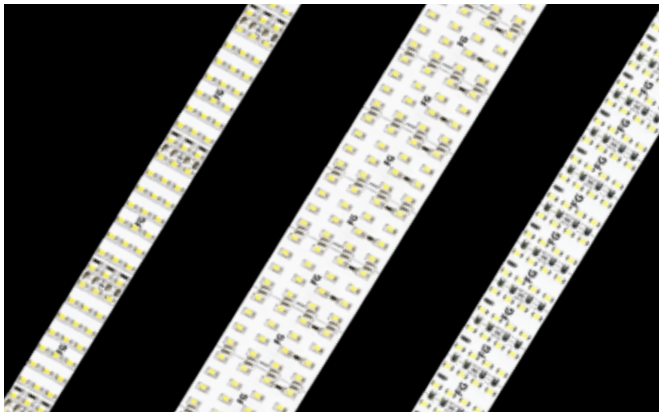


FN-H2835T-XXX-24

- High CRI @ 90+/95+
- Color Consistency : 3SDCM (typical)
- Multiple specifications are available



BASIC PARAMETERS

Size: 5000X22/50/28mm
LED/unit: 24/16/8LED
Input Voltage: DC24V
LED Qty: 288/416/432LED/m
Max Run: 4.5/6.5/5m

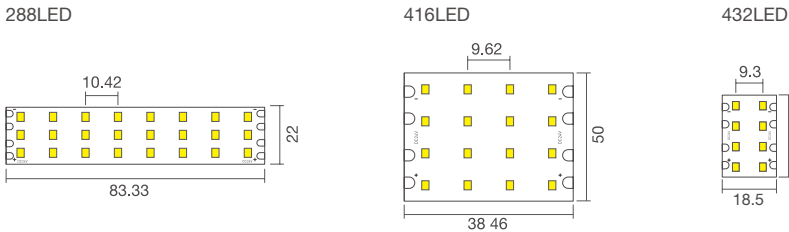



Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-H2835T-288-24	24V DC	>90/95	4000K	3810/3214	147/124	25.92
FN-H2835T-416-24	24V DC	>90/95	4000K	5503/4643	147/124	37.44
FN-H2835T-432-24	24V DC	>90/95	4000K	5715/4821	147/124	38.88


ALUMINUM PROFILE

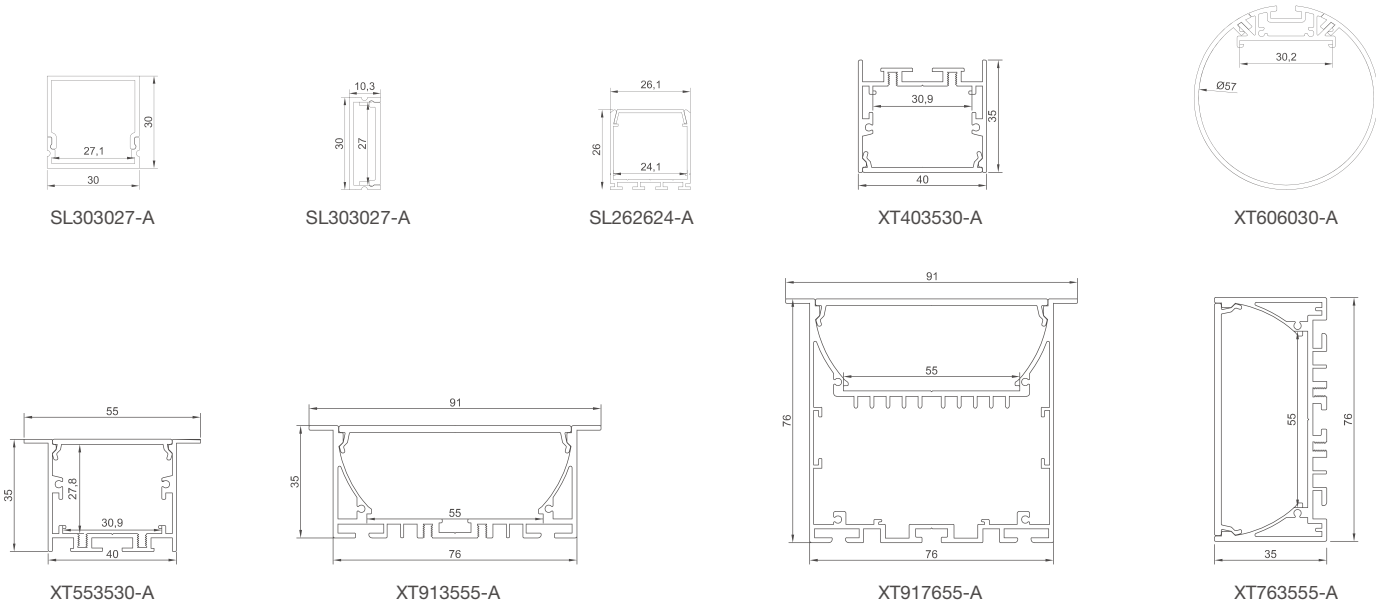

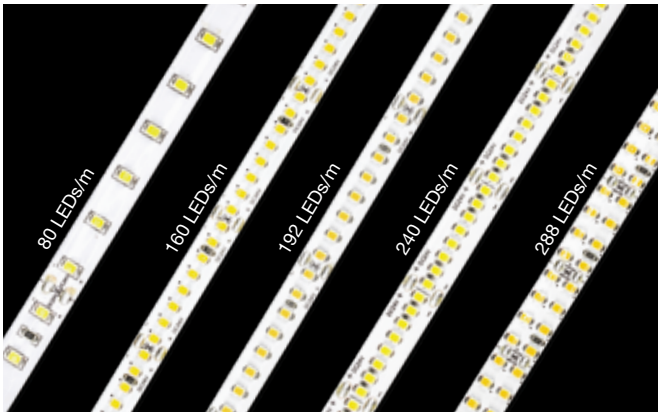







FN-H2835O-XXX-24

- High CRI and high brightness
- Single sided FPC is adopted
- Flexible and cuttable
- Support PWM, DALI, DMX, 0-10V and other dimming
- Multiple specifications, support customization



BASIC PARAMETERS

Size: 5000X10/12mm
LED/unit: 8LED
Input Voltage: DC24V
LED Qty: 80/160/192/240/288 LED/m
Max Run: 4/3/2.5/3.2.5m




Unit: mm


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-H2835O-80-24	24V DC	>90	4000K	2304	160	14.4
FN-H2835O-160-24	24V DC	>90	4000K	3840	160	24.0
FN-H2835O-192-24	24V DC	>90	4000K	4608	160	28.8
FN-H2835O-240-24	24V DC	>90	4000K	5724	159	36.0
FN-H2835O-288-24	24V DC	>90	4000K	6955	161	43.2

ALUMINUM PROFILE

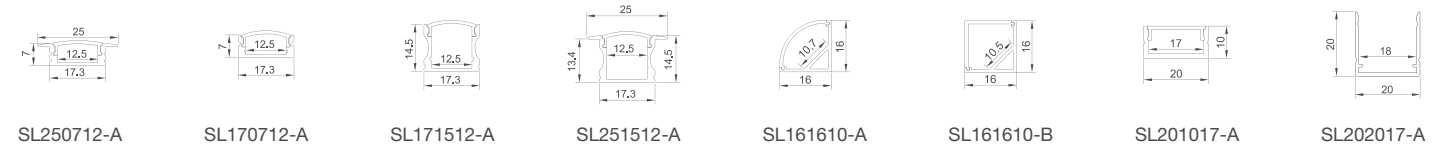


QUICK CONNECTOR

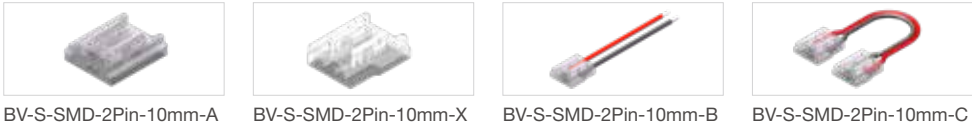


Suitable for 10mm width product with LED density less than 120 LEDs/m.

WIRE

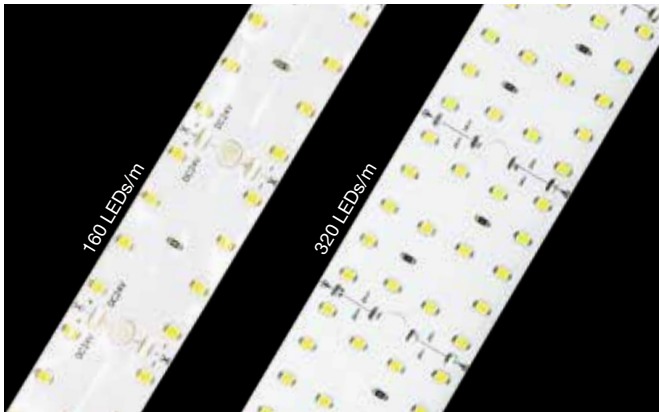




FN-HD2835O-XXX-24

- High CRI and high brightness
- Single sided FPC is adopted
- Flexible and cuttable
- Support PWM, DALI, DMX, 0-10V and other dimming
- Multiple specifications, support customization



BASIC PARAMETERS

Size: 5000X28/56mm
LED/unit: 8LED
Input Voltage: DC24V
LED Qty: 160/320 LED/m
Max Run: 2m




Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-HD2835O-160-24	24V DC	>90	4000K	4636	161	28.8
FN-HD2835O-320-24	24V DC	>90	4000K	9273	161	57.6

ALUMINUM PROFILE

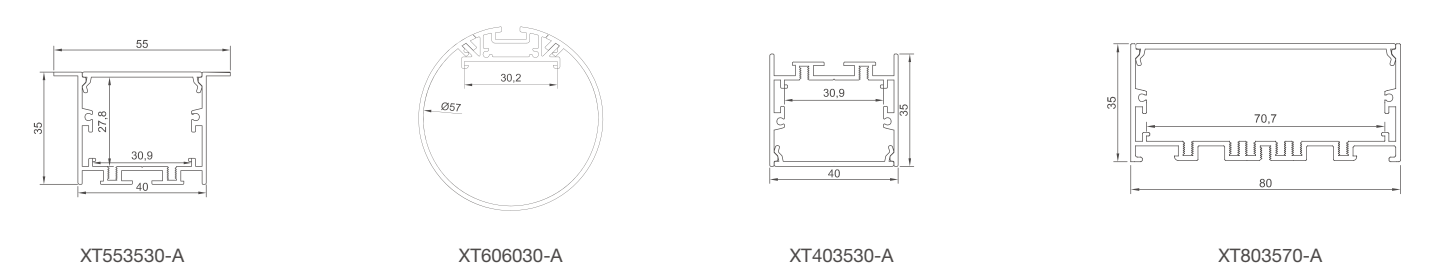

WIRE




SCOB/COB

SERIES



180° beam angle
Ra 90+



Lighter, thinner,
and small in size



Good environmental
adaptability UV resistance



Silicone integrated
extrusion shaping process




IP20

COB Series



FN-FC-XXX-XX(HS)


- Reel-to-Reel, long run series and no welding spots
- Long run series and no welding spots
- Dot-free, no shadows, high temperature resistance
- 135° big luminous angle, Ra 90+
- Stable internal structure and long service life
- Seamless linear lighting with good flexibility




Unit: mm

BASIC PARAMETERS


Size:	5000x5mm	5000X8mm
Input Voltage:	DC24V	DC24V
LED Qty:	320 LED/m	320/480 LED/m
Standard Run:	5m	5m




320LED/m-12V-5mm




320LED/m-12V-5mm



320/480 LED/m-12V



320/480 LED/m-24V



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-FC-320-12/24(HS)-5mm	12/24V DC	>90	4000K	640	80	8.0
FN-FC-320-12/24(HS)	12/24V DC	>90	4000K	900	90	10.0
FN-FC-480-12/24(HS)	12/24V DC	>90	4000K	950	95	10.0

QUICK CONNECTORS



Connector: IV-C208-BB



Connector: CB2P-8





Connector: OB2P-8-L



Connector: O2P-8-T





Connector: OA2P-8-A






MN-FC-480-12(HS)-4mm

- Mini PCB width 3/4mm optional
- Pure light color, dot-free
- Using very soft FPC substrate, can be bent properly
- Environmental protection, accord to RoHS standard




BASIC PARAMETERS

Size: 5000x4mm
Input Voltage: DC12V
LED Qty: 480 LED/m
Max Run: 3m



PROFILE DRAWINGS

Unit: mm





OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
MN-FC-480-12(HS)-4mm	12V DC	>90	2700K	350	70	5
			3000K	375	75	
			4000K	400	80	
			6500K	425	85	




LN-FC-384-24(HS)

- Max run 10m
- Uniform lighting, no light spots, no shadows.
- DC 24V constant voltage drive design, low voltage drop
- Compliant with RoHS & REACH environmental standards




BASIC PARAMETERS

Size: 10000*8mm
Input Voltage: DC 24V
LED Qty: 384 LED/m
Max Run: 10m



PROFILE DRAWINGS

Unit: mm





OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
LN-FC-384-24(HS)	24V DC	>90	2700K	650	65	10
			3000K	700	70	
			4000K	750	75	
			6500K	800	80	



SN-FC-XXX-XX(HS)

- Side-emitting technology
- No light spots or dark areas, suitable for linear lighting
- 110° large luminous angle, achieving a wider light distribution compared to LED light strips
- 24V input ensures safe use




Ra
90



BASIC PARAMETERS


Size:	5000x8mm	5000x10mm
Input Voltage:	DC12/24V	DC24V
LED Qty:	480 LED/m	640 LED/m
Max Run:	2/4m	4m




PROFILE DRAWINGS

Unit: mm


SN-FC-480-12(HS)



SN-FC-480-24(HS)




SN-FC-640-24-WN(HS)



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
SN-FC-480-12/24(HS)	12/24V DC	>90	2700K	600	60	10
			3000K	650	65	
			4000K	700	70	
			6500K	750	75	
SN-FC-640-24-WN(HS)	24V DC	>90	2700K	360	45	8
			6500K	480	60	8
			W+N	800	50	16

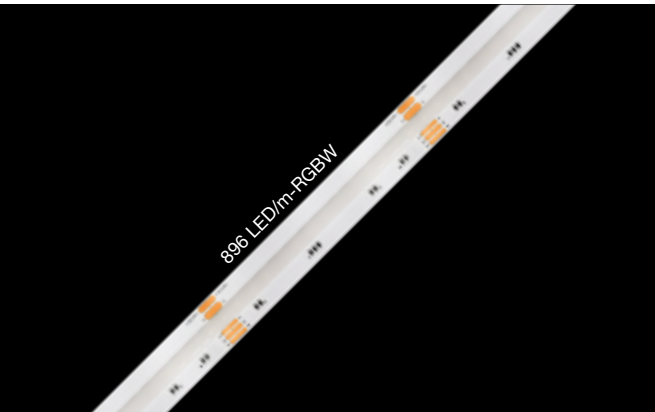

TN-FC-896-24-RGBW (HS)

- Uniform lighting, no light spots, no shadows.
- Max light emitting angle up to 135°.
- Shorter heat dissipation path, lower thermal resistance
- 24V low-voltage input ensures safe use
- Energy-saving and environmentally friendly, compliant with ROHS & REACH environmental standards.




Ra
90



BASIC PARAMETERS


Size:	5000x12mm
Input Voltage:	DC24V
LED Qty:	896 LED/m
Max Run:	5m

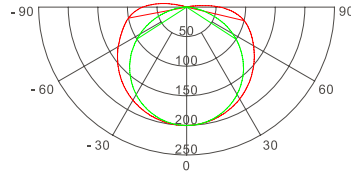

PROFILE DRAWINGS

Unit: mm

896 LED/m-RGBW




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
TN-FC-896-24-RGBW (HS)	24V DC	>90	4000K	320	80	4.0
			R	72	18	4.0
			G	408	102	4.0
			B	60	15	4.0
			RGBW	850	53	16.0




DN-FC-XXX-XX(HS)

- Pixel LED strip, SPI control
- Uniform lighting, no light spots, no shadows.
- Max light emitting angle up to 135°.
- Compliant with ROHS & REACH environmental standards.



BASIC PARAMETERS


Size:	5000x10mm	5000x10mm
Input Voltage:	DC24V	DC12/24V
LED Qty:	576 LED/m	720 LED/m
Max Run:	5m	5m

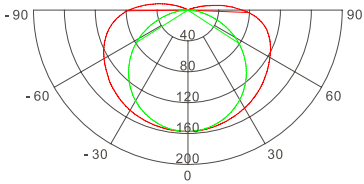


PROFILE DRAWINGS

Unit: mm


576 LED/m



720 LED/m-12V



720 LED/m-24V



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
DN-FC-576-24-SPI-WN(HS)	24V DC	>90	W:2700K	300	60	5
			N:6500K	410	82	5
			WN:\	702	78	9
DN-FC-720-12-SPI RGB(HS)	12V DC	\	R	60	15	4
			G	280	70	4
			B	48	12	4
			RGB	350	35	10
DN-FC-720-24-SPI RGB(HS)	24V DC	\	R	69	16	4.3
			G	301	70	4.3
			B	52	12	4.3
			RGB	370	37	10




DN-FC-XXX-XX(HS)

- Pixel LED strip, SPI control
- Uniform lighting, no light spots, no shadows.
- Max light emitting angle up to 135°.
- Compliant with ROHS & REACH environmental standards.



BASIC PARAMETERS


Size:	5000x10mm	5000x12mm
Input Voltage:	DC24V	DC12/24V
LED Qty:	784 LED/m	630 LED/m
Max Run:	5m	5m

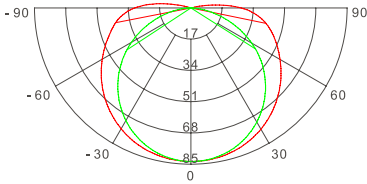


PROFILE DRAWINGS

Unit: mm


784 LED/m



630 LED/m-12V




630 LED/m-24V





OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
DN-FC-784-24-SPI-RGBW(HS)	24V DC	\	R	126	18	7
			G	225	75	3
			B	40	8	5
			W	330	55	6
			RGBW	\	\	21
DN-FC-630-12-DMX-RGB(HS)	12V DC	\	R	48	12	4
			G	140	35	4
			B	28	7	4
			RGB	230	23	10
DN-FC-630-24-DMX-RGB(HS)	24V DC	\	R	72	12	6
			G	180	30	6
			B	42	7	6
			RGB	300	20	15

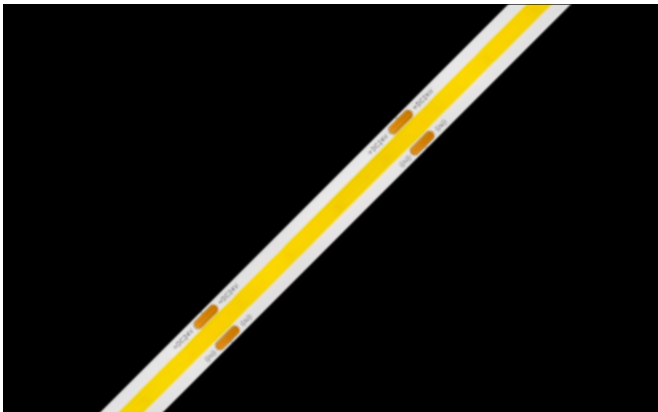

HN-FC-480-24(HS)

- High brightness, high efficiency.
- Uniform lighting, no light spots, no shadows.
- Shorter heat dissipation path, lower thermal resistance.
- Compliant with ROHS & REACH environmental standards.
- Multiple specifications, support customization




Ra
90




BASIC PARAMETERS

Size: 5000x8mm
Input Voltage: DC24V
LED Qty: 480 LED/m
Max Run: 5m

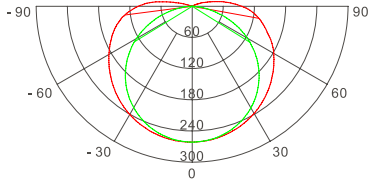

PROFILE DRAWINGS

Unit: mm

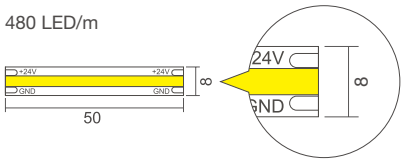



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
HN-FC-480-24(HS)	24V DC	>90	2700K	1000	100	10
			3000K	1050	105	
			4000K	1150	115	
			6500K	1200	120	



EN-FC-528-24(HS)

- Arbitrary cutting design.
- Uniform lighting, no light spots, no shadows.
- Shorter heat dissipation path, lower thermal resistance.
- Compliant with ROHS & REACH environmental standards.
- Multiple specifications, support customization




Ra
90




BASIC PARAMETERS

Size: 5000x8mm
Input Voltage: DC24V
LED Qty: 528 LED/m
Max Run: 5m

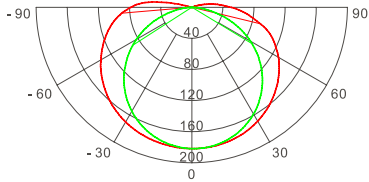

PROFILE DRAWINGS

Unit: mm

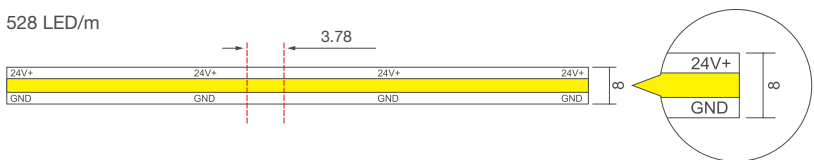

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
EN-FC-528-24(HS)	24V DC	>90	2700K	715	55	13
			3000K	780	60	
			4000K	845	65	
			6500K	910	70	




GN-FC-320-24(HS)

- The light spectrum covers the visible light region of 380-780nm with good spectral continuity.
- Maxiumly reduce the ratio of blue light, effectively weaken the harm of blue light.
- The light quality is closer to sunlight.
- Rf>97,Rg>99,CRI 95+.
- Multiple specifications and color temperatures optional.




BASIC PARAMETERS

Size:	5000x8mm
Input Voltage:	DC24V
LED Qty:	480 LED/m
Max Run:	5m

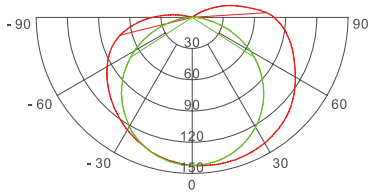

PROFILE DRAWINGS

Unit: mm

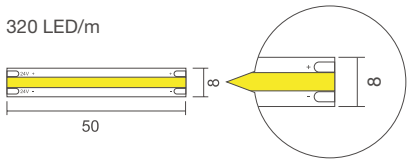


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	Color	LM/m	LM/W	W/m
GN-FC-320-24(HS)	24V DC	>95	2700K	700	70	10
			3000K	750	75	
			4000K	800	80	
			5000K	800	80	
			6500K	850	85	




VN/VMN-FC-320-24(HS)

- 2LEDs/cut strip, min cut unit 6.25mm.
- Uniform lighting, no light spots, no shadows.
- Max light-emitting angle up to 180°.
- No silver plating, no risk of sulfuration.
- Compliant with RoHS & REACH environmental standards.




BASIC PARAMETERS

Size:	5000x8mm	5000x5mm
Input Voltage:	DC24V	DC12V
LED Qty:	320 LED/m	320 LED/m
Max Run:	5m	2m

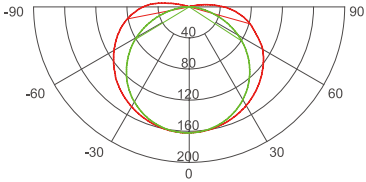

PROFILE DRAWINGS

Unit: mm




OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
VN-FC-320-24(HS)	24V DC	>90	2700K	550	55	10
			3000K	600	60	
			4000K	650	65	
			6500K	700	70	
VMN-FC-320-12(HS)-5mm	12V DC	>90	2700K	360	45	8
			3000K	400	50	
			4000K	480	60	
			6500K	520	65	

MULTI POWER STRIP

SERIES

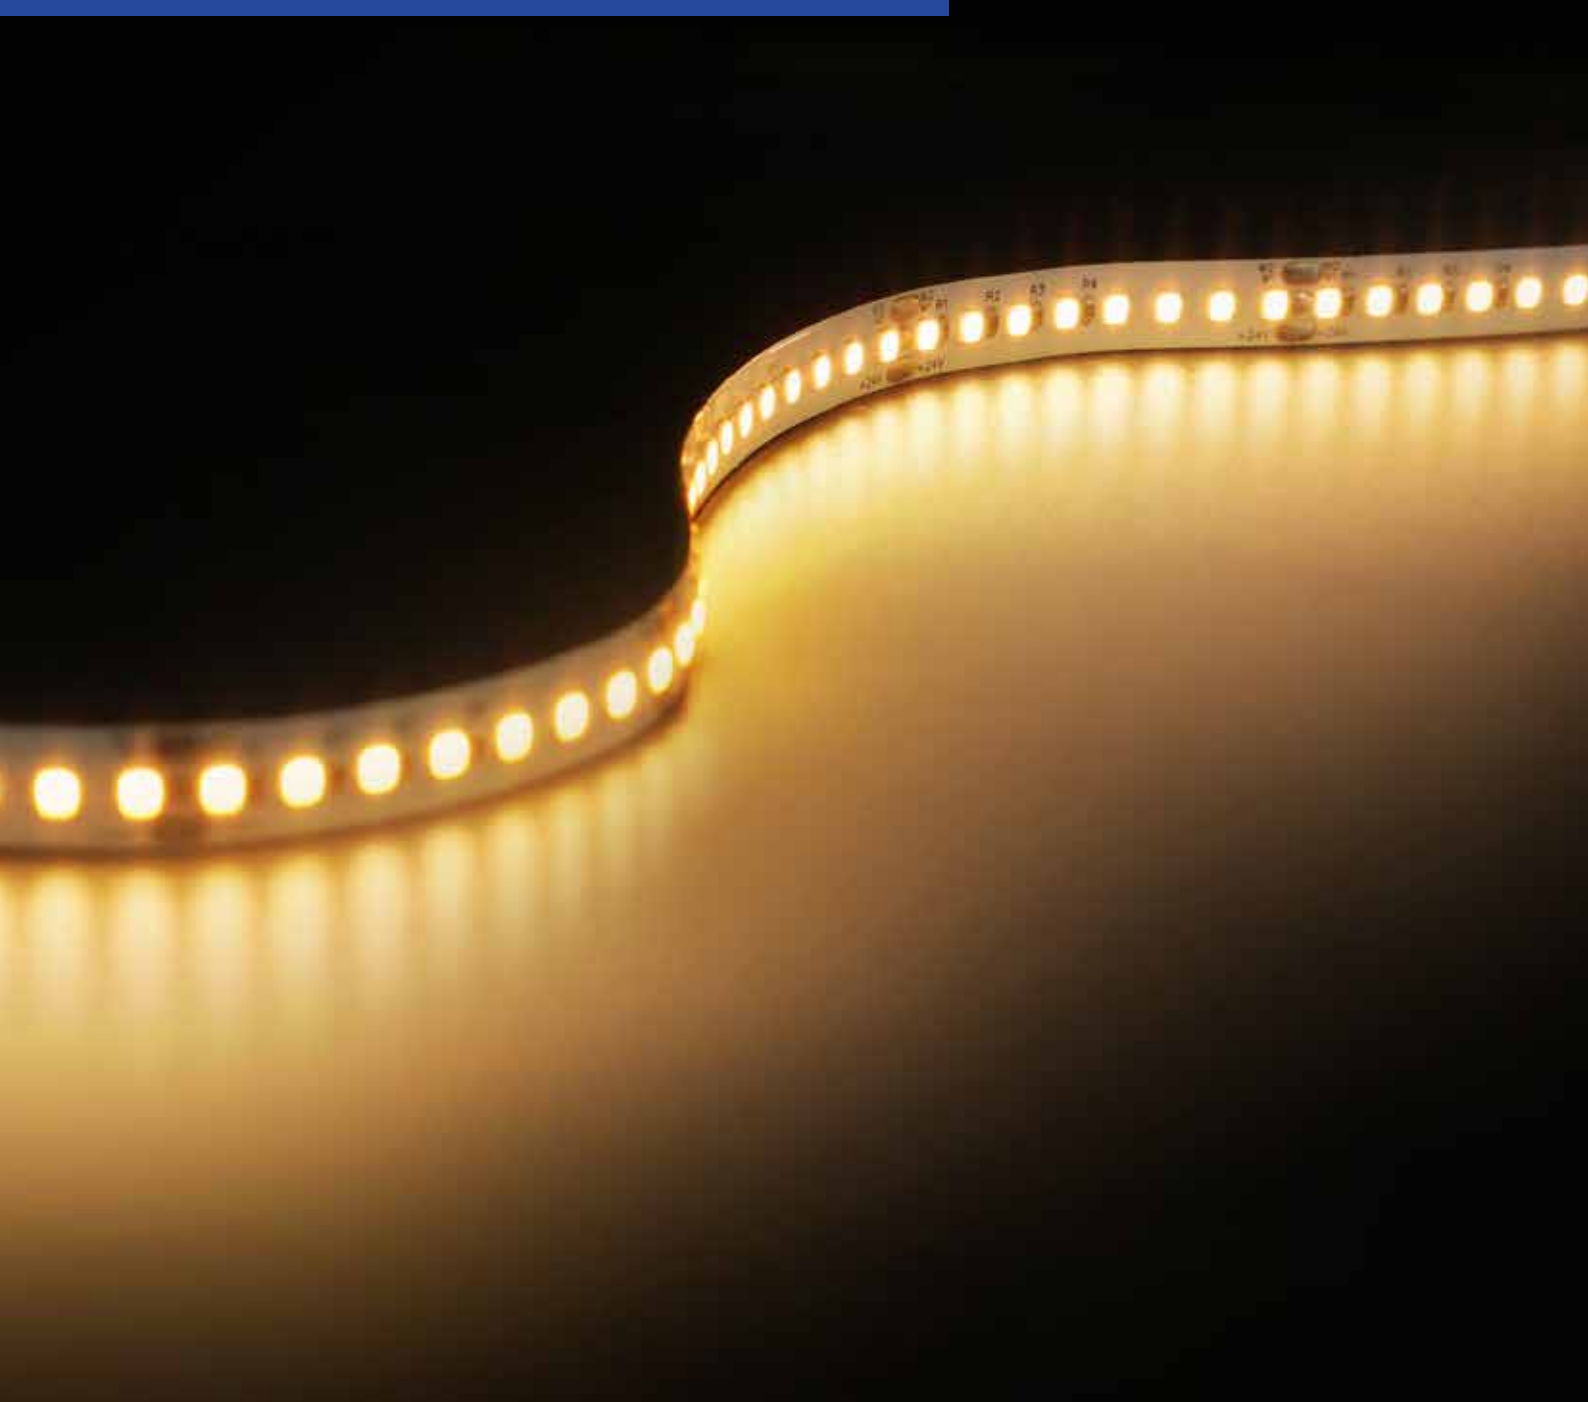


Thor Series

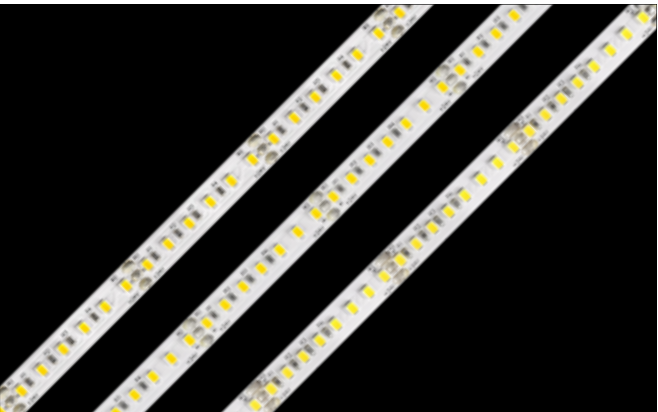

FN-XS2835T-XXX-XX





- Three powers for options;
- Ra90+/Ra95+ available;
- SDCM<3;
- Support PWM, DALI and DMX dimming;
- Multiple specifications and support customization;



Unit: mm

BASIC PARAMETERS


Size: 5000x10mm
LED/unit: 6/7/8 LED
Input Voltage: DC24V
LED Qty: 120/140/160 LED/m
Max Run: 15/12/9m




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-S2835T-120-24	24V DC	>90/95	4000K	570/475	119/99	4.8
				1075/950	112/99	9.6
				1570/1410	109/98	14.4
FN-S2835T-140-24	24V DC	>90/95	4000K	635/555	133/116	4.8
				1260/1120	131/117	9.6
				1855/1640	129/114	14.4
FN-HS2835T-160-24	24V DC	>90/95	4000K	710/630	148/131	4.8
				1340/1250	147/130	9.6
				1715/1860	143/129	14.4


ALUMINUM PROFILE

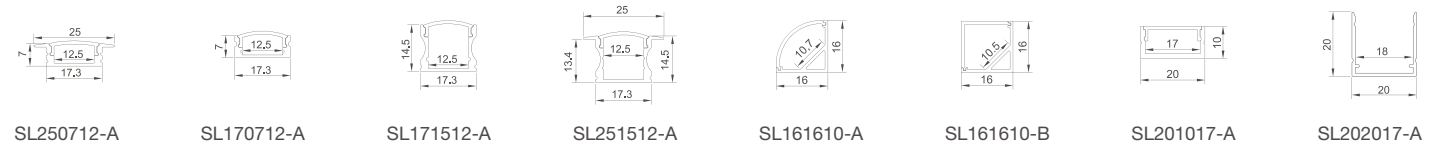

QUICK CONNECTOR

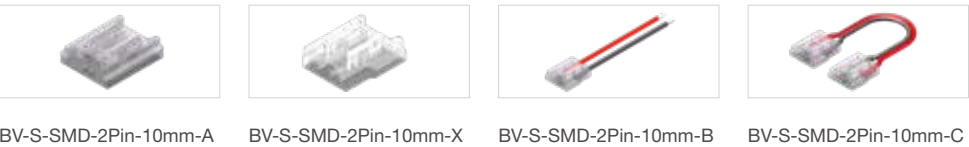

WIRE




Suitable for 10mm width product with LED density less than 120 LEDs/m.

S-TYPE STRIP
SERIES



IP20

S-TYPE STRIP

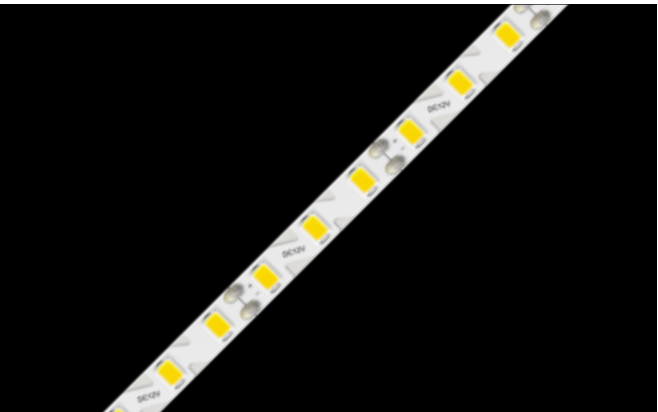

SN-2835A-120-12

- PCB width 5mm,small size,suitable for various small space applications
- Great flexibility, easy mounted on curved surface
- Long service life with great lumen maintenance
- Every 3 LEDs cuttable for various application
- Multiple spec. optional, customizable



2835


120°

Ra
80

3Years


BASIC PARAMETERS

Size: 5000x5mm
Input Voltage: DC12V
LED Qty: 120 LED/m
Max Run: 1.5m

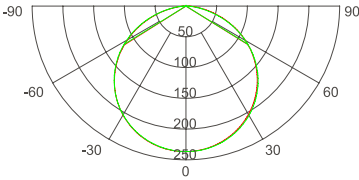

PROFILE DRAWINGS

Unit: mm

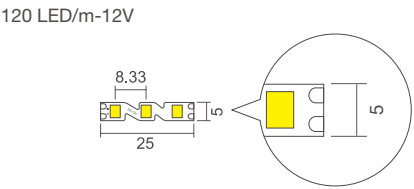

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
SN2835A-120-12	12V DC	>80	2700K	655	91	7.2
			3000K	691	96	
			4000K	705	98	
			5000K	712	99	
			6500K	720	100	




GF2835C-60-12

- High light efficiency, up to 630lm/m .
- Flame retardant and resistant to high temperatures .
- Single sided FPC made with RA Cu and PI film .
- Good flexibility and every 3 LEDs cuttable .
- Multiple specifications, support customization .



BASIC PARAMETERS


Size: 5000x6.8mm
Input Voltage: DC12V
LED Qty: 60 LED/m
Max Run: 3m

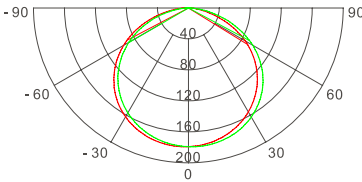

PROFILE DRAWINGS


Unit: mm

60 LED/m-12V

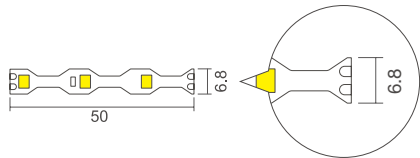

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
GF2835C-60-12	12V DC	>80	3000K	570	95	6.0
			4500K	630	105	
			5000K	630	105	
			6500K	630	105	
			7500K	600	100	
GF2835C-60-12	12V DC	>70	1100K	580	97	6.0

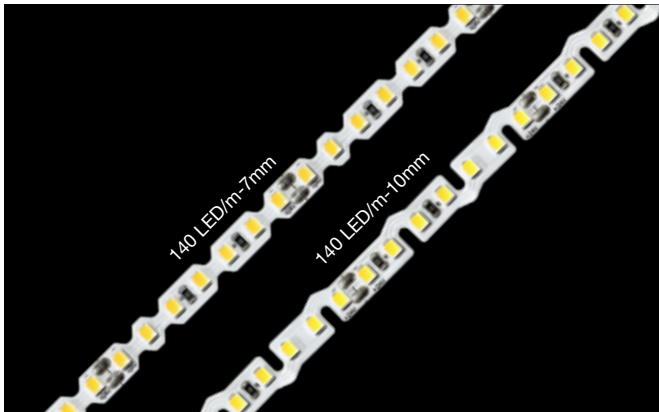


SNF2835-140-24

- High CRI
- Can be freely bent and easily fixed on uneven surfaces;
- Supports PWM, DALI, and DMX dimming;
- Compatible with multiple installation methods.



BASIC PARAMETERS


Size: 5000x7/5000x10mm
Input Voltage: DC24V
LED Qty: 140 LED/m
Max Run: 3m

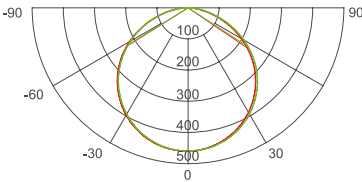


PROFILE DRAWINGS

Unit: mm

140 LED/m-7mm

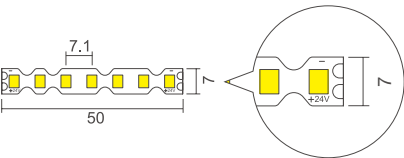


140 LED/m-10mm

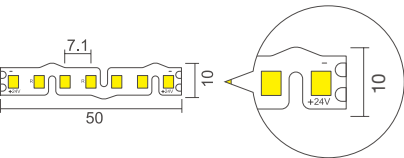


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
SNF-2835-140-24_7mm	24V DC	>90	3000K	1415	118	12.0
SNF-2835-140-24_10mm	24V DC	>90	4000K	1440	120	12.0

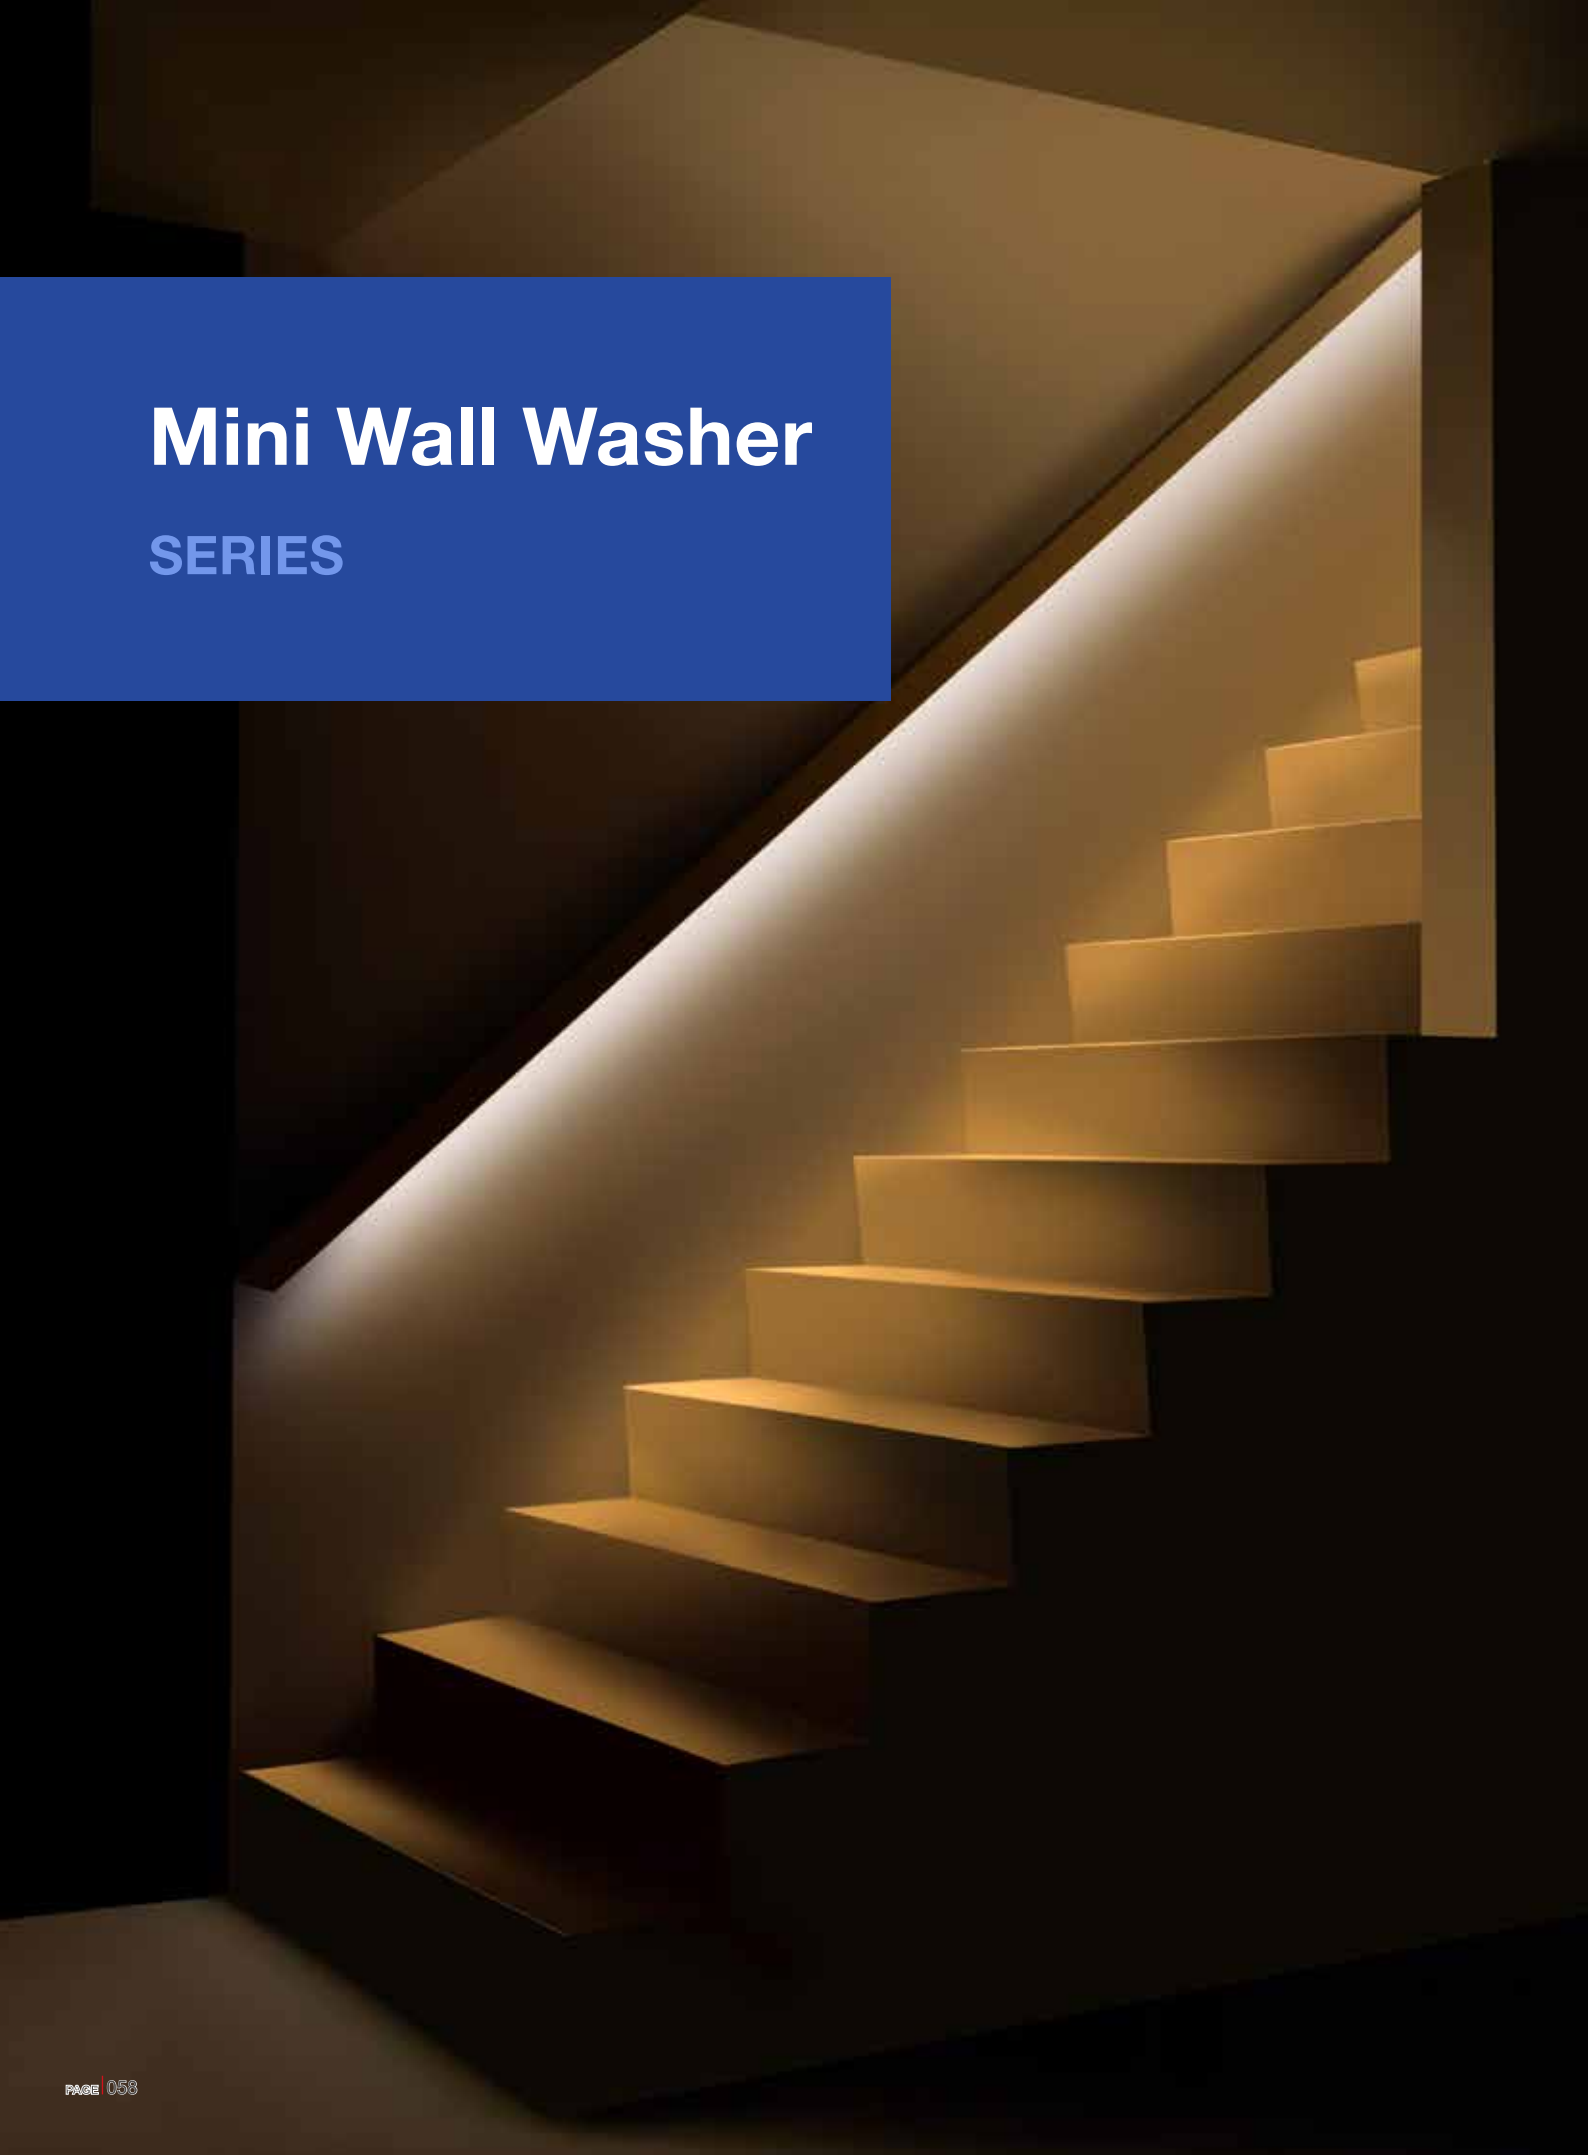


Mini Wall Washer

SERIES

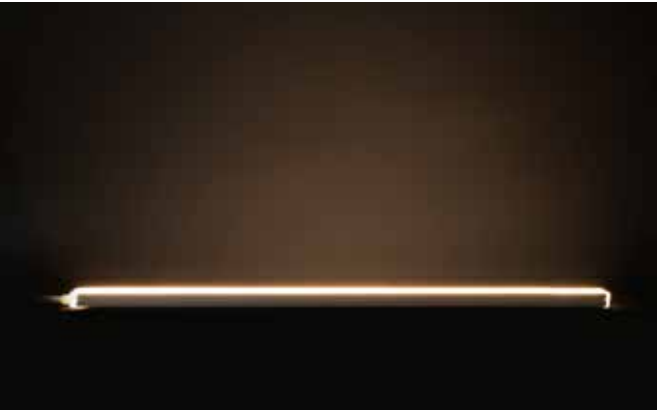

WHE2014



- Flexible and bendable.
- Excellent waterproof performance.
- High-quality circuitry for stable and reliable performance.
- Even light distribution with shadow-free illumination.
- Multiple beam angles, color temperatures, and sizes available; customizable.
- Pre-cut marks for easy on-site trimming and installation.
- Warranty: 5 years indoor, 3 years outdoor.



Unit: mm

BASIC PARAMETERS




Size : 10000x20x14mm
LED/unit : --
Input Voltage : DC24V
LED Qty : 140 LED/m
Standard Run : 10m

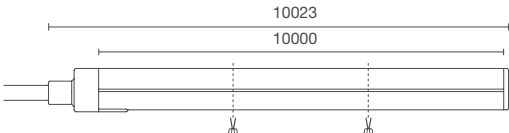

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
WHE2014-Single color	24V DC	>90	3000K	1779	103	17.28
			3500K	1797	104	
			4000K	1892	109	
			6000K	1854	107	

IRRADIATION ANGLE



QUICK CONNECTOR



Item: Aluminum Channel
Part No.: 01.08.04230510010020
Size: 20*14*22mm
Free/Optional: Optional

CLASSICAL SERIES

R2R 2835-Thor / 2835-Loki

2110 / 2016 / 3528 / 5050



Easy to mount on a
curved surface



Various specifications
are available



Long lifespan with great
lumen maintenance



REEL-TO-REEL



F2-J-2835-XXX-XX



- Good linear effect and long life span
- Long run series, reel-to-reel technology with less power feed
- Color rendering index up to RA90+
- Can be cut and support customization



Unit: mm

BASIC PARAMETERS


Size:	5000/20000x7.6mm	5000/20000x8mm
LED/unit:	6LED	6LED
Input Voltage:	DC24V	DC12/24V
LED Qty:	60LED/m	120LED/m
Max run:	10m	4/10m

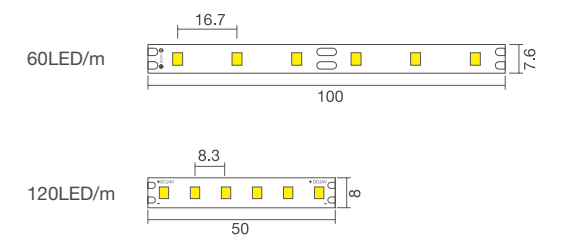


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
F2-J-2835-60-24	24V DC	>90	4000K	580	81	7.2
F2-J-2835-120-24	24V DC	>90	4000K	787	82	9.6

ALUMINUM PROFILE

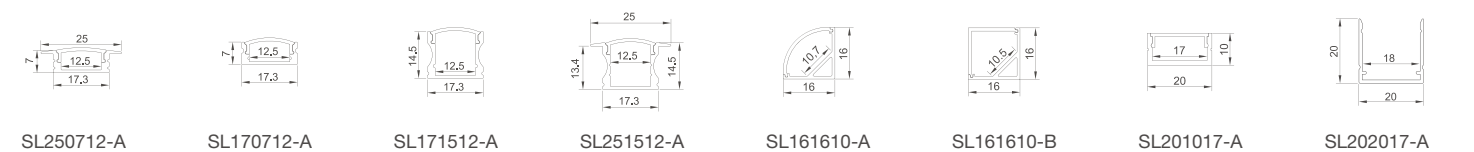



QUICK CONNECTOR

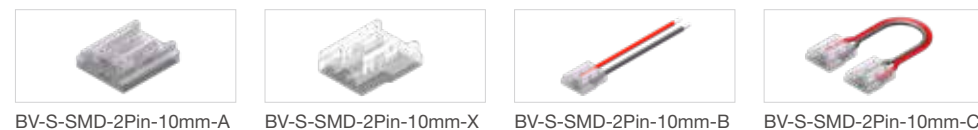

Suitable for 10mm width product with LED density less than 120 LEDs/m.


WIRE

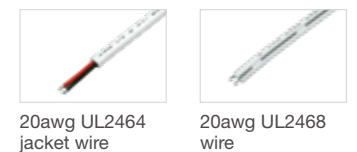

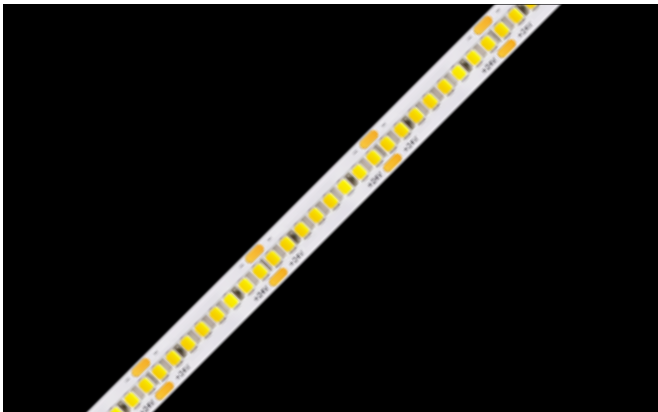

FJN-H2835T-XXX-XX


- Reel-to-reel plated board, no welding joints, reducing dimensional tolerances.
- Long-run design, high brightness and efficiency, stable performance.
- Bracket thickness is 1.1mm, with a high bending resistance of 40–45 N.
- Made of flexible rolled copper, it is easy to install.
- High CRI, with options for CRI90 or CRI95.
- SDCM and specifications support customization.
- Various waterproofing processes are available.



Unit: mm

BASIC PARAMETERS


Size: 5000X10 mm
LED/unit: 8 LED
Input Voltage: DC 24V
LED Qty: 64/128/160/240 LED/m
Max run: 7/6/5/4 m

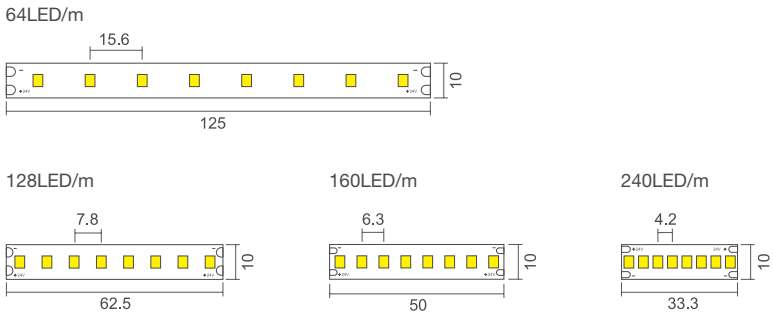


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FJN-H2835T-64-24	24V DC	>90/95	4000K	1125/975	147/127	7.68
FJN-H2835T-128-24	24V DC	>90/95	4000K	1728/1475	150/128	11.52
FJN-H2835T-160-24	24V DC	>90/95	4000K	2131/1800	148/125	14.4
FJN-H2835T-240-24	24V DC	>90/95	4000K	3240/2678	150/124	21.6

ALUMINUM PROFILE


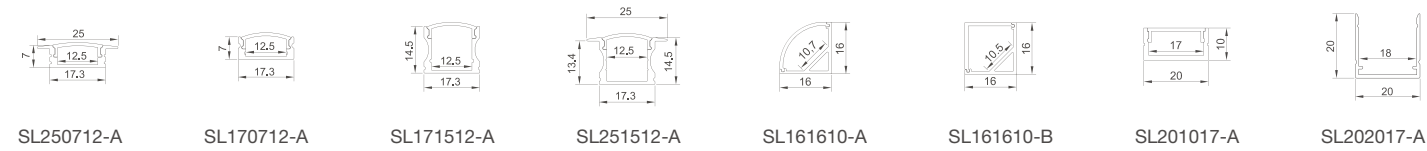


QUICK CONNECTOR

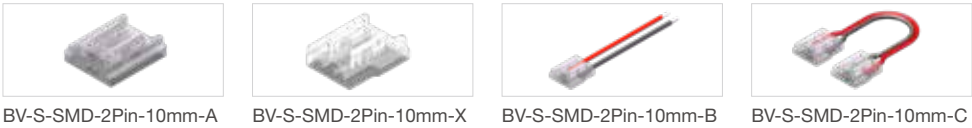

Suitable for 10mm width product with LED density less than 120 LEDs/m.

WIRE

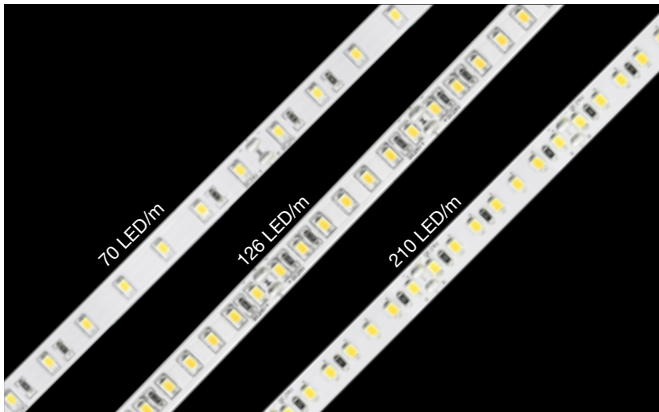

FN-2835T-70/126/210-24


- High CRI @ 90+/95+
- Color Consistency: 3 SDCM (typical)
- Multiple specifications are available



Unit: mm

BASIC PARAMETERS


Size: 5000X10mm
LED/unit: 7LED
Input Voltage: DC24V
LED Qty: 70/126/210LED/m
Standard Run: 5m

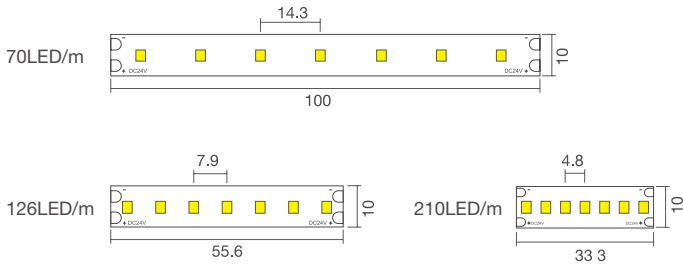


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-2835T-70-24	24V DC	>90/95	4000K	1699/1512	118/105	14.40
FN-2835T-126-24	24V DC	>90/95	4000K	1620/1439	125/111	12.96
FN-2835T-210-24	24V DC	>90/95	4000K	1814/1613	126/112	14.40

ALUMINUM PROFILE

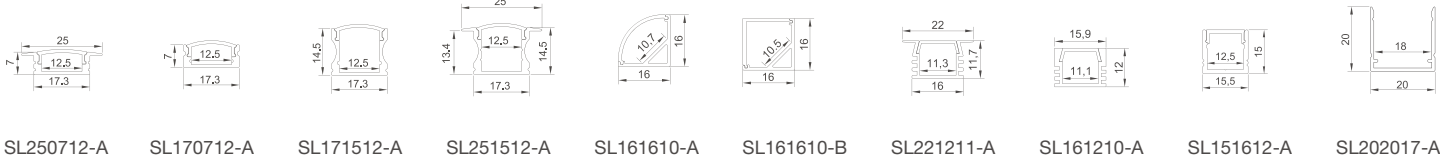


QUICK CONNECTOR

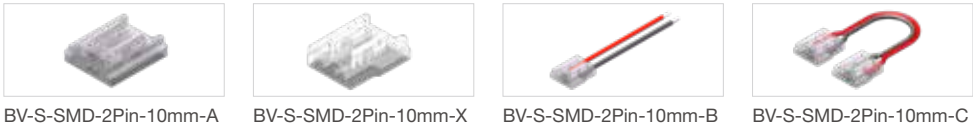

Suitable for 10mm width product with LED density less than 120 LEDs/m.

WIRE





FN-2835T-XXX-12/24



- High CRI @ 90+/95+
- Color Consistency: 3 SDCM (typical)
- Multiple specifications are available



Unit: mm

BASIC PARAMETERS


Size:	5000X10mm	5000X10mm	5000X10mm
LED/unit:	3/6 LED	3/6 LED	3/6 LED
Input Voltage:	DC12/24V	DC12/24V	DC12/24V
LED Qty:	30LED/m	60LED/m	120LED/m
Max Run:	7/12m	4,5/8m	4,5/8m

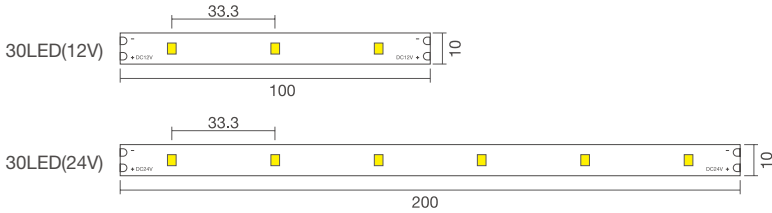

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-2835T-30-12/24	12/24V DC	>90/95	4000K	749/662	104/92	7.2
FN-2835T-60-12/24	12/24V DC	>90/95	4000K	1498/1325	104/92	14.4
FN-2835T-120-12/24	12/24V DC	>90/95	4000K	1526/1354	106/94	14.4

ALUMINUM PROFILE

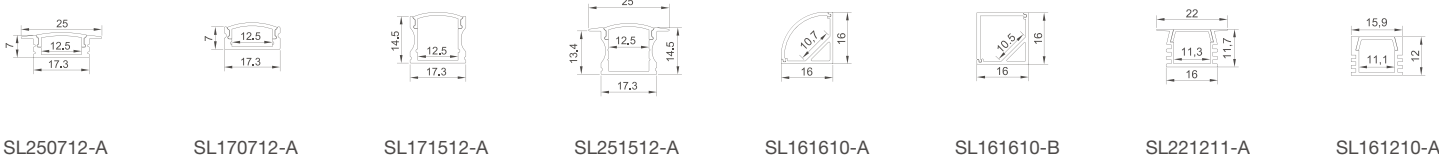


QUICK CONNECTOR



Suitable for 10mm width product with LED density less than 120 LEDs/m.

WIRE



FN-2835T-XXX-XX


- High CRI @ 90+/95+
- Color Consistency: 3 SDCM (typical)



Unit: mm

BASIC PARAMETERS


Size:	5000X14mm	5000X28mm
LED/unit:	3/6 LED	24LED
Input Voltage:	DC12/24V	DC24V
LED Qty:	240LED/m	432LED/m
Max Run:	3/5m	4m

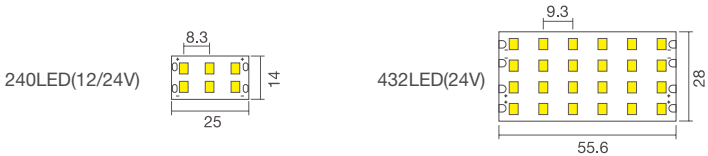


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-2835T-240-12/24	12/24V DC	>90/95	4000K	3053/2707	106/94	28.8
FN-2835T-432-24	24V DC	>90/95	4000K	4873	106/94	51.84


ALUMINUM PROFILE

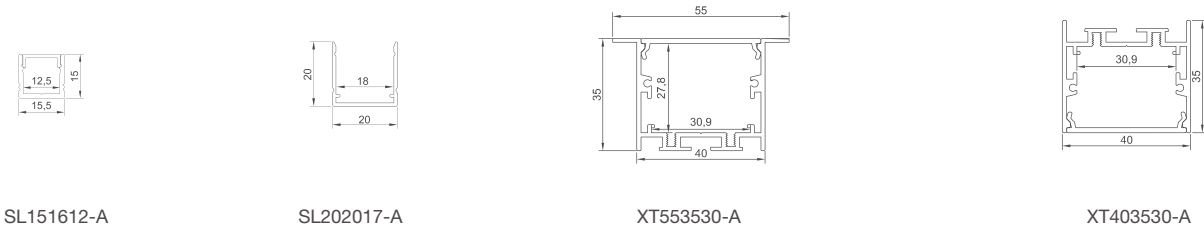

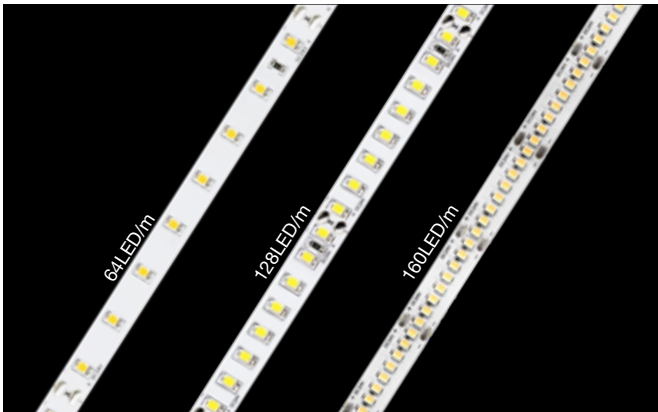



FN-H2835L-XXX-24

- High brightness and luminous efficiency
- Made of calendered copper flexible material and cuttable
- Excellent environmental adaptability and UV resistance
- Support PWM, DALI, DMX, 0-10V and other dimming modes
- Various specifications, support customization



BASIC PARAMETERS


Size: 5000X10/14mm
LED/unit: 8LED
Input Voltage: DC24V
LED Qty: 64/128/160/240 LED/m
Max run: 6/4.5/4/4m

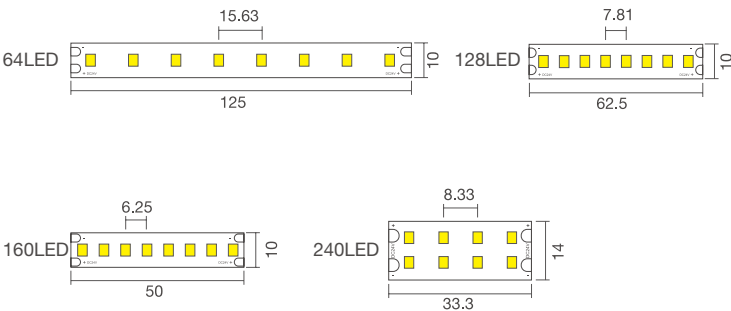

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-H2835L-64-24	24V DC	>80	4000K	1137	148	7.68
FN-H2835L-128-24	24V DC	>80	4000K	1693	147	11.52
FN-H2835L-160-24	24V DC	>80	4000K	2146	149	14.40
FN-H2835L-240-24	24V DC	>80	4000K	3110	144	21.60

ALUMINUM PROFILE


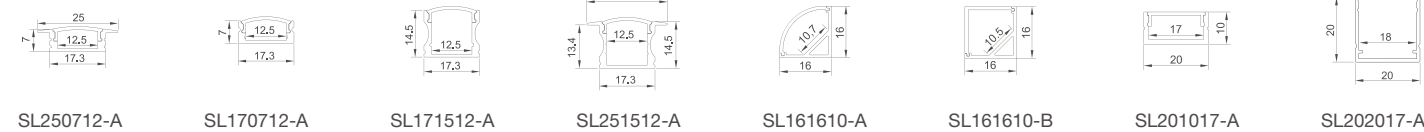


QUICK CONNECTOR



Suitable for 10mm width product with LED density less than 120 LEDs/m.

WIRE

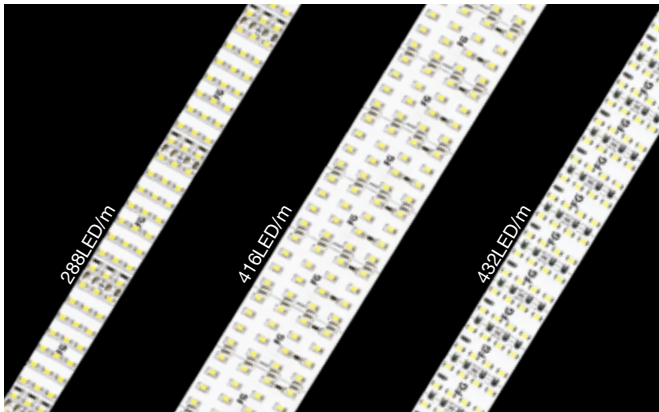



FN-H2835L-XXX-24

- High brightness and luminous efficiency
- Made of calendered copper flexible material and cuttable
- Excellent environmental adaptability and UV resistance
- Support PWM, DALI, DMX, 0-10V and other dimming modes
- Various specifications, support customization



BASIC PARAMETERS



Size: 5000X22/50/28mm
LED/unit: 24/16/8LED
Input Voltage: DC24V
LED Qty: 288/416/432LED/m
Max run: 5/6/4m

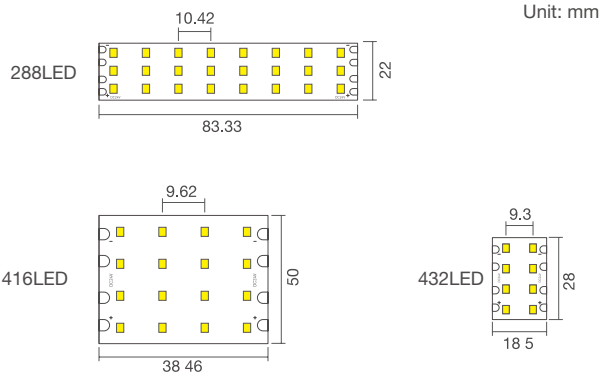

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-H2835L-288-24	24V DC	>80	4000K	3732	144	25.92
FN-H2835L-416-24	24V DC	>80	4000K	5391	144	37.44
FN-H2835L-432-24	24V DC	>80	4000K	5832	150	38.88

ALUMINUM PROFILE

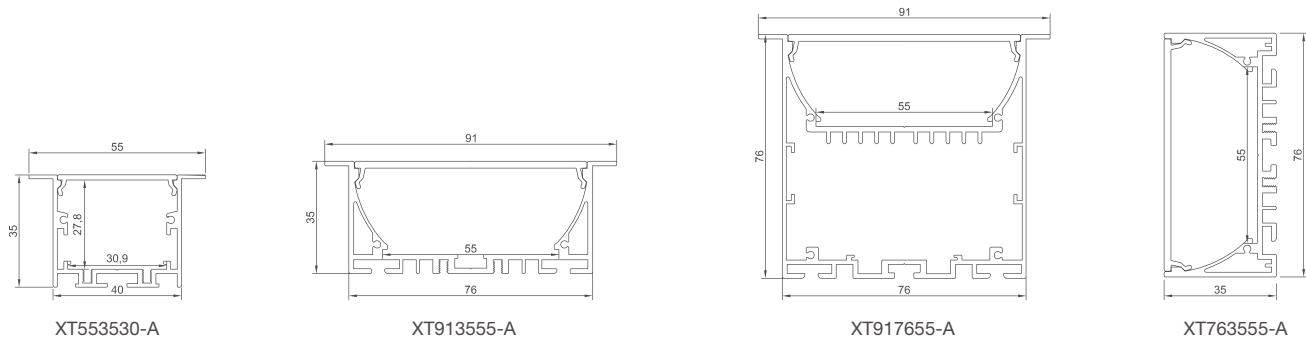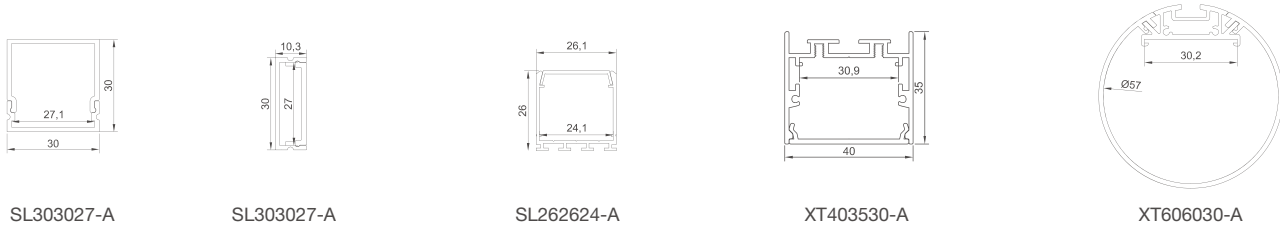



FN-1612-XXX-24

- High brightness, high efficiency;
- High density design with good linear lighting effect;
- Cuttable and support customization;



4000K

1612

120°


Ra
90

3Years


Unit: mm

BASIC PARAMETERS


Size: 5000X10 mm
LED/unit: 7 LED
Input Voltage: DC 24V
LED Qty: 350/560 LED/m
Max Run: 5/4 m



350 LED/m




560 LED/m



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-1612-350-24	24V DC	>90	4000K	1570	109	14.4
FN-1612-560-24	24V DC	>90	4000K	2016	105	19.2

ALUMINUM PROFILE




SL250712-A



SL170712-A



SL171512-A



SL251512-A



SL161610-A



SL161610-B

QUICK CONNECTOR



BV-S-SMD-2Pin-10mm-A



BV-S-SMD-2Pin-10mm-X



BV-S-SMD-2Pin-10mm-B



BV-S-SMD-2Pin-10mm-C

WIRE



20awg UL2464
jacket wire



20awg UL2468
wire

Suitable for 10mm width product with LED density less than 120 LEDs/m.

LONG RUN
SERIES



Max run up to 50m



Constant current
design



Long run without
brightness drop



LN-2835T-XX-XX


- Max run up to 50m without voltage drop
- Color consistency: 3 SDCM[typical]
- Multiple lumen options available
- Constant current regulator design to ensure stable performance



Unit: mm

BASIC PARAMETERS

Size: 50000X10/12mm
LED/unit: 6/10LED
Input Voltage: DC24/36V
LED Qty: 60/80 LED/m
Max run: 50m

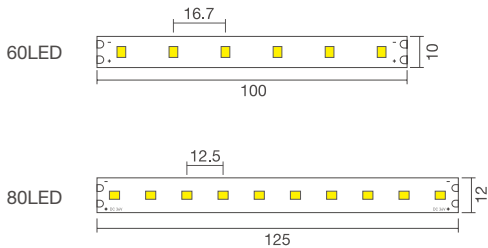

OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
LN-2835T-60-24	24V DC	>90	4000K	240	101	2.4
LN-2835T-80-36	36V DC	>90	4000K	580	112	5.18

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
LN-2835T-60-24	24V DC	>95	4000K	215	90	2.4
LN-2835T-80-36	36V DC	>95	4000K	513	99	5.18

ALUMINUM PROFILE



SL171512-A



SL251512-A




SL161610-A




SL161610-B




SL201017-A



SL202017-A




SL561512-A

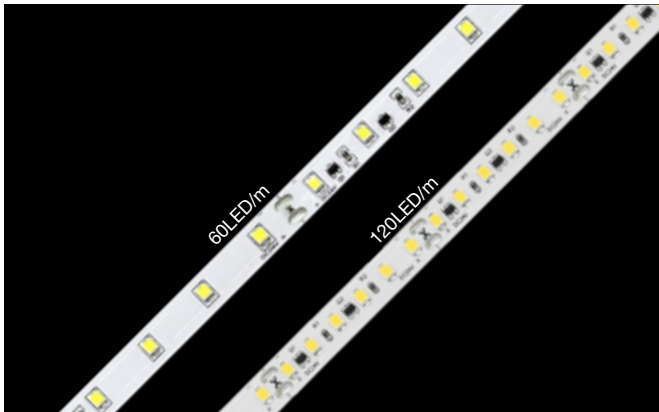

LN-2835A-XXX-24



- Cutttable every 6 LEDs.
- Bendable with good flexibility.
- Long lifespan with great lumen maintenance .



Unit: mm

BASIC PARAMETERS


Size: 21000/16000X10mm
LED/unit: 6LED
Input Voltage: DC24V
LED Qty: 60/120 LED/m
Max Run: 21/16m

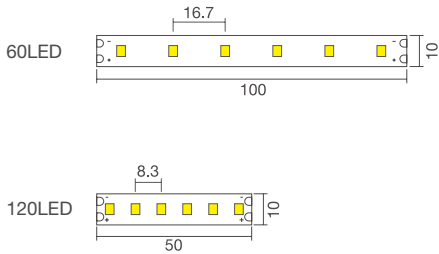

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
LN-2835A-60-24-5W	24V DC	>80	4000K	431	86	5.04
LN-2835A-120-24-6W	24V DC	>80	4000K	525	88	6.0
LN-2835A-120-24-10W	24V DC	>80	4000K	862	86	10.8

ALUMINUM PROFILE




SL250712-A



SL170712-A



SL171512-A



SL251512-A



SL161610-A



SL161610-B

QUICK CONNECTOR



BV-S-SMD-2Pin-10mm-A



BV-S-SMD-2Pin-10mm-X



BV-S-SMD-2Pin-10mm-B



BV-S-SMD-2Pin-10mm-C

WIRE



20awg UL2464 jacket wire



20awg UL2468 wire

Suitable for 10mm width product with LED density less than 120 LEDs/m.



LN-2835T-168-24-WN



- Adopt constant current design, long run series.
- High brightness, high efficiency
- Waterproof: IP22 non-waterproof (N)



Unit: mm

BASIC PARAMETERS

Size: 15000X12mm
LED/unit: 14LED
Input Voltage: DC24V
LED Qty: 168 LED/m
Max run: 14m



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
LN-2835T-168-24-WN	24V DC	>90	W: 3000K	702	115	5.76
			N: 6500K	683	113	5.76
			W+N: /	1345	113	11.52

ALUMINUM PROFILE




SL170712-A



SL201017-A



SL202017-A



SL561512-A



LN-5050B-60-24-RGB-A/B



- Constant current design, good lumen maintenance
- Can achieve rich color changes via controller
- Support 0~1KHz PWM dimming
- Multiple specifications, support customization



Unit: mm

BASIC PARAMETERS

Size: /
LED/unit: 6LED
Input Voltage: DC24V
LED Qty: 60 LED/m
Max run: 9/11m



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CCT/Color Available	LM/m	LM/W	W/m
LN-5050B-60-24-RGB-A	24V DC	R: 615-620nm	122	25	4.8
		G: 515-520nm	173	36	4.8
		B: 460-465nm	48	10	4.8
		RGB: /	315	22	14.4

Model No.	Voltage	CCT/Color Available	LM/m	LM/W	W/m
LN-5050B-60-24-RGB-B	24V DC	R: 615-620nm	118	25	4.8
		G: 515-530nm	170	35	4.8
		B: 460-465nm	43	9	4.8
		RGB: /	287	20	14.4


ALUMINUM PROFILE



SL170712-A



SL171512-A



SL251512-A



SL161610-A



SL161610-B

FLEXIBLE WALL WASHER

SERIES

IP67

Top Bending





DFO-XXXX-XXX-XX

- Optical lens design, suitable for wall washing
- Excellent flexibility and bendable
- Good lumen maintenance, long service life
- Multiple specifications available, support customization



BASIC PARAMETERS


Size: 5000X21 mm
LED/unit: 2/4/7 LED
Input Voltage: DC 24V
LED Qty: 40/42 LED/m
Max run: 9/8/5/7/5 m




PROFILE DRAWINGS

Unit: mm


40LED



40LED (WN)



42LED (RGB/RGBW)



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Beam Angle	Ra	Light Color	LM/m	LM/W	W/m
DFO-2835-40-24-R/G/B	24V DC	30/25°45/60°	\	R	532	37	14.4
				G	1137	79	
				B	259	18	
DFO3030-40-24	24V DC	30/25°45/60°	>80	W	1958	136	14.4
			>90	W	1670	116	
DFO-3030-40-24-WN	24V DC	30/25°45/60°	>80	W	1000	125	8.0
			>80	N	1120	140	
			\	WN	2120	132	
DFO-3030-42-24-RGB	24V DC	30/25°45/60°	\	R	240	40	6.0
				G	552	92	
				B	120	20	
				RGB	900	50	
DFO-F5050-42-24-RGBW	24V DC	30/45/25°45°	\	R	161	35	4.6
			\	G	391	85	
			\	B	96	21	
			>80	W	460	100	
			\	RGB	648	47	
			\	RGBW	1085	59	



Flexible and bendable



IP67 protection



Easy-to-install



Mini cut design





DFO-XXXX-XXX-XX

- Optical lens design, suitable for wall washing
- Excellent flexibility and bendable
- Good lumen maintenance, long service life
- Multiple specifications available, support customization




BASIC PARAMETERS

Size: 5000X21mm
LED/unit: 6LED
Input Voltage: DC24V
LED Qty: 40/36 LED/m
Max run: 6/10m



PROFILE DRAWINGS

36LED (RGB/RGBW-DMX)



Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Beam Angle	Ra	Light Color	LM/m	LM/W	W/m
DFO-3030-40-24-ASY 10°	24V DC	22/Asymmetric10°	>80/90	W	1958/1670	136/116	14.4
DFO-3030-36-24-RGB-DMX	24V DC	30/25°45/60°	\	R	76	19	4.0
				G	192	48	4.0
				B	44	11	4.0
				RGB	377	41	9.2
DFO-F5050-36-24-RGBW-DMX	24V DC	30/45/25°45°	\	R	60	15	4.0
				G	180	45	4.0
				B	44	11	4.0
				>80 W	172	43	4.0
				\ RGB	349	38	9.2
DFO-3030-36-24-RGB-SPI	24V DC	30/25°45/60°	\	RGBW	519	44	11.8
				R	88	22	4.0
				G	244	61	4.0
				B	56	14	4.0
				RGB	395	43	9.2
DFO-F5050-36-24-RGBW-SPI	24V DC	30/45/25°45°	\	R	76	19	4.0
				G	232	58	4.0
				B	56	14	4.0
				>80 W	224	56	4.0
				\ RGB	377	41	9.2
			\	RGBW	554	47	11.8





P2-8

- Optical lens design with good flexibility
- Suitable for wall washing and small space lighting
- Cuttable and easy to install
- Great decay performance, longer lifespan
- Support PWM dimming
- Multiple beam angles, CCT, and specifications are available



BASIC PARAMETERS

Size: 5010*24*17mm
LED/unit: --
Input Voltage: 24V
LED Qty: 40/36 LED/m
Max Run: 5-10m

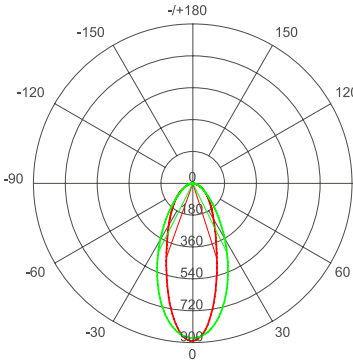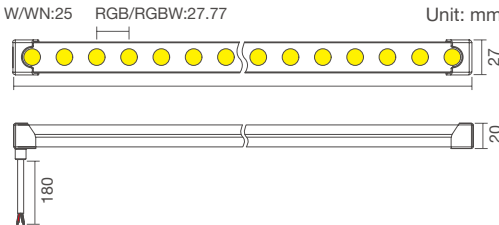

PROFILE DRAWINGS

Model No.	Voltage	Beam Angle	Ra	Light Color	LM/m	LM/W	W/m
P2-8-2835-40-24-R/G/B	24V DC	30/25°45/60°	\	R	528	33	16.0
				G	1088	68	
				B	240	15	
				W	1920	120	16.0
P2-8-3030-40-24	24V DC	30/25°45/60°	>80	W	1920	120	16.0
P2-8-5050-40-24-WN	24V DC	30/25°45/45°	>80	W	560	70	8.0
			>80	N	600	75	8.0
			\	WN	1152	72	16.0
P2-8-5050-36-24-RGB	24V DC	30/25°45/45°	\	R	222	39	5.7
				G	285	50	5.7
				B	39	7	5.7
				RGB	510	30	17.0
P2-8-F5050-36-24-RGBW	24V DC	30/25°45/45°	\	R	206	39	5.3
				G	265	50	5.3
				B	37	7	5.3
				>80 W	328	62	5.3
				\ RGB	474	30	15.8
				RGBW	777	37	21.0





P2-8

- Optical lens design with good flexibility
- Suitable for wall washing and small space lighting
- Cuttable and easy to install
- Great decay performance, longer lifespan
- Support PWM dimming
- Multiple beam angles, CCT, and specifications are available



BASIC PARAMETERS

Size: 5010*24*17mm
LED/unit: --
Input Voltage: 24V
LED Qty: 36 LED/m
Max Run: 7-10m

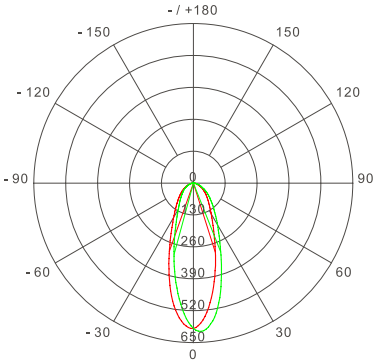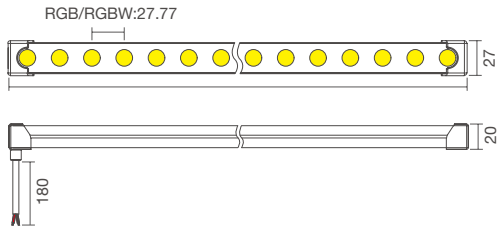

PROFILE DRAWINGS

Model No.	Voltage	Beam Angle	Ra	Light Color	LM/m	LM/W	W/m
P2-8-5050-36-24-RGB-SPI	24V DC	30/25°45/45°	\	R	192	24	8.0
				G	248	31	8.0
				B	40	5	8.0
				RGB	462	25	18.5
P2-8-5050-36-24-RGBW-SPI	24V DC	30/25°45/45°	\	R	184	23	8.0
				G	256	32	8.0
				B	40	5	8.0
				>80 W	328	41	8.0
				\ RGB	444	24	18.5
P2-8-F5050-36-24-RGB-DMX	24V DC	30/25°45/45°	\	RGBW	613	26	23.6
				R	160	20	8.0
				G	208	26	8.0
				B	32	4	8.0
				RGB	407	22	18.5
P2-8-5050-36-24-RGBW-DMX	24V DC	30/25°45/45°	\	R	152	19	8.0
				G	208	26	8.0
				B	32	4	8.0
				>80 W	272	34	8.0
				\ RGB	388	21	18.5
				RGBW	708	30	23.6




P2-8pro

- Light emission distance up to 5m.
- 3D bending and easy to install.
- Optical lens design with good flexibility, suitable for wall washing and small space lighting.
- Long lifespan with great lumen maintenance.
- Multiple beam angles, CCT, and specifications are available.




BASIC PARAMETERS

Size: 5000*30*22mm
LED/unit: --
Input Voltage: 24V
LED Qty: 24 LED/m
Max Run: 5 m

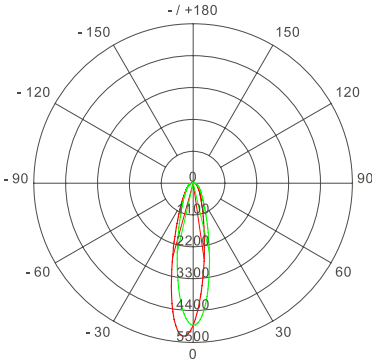

PROFILE DRAWINGS

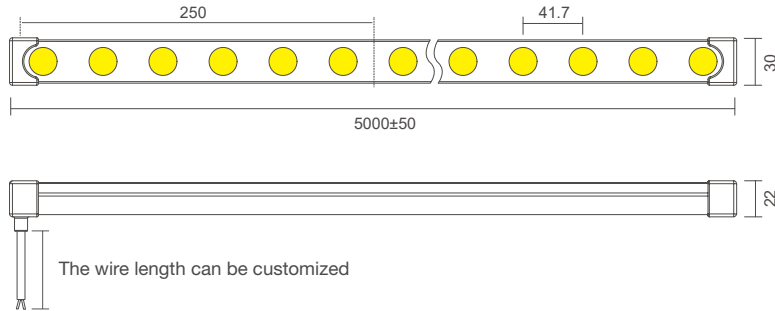

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	LM/m	LM/W	W/m
P2-8 pro	24V DC	>80	2700K	2375	95	25.0
			3000K	2425	97	
			4000K	2575	103	
			5000K	2625	105	
			6500K	2750	110	
P2-8 pro	24V DC	>90	2700K	1900	76	25.0
			3000K	2075	83	
			4000K	2500	100	
			5000K	2575	103	




SFO1616-3030-XX-24

- Adopt professional lens,with good flexibility, suitable for wall washing
- Combined module and silicone tube, with good weatherability
- Great brightness maintenance, long life span
- Top bend and side bend combined into one
- Single color supports PWM, 0-10V, DALI, and DMX dimming




BASIC PARAMETERS

Size:	5020*16*16mm	5020*16*16mm
LED/unit:	--	--
Input Voltage:	24V	24V
LED Qty:	48LED/m	60LED/m
Max Run:	W:6m/R:9m/G:8m/B:8m	WN:5m

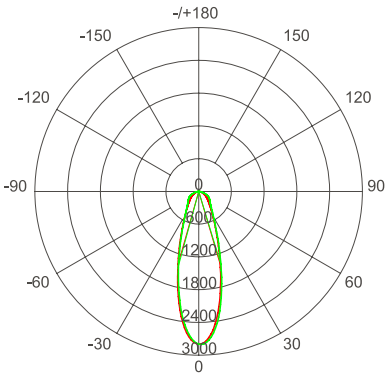

PROFILE DRAWINGS

Unit: mm

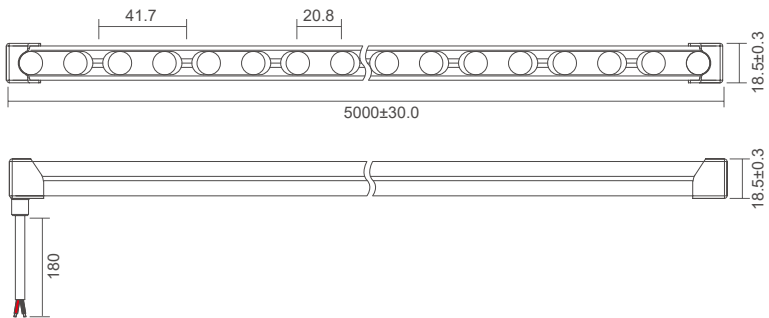

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
SFO1616-3030-48-24	24 DC	>80	4000K	2080	130	16
		>90	4000K	1792	112	
Model No.	Voltage	Ra	Color Available	LM/m	LM/W	W/m
SFO1616-3030-48-24	24 DC	\	R: 620-625	512	32	16
			G: 520-525	1120	70	
			B: 465-470	240	15	
Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
SFO1616-3030-60-24-WN	24 DC	>90	W: 2700K	855	95	9
		>90	N: 6500K	900	100	9
		\	WN: \	1764	98	18




SFO2317-XXXX-XXX-XX

- Adopt professional lens, with good flexibility, suitable for wall washing
- Combined module and silicone tube, with good weatherability
- Great brightness maintenance, long life span
- Top bend and side bend combined into one
- Support PWM, 0~10V, DALI and DMX dimming



BASIC PARAMETERS


Size:	5020*25.5*19.5mm	5020*25.5*19.5mm
LED/unit:	1pc	1pc
Input Voltage:	24V	24V
LED Qty:	40 LED/m	36 LED/m
Max Run:	7m	8m(RGBW) / 7m(DMX-RGBW)

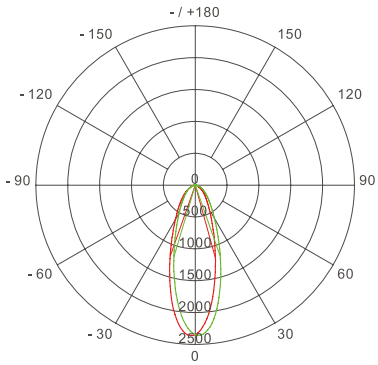


PROFILE DRAWINGS

Unit: mm

SFO2317-3030-40-24

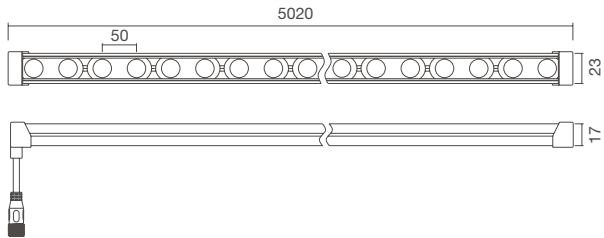

SFO2317-F5050-36-24-RGBW/SFO-F5050-36-24-DMX-RGBW

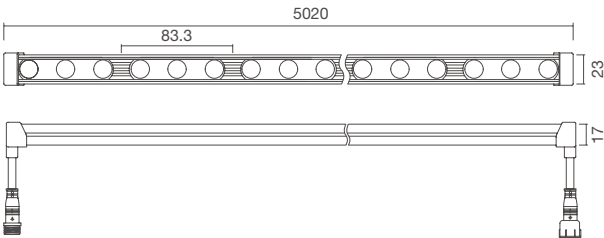

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Coler	LM/m	LM/W	W/m
SFO2317-3030-40-24	24V DC	>80	4000K	1900	132	14.4
		>90	4000K	1656	115	
SFO2317-F5050-36-24-RGBW	24V DC	>80	4000K	333	63	5.3
			R	190	36	5.3
			G	265	50	5.3
			B	47	9	5.3
			RGB	505	32	15.8
			RGBW	798	38	21.0
SFO2317-F5050-36-24-DMX-RGBW	24V DC	>80	4000K	280	35	8.0
			R	160	20	8.0
			G	216	27	8.0
			B	40	5	8.0
			RGB	425	23	18.5
			RGBW	731	31	23.6




FNO5050-XXX-XX

- Mini 30° beam angle, far distance
- Cuttable and support customization







BASIC PARAMETERS

Size:	5000X10mm	5000X10mm
LED/unit:	3/6LED	3/6LED
Input Voltage:	DC12/24V	DC12/24V
LED Qty:	48LED/m	60LED/m
Max run:	2.5/4m	2/3.5m



PROFILE DRAWINGS

Unit: mm



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FNO5050-48-12/24	12/24V DC	>80	4000K	1150	100	11.52
FNO5050-60-12/24	12/24V DC	>80	4000K	1440	100	14.40




TNO5050-XXX-XX

- Mini 30° beam angle, longer illumination distance
- Cuttable and support customization



BASIC PARAMETERS


Size:	5000X10mm	5000X10mm	5000X10mm
LED/unit:	3/6LED	3/6LED	3/6LED
Input Voltage:	DC12/24V	DC12/24V	DC12/24V
LED Qty:	48LED/m	60LED/m	72LED/m
Max run:	3.5/6.5m	3.5/5.5m	3/5m

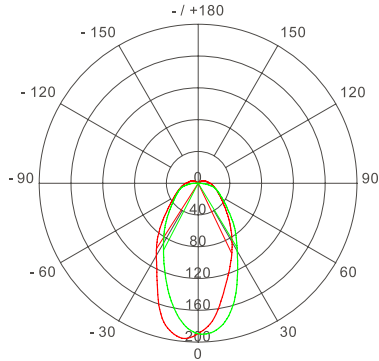


PROFILE DRAWINGS

Unit: mm


48LED (DC12V)




60LED (DC12V)




72LED (DC12V)




48LED (DC24V)



60LED (DC24V)



72LED (DC24V)



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CCT/Color Available	LM/m	LM/W	W/m
TNO5050-48-12-RGB	12V DC	R: 615-620nm	120	32	3.84
		G: 515-520nm	265	70	3.84
		B: 460-465nm	55	15	3.84
		RGB: /	435	38	11.52
TNO5050-60-24-RGB	24V DC	R: 615-620nm	150	32	4.80
		G: 515-520nm	335	70	4.80
		B: 460-465nm	70	15	4.80
		RGB: /	545	38	14.40
TNO5050-72-12/24-RGB	12/24V DC	R: 615-620nm	180	32	4.80
		G: 515-520nm	400	70	4.80
		B: 460-465nm	85	15	4.80
		RGB: /	655	38	14.40




ST9 3.0

- High light efficiency, high brightness;
- Integrated LED and optical lens;
- S-type strip, can be bent to any shape;
- Single LED cut, easy to install;
- Multiple specifications and support customization;



BASIC PARAMETERS

Size:	5000X10mm	5000X8mm
LED/unit:	1 LED	3 LED
Input Voltage:	DC12V	DC12V
LED Qty:	24LED/m	48LED/m
Max run:	2m	3m

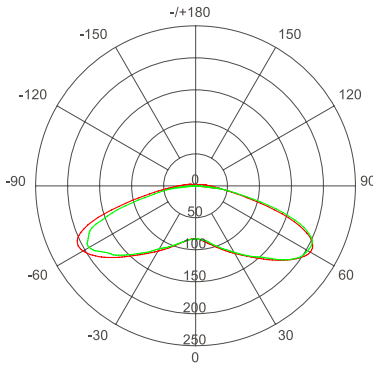

PROFILE DRAWINGS

Unit: mm



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
ST9 3.0-24-12	12V DC	>80	3000K	1114	86	12.96
		>80	4000K	1179	91	
		>80	6500K	1166	90	
		>70	11000K	1076	98	
ST9 3.0-48-12	12V DC	>80	3000K	941	98	9.6
		>80	4000K	1008	105	
		>80	6500K	960	100	
		>70	11000K	893	93	




FO-XXXX-XXX-XX-WN

- High efficiency, high brightness;
- Adopt large-angle diffuse reflection lens;
- Support external dimmers, enabling brightness adjustment and dual-color temperature tuning;
- Multiple specifications and support customization;




BASIC PARAMETERS

Size:	10000X12mm	10000X12mm
LED/unit:	4 LED	2 LED
Input Voltage:	DC24V	DC24V
LED Qty:	48LED/m	48LED/m
Max run:	8m	7m

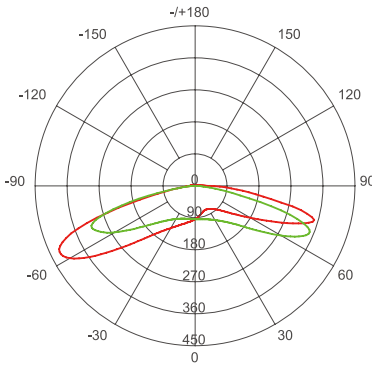

PROFILE DRAWINGS

Unit: mm



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FO-6060-48-24-WN	24V DC	>80	W: 3000K	570	99	5.76
		>80	N: 6500K	582	101	5.76
		\	W+N	1140	99	11.52
		>80	W: 3000K	651	113	5.76
FO-G2835-48-24	24V DC	>80	N: 6500K	726	126	5.76
		\	W+N	1359	118	11.52
		>80	W: 3000K	651	113	5.76

SHORT CUTTABLE

SERIES



Mini. 1 LED/cut




High efficiency
120+ lm/W



Support a variety of
production processes



SHORT-CUTTABLE

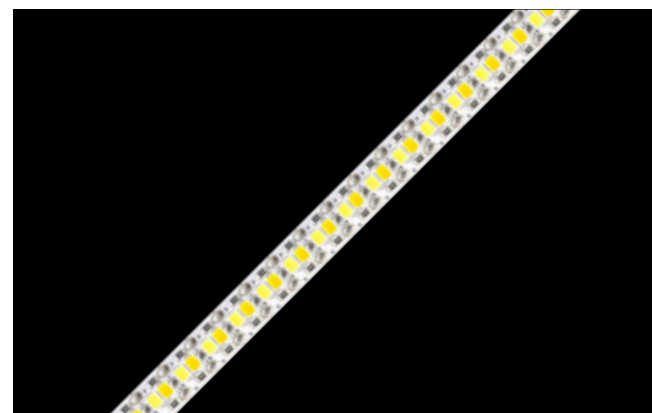


TN-H2835C+-XXX-24-WN

- High efficiency, up to 150lm/W;
- Various IP process available;
- Support PWM, DALI and DMX dimming;
- Multiple specifications and support customization;



BASIC PARAMETERS

Size: 5000X10mm
LED/unit: 2LED
Input Voltage: DC24V
LED Qty: 180/240 LED/m
Max Run: 4/3m



180LED



240LED




Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
TN-H2835C+-180-24	24V DC	>90	W: 2700K	1598	148	10.8
		>90	N: 6500K	1685	156	10.8
		\	W+N: \	3218	149	21.6
TN-H2835C+-240-24	24V DC	>90	W: 2700K	2102	146	14.4
		>90	N: 6500K	2232	155	14.4
		\	W+N: \	4262	148	28.8

ALUMINUM PROFILE




SL250712-A



SL170712-A



SL171512-A



SL251512-A



SL161610-A



SL161610-B

QUICK CONNECTOR



BV-S-SMD-2Pin-10mm-A



BV-S-SMD-2Pin-10mm-X



BV-S-SMD-2Pin-10mm-B



BV-S-SMD-2Pin-10mm-C

WIRE



20awg UL2464
jacket wire




20awg UL2468
wire

Suitable for 10mm width product with LED density less than 120 LEDs/m.



SHORT-CUTTABLE

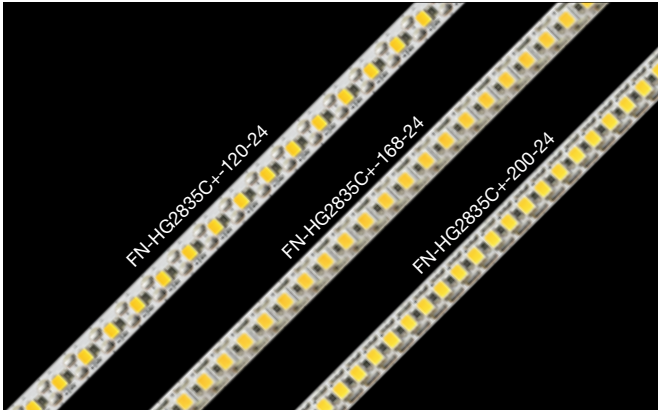

FN-HG2835C+-XXX-24


- High efficiency, up to 150lm/W
- Single LED cut, min cut unit 5mm
- Support PWM, DALI and DMX dimming
- Various IP process available
- Multiple specifications, support customization



Unit: mm

BASIC PARAMETERS

Size: 5000X8mm
LED/unit: 1LED
Input Voltage: DC24V
LED Qty: 128/168/200 LED/m
Max Run: 5/4.5/4m



120LED



168LED




200LED



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-HG2835C+-120-24	24V DC	>90	4000K	2625	152	17.28
FN-HG2835C+-168-24	24V DC	>90	4000K	3080	153	20.16
FN-HG2835C+-200-24	24V DC	>90	4000K	3645	152	24.00

ALUMINUM PROFILE




SL250712-A



SL170712-A



SL171512-A



SL251512-A



SL161610-A



SL161610-B

QUICK CONNECTOR



BV-S-SMD-2Pin-10mm-A



BV-S-SMD-2Pin-10mm-X



BV-S-SMD-2Pin-10mm-B



BV-S-SMD-2Pin-10mm-C

Suitable for 10mm width product with LED density less than 120 LEDs/m.

WIRE



20awg UL2464
jacket wire



20awg UL2468
wire

FULL SPECTRUM | SERIES



Excellent color
rendition ability

>95

Rf>95 / Rg>99 /
CRI 95+




FULL SPECTRUM




FN/CN-2835G-XXX-24

- The light spectrum covers the visible light region of 380-780nm with good spectral continuity
- Maxiumly reduce the ratio of blue light, effectively weaken the harm of blue light
- The light quality is closer to sunlight
- Rf>96, Rg>100, CRI: 95+
- Multiple specifications and color temperatures optional




BASIC PARAMETERS


Size: 5000X10mm
LED/unit: 6/7LED
Input Voltage: DC24V
LED Qty: 60/120/56/126LED/m
Max Run: 8/7/12/12m




60LED




120LED



56LED



126LED




Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-2835G-60-24	24V DC	>95	4000K	892	74	12
FN-2835G-120-24	24V DC	>95	4000K	910	76	12
CN-2835G-56-24	24V DC	>95	4000K	829	73	11.52
CN-2835G-126-24	24V DC	>95	4000K	924	74	12.96

ALUMINUM PROFILE




SL250712-A



SL170712-A



SL171512-A



SL251512-A



SL161610-A



SL161610-B

QUICK CONNECTOR



BV-S-SMD-2Pin-10mm-A



BV-S-SMD-2Pin-10mm-X



BV-S-SMD-2Pin-10mm-B



BV-S-SMD-2Pin-10mm-C

WIRE



20awg UL2464
jacket wire



20awg UL2468
wire

Suitable for 10mm width product with LED density less than 120 LEDs/m.



FULL SPECTRUM




FN/CN-2835E-XXX-24

- The light spectrum covers the visible light region of 380-780nm with good spectral continuity
- Maxiumly reduce the ratio of blue light, effectively weaken the harm of blue light
- The light quality is closer to sunlight
- Rf>95, Rg>99, CRI 95+
- Multiple specifications and color temperatures optional




BASIC PARAMETERS


Size: 5000X10mm
LED/unit: 6/7LED
Input Voltage: DC24V
LED Qty: 60/120/56/126LED/m
Max Run: 8/7/12/12m




60LED




120LED



56LED



126LED




Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
FN-2835E-60-24	24V DC	>95	4000K	941	76	12
FN-2835E-120-24	24V DC	>95	4000K	996	79	12
CN-2835E-56-24	24V DC	>95	4000K	997	85	11.52
CN-2835E-126-24	24V DC	>95	4000K	1074	85	12.96

ALUMINUM PROFILE



SL250712-A



SL170712-A



SL171512-A



SL251512-A



SL161610-A



SL161610-B

QUICK CONNECTOR



BV-S-SMD-2Pin-10mm-A



BV-S-SMD-2Pin-10mm-X



BV-S-SMD-2Pin-10mm-B



BV-S-SMD-2Pin-10mm-C



20awg UL2464
jacket wire



20awg UL2468
wire

Suitable for 10mm width product with LED density less than 120 LEDs/m.

CONSTANT
CURRENT SERIES



Constant
current design




No brightness
differences



Mini. 10mm
PCB



CONSTANT CURRENT

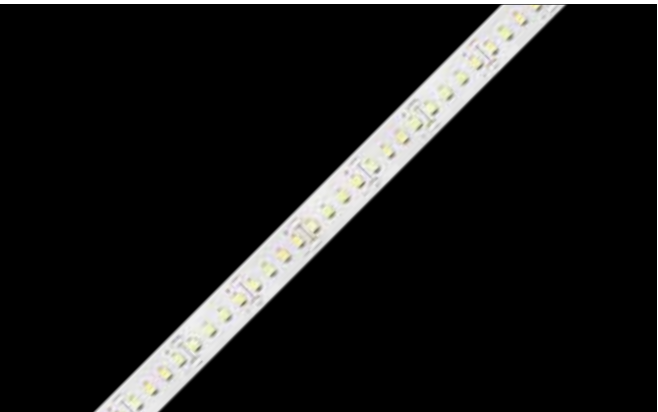




CCN-G/F2835-XXX-36

- Light efficiency over 150lm/W
- Constant current with uniform lighting
- Input voltage 30V-36V



BASIC PARAMETERS

Size:	5000X10mm	5000X24mm
LED/unit:	2 LED	4 LED
Input Voltage:	30-36V	30-36V
LED Qty:	78 LED/m	160 LED/m
Max Run:	/	/




Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
CCN-G2835-78	30-36V	>90	4000K	1508/2575	117/104	12.88/26.49
CCN-F2835-160	30-36V	>80	4000K	2083/4606	163/152	12.67/30.32


ALUMINUM PROFILE

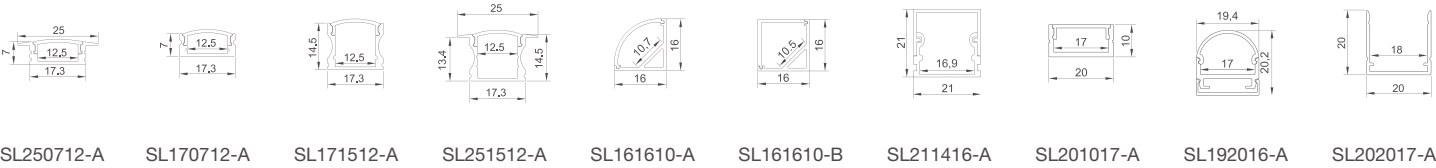

QUICK CONNECTOR



WIRE



Suitable for 10mm width product with LED density less than 120 LEDs/m.



CONSTANT CURRENT




TCCN-H2835-XXX-XX-WN

- High quality 2835 LED
- Flexible and cuttable
- Good stability, reliability performance
- Long lifespan with great lumen maintenance





BASIC PARAMETERS

Size:	5000X10mm	5000X10mm
LED/unit:	14 LED	10 LED
Input Voltage:	30-42V DC	25-32V DC
LED Qty:	168 LED/m	200 LED/m
Max Run:	5m	5m



PROFILE DRAWINGS


Unit: mm



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
TCCN-H2835-168-39-WN	30-42V DC	>80	2700K	1600	134	11.9
			6500K	1700	143	
TCCN-H2835-200-30-WN	25-32V DC	>80	2700K	1700	150	11.3
			6500K	1800	159	

ALUMINUM PROFILE




SL250712-A



SL170712-A



SL171512-A



SL251512-A



SL161610-A



SL161610-B



NARROW SERIES



Dot free and
ultra-thin



Available in different
widths of 3-6mm



Ideal for space-
limit places



3mm



MN-2016A-182-24


- Small in size and good flexibility
- Give out light evenly and no dark spots
- Mini PCB width 3mm, suitable for tight space



BASIC PARAMETERS

Size:	5000X3mm
LED/unit:	7LED
Input Voltage:	DC24V
LED Qty:	182LED/m
Standad Run:	3m

PROFILE DRAWINGS

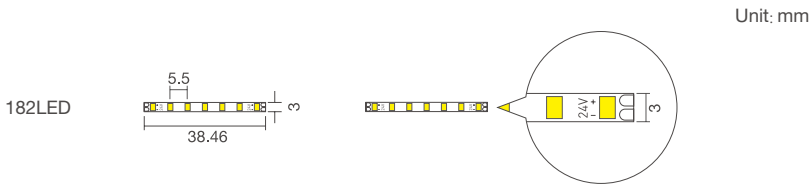

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	CCT	LM/m	LM/W	W/m
MN-2016A-182-24	24V DC	>90	4000K	908	97	9.36


ALUMINUM PROFILE



SL080805-A



3mm

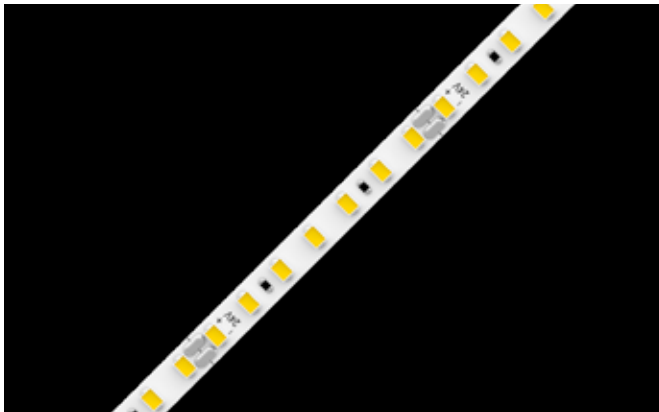

MN-1612-280-24


- High brightness, high efficiency;
- High density design with good linear lighting effect;
- Cuttable and support customization;



BASIC PARAMETERS

Size:	5000X3mm
LED/unit:	7LED
Input Voltage:	DC24V
LED Qty:	280LED/m
Standad Run:	3m

PROFILE DRAWINGS

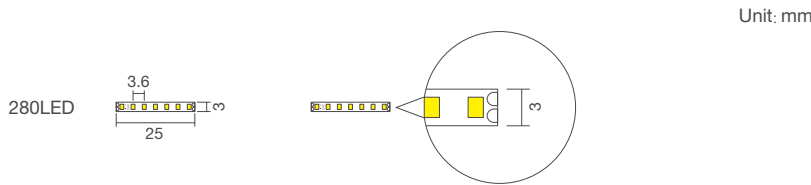

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
MN-1612-280-24	24V DC	>90	4000K	1046	109	9.6

ALUMINUM PROFILE




SL080805-A



MN-2110-238-24

- Small in size and good flexibility
- Good lumen maintenance, high efficiency
- Excellent environmental adaptability UV resistance
- Cutable and long lifespan



BASIC PARAMETERS

Size:

5000X4mm

LED/unit:

7LED

Input Voltage:


DC24V

LED Qty:


238LED/m

Max Run:

2m



PROFILE DRAWINGS

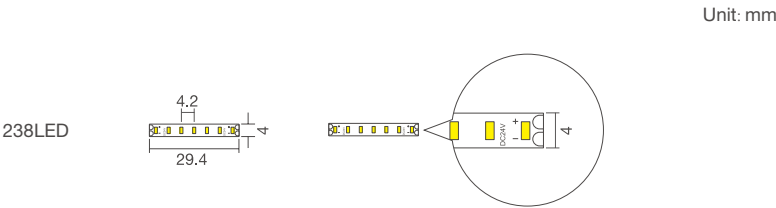

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
MN-2110-238-24	24V DC	>90	4000K	1004	82	12.24
		>95	4000K	808	66	12.24

ALUMINUM PROFILE



SL080805-A



SL080804-A



SL161508-A




SL101508-A



MN-2835A-120-12/24

- High light efficiency, good flexibility
- Good lumen maintenance and long service life
- Multiple specifications, support customization



BASIC PARAMETERS

Size:

5000X4mm

5000X4mm

LED/unit:

3LED

6LED

Input Voltage:

DC12V

DC24V

LED Qty:


120LED/m

120LED/m


Standan Run:

1m

2m



PROFILE DRAWINGS

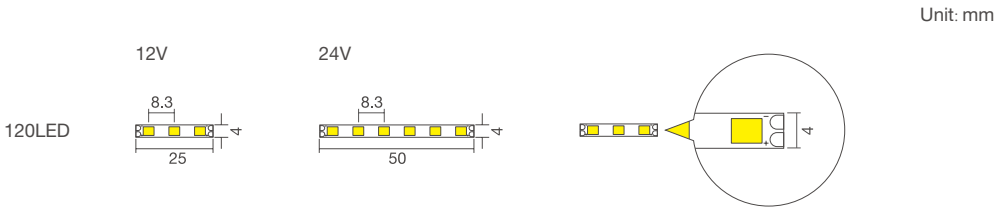

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
MN-2835A-120-12/24	12/24V DC	>90	4000K	912	95	9.6


ALUMINUM PROFILE



SL080805-A




5mm

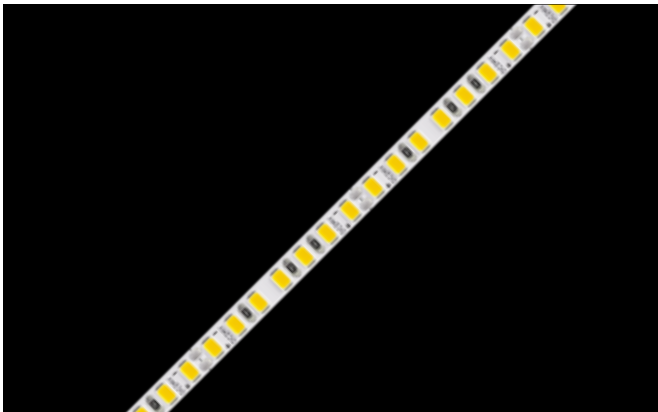

MN-2835T-182-24

- Small in size and good flexibility
- Good lumen maintenance and long service life
- Multiple specifications, support customization




BASIC PARAMETERS

Size:	5000X5mm
LED/unit:	7LED
Input Voltage:	DC24V
LED Qty:	182LED/m
Max Run:	2.5m

PROFILE DRAWINGS

Unit: mm

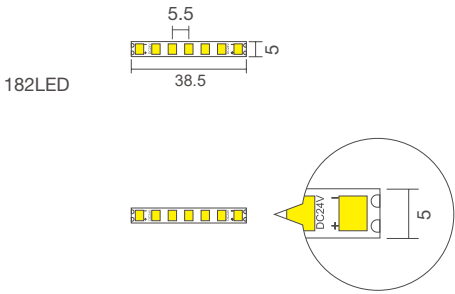

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
MN-2835T-182-24	24V DC	>90	4000K	1495	120	12.48
		>95	4000K	1270	102	12.48

ALUMINUM PROFILE



SL080805-A




5mm



MN-2016A-XXX-24

- Small in size, suitable for tight space
- Give out light evenly and no dark spots
- Cuttable and good flexibility



BASIC PARAMETERS

Size:	5000X5mm	5000X3mm
LED/unit:	7LED	6LED
Input Voltage:	DC24V	DC24V
LED Qty:	182LED/m	240LED/m
Standad Run:	3.5m	4m

PROFILE DRAWINGS

Unit: mm



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
MN-2016A-182-24	24V DC	>90	4000K	918	98	9.36
MN-2016A-240-24	24V DC	>90	4000K	815	85	9.6

ALUMINUM PROFILE



SL080805-A



5mm




MN-2110-280-24-WN

- Dual color temperature, CCT controllable
- Great linear effect and dimmable via controller
- Small size with great flexibility, easy mounted on curved surface
- Long lifespan with great lumen maintenance




BASIC PARAMETERS

Size: 5000X5mm
LED/unit: 7X2LED
Input Voltage: DC24V
LED Qty: 280LED/m
Max run: --



PROFILE DRAWINGS

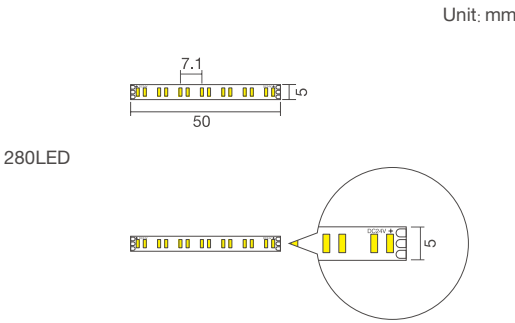

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
MN-2110-280-24-WN	24V DC	>90	W:2700K	360	75	4.8
			N:6500K	418	87	4.8
			W+N	768	80	9.6

ALUMINUM PROFILE



SL080805-A



SL101008-A



SL101508-A



SL161508-A



SL120710-A



5mm




MN-4040-120-24-RGB

- Small in size, suitable for tight space
- Give out light evenly
- Longer service life and good lumen maintenance
- Flexible and cuttable, easy to use




BASIC PARAMETERS

Size: 5000X5mm
LED/unit: 6LED
Input Voltage: DC24V
LED Qty: 120LED/m
Max run: 3m



PROFILE DRAWINGS

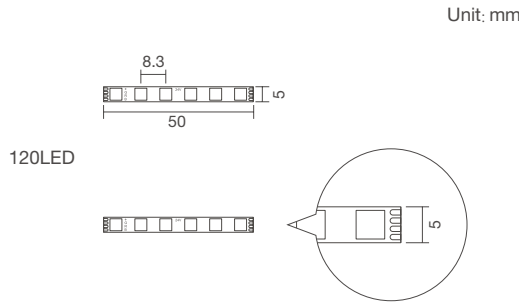

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
MN-4040-120-24-RGB	24V DC	R	620-630nm	134	28	4.8
		G	515-530nm	446	93	4.8
		B	460-470nm	96	20	4.8
		RGB	\	648	45	14.4

ALUMINUM PROFILE



SL080805-A



SL101008-A



SL101508-A



SL161508-A



SL120710-A



5mm




TN-2020-192-24-WN

- Narrow PCB width;
- 2in1 dual-color encapsulation design with excellent color mixing effect;
- Multiple specifications and support customization.




BASIC PARAMETERS

Size: 5000X5mm
LED/unit: 7LED
Input Voltage: DC24V
LED Qty: 196LED/m
Max run: 3m



PROFILE DRAWINGS

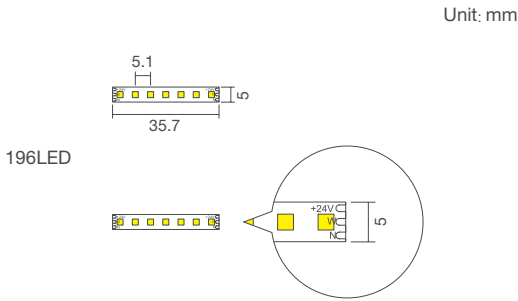

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
TN-2020-196-24-WN	24V DC	>90	W: 2700K	1025	102	10.08
			N: 6500K	1125	112	10.08
			W+N: --	2110	105	20.16

ALUMINUM PROFILE



SL161508-A



SL101008-A



SL101508-A



SL181510-A



6mm




MN-4040-96-24-RGB

- Small in size, suitable for tight space
- Give out light evenly
- Longer service life and good lumen maintenance
- Flexible and cuttable, easy to use




BASIC PARAMETERS

Size: 5000X6mm
LED/unit: 6LED
Input Voltage: DC24V
LED Qty: 96LED/m
Max run: 3m



PROFILE DRAWINGS

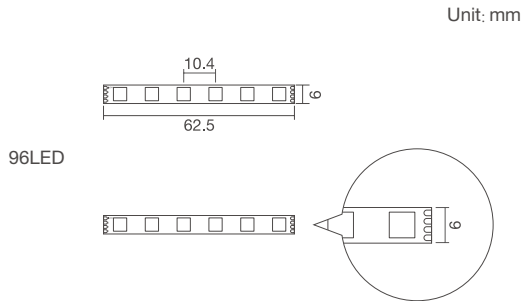

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
MN-4040-96-24-RGB	24V DC	R	615-630nm	169	33	5.2
		G	515-530nm	307	60	5.2
		B	460-470nm	64	12.4	5.2
		RGB	100000K	492	32	15.6

ALUMINUM PROFILE



SL161508-A



SL101008-A



SL101508-A



SL181510-A

NARROW SERIES



SIDE VIEW SERIES




FN-SV3014P-XXX-24

- Side illumination
- High efficiency, high CRI, and high power
- Cuttable design for various applications
- Multiple specifications, support customization




BASIC PARAMETERS

Size:	5000X8mm	5000X8mm	5000X8mm
LED/unit:	6LED	6LED	6LED
Input Voltage:	DC24V	DC24V	DC24V
LED Qty:	60LED/m	96LED/m	120LED/m
Max run:	7m	6m	5m



PROFILE DRAWINGS

Unit: mm

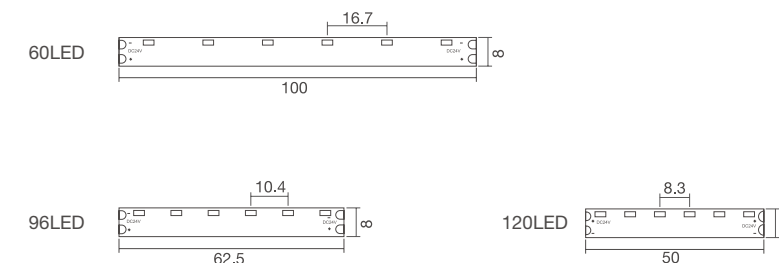

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-SV3014P-60-24	24V DC	>95	4000K	826	86	9.6
FN-SV3014P-96-24	24V DC	>95	4000K	1034	90	11.52
FN-SV3014P-120-24	24V DC	>95	4000K	1303	90	14.4

WIRE



20awg UL2464 jacket wire



20awg UL2468 wire

LIGHTING DIRECTION



Side illumination



CRI up to 95+



Cuttable design




TN-SV4713-XXX-24-RGB

- 4713 RGB side emitting, three in one design
- Light color can be changed via controller
- Cuttable design for various applications
- Multiple specifications, support customization




BASIC PARAMETERS

Size:	5000X10mm	5000X12mm
LED/unit:	6LED	6LED
Input Voltage:	DC24V	DC24V
LED Qty:	60LED/m	108LED/m
Max Run:	5m	8m





LIGHTING DIRECTION



PROFILE DRAWINGS

Unit: mm



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-SV4713-60-24-RGB	24V DC	R	620-630nm	98	27	3.60
		G	515-530nm	195	54	3.60
		B	460-470nm	43	12	3.60
		RGB	/	318	29	10.80
TN-SV4713-108-24-RGB	24V DC	R	620-630nm	125	29	4.32
		G	515-530nm	314	73	4.32
		B	460-470nm	64	15	4.32
		RGB	/	471	36	12.96

WIRE



20awg UL2464 wire

48V
SERIES

48V INPUT
LONGER MAX RUN



DC 48V



Support dimming



Good flexibility



SHORT CUTTABLE DESIGN



FN-F2835-80-48

- High voltage DC 48V, long run series
- Good flexibility, suitable for curved surface
- Support PWM, 0-10V, DALI, DMX dimming
- Multiple specifications, support customization



BASIC PARAMETERS

Size: 18000X10mm
LED/unit: 4LED
Input Voltage: DC48V
LED Qty: 80 LED/m
Max run: 18m




Unit: mm


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-F2835-80-48	48V DC	>90	4000K	1226	76	15.36


ALUMINUM PROFILE

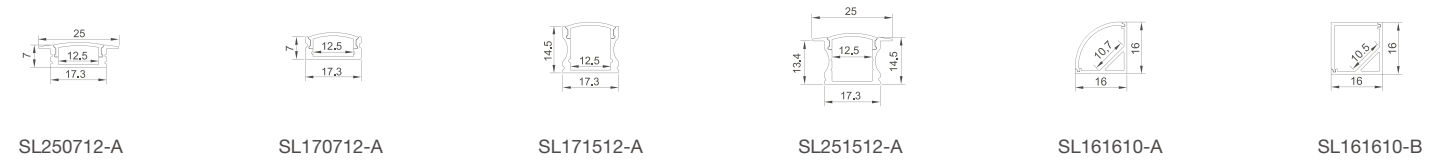

QUICK CONNECTOR



WIRE




Suitable for 10mm width product with LED density less than 120 LEDs/m.



HIGH EFFICACY DESIGN



FN-H2835T-150-48

- High voltage DC 48V, long run series
- High brightness, high efficacy
- Good flexibility, suitable for curved surface
- Support PWM, 0-10V, DALI, DMX dimming
- Multiple specifications, support customization



BASIC PARAMETERS

Size: 11000X10mm
LED/unit: 15LED
Input Voltage: DC48V
LED Qty: 150 LED/m
Max run: 11m




Unit: mm


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
FN-H2835T-150-48	48V DC	>90	4000K	1987	138	14.4


ALUMINUM PROFILE

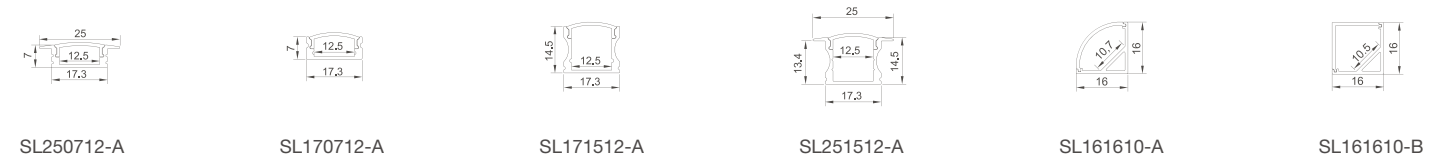

QUICK CONNECTOR



WIRE



Suitable for 10mm width product with LED density less than 120 LEDs/m.




LN-2835T-XXX-48

- High voltage DC 48V, long run series
- Constant current design
- High brightness, high efficacy
- Good flexibility, suitable for curved surface
- Multiple specifications, support customization




BASIC PARAMETERS

Size:	27000X10mm	50000X10mm	18000X10mm
LED/unit:	14LED	12LED	14LED
Input Voltage:	DC48V	DC48V	DC48V
LED Qty:	56 LED/m	72 LED/m	112 LED/m
Max run:	27m	50m	18m



PROFILE DRAWINGS

Unit: mm

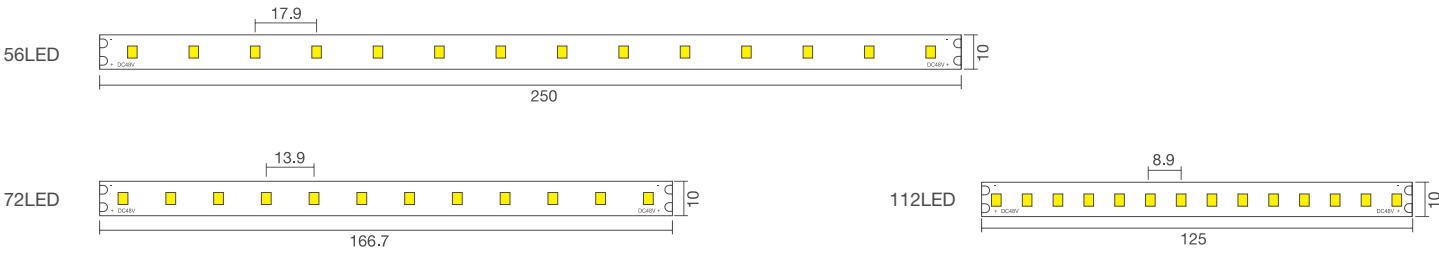


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
LN-2835T-56-48	48V DC	>90	4000K	699	112	5.76
LN-2835T-72-48	48V DC	>90	4000K	393	80	4.32
LN-2835T-112-48	48V DC	>90	4000K	1245	108	11.52


ALUMINUM PROFILE



QUICK CONNECTOR

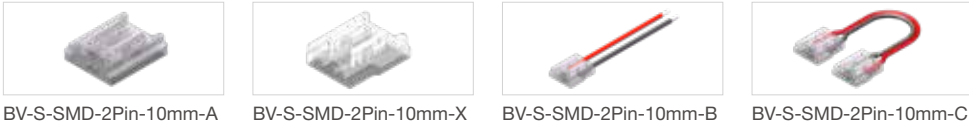

WIRE




TN-F5050-56-48-RGBW

- High voltage DC 48V, long run series
- Good flexibility, suitable for curved surface
- Can achieve reach colors via controller
- Multiple specifications, support customization




BASIC PARAMETERS

Size:	17000X16mm
LED/unit:	14LED
Input Voltage:	DC48V
LED Qty:	56 LED/m
Max run:	17m



PROFILE DRAWINGS


Unit: mm

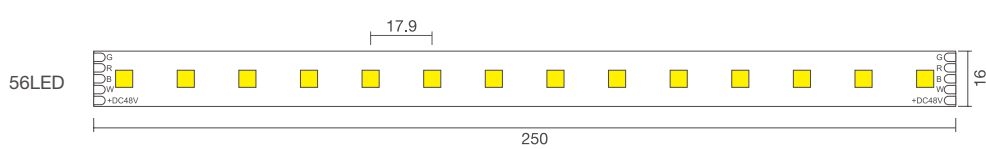

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-F5050-56-48-RGBW	48V DC	/	W	4000K	218	113	1.92
			R	620-625nm	74	39	1.92
			G	515-520nm	213	99	1.92
			B	460-470nm	38	19	1.92
			RGB	100000K	328	54	5.76
			RGBW	100000K+	543	67	7.68

ALUMINUM PROFILE

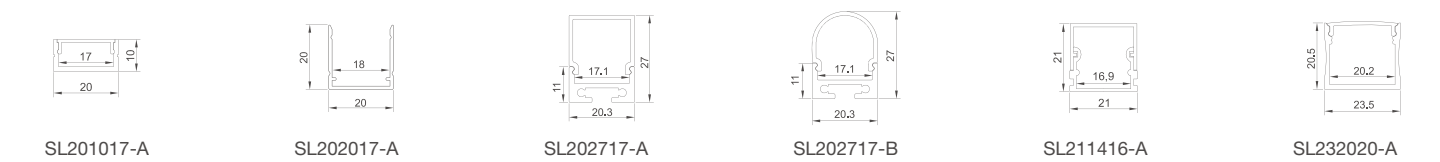

WIRE



MULTI-COLOR SERIES

Dim to Warm / CCT Controllable
RGB / RGBW / RGBWN / SPI / DMX



Offering bright colors and plenty
of amazing lighting effects



High-quality luminance
and vibrant colors



DIM TO WARM




PTW-2835T-168-24-WN

- Dim the light when CCT gets warm
- Linear lighting effect, suitable for ambient lighting
- PWM technology for easy control system
- 14 LEDs/group, can be cut according to needs
- Long lifespan with great lumen maintenance;
- Multiple specifications, support customization



BASIC PARAMETERS


Size: 5000X10mm
LED/unit: 7X2 LED
Input Voltage: 24V DC
LED Qty: 168 LED/m
Max Run: 7m



ZL 2017 2 1153882.0

PROFILE DRAWINGS

Unit: mm



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
PTW-2835T-168-24-WN	24V DC	>90	2700-6200K	1685	117	14.4

ALUMINUM PROFILE




SL250712-A




SL170712-A




SL201017-A



SL202017-A



SL561512-A



SL230815-A



DIM TO WARM



PTW-2016A-224-24-WN

- Small in size with good flexibility
- PWM technology for easy control system
- 14 LEDs/group, can be cut according to needs
- Long lifespan with great lumen maintenance
- Multiple specifications, support customization



BASIC PARAMETERS


Size: 5000X10mm
LED/unit: 14 LED
Input Voltage: 24V DC
LED Qty: 224 LED/m
Standad Run: 4m



ZL 2017 2 1153882.0

PROFILE DRAWINGS


Unit: mm



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
PTW-2016A-224-24-WN	24V DC	>90	3000-6000K	1730	88	19.68

ALUMINUM PROFILE



SL250712-A




SL170712-A



SL201017-A



SL202017-A



SL561512-A



SL230815-A



CCT CONTROLLABLE



TN-H2835T-XXX-24-WN


- High efficacy, high brightness
- Good lumen maintenance and long service span
- CCT and brightness adjustable via dimmer
- Various specifications, support customization



BASIC PARAMETERS

Size: 5000X10mm
LED/unit: 16LED
Input Voltage: DC24V
LED Qty: 128/160/192 LED/m
Max Run: 3/2.5/2m

Unit: mm

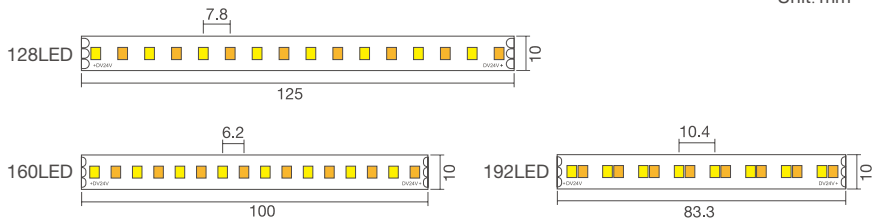

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT	LM/m	LM/W	W/m
TN-H2835T-128-24-WN	24V DC	>90/95	W	2200K	743/576	129/100	5.76
			N	6200K	853/772	148/134	5.76
			W+N	/	1590/1348	138/117	11.52
TN-H2835T-160-24-WN	24V DC	>90/95	W	2200K	922/727	128/101	7.2
			N	6200K	1073/965	149/134	7.2
			W+N	/	2002/1699	139/118	14.4
TN-H2835T-192-24-WN	24V DC	>90/95	W	2200K	1115/855	129/99	8.64
			N	6200K	1288/1158	149/134	8.64
			W+N	/	2402/2022	139/117	17.3

ALUMINUM PROFILE



SL120710-A



SL181510-A



SL221211-A



SL161210-A



SL161610-A



SL161610-B

WIRE



22awg UL1007 wire




CCT CONTROLLABLE




TN-2016A-XXX-XX-WN

- Good flexibility and small in size
- Soft and even illumination , no dark spots
- Good lumen maintenance, long life span
- CCT and brightness adjustable via dimmer



BASIC PARAMETERS


Size: 5000X10mm
LED/unit: 6/12LED
Input Voltage: DC12/24V
LED Qty: 180/240 LED/m
Standard Run: 2.5/3.5m

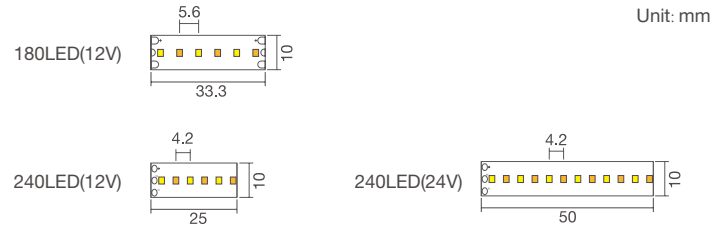

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT	LM/m	LM/W	W/m
TN-2016A-180-12-WN	12V DC	>90	W	3000K	495	76	6.48
			N	6500K	540	83	6.48
			W+N	/	1000	77	12.96
TN-2016A-240-12/24-WN	12/24V DC	>90	W	3000K	660	76	8.64
			N	6500K	720	83	8.64
			W+N	/	1300	75	17.28

ALUMINUM PROFILE




SL250712-A



SL170712-A



SL171512-A



SL251512-A



SL161610-A

QUICK CONNECTOR



FN-WC10CF3



FN-W10CF3

JOINT



D10W1



D10W2



S10W0



RGB






TN-2835RGB-XXX-24

- Good flexibility, with stable and reliable performance.
- Cuttable and easy to install.
- Can create rich color effects via controller.



BASIC PARAMETERS

Size: 5000*10mm 5000*12mm
LED/unit: 6LED 6LED
Input Voltage: DC24V DC24V
LED Qty: 168 LED/m 240 LED/m
Max Run: 2m 1m



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-2835RGB-168-24	24V DC	R	615-630nm	168	25	6.72
		G	515-530nm	538	80	6.72
		B	460-470nm	114	17	6.72
		RGB	/	806	40	20.16
TN-2835RGB-240-24	24V DC	R	615-630nm	208	26	8
		G	515-530nm	704	88	8
		B	460-470nm	144	18	8
		RGB	/	1056	44	24

ALUMINUM PROFILE



SL181510-A



SL221211-A



SL161210-A



SL161610-A



SL161610-B

Note: Suitable for strip with 10mm PCB width





TN-4040A-120-24-RGB

- Cuttable and easy to install
- Good flexibility, can be mounted on cove surface
- Long service life with excellent lumen maintenance



BASIC PARAMETERS

Size: 5000X8mm
LED/unit: 6LED
Input Voltage: DC24V
LED Qty: 120 LED/m
Max Run: 4m



Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-4040A-120-24-RGB	24V DC	R	615-630nm	211	33	6.4
		G	515-530nm	384	60	6.4
		B	460-470nm	87	13.5	6.4
		RGB	/	614	32	19.2

ALUMINUM PROFILE



SL181510-A



SL221211-A



SL161210-A



SL161610-A



SL161610-B




F5H-XXX-XX-RGB

- Long lifespan with great lumen maintenance
- Can create rich lighting effects via a controller
- Cuttable and east-to-install
- Support customization




BASIC PARAMETERS


Size: 5000X12mm
LED/unit: 6LED
Input Voltage: DC24V
LED Qty: 30/60 LED/m
Max Run: 7/4m



30LED



60LED



Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
F5H-30-24-RGB	24V DC	\	R	620-630	49	20	2.4
			G	520-535	163	68	2.4
			B	460-475	40	17	2.4
			RGB	\	240	33	7.2
F5H-60-24-RGB	24V DC	\	R	620-630	100	21	4.8
			G	520-535	328	68	4.8
			B	460-475	80	17	4.8
			RGB	\	486	34	14.4

ALUMINUM PROFILE



SL181510-A



SL221211-A



SL161210-A



SL161610-A



SL161610-B





TN-F5050-60-12/24-RGBW

- Adopt high quality 5050 LED
- Adopt red, green, blue, and white 4in1 LED
- Flexible and cuttable every 3 or 6 LEDs
- Good stability and reliability performance
- Input voltage:DC12V and DC24V



BASIC PARAMETERS

Size:	5000X14mm	5000X14mm
LED/unit:	3/6 LED	6LED
Input Voltage:	DC12/24V	DC24V
LED Qty:	60 LED/m	120 LED/m
Max Run:	2.5/4.5m	4.5m

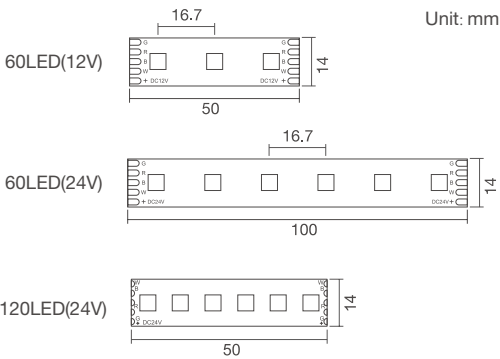

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-F5050-60-12/24-RGBW	12/24V DC	>80 \	W	3000K	456	95	4.8
			R	620-630nm	R+G+B:464	25	4.8
			G	515-530nm		68	4.8
			B	460-470nm		11	4.8
			RGBW	\		64	19.2
TN-F5050-120-24-RGBW	24V DC	>90 \	W	3000K	376	75	5
			R	620-630nm	140	28	5
			G	515-530nm	423	85	5
			B	460-470nm	95	19	5
			RGBW	\	990	50	20

ALUMINUM PROFILE


JOINT



SL211416-A



SL192016-A



SL202017-A



RGBW14W1



RGBW14W0



RGBW14W2





F5H-120-24-RGBW

- Long lifespan with great lumen maintenance
- Can create rich lighting effects via a controller
- Cuttable and east-to-install
- Support customization



BASIC PARAMETERS


Size:	5000X12mm
LED/unit:	12 LED
Input Voltage:	DC24V
LED Qty:	120 LED/m
Max Run:	4m

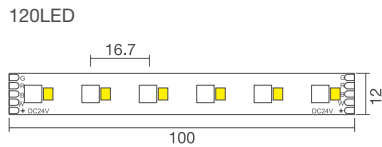

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
F5H-120-24-RGBW	24V DC	>90 \	W	4000K	308	64	4.8
			R	620-630	104	22	4.8
			G	520-535	353	74	4.8
			B	460-475	81	17	4.8
			RGB	\	527	37	14.4
			RGB+W	100000K+	1001	52	19.2

ALUMINUM PROFILE



SL251512-A



SL161610-A



SL161610-B



SL171512-A



RGBW





TN-F4040-120-24-RGBW

- RGBW 4in1 4040LEDs, good lighting performance;
- Adopt flexible FPC material, with stable quality;
- Use controller to create rich color effects;
- Cuttable and support customization;



BASIC PARAMETERS

Size: 5000X8mm
LED/unit: 6 LED
Input Voltage: DC 24V
LED Qty: 120 LED/m
Max Run: 7m



Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-F4040-120-24-RGBW	24V DC	\	R	620-630nm	120	25	4.8
		\	G	520-530nm	112	57	4.8
		\	B	460-470nm	27	14	4.8
		>80	W	4000K	321	67	4.8
		\	RGBW	100000K+	768	40	19.2

ALUMINUM PROFILE



SL181510-A



SL221211-A



SL161210-A



SL161610-A



SL161610-B



RGB+W




TN-42T-192-24-RGB+W

- 3in1 RGB + 2835W
- Great flexibility, easy mounted on curved surface
- Long lifespan with great lumen maintenance
- Create rich color effects via controller




BASIC PARAMETERS

Size: 5000X12mm
LED/unit: 2X6 LED
Input Voltage: DC24V
LED Qty: 192 LED/m
Max Run: 3m



PROFILE DRAWINGS

Unit: mm




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-42T-192-24-RGB+W	24V DC	>90	W	2900K	681	88	8
			R	620-630nm	161	28	6
			G	515-530nm	368	62	6
			B	460-470nm	83	14	6
			RGBW	/	1148	44	25

ALUMINUM PROFILE



SL202017-A



SL561512-A



RGB+W




TN-50AA-60-12/24-RGB+W

- Good flexibility with stable and reliable performance
- Cuttable and easy to install
- Create rich color effects via controller
- Long lifespan with great lumen maintenance



BASIC PARAMETERS

Size: 5000X14mm
LED/unit: 6/12 LED
Input Voltage: DC12/24V
LED Qty: 60 LED/m
Max Run: 3/5m

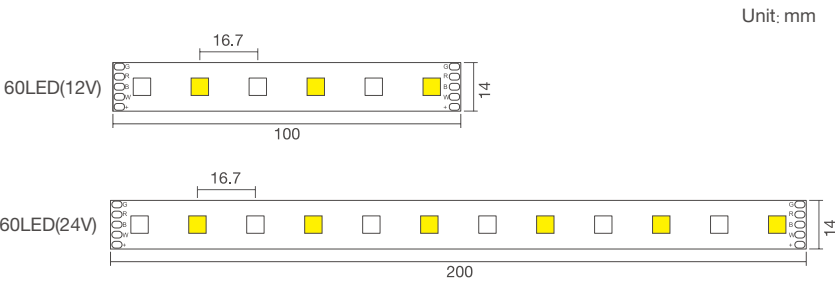

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-50AA-60-12/24-RGB+W	12/24V DC	>80	W	4000K	770	107	7.2
			R	620-630nm	60	25	2.4
			G	515-530nm	24	10	2.4
			B	460-470nm	101	42	2.4
			RGBW	/	950	19	14.4

ALUMINUM PROFILE

JOINT



SL211416-A



SL192016-A



SL202017-A



RGBW14W1



RGBW14W0



RGBW14W2



RGB+W





TN-50AA-120-24-RGB+W

- 5050 3in1 RGB + 5050W
- Small in size, good flexibility and suitable for curved surface
- Long lifespan with great lumen maintenance
- Create rich color effects via controller



BASIC PARAMETERS


Size: 5000X20mm
LED/unit: 12 LED
Input Voltage: DC24V
LED Qty: 120 LED/m
Max Run: 4m

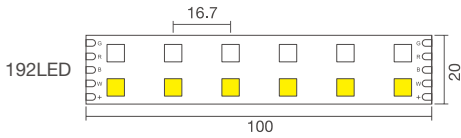


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-50AA-120-24-RGB+W	24V DC	>90	W	3000K	1136	79	14.4
			R	620-625nm	172	36	4.8
			G	515-520nm	341	72	4.8
			B	460-470nm	80	17	4.8
			RGBW	5363K	1712	59	28.8


ALUMINUM PROFILE




SL302027-A



XT303025-A



SL261822-A



SL262624-A



RGBWN



TN-S5050-60-24-RGBWN

- High efficacy 5050 LED
- 5in1 LED (red, green, blue, white and warm white)
- Can create rich lighting effects
- Available of dimming




BASIC PARAMETERS

Size:	5000X12mm
LED/unit:	6LED
Input Voltage:	DC24V
LED Qty:	60LED/m
Max Run:	3.5m

PROFILE DRAWINGS

Unit: mm




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-S5050-60-24-RGBWN	24V DC	>80	WW	2300-2600K	193	80	2.4
			NW	6500-7000K	231	97	2.4
TN-S5050-60-24-RGBWN	24V DC	/	R	615-625nm	82	/	2.4
			G	515-525nm	175	/	2.4
			B	460-470nm	39	/	2.4
			RGBWN	/	700	/	12.0

ALUMINUM PROFILE



SL202017-A



SL561512-A



RGBWN




TN-566-180-24-RGB+W+N

- 5050 and 2016 LED
- Cuttable every 10cm
- Small size for convenient installation
- Can create rich lighting effects via controller
- Long lifespan with great lumen maintenance
- Available of red, green, blue, warm white and white




BASIC PARAMETERS

Size:	5000X12mm
LED/unit:	18LED
Input Voltage:	DC24V
LED Qty:	180LED/m
Max Run:	5m



PROFILE DRAWINGS

Unit: mm



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
TN-566-180-24-RGB+W+N	24V DC	>90	WW	2000K	152	60	2.4
			NW	6500K	223	86	2.4
TN-566-180-24-RGB+W+N	24V DC	/	R	615-625nm	67	/	2.4
			G	515-520nm	118	/	2.4
			B	460-465nm	28	/	2.4
			RGBWN	/	570	/	12.0

ALUMINUM PROFILE




SL211416-A



SL192016-A



SL202017-A

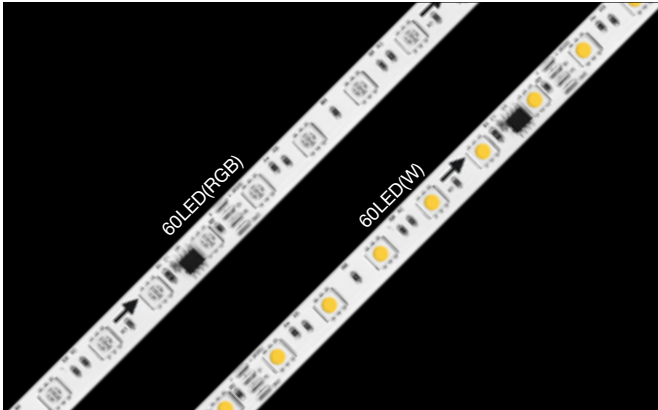

DN-5050A-60-12/24-RGB/W-D

- Support SPI control
- Flexible and cuttable
- Good stability and reliability performance
- Create rich lighting effects via controller
- Long lifespan with great lumen maintenance




BASIC PARAMETERS


Unit: mm

Size:	5000X12mm	5000X12mm	5000X12mm
LED/unit:	3/6LED	3/6LED	3/6LED
Input Voltage:	DC12V	DC24V	DC24V
LED Qty:	60LED/m	60LED/m	60LED/m
Max Run:	2.5m(RGB/W)	4m(RGB)	3.5m(W)

60LED(12V)



60LED(24V)



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
DN-5050A-60-12/24-RGB-D	12/24V DC	/	R	615-630nm	47	11.5	4.08
			G	515-530nm	100	24.5	4.08
			B	460-470nm	23	5.5	4.08
			RGB	100000K+	245	20	12.4
DN-5050A-60-12/24-W-D	12/24V DC	>80	W	4000K	1337	103	12.96

DIGITAL CONTROLLER


ALUMINUM PROFILE



SP-105E



BV-502



SL251512-A



SL161610-A



SL161610-B



SL171512-A



DN-5050C-XXX-12-RGB-D

- Ultra high cost-effectiveness.
- Constant current design, good lumen maintenance;
- External controllers can be connected to achieve various lighting effects;
- Do not support PWM dimming. Suggested controller: SP105E/MR-502;
- Cuttable and support customization;




BASIC PARAMETERS


Unit: mm

Size:	5000X10mm
LED/unit:	3LED
Input Voltage:	DC 12V
LED Qty:	30/48/60 LED/m
Max Run:	9/6/6m


30LED



48LED



60LED



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
DN-5050C-30-12-RGB-D	12V DC	R	620-625nm	42	16	2.64
		G	517-525nm	138	52	2.64
		B	465-470nm	30	11	2.64
		RGB	\	201	33	6.00
DN-5050C-48-12-RGB-D	12V DC	R	620-625nm	67	15	4.22
		G	517-525nm	221	52	4.22
		B	465-470nm	48	11	4.22
		RGB	\	320	33	9.60
DN-5050C-60-12-RGB-D	12V DC	R	620-625nm	75	14	5.28
		G	517-525nm	259	49	5.28
		B	465-470nm	55	10	5.28
		RGB	\	387	32	12.00

DIGITAL CONTROLLER


ALUMINUM PROFILE



SP-105E



BV-502



SL251512-A



SL161610-A



SL161610-B



SL171512-A



DN-5050C-XXX-24-RGB-D


- Ultra high cost-effectiveness.
- Constant current design, good lumen maintenance;
- External controllers can be connected to achieve various lighting effects;
- Do not support PWM dimming. Suggested controller: SP105E/MR-502;
- Cuttable and support customization;



Unit: mm

BASIC PARAMETERS

Size: 5000X10mm
LED/unit: 6LED
Input Voltage: DC 24V
LED Qty: 30/48/60 LED/m
Max Run: 10/9/8m

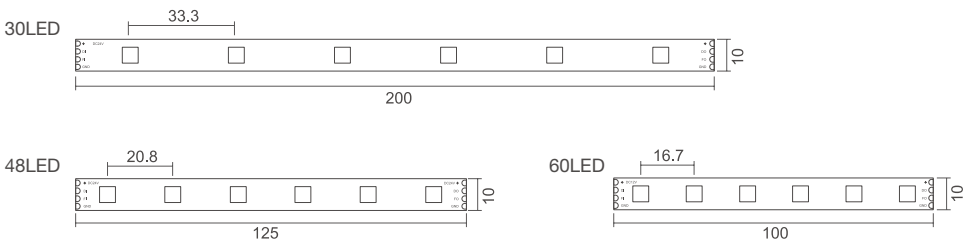

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
DN-5050C-30-24-RGB-D	24V DC	R	620-625nm	41	15	2.64
		G	517-525nm	127	48	2.64
		B	465-470nm	27	10	2.64
		RGB	\	194	32	6.00
DN-5050C-48-24-RGB-D	24V DC	R	620-625nm	59	14	4.22
		G	517-525nm	197	46	4.22
		B	465-470nm	43	10	4.22
		RGB	\	301	31	9.60
DN-5050C-60-24-RGB-D	24V DC	R	620-625nm	72	13	5.28
		G	517-525nm	247	46	5.28
		B	465-470nm	54	10	5.28
		RGB	\	375	31	12.00

DIGITAL CONTROLLER


ALUMINUM PROFILE



SP-105E



BV-502



SL251512-A



SL161610-A



SL161610-B



SL171512-A



DN-2835-120-24-W-D



- Pixel-controlled white light strip;
- Single IC fails does not affect other parts;
- Adopt flexible FPC material, with stable performance;
- External controllers can be connected to achieve various lighting effects such as jump changes, gradients, and flashing;
- Cuttable and support customization;



Unit: mm

BASIC PARAMETERS

Size: 5000X10mm
LED/unit: 15LED
Input Voltage: DC 24V
LED Qty: 120 LED/m
Max Run: 7m

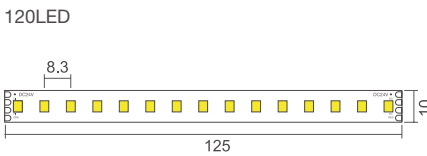

OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
DN-2835-120-24-W-D	24V DC	>80	2700K	614	64	9.6
			3000K	634	66	
			4000K	652	68	
			5000K	653	68	
			6500K	672	70	

DIGITAL CONTROLLER

ALUMINUM PROFILE



SP-105E



SL251512-A



SL161610-A



SL161610-B



SL171512-A





DN-S43528-XXX-XX-WN-D

- Support breakpoint resume, and one section's failure won't affect the rest;
- Create running chasing moving effect via controller;
- Good lumen maintenance, long life span;
- Do not support PWM dimming, suggested controller: SP105E/MR-502;
- Customization available;



BASIC PARAMETERS

Size: 5000X10mm
LED/unit: 6LED
Input Voltage: DC 24V
LED Qty: 120 LED/m
Max Run: 6m



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
DN-S43528-120-24-WN-D	24V DC	>95	W: 2200K	338	34	9.72
		>95	N: 6500K	428	44	9.72
		\	W+N: --	762	46	16.44

DIGITAL CONTROLLER


ALUMINUM PROFILE



SP-105E



BV-502



SL251512-A



SL161610-A



SL161610-B



SL171512-A





DN-N5-120-24-RGB-DD

- Adopt flexible FPC material, with stable performance;
- Pre-cut marks for easy on-site trimming and installation;
- With an external controllers, to achieve a variety of lighting effects like colors chasing,racing, flowing;
- Low light attenuation, long lifespan;
- Each LED can be controlled individually.
- With Reverse Voltage Protectio;



BASIC PARAMETERS

Size: 5000X10mm
LED/unit: 6LED
Input Voltage: DC 24V
LED Qty: 120 LED/m
Max Run: 3m



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
DN-N5-120-24-RGB-DD	24V DC	R	615-630nm	78	6	12.24
		G	515-530nm	282	23	
		B	460-470nm	64	5	
		RGB	\	435	36	

DIGITAL CONTROLLER


ALUMINUM PROFILE



SP-105E



BV-502



SL251512-A



SL161610-A



SL161610-B



SL171512-A



DMXN-5050A-XX-XX-W

- Flexible and cuttable
- Create rich lighting effects via controller
- Great lumen maintenance
- Adopt the DMX512 (1990) signal protocol




BASIC PARAMETERS

Size:	5000X12mm
LED/unit:	3/6LED
Input Voltage:	DC12/24V
LED Qty:	60 LED/m
Max Run:	2.5/3.5m

PROFILE DRAWINGS

Unit: mm



OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	CCT	LM/m	LM/W	W/m
DMXN-5050A-60-12-W	12V DC	>80	4000K	1321	86	15.36
DMXN-5050A-60-24-W	24V DC	>80	4000K	1337	87	15.36

DIGITAL CONTROLLER

ALUMINUM PROFILE



BV-502



SL251512-A



SL161610-A



SL161610-B



SL171512-A




DMXN-5050-XX-XX-RGB

- Flexible and cuttable
- Create rich lighting effects via controller
- Great lumen maintenance
- Adopt the DMX512 (1990) signal protocol
- Multiple specifications, support customization




BASIC PARAMETERS

Size:	5000X12mm	5000X12mm
LED/unit:	3LED	3/6LED
Input Voltage:	DC12V	DC12/24V
LED Qty:	30 LED/m	60 LED/m
Max Run:	4m	2.5/3.5m



PROFILE DRAWINGS

Unit: mm



OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
DMXN-5050-30-12-RGB	12V DC	/	R	615-630nm	52	15.5	3.36
			G	515-530nm	76	22.5	3.36
			B	460-470nm	20	5.8	3.36
			RGB	100000K	153	19.9	7.68
DMXN-5050-60-12/24-RGB	12/24V DC	/	R	615-630nm	104	15.5	6.72
			G	515-530nm	152	22.5	6.72
			B	460-470nm	39	5.8	6.72
			RGB	100000K	306	19.9	15.36

DIGITAL CONTROLLER

ALUMINUM PROFILE



BV-502



SL251512-A



SL161610-A



SL161610-B



SL171512-A




DMXN-F5050-XX-XX-RGBW

- Flexible and cuttable
- Create rich lighting effects via controller
- Great lumen maintenance
- Adopt the DMX512 (1990) signal protocol
- Multiple specifications, support customization




BASIC PARAMETERS

Size:	5000X12mm	5000X12mm
LED/unit:	6LED	3/6LED
Input Voltage:	DC12V	DC12/24V
LED Qty:	30 LED/m	60 LED/m
Max Run:	3.5m	2/4.5m



PROFILE DRAWINGS

Unit: mm



OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Light Color	CCT/Wavelength	LM/m	LM/W	W/m
DMXN-F5050-30-12-RGBW	12V DC	>80	W	2700-6500K	134-202	40-60	3.36
			R	615-630nm	52	15.5	3.36
			G	515-530nm	119	35.5	3.36
			B	460-470nm	29	8.6	3.36
			RGB	100000K	295-443	30-45	9.84
DMXN-F5050-60-12/24-RGBW	12V DC	>80	W	2700-6500K	269-403	40-60	6.72
			R	615-630nm	105	15.5	6.72
			G	515-530nm	238	35.5	6.72
			B	460-470nm	58	8.6	6.72
			RGB	100000K	590-885	30-45	19.68

DIGITAL CONTROLLER

ALUMINUM PROFILE



BV-502



SL251512-A



SL161610-A



SL161610-B



SL171512-A

FLEXIBLE PANEL

SERIES

WHITE / TUNABLE WHITE
RGB / RGBW / RGB+WN / SPI




Light chasing, color
gradient, animation video
etc. can be realized



Ideal for the backlight of the
showcase, signage light box.
background wall, and ceiling light



WHITE

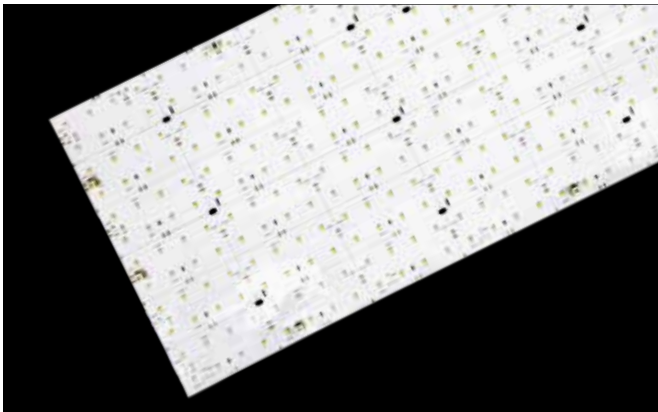


H150-W-FN-H2835T-200-24

- Adopt single-sided FPC, flexible and cuttable
- Long run with no lumen drop
- Create rich lighting effects via controller
- Support PWM, DMX, 0-10V, DALI dimming




BASIC PARAMETERS

Size:	480X240mm
Input Voltage:	DC24V
LED Qty:	200 LED/pc
Max Run:	4pcs



PROFILE DRAWINGS

Unit: mm

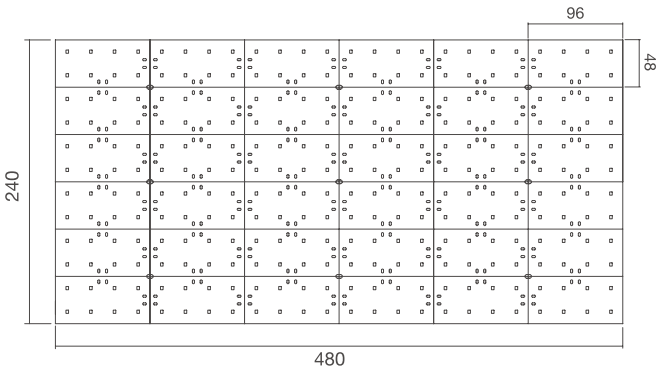

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT	LM/pcs	LM/W	W/pcs
H150-W-FN-H2835T-200-24	24V DC	>90/95	W	4000K	2628/2124	146/118	18

ACCESSORIES



XH-2Y Power cable




XH-2Y Joint line



Screw



WHITE

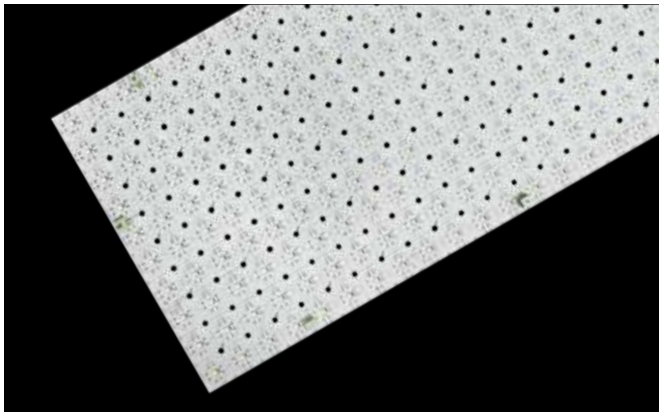


H150-W-FN-HG2835C+-XXX-24

- Single LED cut
- High efficiency above 140lm/W
- SDCM≤5, CRI≥90
- Support PWM, DMX, 0-10V and DALI dimming.
- Multiple specifications, customization available.





BASIC PARAMETERS

Size:	480x240mm	610x305mm
Input Voltage:	DC24V	DC24V
LED Qty:	200 LED/pc	288 LED/pc
Max Run:	7pcs	5pcs



PROFILE DRAWINGS

Unit: mm

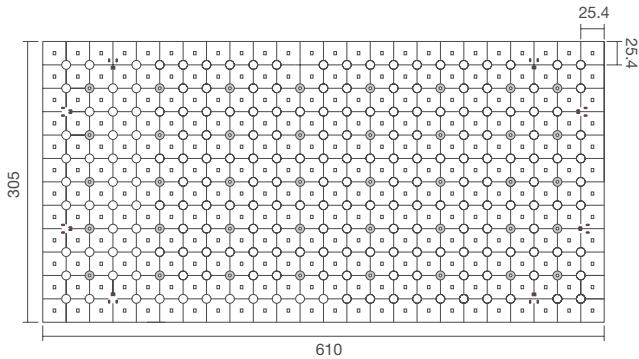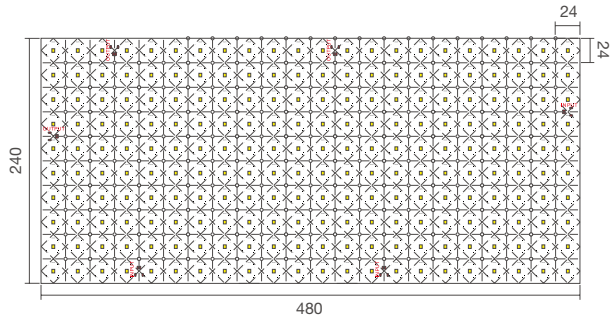

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	Light Color	CCT	LM/pcs	LM/W	W/pcs
H150-W-FN-H2835C+-200-24	24V DC	>90	W	4000K	2330	152	15.36
H150-W-FN-H2835C+-288-24	24V DC	>90	W	4000K	3300	150	22.00

ACCESSORIES



XH-2Y Power cable




XH-2Y Joint line



Screw




TUNABLE WHITE

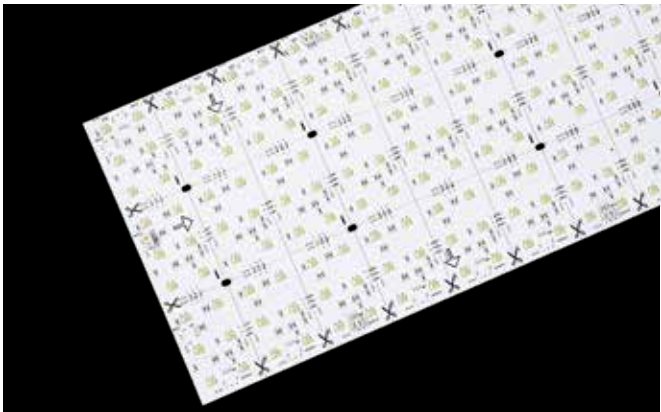


H150-WN-TN-2835-324-24

- Adopt single-sided FPC, flexible and cuttable
- Long run with no lumen drop
- Lighting effects and brightness adjustable via build-in controller
- IP22&IP64 available
- CCT support customization




BASIC PARAMETERS

Size: 480X240mm
Input Voltage: DC24V
LED Qty: 324 LED/pc
Max Run: 4pcs



PROFILE DRAWINGS

Unit: mm

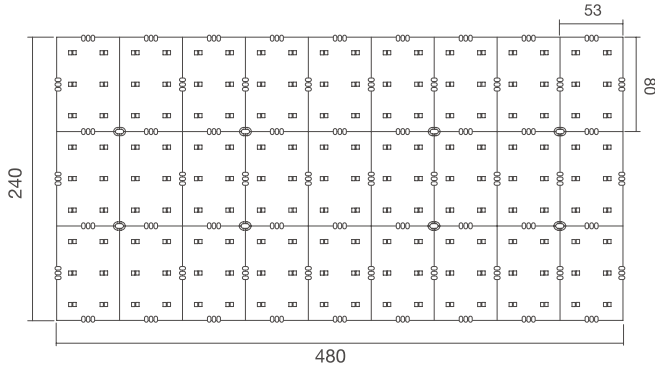

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT	LM/pcs	LM/W	W/pcs
H150-WN-TN-2835-324-24	24V DC	>80	W	2700K	1425	110	13
			N	6500K	1555	120	13
			W+N	4500K	2980	115	26

ACCESSORIES



XH-3Y Power cable




XH-3Y Jumper



Screw



RGB

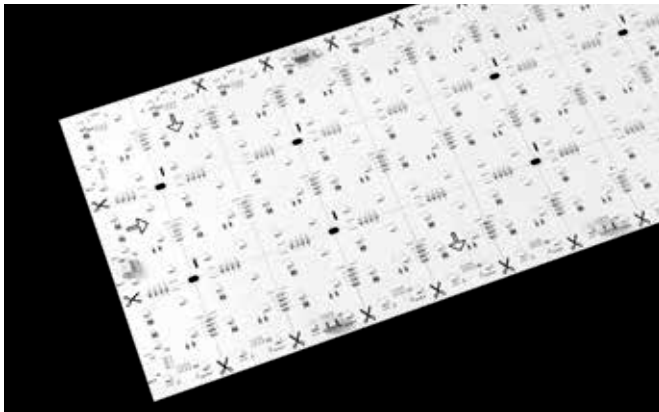


H150-RGB-TN-4040-162-24

- RGB in one 4040 LED
- Satisfy high density and slim application requirements
- Flexible PCB for proper bending and versatile use
- Long service life with great lumen maintenance
- Achieve rich lighting effects via controller




BASIC PARAMETERS

Size: 480X240mm
Input Voltage: DC24V
LED Qty: 162 LED/pc
Max Run: 4pcs



PROFILE DRAWINGS

Unit: mm

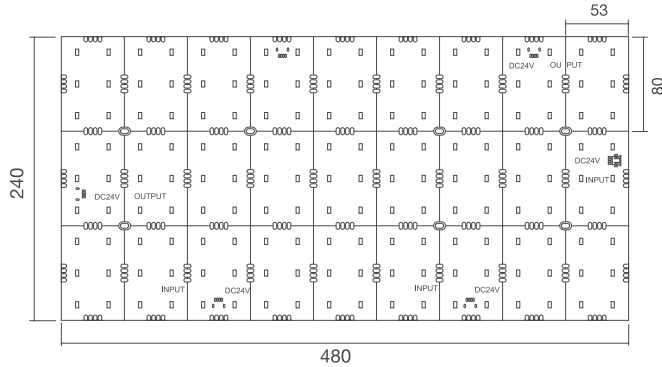

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Color Available	LM/pcs	LM/W	W/pcs
H150-RGB-TN-4040-162-24	24V DC	/	R	615-630nm	272	28	9.72
			G	515-530nm	564	58	9.72
			B	460-470mn	117	12	9.72
			RGB	100000K	962	33	29.16

ACCESSORIES



XH-4Y Power cable




XH-4Y Jumper



Screw



RGBW(4IN1)

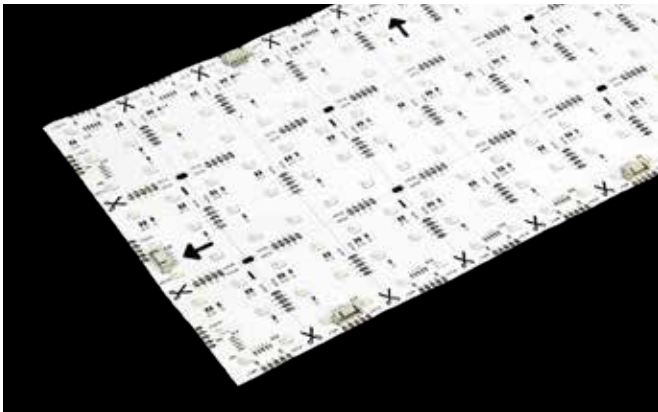


H150-RGBW-TN-F5050-162-24

- 4in1 with colors of red, green, blue and white
- Flexible and cuttable
- Long lifespan with great lumen maintenance
- Create rich lighting effects via controller
- Support PWM, 0~10V, DALI and DMX dimming




BASIC PARAMETERS

Size: 480X240mm
Input Voltage: DC24V
LED Qty: 162 LED/pc
Max Run: 4pcs



PROFILE DRAWINGS

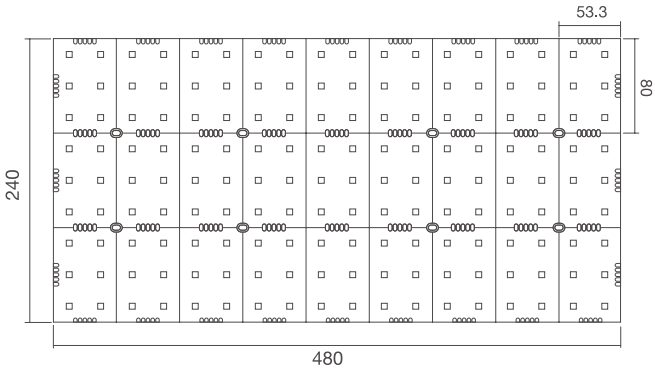

Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Color Available	LM/pcs	LM/W	W/pcs
H150-RGBW-TN-F5050-162-24	24V DC	>80	W	3000K	583	90	6.48
			R	620-630nm	169	26	6.48
			G	515-530nm	480	74	6.48
			B	460-470mn	97	15	6.48
			RGBW	100000K	1218	47	25.92

ACCESSORIES



XH-4Y Power cable




XH-4Y Jumper



Screw



RGB+W

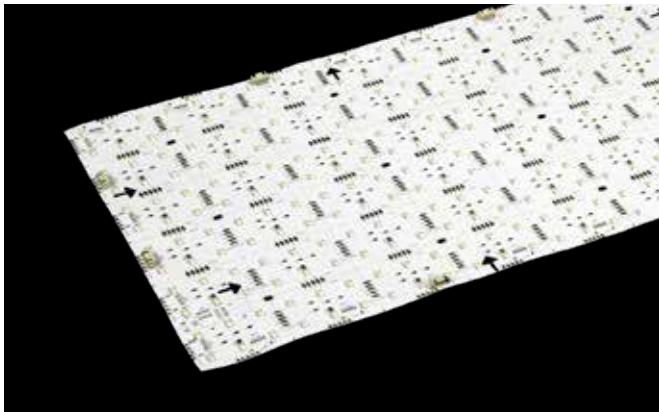


H150-RGB+W-TN-42T-576-24

- Good flexibility and suitable for curved surface
- Long lifespan with great lumen maintenance
- Create rich color effects via controller
- Can be cut to any shapes




BASIC PARAMETERS

Size: 610X305mm
Input Voltage: DC24V
LED Qty: 576 LED/pc
Standard run: 2pcs



PROFILE DRAWINGS

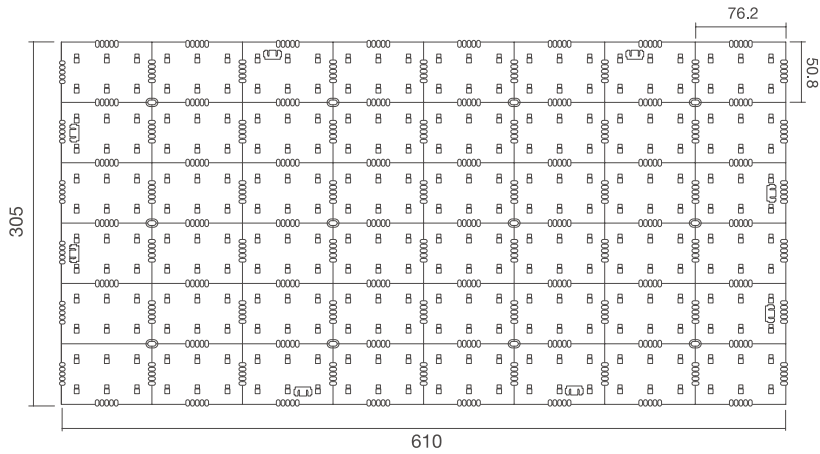

Unit: mm

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Color Available	LM/pcs	LM/W	W/pcs
H150-RGB+W-TN-42T-576-24	24V DC	>90	W	4000K	1094	95	11.5
			R	620-630nm	345	30	11.5
			G	515-530nm	979	85	11.5
			B	460-470mn	207	18	11.5
			RGBW	100000K	2580	56	46.1

ACCESSORIES



XH-5Y Power cable




XH-5Y Jumper



Screw



RGB+WN

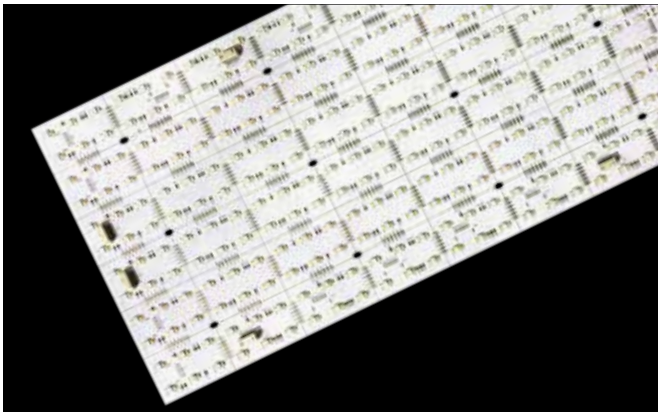


H150-RGB+W+N-TN-522-864-24

- Good flexibility and suitable for curved surface
- Can be cut to any shapes
- Multiple specifications, support customization




BASIC PARAMETERS

Size: 610X305mm
Input Voltage: DC24V
LED Qty: 864 LED/pc
Standard run: 2pcs



PROFILE DRAWINGS

Unit: mm

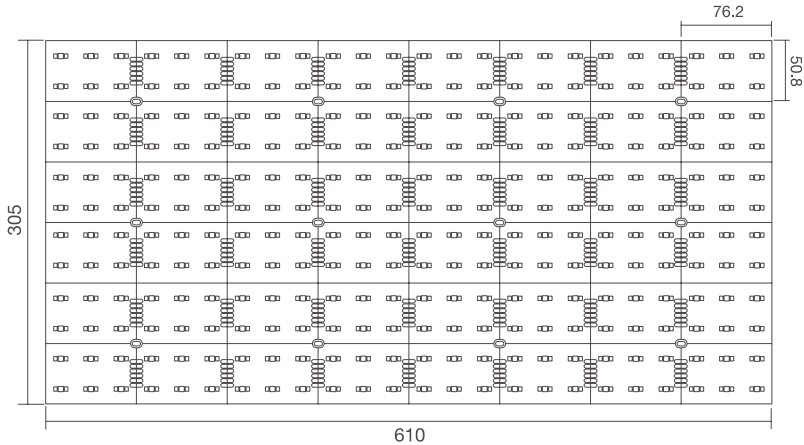

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Color Available	LM/pcs	LM/W	W/pcs
H150-RGB+W+N-TN-522-864-24	24V DC	>90	W	2700K	1047	91	11.52
			N	9000K	1240	108	11.52
H150-RGB+W+N-TN-522-864-24	24V DC	/	R	620-630nm	245	30	8.06
			G	520-535nm	981	121	8.06
			B	460-475mn	196	24	8.06
			WN	/	2207	95	23.04
			RGB	/	1368	56	24.19
			RGB+WN	/	3364	71	47.23

ACCESSORIES




XH-6Y Jumper



Screw



RGB+W

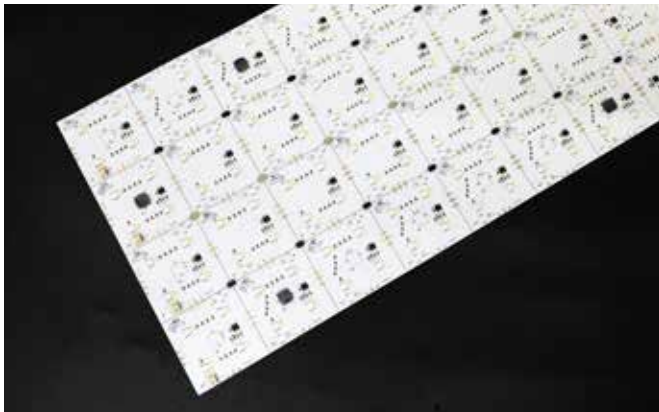


H150-D4-DN-52-256-24-RGB+W

- 8 LEDs per cutting units
- Support SPI signal control
- Controller recommended SP105E/MR502
- Adopt flexible FPC material, suitable for curved mounting surface
- Multiple specification, support customization




BASIC PARAMETERS

Size: 480x240mm
Input Voltage: DC24V
LED Qty: 256 LED/pc
Max Run: 4pcs



PROFILE DRAWINGS


Unit: mm

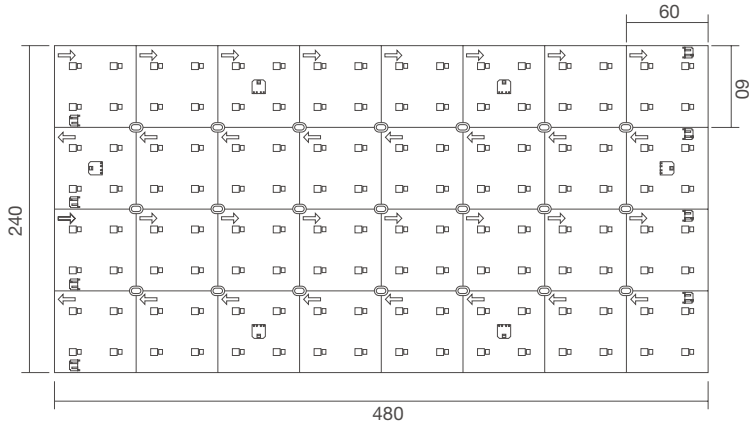


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Light Color	CCT/Color Available	LM/pcs	LM/W	W/pcs
H150-D4-DN-52-256-24-RGB+W	24V DC	>90	W	4000K	281	28	10
			R	620-630nm	76	7	10
			G	515-530nm	206	20	10
			B	460-470nm	48	4	10
			RGB	10000K	339	16	20
			RGB+W	\	620	24	25

ACCESSORIES



PH2.0-Y Connector



HRB Connector



Screw



XLG-75

Input Voltage:100 ~ 305VAC
Output Voltage:12/24 VDC
Power:96W
Certificates:cRUus,CE,RoHS
Size:220x96x38.8mm



XLG-100

Input Voltage:90 ~ 305 VAC
Output Voltage:12/24/36/48 VDC
Power:120W
Certificates:cRUus,CE,RoHS
Size:220x96x38.8mm



XLG-150

Input Voltage:90~305 VAC
Output Voltage:12/24/36/48 VDC
Power:150W
Certificates:cRUus,CE,RoHS
Size:220x96x38.8mm



HLG-100H

Input Voltage:90~305 VAC
Output Voltage:24/36/48 VDC
Power:96W
Certificates:cRUus,CE,RoHS
Size:220x96x38.8mm



HLG-120H

Input Voltage:90 ~ 305 VAC
Output Voltage:12/24/36/48 VDC
Power:120W
Certificates:cRUus,CE,RoHS
Size:220x96x38.8mm



HLG-150H

Input Voltage:90~305 VAC
Output Voltage:12/24/36/48 VDC
Power:150W
Certificates:cRUus,CE,RoHS
Size:220x96x38.8mm



HLG-185H

Input Voltage:90 ~ 305 VAC
Output Voltage:12/24/36/48 VDC
Power:185W
Certificates:cRUus,CE,RoHS
Size:220x96x38.8mm



HLG-240H

Input Voltage:90~305 VAC
Output Voltage:12/24/36/48 VDC
Power:240W
Certificates:cRUus,CE,RoHS
Size:220x96x38.8mm



HLG-320H

Input Voltage:90 ~ 305 VAC
Output Voltage:12/24/36/48 VDC
Power:320W
Certificates:cRUus,CE,RoHS
Size:220x96x38.8mm

Plug-in IP22 constant Voltage Series



BV-W36

Input vol: 100-240 VAC
Function Mode: 56 / 60Hz
Output: 12VDC-3A / 24VDC-1.5A
Power: 36W
Output Plug: DC
Dimension: 85*48*30mm
Certificate: cRUus,CE,RoHs
Class II



BV-W24

Input vol: 100-240 VAC
Function Mode: 56 / 60Hz
Output: 12VDC-2A / 24VDC-1A
Power: 24W
Output Plug: DC
Dimension: 85*48*30mm
Certificate: cRUus,CE,RoHs
Class II

Desktop Constant Voltage Series

STANDARD AVAILABLE
US / EU / UK / AU / KC / PS / 3C
Other output power are available:12W 24W 48W 90W



BV-D60

Input vol: 100-240 VAC
Function Mode: 56 / 60Hz
Output: 12VDC-5A / 24VDC-2.5A
Power: 60W
Output Plug: DC
Dimension: 114*50*30mm
Certificate: cRUus,CE,RoHs
Class II



BV-D100

Input vol: 100-240 VAC
Function Mode: 56 / 60Hz
Output: 12VDC-8.33A / 24VDC-4.17A
Power: 100W
Output Plug: DC
Dimension: 140*62*35mm
Certificate: cRUus,CE,RoHs
Class II

Single Zone Sync Control



BV-350RF

Input Voltage:	DC12V-DC24V
Output current:	6A×3CH
Output power:	216W(12V)/440W(24V)
Scale levels:	4096 levels×3
Mode:	37modes
Speed level:	16 levels
Brightness level:	16 levels
Remote control distance:	30m with obstacle, 60m without obstacle
Dimension:	L176×W46×H30(mm)



BV3060 SIGNAL AMPLIFIER

Input Singal:	PWM
Input Vol:	5-24VDC
Max Output Power:	5V=75W,12V=180W,24V=360W
Max Current Load:	5A×3CH



BV-311 DIMMER

Input Voltage:	DC12V-DC24V
Max current load:	8A/CH×3
Max output power:	290W(12V)/580W(24V)
Scale level:	4096 levels×3
Dimension:	L165×W56×H36(mm)
Package Size:	L170×W60×H40(mm)



T1

Working Vol.: 3V(CR2032)
Working Frequency: 433.92MHz
Remote Distance: 40m-50m
Working Temperature: -20°C-55°C
Size: L106×W56×H9(mm)

R3

Working Vol.: DC12V-DC24V
Output Current: Max 3A×3CH
Output Power: Max 108W(12V)/216W(24V)
Working Temp: -30°C-55°C
Dimensions: L135×W30×H20(mm)



T2

Working Vol.: 3V(CR2032)
Working Frequency: 433.92MHz
Remote Distance: 40m-50m
Working Temperature: -20°C-55°C
Size: L106×W56×H9(mm)

R3

Working Vol.: DC12V-DC24V
Output Current: Max 3A×3CH
Output Power: Max 108W(12V)/216W(24V)
Working Temp: -30°C-55°C
Dimensions: L135×W30×H20(mm)



T3

Working Vol.: 3V(CR2032)
Working Frequency: 433.92MHz
Remote Distance: 40m-50m
Working Temperature: -20°C-55°C
Size: L106×W56×H9(mm)

R4

Working Vol.: DC12V-DC24V
Output Current: Max 5A×4CH
Output Power: Max 240W(12V)/480W(24V)
Working Temp: -30°C-55°C
Dimensions: L176×W46×H30(mm)



T4

Working Vol.: 3V(CR2032)
Working Frequency: 433.92MHz
Remote Distance: 40m-50m
Working Temperature: -20°C-55°C
Size: L106×W56×H9(mm)

R4

Working Vol.: DC12V-DC24V
Output Current: Max 5A×4CH
Output Power: Max 240W(12V)/480W(24V)
Working Temp: -30°C-55°C
Dimensions: L176×W46×H30(mm)



T5

Working Vol.: 3V(CR2032)
Working Frequency: 433.92MHz
Remote Distance: 40m-50m
Working Temperature: -20°C-55°C
Size: L106×W56×H9(mm)

R4

Working Vol.: DC12V-DC24V
Output Current: Max 5A×4CH
Output Power: Max 240W(12V)/480W(24V)
Working Temp: -30°C-55°C
Dimensions: L176×W46×H30(mm)

Digital Controller

SP105E Digital Controller

Working temperature : -20°C~60°C;
Working Voltage : DC5V~24V;
Working Current : 28mA~40mA;
Remote distance : 20 Meters;
Product size : 85mm*45mm*22mm;



BV-201 SPI Digital Controller

Working temperature : DC5V-DC24V;
Output current: Max 10A
Output power: 50W(5V)/120W(12V)/240W(24V)
Remote control distance: 30-50m
Dimension: L135×W30×H20(mm)



BV-502 Digital Controller

Input Vol : AC 12V/ DC 7.5V-24V/ DC 5V
Rated Power : 2W
Programmable
Gray Level Control : 32-65536 grade
SD Card Capacity : 4GB(Factory Standard)
Support the majority of serial driver LED driver IC



CABLE JOINER

H1



Cable Joiner in 1PIN
Working Vol.:0-36V
Working Current:0-8A
Cable Size:AWG18-22#(or<Φ2.1mm)

H2



Cable Joiner in 2PIN
Working Vol.:0-36V
Working Current:0-8A
Cable Size:AWG18-22#(or<Φ2.1mm)

T1



T Cable Joiner in 1PIN
Working Vol.:0-36V
Working Current:0-8A
Cable Size:AWG18-22#(or<Φ2.1mm)

T2



T Cable Joiner in 2PIN
Working Vol.:0-36V
Working Current:0-8A
Cable Size:AWG18-22#(or<Φ2.1mm)

IP22 TAPE LIGHT HOLDER

FN-08MC



IP22 Tape Light Holder
Available Color:Transparent,White
Applied:8mm width FPC

FN-10MC



IP22 Tape Light Holder
Available Color:Transparent,White
Applied:10mm width FPC

FN-12MC



IP22 Tape Light Holder
Available Color:Transparent,White
Applied:12mm width FPC



IP65(IP44) GLUE COATING TAPE LIGHT HOLDER

FWS-08MC



IP65(IP44)Tape Light Holder
Available Color: Transparent,White
Applied: 8mm width FPC

FWS-10MC



IP65(IP44)Tape Light Holder
Available Color: Transparent,White
Applied:10mm width FPC



FAST CONNECTOR-FARA SERIES

FN-W8CF2  IP22 Joiner for Cable to Tape Light in 2PIN Apply:8mm-Signle Color Tape Light Working Vol.:0-36V Working Current:0-3A Cable Size:AWG18-22#(or<Φ2.1mm)	FWS-W8CF2  IP65(IP44,glue coated) Joiner for Cable to Tape Light in 2PIN Apply:8mm-Signle Color Tape Light Working Vol.:0-36V Working Current:0-3A Cable Size:AWG18-22#(or<Φ2.1mm)	FN-W10CF2  IP22 Joiner for Cable to Tape Light in 2PIN Apply:10mm-Signle Color Tape Light Working Vol.:0-36V Working Current:0-3A Cable Size:AWG18-22#(or<Φ2.1mm)	FWS-W10CF2  IP65(IP44,glue coated) Joiner for Cable to Tape Light in 2PIN Apply:10mm-Signle Color Tape Light Working Vol.:0-36V Working Current:0-3A Cable Size:AWG18-22#(or<Φ2.1mm)
FN-W10CF3  IP22 Joiner for Cable to Tape Light in 3PIN Apply:10mm-Dual White Tape Light Working Vol.:0-36V Working Current:0-3A Cable Size:AWG18-22#(or<Φ2.1mm)	FWS-W10CF3  IP65(IP44,glue coated) Joiner for Cable to Tape Light in 3PIN Apply:10mm-Dual White Tape Light Working Vol.:0-36V Working Current:0-3A Cable Size:AWG18-22#(or<Φ2.1mm)	FN-W10CF4  IP22 Joiner for Cable to Tape Light in 4PIN Apply:10mm-RGB Tape Light Working Vol.:0-36V Working Current:0-3A Cable Size:AWG18-22#(or<Φ2.1mm)	FWS-W10CF4  IP65(IP44,glue coated) Joiner for Cable to Tape Light in 4PIN Apply:10mm-RGB Tape Light Working Vol.:0-36V Working Current:0-3A Cable Size:AWG18-22#(or<Φ2.1mm)
FWT-W10CF2  IP67(Silicone Sleeve Encased) Joiner for Cable to Tape Light in 2PIN Apply:10mm-Single Color Tape Light Working Vol.:0-36V Working Current:0-3A Cable Size:AWG18-22#(or<Φ2.1mm)	FWT-W10CF4  IP67(Silicone Sleeve Encased) Joiner for Cable to Tape Light in 4PIN Apply:10mm-RGB Tape Light Working Vol.:0-36V Working Current:0-3A Cable Size:AWG18-22#(or<Φ2.1mm)	FWS-W12CF5  IP65 Joiner for Cable to Type Light in 5PIN Apply: 12mm-RGBW/RGB+W Tape Light Working Vol.:0-36V Working Current: 5A Cable size: AWG22-AWG18 (Φ1.5 mm~Φ 2.1mm)	

JOINER-INPUT TAPE TO TAPE

FN-W8FF2  IP22 Joiner for tape light to tape light in 2PIN Apply:8mm-Signle Color Tape Light Working Vol.:0-36V Working Current:0-3A	FWS-W8FF2  IP65(IP44,glue coated) Joiner for tape light to tape light in 2PIN Apply:8mm-Signle Color Tape Light Working Vol.:0-36V Working Current:0-3A	FN-W10FF2  IP22 Joiner for tape light to tape light in 2PIN Apply:10mm-Signle Color Tape Light Working Vol.:0-36V Working Current:0-3A	FWS-W10FF2  IP65(IP44,glue coated) Joiner for tape light to tape light in 2PIN Apply:10mm-Signle Color Tape Light Working Vol.:0-36V Working Current:0-3A
FN-W10FF3  IP22 Joiner for Cable to Tape Light in 3PIN Apply:10mm-Dual White Tape Light Working Vol.:0-36V Working Current:0-3A	FWS-W10FF3  IP65(IP44,glue coated) Joiner for Cable to Tape Light in 3PIN Apply:10mm-Dual White Tape Light Working Vol.:0-36V Working Current:0-3A	FN-W10FF4  IP22 Joiner for Cable to Tape Light in 4PIN Apply:10mm-RGB Tape Light Working Vol.:0-36V Working Current:0-3A	FWS-W10FF4  IP65(IP44,glue coated) Joiner for tape light to tape light in 4PIN Apply:10mm-RGB Tape Light Working Vol.:0-36V Working Current:0-3A
FWT-W10FF2  IP67(Silicone Sleeve Encased) Joiner for Cable to Tape Light in 2PIN Apply:10mm-Single Color Tape Light Working Vol.:0-36V Working Current:0-3A	FWT-W10FF4  IP67(Silicone Sleeve Encased) Joiner for Cable to Tape Light in 4PIN Apply:10mm-RGB Tape Light Working Vol.:0-36V Working Current:0-3A	FWS-W12FF5  IP65 Joiner for Type Light to Type Light in 5PIN Apply: 12mm-RGBW/RGB+W Tape Light Working Vol.:0-36V Working Current: 5A Cable size: AWG22-AWG18 (Φ1.5 mm~Φ 2.1mm)	

FAST CONNECTOR--SAAR SERIES

Input Cable

S8W1	S10W1	D10W1	RGB10W1	RGBW14W1
				
2PIN-input Cable for LED single color tape light	2PIN-input Cable for LED single color tape light	3PIN-input Cable for LED Dual White tape light	4PIN-input Cable for LED RGB tape light	5PIN-input Cable for LED RGBW tape light
Applied: 8mm width Cable Lenght: 150mm	Applied: 10mm width Cable Lenght: 150mm	Applied: 10mm width Cable Lenght: 150mm	Applied: 10mm width Cable Lenght: 150mm	Applied: 14mm width Cable Lenght: 150mm

EXTENSION CABLE


S8W2	S10W2	D10W2	RGB10W2	RGBW14W2
				
2PIN-Extension cable for LED single color tape light	2PIN-Extension cable for LED single color tape light	3PIN-Extension cable for LED Dual White tape light	4PIN-Extension cable for LED RGB tape light	5PIN-Extension cable for LED RGBW tape light
Applied: 8mm width Cable Lenght: 150mm	Applied: 10mm width Cable Lenght: 150mm	Applied: 10mm width Cable Lenght: 150mm	Applied: 10mm width Cable Lenght: 150mm	Applied: 14mm width Cable Lenght: 150mm

JOINER


S8W0	S10W0	D10W0	RGB10W0	RGBW14W0
				
2PIN-Joiner for LED single color tape light	2PIN-Joiner for LED single color tape light	3PIN-Joiner for for LED Dual White tape light	4PIN-Joiner for for LED RGB tape light	5PIN-Joiner for for LED RGBW tape light
Applied: 8mm width	Applied: 10mm width	Applied: 10mm width	Applied: 10mm width	Applied: 14mm width

MINI CONNECTOR

1.Wire-Board

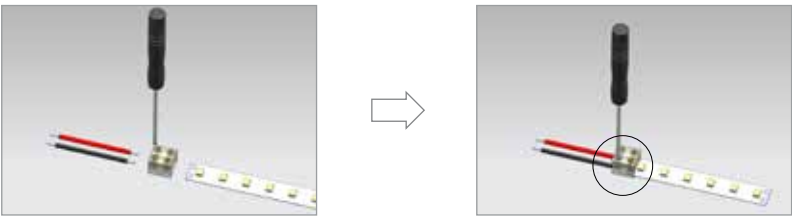

2. Board-Board

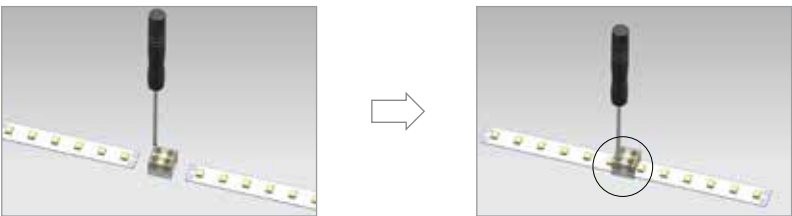

Dimension 10*10.3*7.3mm,Suitable for 8mm width IP22 PCB
Max wire 18AWG,max overcurrent 5A,
Mini connector can be put into Alumnium profile


COMPACT SPLICING CONNECTOR



Model No. : 221-413
3PIN compact splicing connector

Model No. : 221-415
5PIN compact splicing connector

TUBE

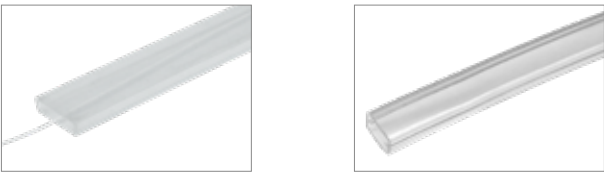

silicone sleeve match 14mm
PCB

PU sleeve match 10mm
PCB,100m/reel

QUICK CONNECTOR

WIRE



UL2464 wire, 2 cores, outdoor rated, 20AWG



UL2468 wire, 2 cores, indoor rated, 20AWG



UL2468 wire, 3 cores, indoor rated, 22AWG



UL2468 wire, 4 cores, indoor rated, 22AWG



UL2464 wire, 4 cores, outdoor rated, 20AWG

WATERPROOF MALE/FEMALE



IP67 waterproof DC male connector with 10cm wire



IP67 waterproof DC female connector with 10cm wire



IP64, UL male connector for single color LED products, with 8cm 20AWG, 2464 wire



IP64, UL female connector for single color LED products, with 8cm 20AWG, 2464 wire



IP64, Clear female connector, 4 cores, UL2464 22AWG L=300/3mm, with 20mm wire



IP64, Clear male connector, 4 cores, UL2464 22AWG L=300/3mm, with 20mm wire



IP64, Clear female connector, 2 cores, UL2468 22AWG L=90/2mm



IP64, Clear male connector, 2 cores, UL2468 22AWG L=90/2mm

NON-WATERPROOF MALE/FEMALE



DC male connector with 30cm wire



DC female connector with 30cm wire



White DC male connector UL2464 20AWG L=150/3mm



White DC female connector UL2464 20AWG L=150/3mm



SM-2A female connector, 2 cores, UL2468 20AWG L=80/2mm



SM-2A male connector, 2 cores, UL2468 20AWG L=80/2mm



SM-4A female connector, 4 cores, UL2464 20AWG L=70/2.5mm, with 18mm wire



SM-4A male connector, 4 cores, UL2464 20AWG L=70/2.5mm, with 18mm wire

QUICK CONNECTOR

BOARED CONNECTOR



For 10mm RGB strip, L shape

END CAP



end cap(with hole) for silicone sleeve match 8mm PCB



end cap for silicone sleeve match 8mm PCB



end cap(with hole) for silicone sleeve match 10mm PCB



end cap for silicone sleeve match 10mm PCB




end cap(with hole) for silicone sleeve match 10mm PCB





end cap for silicone sleeve match 14mm PCB

CLIPS



Hard mounting clip, for sleeve match 10mm PCB



Soft mounting clip, for sleeve match 10mm PCB

HUB



Specifications


- 1. Socket Matrial: PC UL94V-0
- 2. Parallel
- 3. Socket Color: White
- 4. Current Rating: 10A 30V
- 5. Cable: VDE H03VVH2-F 2*0.75mm² White color
- 6. Cable lenght: 100mm
- 7. End: tin



Specifications


- 1. Socket Matrial: PC UL94V-0
- 2. Parallel
- 3. Socket Color: White
- 4. Current Rating: 10A 12~30V AC
- 5. Cable: H03VVH2-F 2*0.75mm² White color
- 6. End: tin

ALUMINUM PROFILE

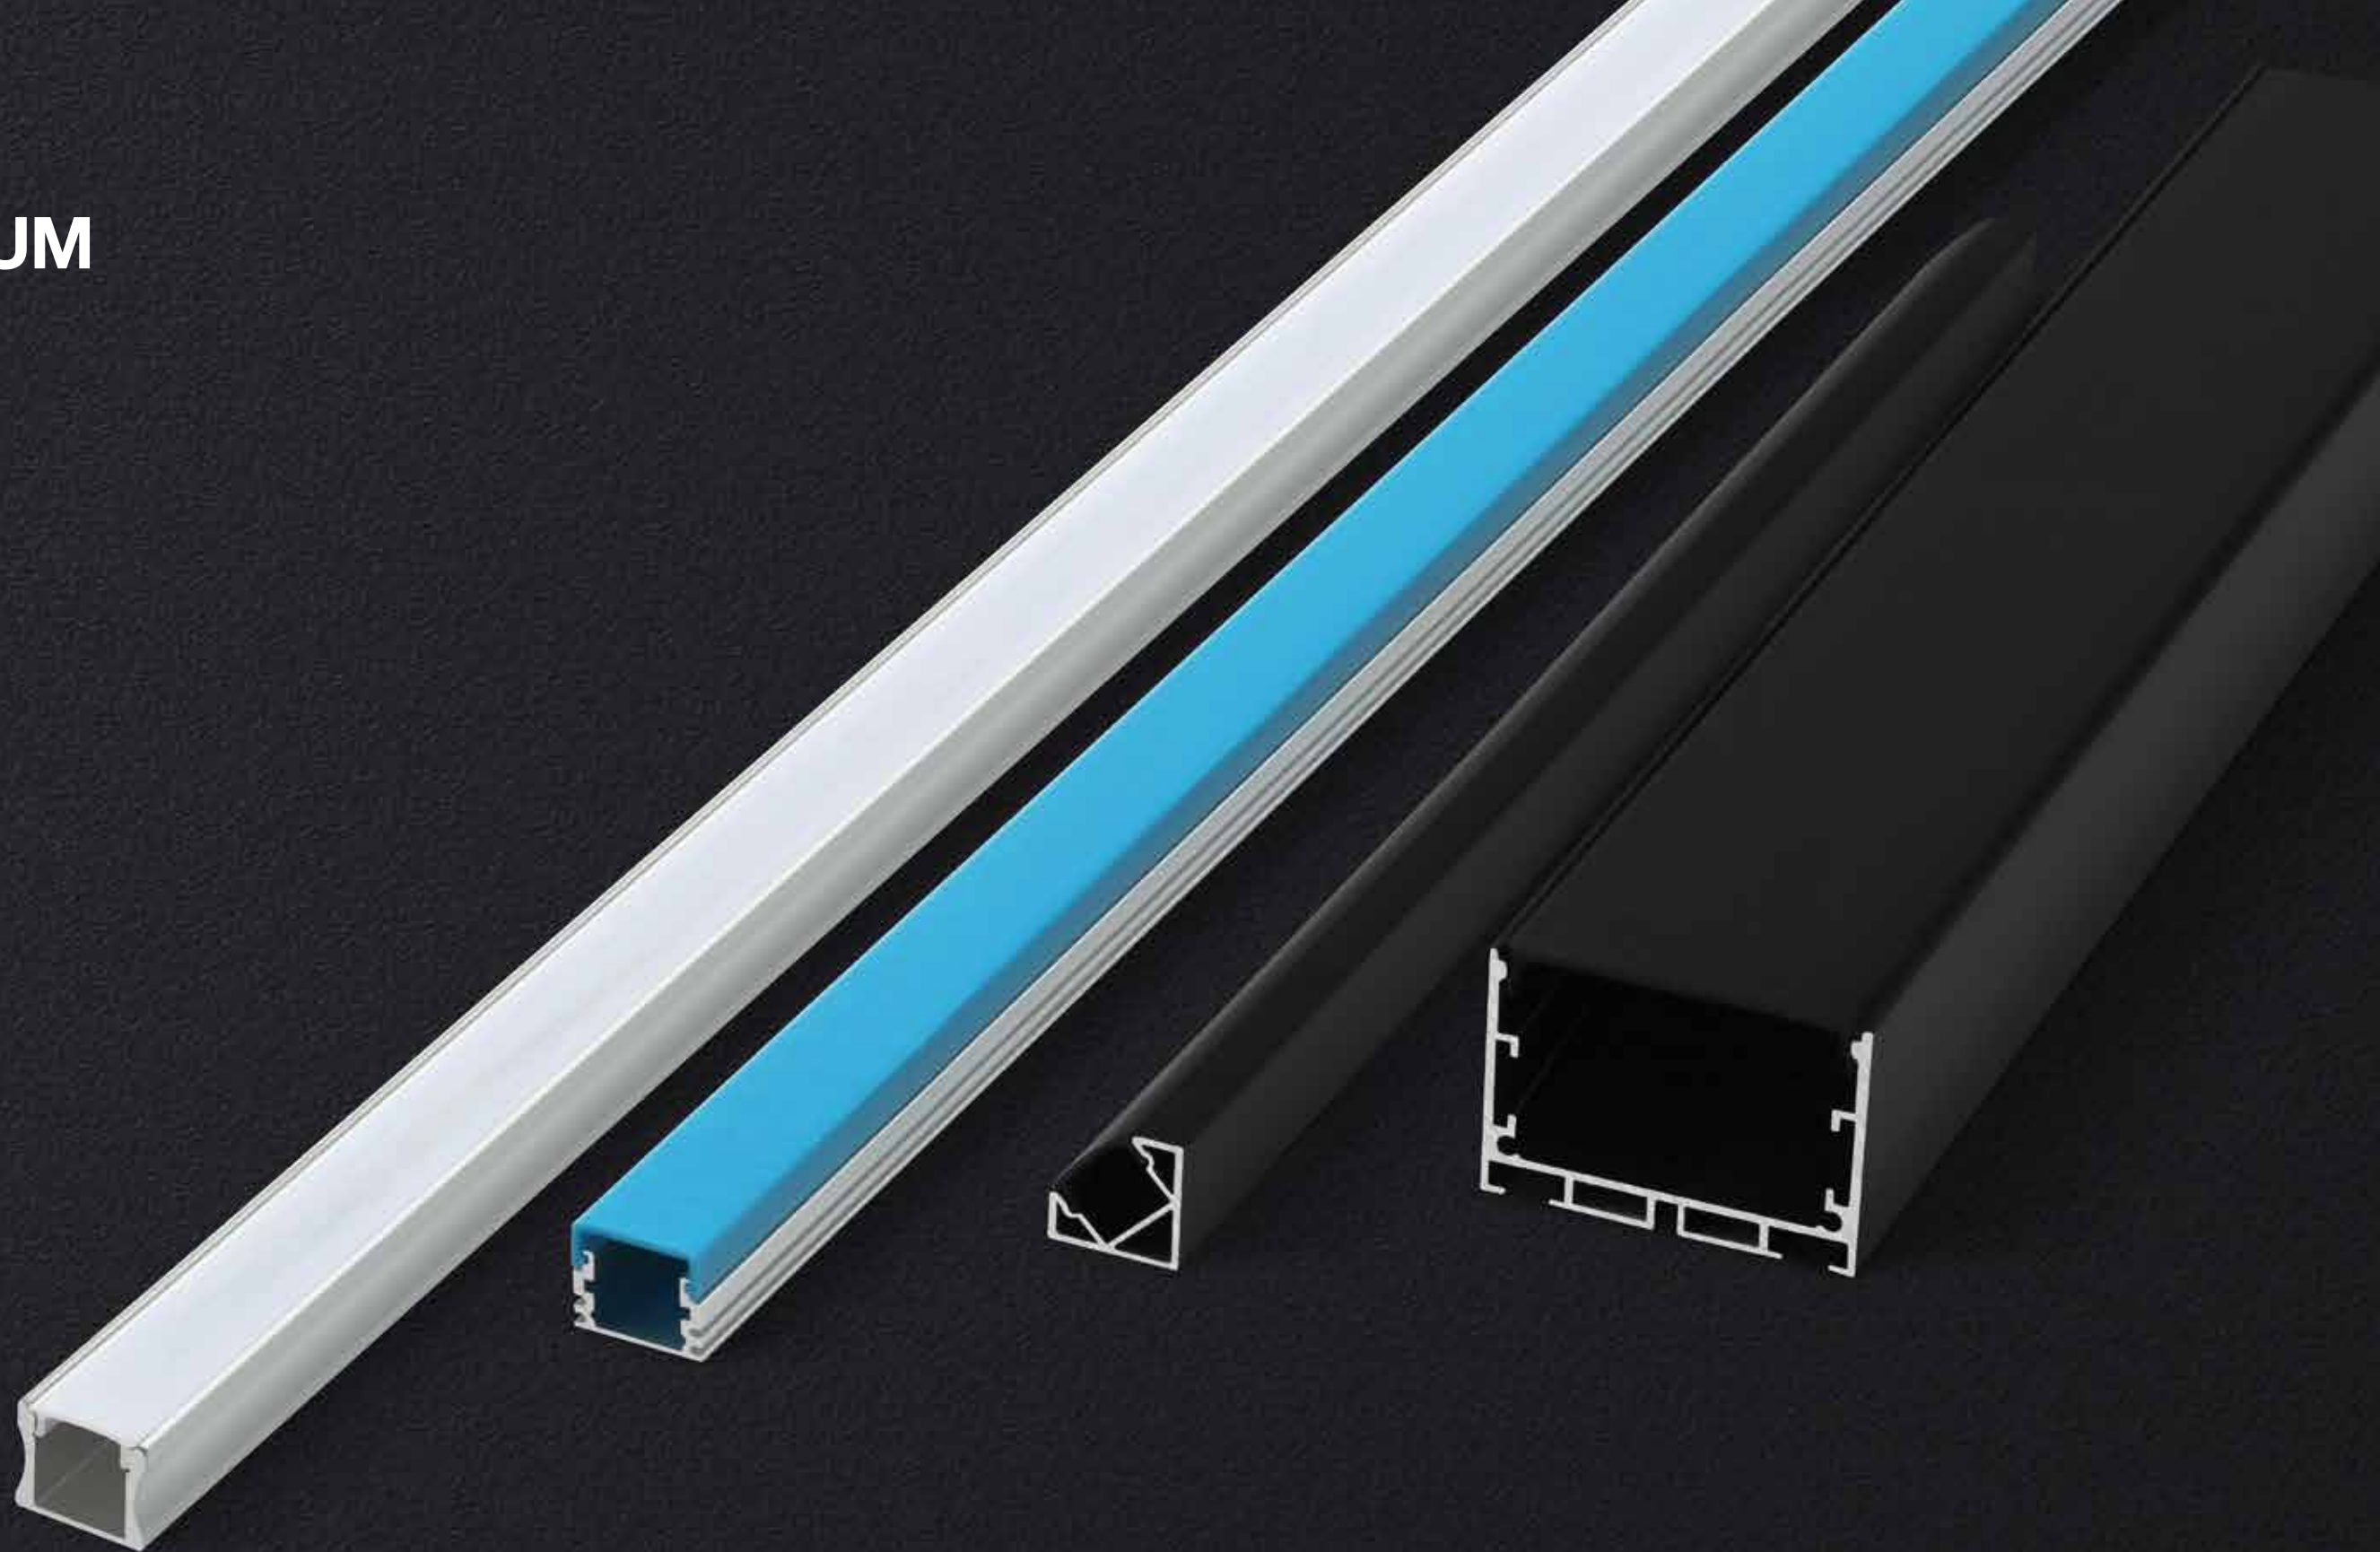

ALUMINUM PROFILE


Hot-Sale Series

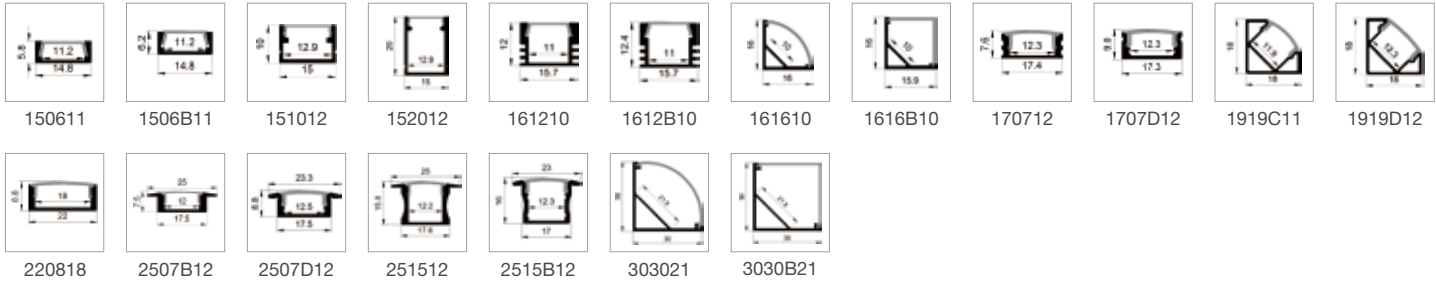


Angular Surface Mounted



Mini

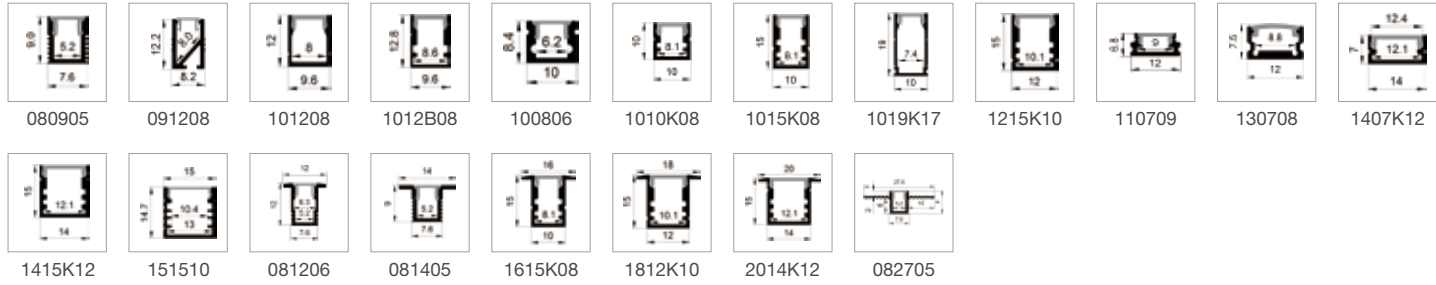


Vertical Surface Mounted- U lens

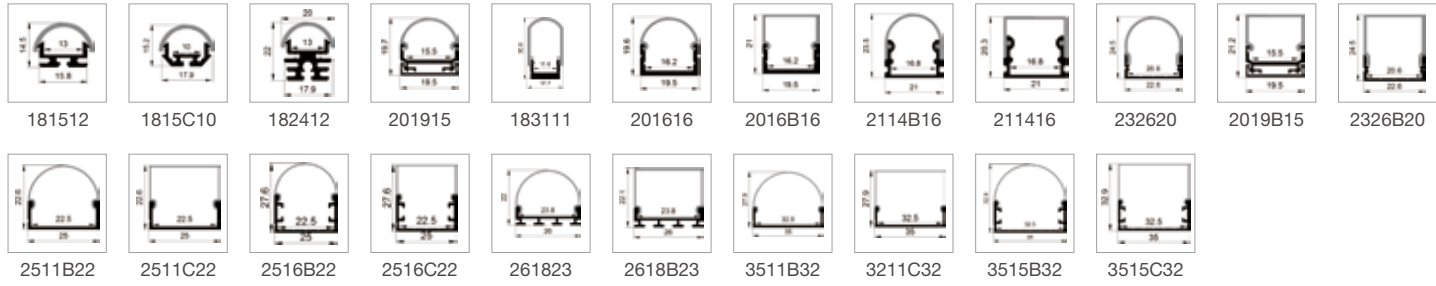


ALUMINUM PROFILE


Vertical Surface Mounted

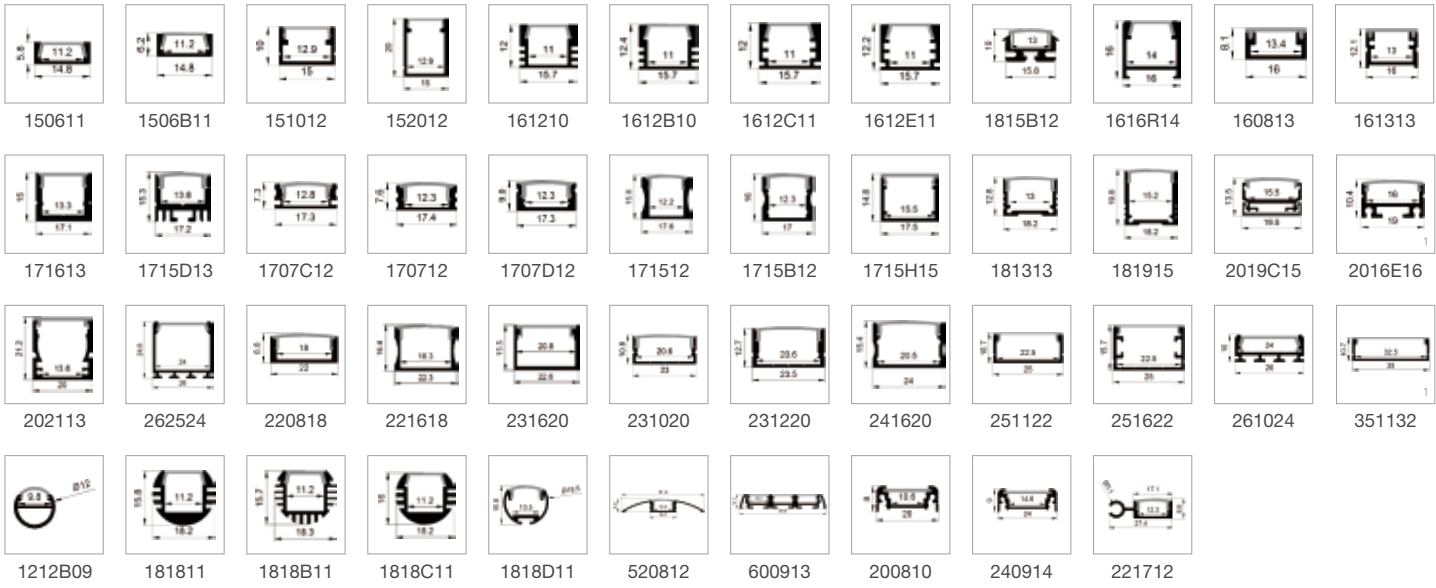

Pendant

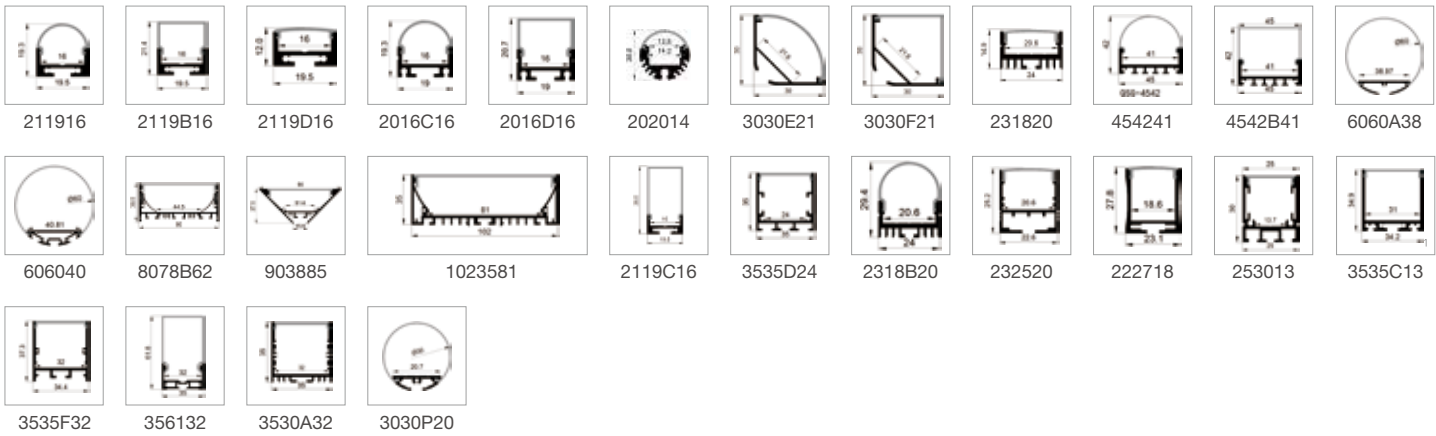


Trimless Recessed

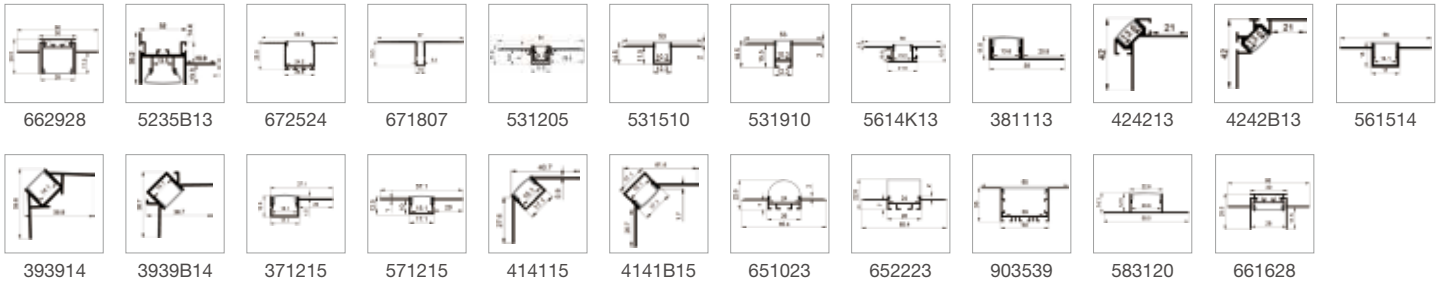

ALUMINUM PROFILE


Trimed Recessed

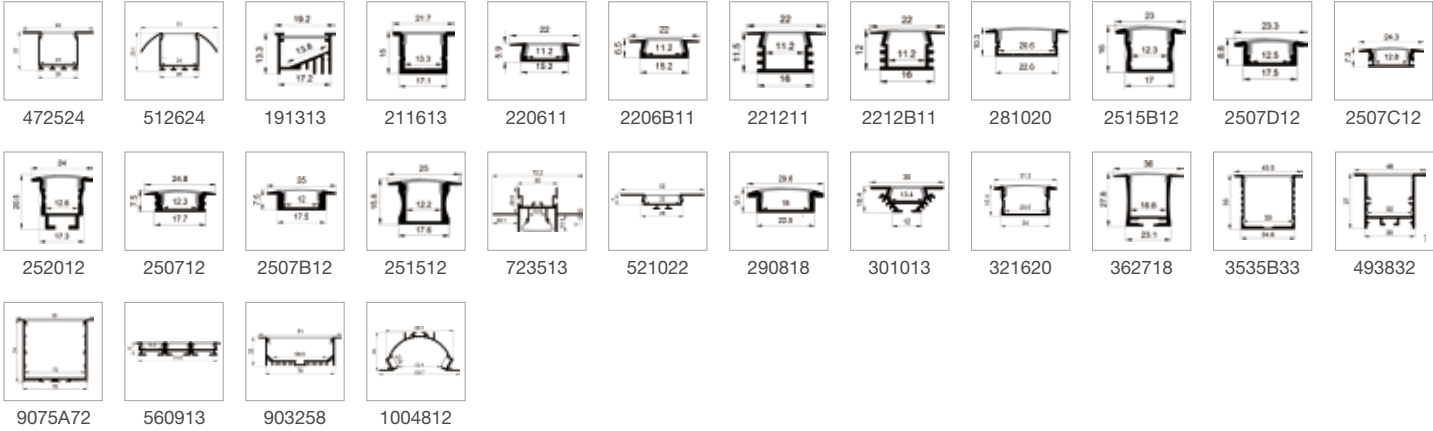

Wall Mounted




Closet Series



Magnetic Surface Mounted



IP44 Series

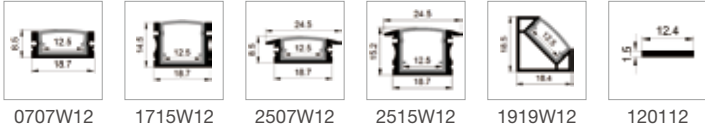


ALUMINUM PROFILE


Skirting Series



Inground Series

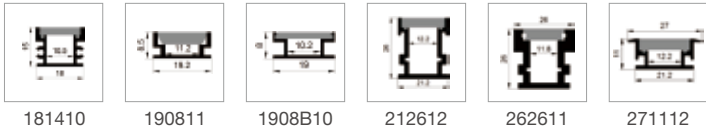

Stairs Series

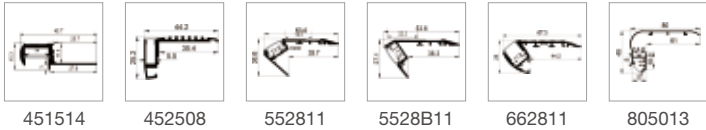


Carpet Series



Shelf board Series



Optical Series



Bending



Note: for more information about channels Blueview offer, please contact your sales rep for "Blueview Profile Catalog".



Blueview Elec-Optic Tech Co., Ltd

Tel: +86-28-8148 0011

Fax: +86-28-8148 1258

Web: www.blueviewled.com

Email: sales@blueviewled.com

© No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Zone, Chengdu, Sichuan, China