



# LUZ SERIES

## LINEAR LIGHT

LUZ P/M/W is a linear LED lighting fixture that features by various Optic options. It can be built hundreds of options depending on the lighting environment requires based on various optical options.

The 15° / 30° / 45° louver plus the Wall washer louver are satisfying most of the application.

Fixture features 80+, 90+ or 95+ Ra LEDs. White color from 2700K to 6500K.

Dimmable driver available in Dali, 0/1-10V type, also controllable options in DMX, PWM and 2.4G Static, Tunable white, RGBW solution available.

The fixture is designed in multiple installation in Sus-pendant, Wall / Ceiling Mounted, Trim-less or Trimmed Recessed.

Fixture lengths are available in 2ft, 4ft, 5ft and 8ft, and custom lengths are available in 19.6ft.

### Finish

Aluminum clear matt anodized  
White / Black powder coating  
Customized RAL color available


### Applications

Indoor - Commercial, Residential, Office, Educational Institutions, Conference Rooms and many other workspace

# LUZ SERIES

TRIMLESS RECESSED LINEAR LIGHT

UGR  
< 12

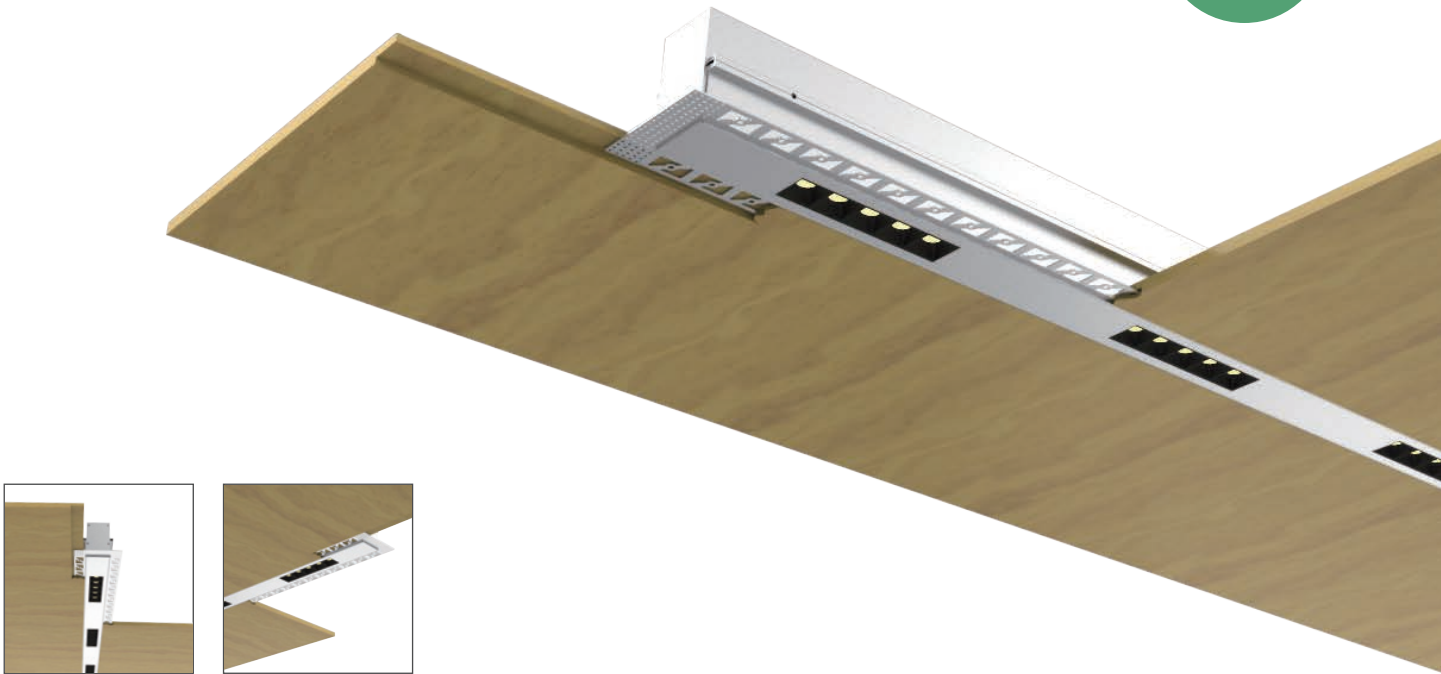

## ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY <sup>1</sup>	COLOR TEMP <sup>2</sup>	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U1008533	W White  B Black  S Silver	15 -15Deg. Reflector Louver  30 -30Deg. Reflector Louver  45 -45Deg. Reflector Louver	4 - 1247mm  CM -Customized	3 3-Step MacAdam Ellipse	30 - 3000K  40 - 4000K  50 - 5000K  65 - 6500K	80 80+ CRI  90 <sup>3</sup> 90+ CRI	TLR Trim-Less Recessed	22 IP22	D1 - DALI  D2 - 0-10V  D3 - On/off

1. Blueview's standard is 3-Step MacAdam

2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.


3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

# LUZ SERIES

TRIMLESS RECESSED LINEAR LIGHT

## SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC	29-34 VDC Constant Current
Width / Height	W100mm x W85mm with mudflange	
Length	1247mm with 4sets Reflector Kit	132.5mm
Power (W/m /ft)	23 W/pc	23 W/pc
Efficacy Up to	90lm/w	90lm/w
Control	Dali , 0-10V, on/off	



## SPECIFICATIONS


	Color Temperature	3000K	4000K	5000K	6500K
NICHIA RA 80	Lumen / Length	1717lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m	1902lm / 1.2m
NICHIA RA 90	Color Temperature	3000K	4000K	5000K	6500K
	Lumen / Length	1516lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m	1680lm / 1.2m

**Note:**


- The given data are typical values in 4sets 30Deg. Reflector Louver kit. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

## BEAM ANGLE

## LED CHIPS AND DRIVER OPTIONS

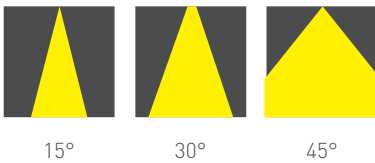

## DIMENSIONS

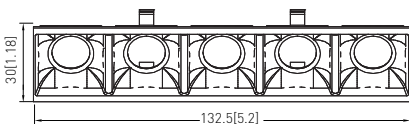

Unit:mm[in]

# LUZ SERIES

TRIMLESS RECESSED LINEAR LIGHT

## SPECIFICATIONS

	Color Temperature	Lumen / Length			
RA 80	2700K	1204lm / 0.6m	2330lm / 1.2m	2917lm / 1.5m	4784lm / 2.4m
	3000K	1267lm / 0.6m	2526lm / 1.2m	3070lm / 1.5m	5036lm / 2.4m
	3500K	1334lm / 0.6m	2659lm / 1.2m	3232lm / 1.5m	5301lm / 2.4m
	4000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	5000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	6000K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
	6500K	1404lm / 0.6m	2799lm / 1.2m	3402lm / 1.5m	5580lm / 2.4m
RA 90	2700K	963lm / 0.6m	1920lm / 1.2m	2333lm / 1.5m	3827lm / 2.4m
	3000K	1014lm / 0.6m	2021lm / 1.2m	2456lm / 1.5m	4029lm / 2.4m
	3500K	1067lm / 0.6m	2127lm / 1.2m	2586lm / 1.5m	4241lm / 2.4m
	4000K	1123lm / 0.6m	2239lm / 1.2m	2721lm / 1.5m	4464lm / 2.4m
	5000K	1123lm / 0.6m	2239lm / 1.2m	2721lm / 1.5m	4464lm / 2.4m
	5500K	1123lm / 0.6m	2239lm / 1.2m	2721lm / 1.5m	4464lm / 2.4m
	6500K	1123lm / 0.6m	2239lm / 1.2m	2721lm / 1.5m	4464lm / 2.4m
RA 95	2700K	867lm / 0.6m	1728lm / 1.2m	2100lm / 1.5m	3445lm / 2.4m
	3000K	912lm / 0.6m	1819lm / 1.2m	2111lm / 1.5m	3626lm / 2.4m
	3500K	960lm / 0.6m	1914lm / 1.2m	2327lm / 1.5m	3817lm / 2.4m
	4000K	1011lm / 0.6m	2015lm / 1.2m	2449lm / 1.5m	4017lm / 2.4m
	6500K	1011lm / 0.6m	2015lm / 1.2m	2449lm / 1.5m	4017lm / 2.4m
SAMSUNG RA 80	3000K	1140lm / 0.6m	2273lm / 1.2m	2763lm / 1.5m	4532lm / 2.4m
	4000K	1263lm / 0.6m	2519lm / 1.2m	3061lm / 1.5m	5022lm / 2.4m
	6500K	1263lm / 0.6m	2519lm / 1.2m	3061lm / 1.5m	5022lm / 2.4m

### Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.
- 10% less on UGR<19 version.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.